



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

### Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

### About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

NYPL RESEARCH LIBRARIES



3 3433 06637499 6





Houston

2162







Moucton.

3-VQC



1200 Ed. 1st ed. 11/4 02 00  
The Library of Electrical Science

VOLUME ONE

---

A DICTIONARY OF  
**ELECTRICAL**  
WORDS, TERMS *and* PHRASES

BY  
EDWIN J. HOUSTON, A.M., PH.D.

EMERITUS PROFESSOR OF NATURAL PHILOSOPHY AND PHYSICAL GEOGRAPHY  
IN THE CENTRAL HIGH SCHOOL OF PHILADELPHIA; PROFESSOR OF  
PHYSICS IN THE FRANKLIN INSTITUTE OF PENNSYLVANIA;  
ELECTRICIAN OF THE INTERNATIONAL ELECTRICAL  
EXHIBITION, ETC., ETC., ETC.

PART ONE—A to S




NEW YORK  
P. F. COLLIER & SON

1903

RECEIVED  
FEB 10 1903





---

COPYRIGHT 1889, 1892, 1894, 1897  
By THE W. J. JOHNSTON COMPANY

---

APPENDIX B  
COPYRIGHT 1897  
By EDWIN J. HOUSTON

---

## PREFACE TO THE FIRST EDITION.

THE rapid growth of electrical science, and the almost daily addition to it of new words, terms and phrases, coined, as they too frequently are, in ignorance of those already existing, have led to the production of an electrical vocabulary that is already bewildering in its extent. This multiplicity of words is extremely discouraging to the student, and acts as a serious obstacle to a general dissemination of electrical knowledge, for the following reasons :

1. Because, in general, these new terms are not to be found even in the unabridged editions of dictionaries.
2. The books or magazines, in which they were first proposed, are either inaccessible to the ordinary reader, or, if accessible, are often written in phraseology unintelligible except to the expert.
3. The same terms are used by different writers in conflicting senses.
4. The same terms are used with entirely different meanings.
5. Nearly all the explanations in the technical dictionaries are extremely brief as regards the words, terms and phrases of the rapidly growing and comparatively new science of electricity.

In this era of extended newspaper and periodical publication, new words are often coined, although others, already in existence, are far better suited to express the same ideas. The new terms are used for a while and then abandoned ; or, if retained, having been imperfectly defined, their exact meaning is capable of no little ambiguity ; and, subsequently, they are often unfortunately adopted by different writers with such varying shades of meaning, that it is difficult to understand their true and exact significance.

Then again, old terms buried away many decades ago and long since forgotten, are dug up and presented in such new garb that their creators would most certainly fail to recognize them.

It has been with a hope of removing these difficulties to some extent that the author has ventured to present this Dictionary of Electrical Words, Terms and Phrases to his brother electricians and the public generally.

He trusts that this dictionary will be of use to electricians, not only by showing the wonderful extent and richness of the vocabulary of the science, but also by giving the general consensus of opinion as to the significance of its different words, terms or phrases. It is, however, to the general public, to whom it is not only a matter of interest but also one of necessity to fully understand the exact meaning of electrical literature, that the author believes the book will be of the greatest value.

In order to leave no doubt concerning the precise meaning of the words, terms and phrases thus defined, the following plan has been adopted of giving :

- (1.) A concise definition of the word, term or phrase.
- (2.) A brief statement of the principles of the science involved in the definition.

(3.) Where possible and advisable, a cut of the apparatus described or employed in connection with the word, term or phrase defined.

It will be noticed that the second item of the plan makes the Dictionary approach to some extent the nature of an Encyclopedia. It differs, however, from an Encyclopedia in its scope, as well as in the fact that its definitions in all cases are concise.

Considerable labor has been expended in the collection of the vocabulary, for which purpose electrical literature generally has been explored. In the alphabetical arrangement of the terms and phrases defined, much perplexity has arisen as to the proper catch-word under which to place them. It is believed that part of the difficulty in this respect has been avoided by the free use of cross references.

In elucidating the exact meaning of terms by a brief statement of the principles of the science involved therein, the author has freely referred to standard textbooks on electricity, and to periodical literature generally. He is especially indebted to works or treatises by the following authors, viz. : S. P. Thompson, Larden, Cumming, Hering, Prescott, Ayrton, Ayrton and Perry, Pope, Lockwood, Sir William Thomson, Fleming, Martin and Wetzler, Preece, Preece and Sivewright, Forbes, Maxwell, De Watteville, J. T. Sprague, Culley, Mascart and Joubert, Schwendler, Fontaine, Noad, Smee, Depretz, De la Rive, Harris, Franklin, Cavallo, Grove, Hare, Daniell, Faraday and very many others.

The author offers his Dictionary to his fellow electricians as a starting point only. He does not doubt that his book will be found to contain many inaccuracies, ambiguous statements, and possibly doubtful definitions. Pioneer work of this character must, almost of necessity, be marked by incompleteness. He, therefore, invites the friendly criticisms of electricians generally, as to errors of omission and commission, hoping in this way to be able finally to crystallize a complete vocabulary of electrical words, terms and phrases.

The author desires in conclusion to acknowledge his indebtedness to his friends, Mr. Carl Hering, Mr. Joseph Wetzler and Mr. T. C. Martin, for critical examination of the proof sheets ; to Dr. G. G. Faught for examination of the proofs of the parts relating to the medical applications of electricity, and to Mr. C. E. Stump for valuable aid in the illustration of the book ; also to Mr. George D. Fowle, Engineer of Signals of the Pennsylvania Railroad Company, for information concerning their System of Block Signaling, and to many others.

EDWIN J. HOUSTON.

CENTRAL HIGH SCHOOL, PHILADELPHIA, PA.,  
SEPTEMBER, 1889.

## PREFACE TO THE SECOND EDITION.

THE first edition of the "Dictionary of Electrical Words, Terms and Phrases" met with so favorable a reception that the entire issue was soon exhausted. Although but a comparatively short time has elapsed since its publication, electrical progress has been so marked, and so many new words, terms and phrases have been introduced into the electrical nomenclature, that the preparation of a new edition has been determined on rather than a mere reprint from the old plates.

The wonderful growth of electrical science may be judged from the fact that the present work contains more than double the matter and about twice the number of definitions that appeared in the earlier work. Although some of this increase has been due to words which should have been in the first edition, yet in greater part it has resulted from an actual multiplication of the words used in electrical literature.

To a certain extent this increase has been warranted either by new applications of electricity or by the discovery of new principles of the science. In some cases, however, new words, terms or phrases have been introduced notwithstanding the fact that other words, terms or phrases were already in general use to express the same ideas.

The character of the work is necessarily encyclopedic. The definitions are given in the most concise language. In order, however, to render these definitions intelligible, considerable explanatory matter has been added.

The Dictionary has been practically rewritten, and is now, in reality, a new book based on the general lines of the old book, but considerably changed as to order of arrangement and, to some extent, as to method of treatment.

As expressed in its preface, the author appreciates the fact that the earlier book was tentative and incomplete. Though the wide scope of the second edition, the vast number of details included therein, and the continued growth of the electrical vocabulary must also necessarily make this edition incomplete, yet the author ventures to hope that it is less incomplete than the first edition. He again asks kindly criticisms to aid him in making any subsequent edition more nearly what a dictionary of so important a science should be.

The order of arrangement in the first edition has been considerably changed. The initial letter under which the term or phrase is defined is in all cases that of the noun. For example, "Electric Light" is defined under the term "Light, Electric — —"; "Diameter of Commutation" under "Commutation, Diameter of — —," "Alternating Current Dynamo-Electric Machine" under "Machine, Dynamo-Electric, Alternating Current — —." As before, the book has numerous cross references.

Although the arrangement of the words, terms and phrases under the initial letter of the first word, term or phrase, as, for example, "Electric Light" under the letter E, might possess some advantages, yet, in the opinion of the author, the educational value



of the work would be thereby considerably decreased, since to a great extent such an arrangement would bring together incongruous portions of the science.

Frequent cross references render it possible to use the Dictionary as a text-book in connection with lectures in colleges and universities. With such a book the student need make notes only of the words, terms or phrases used, and afterwards, by the use of the definitions and explanatory matter connected therewith, work up the general subject matter of the lecture. The author has successfully used this method in his teaching.

In order to separate the definitions from the descriptive matter, two sizes of type have been used, the definitions being placed in the larger sized type.

In the descriptive matter the author has not hesitated to quote freely from standard electrical works, electrical magazines, and periodical literature generally. Among the numerous works consulted, besides those to which reference has already been made in the preface to the first edition, he desires to acknowledge his indebtedness especially to "The Alternating Current Transformer," by J. A. Fleming; to various works of John W. Urquhart; to "Modern Views of Electricity," by Prof. O. J. Lodge; to "A Text-book of Human Physiology," by Landois & Sterling; and to "Practical Application of Electricity in Medicine and Surgery," by Liebig & Rohe.

The cuts or diagrams used in the book have either been drawn especially for the work or have been taken from standard electrical publications.

The chart of standard electrical symbols and diagrams has been taken from Prof. F. B. Crocker's paper on that subject.

The definition of terms used in systems of electric railways have been taken mainly from a paper on "Standards in Electric Railway Practice," by O. T. Crosby.

The author desires especially to express his obligations to Prof. F. B. Crocker of the Electrical Engineering Department, Columbia College, New York, and to Carl Hering, of Philadelphia, for critical examination of the entire manuscript and for many valuable suggestions; also to *The Electrical World* and the *Electrical Engineer* of New York, and to Prof. Elihu Thomson, Edward Caldwell, T. C. Martin, Dr. Louis Bell, Joseph Wetzler, Nikola Tesla, Wm. H. Wahl, Prof. Wm. D. Marks, Prof. A. E. Dolbear, C. W. Pike, John Hoskin, and numerous others, for aid in connection with new words or phrases. So far as they relate to the medical applications of electricity, the proof sheets were revised by Dr. G. G. Faught, of Philadelphia.

The author desires to thank critics of the first edition and the electrical fraternity in general for valuable suggestions. He presents this second edition of his Dictionary in the hope that it may to some extent properly represent the vocabulary of electrical science.

CENTRAL HIGH SCHOOL,  
PHILADELPHIA, May, 1892.

EDWIN J. HOUSTON.

## PREFACE TO THE THIRD EDITION.

THE second edition of the "Dictionary of Electrical Words, Terms, and Phrases" was exhausted in such a comparatively short time that the publishers believed that what new matter might be required for a third edition could best be added in the form of an appendix.

Although not quite two years have elapsed since the issue of the second edition, yet the growth of electrical science has continued at so rapid a pace, and new words, terms, and phrases have of necessity been introduced so rapidly, that fully twenty per cent., both of new words and new matter, have been found necessary for the third edition. Had this fact been known in time, it might have been better to have developed the additional matter throughout the text, rather than placing it at the end of the book as an appendix.

Should a demand be made for a fourth edition, the author contemplates re-writing and re-arranging the entire volume. He is thoroughly aware of the inaccuracies and incompleteness of many of the definitions in the second edition, and hopes, in the event of a demand for a fourth edition, to produce a volume more nearly approximating to what an electrical dictionary should be. In the meantime, he again asks the kindly criticisms of his fellow laborers in the electrical field to aid him in the work.

In order to facilitate the use of the cross-references, all words, terms, and phrases referred to in the appendix are so marked; *i. e.*, (See Appendix—*Insulation, Kilometric, of Cable.*) All references not so marked will be found in the main text of the dictionary.

The author desires to express his obligations to numerous authors and technical journals for information as to new words, terms, and phrases, and to the significance generally given to them in actual use. He desires especially to acknowledge his obligations to his colleague, Mr. A. E. Kennelly, and to Professors R. A. Fessenden, C. Wellman Park; to Messrs. C. P. Steinmetz, J. F. Kelly, O. B. Shallenberger, Carl Hering, H. W. Frye, W. D. Weaver, W. F. C. Hasson, Townsend Wolcott, J. B. Cahoon, and many others, for reading of proof sheets and suggestions.

The author presents this third edition of the Dictionary with the hope that it may prove of value to the electrical fraternity.

EDWIN J. HOUSTON.

PHILADELPHIA, May, 1894.



## PREFACE TO THE FOURTH EDITION.

IN preparing the fourth edition of his "Dictionary of Electrical Words, Terms and Phrases," the author soon found that the recent marvellous growth in the electrical vocabulary was such that it would be impossible to add, in the shape of a separate appendix, the new words, terms and phrases only, that it was necessary to introduce into the book. This will be evident from the fact that the added words exceed in number those already contained in the first, second and third editions. Since it was deemed inadvisable by the publisher to recast the entire book, the only course left open to the author was to alphabetically arrange all the old and new words, and to present them in concise definitions without any encyclopædic matter, referring the reader to the matter contained in the earlier editions for illustration and detail.

It has also been thought advisable to introduce a change in the manner of arrangement, the words, terms and phrases being alphabetically arranged according, either to the word, or to the first word of the term or phrase. This has permitted the entire suppression of all cross references, which, in view of the author's past experience, he believes will prove an advantage.

The author desires to acknowledge the very valuable assistance afforded him by his colleague, Dr. A. E. Kennelly, in the preparation of the matter for the fourth edition, both in collecting new terms, as well as in preparing the definitions, and reading the proof.

The author trusts, that the fourth edition of his electrical Dictionary will prove of benefit not only to the electrical world but to the reading public generally.

All criticisms will be gladly received.

EDWIN J. HOUSTON.

PHILADELPHIA, December, 1897.





# A DICTIONARY OF ELECTRICAL WORDS, TERMS AND PHRASES.

## A

**A. or An.**—An abbreviation sometimes used in medical electricity for anode. (See *Anode*.)

**A. C. C.**—An abbreviation used in medical electricity for Anodic Closure Contraction. (See *Contraction, Anodic Closure*.)

**A. D. C.**—An abbreviation used in medical electricity for Anodic Duration Contraction. (See *Contraction, Anodic Duration*.)

**A. O. C.**—An abbreviation used in medical electricity for Anodic Opening Contraction. (See *Contraction, Anodic Opening*.)

**Abscissa of Rectilinear Co-ordinates.**—A line or distance cut off along axis of abscissas.

The abscissa of the point D, Fig. 1, on the curve O D R, is the distance D 1, or its equal A 2, measured or cut off on the line A C, the axis of abscissas; or, briefly, A 2, is the abscissa of the point D.

**Abscissas, Axis of** — —One of the axes of co-ordinates used for determining the position of points on a curved line.

Thus the position of the point D, Fig. 1, on the curved line O D R, is determined by the perpendicular distances, D 1 and D 2, of such point from two straight lines, A B and A C, called the axes of co-ordinates. A C, is called the axis of abscissas, and A B, the axis of ordinates. The point




Fig. 1. Axes of Co-ordinates.

A, where the lines are considered as starting or originating, is called the *point of origin*, or, generally, the *origin*.

The use of co-ordinates was first introduced by the famous mathematician, Des Cartes.

**Absolute.**—Complete in itself.

The terms absolute and relative are used in electricity in the same sense as ordinarily.

Thus, a galvanometer is said to be calibrated *absolutely* when the exact current strengths required to produce given deflections are known; or, in other words, when the *absolute* current strengths are known; it is said to be calibrated *relatively* when only the *relative* current strengths required to produce given deflections are known.

The word absolute, as applied to the units employed in electrical measurements, was introduced by Gauss to indicate the fact that the values of such units are independent both of the size of the instrument employed and of the value of gravity at the particular place where the instrument is used.

The word absolute is also used with reference to the fact that the values of the units could readily be redetermined from well known constants, in case of the loss of the standards.

The *absolute units of length, mass, and time* are more properly called the C. G. S. units, or the *centimetre-gramme-second units*. (See *Units, Absolute*.)

An absolute system of units based on the *milligramme, millimetre, and second*, was proposed by Weber, and was called the *millimetre-milligramme-second units*. It has been replaced by

the C. G. S. units. (See *Units, Centimetre-Gramme-Second. Units, Fundamental.*)

**Absolute Block System for Railroads.**—(See *Block System for Railroads, Absolute.*)

**Absolute Calibration.**—(See *Calibration, Absolute.*)

**Absolute Electrometer.**—(See *Electrometer, Absolute.*)

**Absolute Galvanometer.**—(See *Galvanometer, Absolute.*)

**Absolute Unit of Current.**—(See *Current, Absolute Unit of.*)

**Absolute Unit of Electromotive Force.**—(See *Force, Electromotive, Absolute Unit of.*)

**Absolute Unit of Inductance.**—(See *Inductance, Absolute Unit of.*)

**Absolute Unit of Resistance.**—(See *Resistance, Absolute Unit of.*)

**Absolute Unit of Self-Induction.**—(See *Induction, Self, Absolute Unit of.*)

**Absolute Units.**—(See *Units, Absolute.*)

**Absolute Vacuum.**—(See *Vacuum, Absolute.*)

**Absorption.**—The taking, or, literally, drinking in, of one form of matter by another, such as a gas, vapor or liquid by a solid; or of the energy of sound, light, heat, or electricity by ordinary matter.

**Absorption, Acoustic** —The taking in of the energy of sound waves produced by one sounding or vibrating body by another vibrating body.

Acoustic absorption may result in the dissipation of the absorbed energy, as heat, or in sympathetic vibrations. (See *Vibrations, Sympathetic.*)

**Absorption, Electric** —The apparent soaking of an electric charge into the glass or other solid dielectric of a Leyden jar or condenser. (See *Condenser.*)

The capacity of a condenser varies with the time the condenser remains charged and with the time taken in charging. Some of the charge acts as if it *soaked into* the solid dielectric, and this is the cause of the *residual charge*. (See *Charge, Residual.*) Therefore, when the con-

denser is discharged, less electricity appears than was passed in; hence the term *electric absorption*.

**Absorption, Luminous** —The absorption of the energy of light in its passage through bodies.

When sunlight falls on an opaque colored body, such for example as a red body, all the colors but the reds are absorbed. The reds are then thrown off and thus cause the color. In the same manner, when sunlight falls on a transparent colored body, such for example as red, all colors but the reds are absorbed, and the reds are transmitted.

When sunlight falls on a phosphorescent body, a part of the light is absorbed as heat; another part is absorbed by the molecules being set into motion sufficiently rapid to cause them to emit light or to become luminous.

A mass of glowing gas or vapor absorbs waves of light of the same length as those it itself emits. This is the cause of the dark lines of the solar spectrum, called the Fraunhofer lines.

The amount of light absorbed by the glass globe of an incandescent lamp, according to Urquhart, is as follows, viz.:

Clear glass .....	10 per cent.
Ground glass.....	35 "
Opalescent glass.....	50 "

**Absorption, Selective** —The absorption of a particular or selected character of waves of sound, light, heat, or electricity.

**Absorption, Thermal** —The absorption of heat energy in its passage through a body.

The phenomena of thermal absorption are similar to those of luminous absorption. A substance that is transparent to heat, or which allows heat waves to pass through without absorption, is called *diathermanous*, or *diathermanic*, or is said to be *transparent to heat*.

**Absorptive Power.**—(See *Power, Absorptive.*)

**Acceleration.**—The rate of change of velocity.

Acceleration is thus distinguished from velocity: velocity expresses in time the rate-of-change of position, as a velocity of three metres per second; acceleration expresses in time the rate-of-change of velocity, as an acceleration of one centimetre per second.

Since all matter is inert, and cannot change its



condition of rest or motion without the application of some force, acceleration is necessarily due to some force outside the matter itself. A force may therefore be measured by the acceleration it imparts to a given mass of matter.

Acceleration is *positive* when the velocity is *increasing*, and *negative* when it is *decreasing*.

**Acceleration, Dimensions of** — — The value of the acceleration expressed in terms of the length or of distance by the time. (See *Acceleration, Unit of*.)

**Acceleration, Unit of** — — That acceleration which will give to a body unit-velocity in unit-time; as, for example, one centimetre-per-second in one second.

Bodies falling freely in a vacuum, and approximately so in air, acquire an acceleration which in Paris or London, at the end of a second, amounts to about 981 centimetres per second, or nearly 32.2 ft. per second.

$$A = \frac{V}{T}, \text{ or, in other words,}$$

*The acceleration equals the velocity divided by the time.*

But, since velocity equals the Distance, or the Length traversed in a Unit of Time,  $V = \frac{L}{T}$ .

$$\text{Therefore, } A = \frac{V}{T} = \frac{\frac{L}{T}}{T} = \frac{L}{T^2}, \text{ or}$$

*The acceleration equals the length, or the distance passed through, divided by the square of the time in seconds.*

These formulæ represent the *Dimensions of Acceleration*.

**Accumulated Electricity.**—(See *Electricity, Accumulated*.)

**Accumulating Electricity.**—(See *Electricity, Accumulating*.)

**Accumulation of Electricity.**—(See *Electricity, Accumulation of*.)

**Accumulator.**—A word sometimes applied to any apparatus in which the strength of a current is increased by the motion past it of a conductor, the currents produced in which tend to strengthen and increase the current which causes the induction.

The word accumulator is sometimes applied to Sir Wm. Thomson's *Electric Current Accumulator*.

Current accumulators operate on the reaction principle of dynamo-electric machines. In this sense, therefore, a dynamo-electric machine is an accumulator. (See *Machine, Dynamo-Electric, Reaction Principle of*.)




Fig. 2. Barlow's Wheel.

The copper disc D, Fig. 2, has freedom of rotation, on a horizontal axis at O, in a magnetic field, the lines of force of which, represented by the dotted lines in the drawing, pass downward perpendicularly into the plane of the paper.

If, now, a current from any source be passed in the direction A, O, B, C, A, through the circuit A, O, B, C, A, which is provided with spring contacts at O, and A, the disc will rotate in the direction of the curved arrow. This motion is due to the current acting on that part of the disc which lies between the two contacts—A and O. This apparatus is known as *Barlow's Wheel*.

If, when no current is passing through the circuit, the disc be turned in the direction of the arrow, a current is set up in such a direction as would oppose the rotation of the disc. (See *Law, Lenz's*.)

If, however, the disc be turned in the opposite direction to that of the arrow, induction currents will as before be produced in the circuit. As this rotation of the disc tends to move the circuit O A, towards the parallel but oppositely directed circuit B C, these two circuits being parallel and in opposite directions tend to repel one another, and there will thus be set up induced currents that tend to oppose the motion of rotation, and the current of the circuit will therefore increase in strength. (See *Dynamics, Electro*.) Should then a current be started in the circuit, and the original field be removed, the induction will be continued, and a current which, up to a certain extent, increases or accumulates, is maintained in the circuit during rotation of the disc. (*Larden*.)

Barlow's Wheel, when used in this manner, is known as *Thomson's Electric Current Accumulator*.



**Accumulator.**—A word often applied to a Leyden jar or condenser, which permits the gradual collection from an electric source of a greater charge than it would otherwise be capable of containing.

A condenser. (See *Condenser*.)

The ability of a source to accumulate an increased charge when connected to a condenser is due to the increased capacity which a plate or other conductor acquires when placed near another plate or conductor. (See *Condenser*. *Far, Leyden*.)

**Accumulator, Capacity of** — —The capacity of a condenser, expressed in microfarads. (See *Condenser, Capacity of*.)

**Accumulator or Condenser; Laws of Accumulation of Electricity.**—Sir W. Snow Harris, by the use of his Unit-Jar and Electric Thermometer, deduced the following laws for the accumulation of electricity, which we quote from Noad's "Student's Text-Book of Electricity," revised by Preece:

(1.) "Equal quantities of electricity are given off at each revolution of the plate of an electrical machine to an *uncharged surface*, or to a surface *charged* to any degree of saturation."

(2.) "A coated surface receives equal quantities of electricity in equal times; and the number of revolutions of the plate is a fair measure of the relative quantities of electricity, all other things remaining the same."

(3.) "The free action of an electrical accumulation is estimated by the interval it can break through, and is directly proportional to the quantity of electricity."

(4.) "The free action is inversely proportional to the surface."

(5.) "When the electricity and the surface are increased in the same ratio, the discharging interval remains the same; but if, as the electricity is increased, the surface is diminished, the discharging interval is directly as the square of the quantity of electricity."

(6.) "The resistance of air to discharge is as the square of the density directly."

According to some later investigations, the quantity a plane surface can receive under a given density depends on the linear boundary of the surface as well as on the area of the surface.

"The amount of electrical charge depends on

surface and linear extension conjointly. There exists in every plane surface what may be termed an *electrical boundary*, having an important relation to the grouping or disposition of the electric particles in regard to each other and to surrounding matter. This boundary in circles or globes is represented by their circumferences. In plane rectangular surfaces, it is by their linear extension or perimeter. If this *boundary* be constant, their electrical charge varies with the *square root of the surface*. If the *surface* be constant the charge varies with the *square root of the boundary*. If the surface and boundary both vary, the charge varies with the *square root of the surface multiplied into the square root of the boundary*."

These laws apply especially to continuous surfaces taken as a whole, and not to surfaces divided into separate parts.

By electrical charge Harris meant the quantity sustained on a given surface under a given electrometer indication; by electrical intensity, he meant the indication of the electrometer corresponding to a given quantity on a given surface.

(See *Condenser, Capacity of*. *Capacity, Electrostatic*. *Capacity, Specific Inductive*.)

Accumulators of this character are now generally called Condensers. (For more modern principles concerning their construction and capacity see *Condenser*. *Condenser, Capacity of*.)

**Accumulator, Secondary or Storage Cell** — —Two inert plates partially surrounded by a fluid incapable of acting chemically on either of them until after the passage of an electric current, when they become capable of furnishing an independent electric current.

This use of the term accumulator is the one most commonly employed. A better term for such a cell is a secondary or storage cell. (See *Cell, Secondary or Storage*.)

Commercially, an accumulator consists of a single jar and its electrolyte, in which a single set of positive and negative plates is properly placed.

**Accumulator, Water-Dropping** — —An apparatus devised by Sir W. Thomson for increasing the difference of potential between two electric charges.

The tube X Y, Fig. 3, connects with a reservoir of water which is maintained at the zero potential of the earth. The water escapes from



the openings at C and D, in small drops and falls on funnels provided, as shown, to receive the separate drops and again discharge them.

The vessels A, A', and B, B', which are electrically connected as shown, are maintained at a certain small difference of potential, as indicated by the respective + and - signs.

Under these circumstances, therefore, C and D, will be charged inductively with charges opposite to those of A and B, or with - and + electricities respectively. As the drops of water fall on the funnels, the charges which the funnels thus constantly receive are given up to B' and A', before the water escapes. Since, therefore, B, B', and A, A', are receiving constant charges, the difference of potential between them must continually increase. This apparatus operates on the same principle as the replenisher. The drops of water act as the carriers, and A, A', and B, B', as the hollow vessels. (See *Replenisher*.)




Fig. 3. Water-Dropping Accumulator.

**Achromatic.**—Free from false coloration.

Images formed by ordinary lenses do not possess the true colors of the object, unless the edges of the lenses are cut off by the use of a diaphragm; *i. e.*, an opaque plate with a central circular opening. The edges of the lenses disperse the light like an ordinary prism, and so produce rainbow-colored (prismatic) fringes in the image. The use of an achromatic lens is to obviate this false coloration.

**Achromatizable.**—Capable of being freed from false coloration.

**Achromatize.**—To free from false coloration.

**Achromatizing.**—Freeing from false coloration.

**Acid, Spent** — — A battery acid, or other acid, that has become too weak for efficient action.

In a voltaic cell the acid of the electrolyte becomes spent by combining with the metal of the positive plate.

**Acidometer.**—A special form of hydrometer used in determining the specific gravity of the acid liquid in a secondary or storage

cell. (See *Areometer or Hydrometer. Cell, Storage*.)

The scale on the acidometer tube is made to indicate the density according to the distance the floating instrument sinks in the liquid.

**Aclinic Line.**—(See *Line, Aclinic*.)

**Acoustic Absorption.**—(See *Absorption, Acoustic*.)

**Acoustic Engraving.**—(See *Engraving, Acoustic*.)

**Acoustic Telegraphy.**—(See *Telegraphy, Acoustic*.)

**Acoustic Tetanus.**—(See *Tetanus, Acoustic*.)

**Acoutemeter, Electric** — — An apparatus for electrically testing the delicacy of hearing.

The Acoutemeter is one of the many applications of Hughes' sonometer. It consists of three flat coils placed parallel to one another on a graduated rod, passing through their axes. The central coil, which is used as the primary of an induction coil, is fixed. The other two, which are employed as secondary coils, are movable. (See *Sonometer, Hughes'. Coil, Induction. Microphone*.) A microphone, electrical tuning fork, switches, plugs, and other accessories, are suitably placed and connected. The subject whose hearing is to be tested is placed with his back to the apparatus, and with two telephone receivers tightly fixed to his ears. As various sounds are produced, the outer or movable coils are moved gradually away from the central coil, until no sound is heard in the telephone receivers. This distance is in the inverse ratio of the delicacy of hearing of the individual.

**Actinic Photometer.**—(See *Photometer, Actinic*.)

**Actinic Ray.**—(See *Ray, Actinic*.)

**Actinism.**—The chemical effects of light, as manifested by the decomposition of various substances.

Under the influence of the sun's light, the carbonic acid absorbed by the leaves of plants is decomposed in the living leaves into carbon, which is retained by the plant for the formation of its woody fibre or ligneous tissue, and oxygen, which is thrown off.

The bleaching of curtains, carpets, and other fabrics exposed to sunlight is caused by the actinic power of the light. The photographic picture is impressed by the actinic power of light on a plate covered with some sensitive metallic salt.

**Actinograph.**—An apparatus for measuring and recording the intensity of the chemical effects of light.

**Actinography.**—The method of measuring and recording the intensity of the chemical effects of light.

**Actinometer.**—A word sometimes applied to a pyrheliometer. (See *Pyrheliometer*.)

**Actinometer, Electric** — —An apparatus for electrically measuring the intensity of the chemically active rays present in any luminous radiation.

The rays from the luminous source are permitted to fall on a selenium resistance, and their intensity determined by the change observed in the resistance as indicated by the deflections of a galvanometer placed in circuit with the selenium resistance. Or, a thermo-electric pile is employed, and the amount of heat present determined by the indications of a galvanometer placed in its circuit.

**Action, Cataphoric** — —The action of electric osmose or cataphoresis. (See *Cataphoresis*.)

**Action Currents.**—(See *Currents, Action*.)

**Action, Inductive, Lines of** — —Lines within the space, separating a charge and a neighboring body, along which electrostatic inductive action takes place.

Lines of electrostatic force.

Lines of inductive action pass through the dielectric, separating the two bodies, and terminate on the surfaces of the conductor. According to the now generally received notions, the electrostatic charge exists in the mass of the dielectric, and not in that of the conductor. The lines of inductive action terminate against the surfaces, one at the positive, and the other at the negative surface. A true E. M. F. exists in the space traversed by lines of inductive action. A conductor brought into this space becomes electrified, or is strained in such a manner that a momentary current is produced by the rearrange-

ment of the electrification brought about by electrostatic induction.

**Action, Local, of Dynamo-Electric Machine** — —The loss of energy in a dynamo-electric machine by the setting up of eddy currents in its pole pieces, cores, or other conducting masses. (See *Currents, Eddy*.)

In a dynamo-electric machine local action is obviated by a *lamination of the pole pieces, armature core, etc.* (See *Core, Lamination of*.)

**Action, Local, of Voltaic Cell** — —An irregular dissolving or consumption of the zinc or positive element of a voltaic battery, by the fluid or electrolyte, when the circuit is open or broken, as well as when closed, or in regular action.

Local action is due to small particles of such impurities as carbon, iron, arsenic, or other negative elements, in the positive plate. These impurities form with the positive element minute voltaic couples, and thus direct the corrosive action of the liquid to portions of the plate near them. Local action causes a waste of energy. It may be avoided by the amalgamation of the zinc. (See *Zinc, Amalgamation of*.)

**Action, Magne-Crystalline** — —A term proposed by Faraday to express differences in the action of magnetism on crystalline bodies in different directions.

A needle of tourmaline, if hung with its axis horizontal, is no longer paramagnetic, as usual, but diamagnetic. The same is true of a crystal of bismuth. Faraday concluded from these experiments that a force existed distinct from either the paramagnetic or the diamagnetic force. He called this the *magne-crystalline force*.

Plücker infers from these phenomena that a definite relation exists between the *ultimate form of the particles of matter and their magnetic behavior*. The subject may be regarded as yet somewhat obscure. (See *Polarity, Diamagnetic*.)

**Action of a Current on a Magnetic Pole.** —(See *Current, Action of, on a Magnetic Pole*.)

**Action, Refreshing, of Current** — —The restoration, after fatigue, of muscular and nervous excitability obtained by the action of



voltaic alternatives. (See *Alternatives, Voltaic*.)

**Activity.**—The work done per second by any agent. (This term is but seldom used.)

Work-per-second, or, as generally termed in the United States, Power, or Rate of Doing Work. (See *Power*.)

**Activity, Unit of** — —A rate of working that will perform one unit of work per second.

In C. G. S. units, the activity of one erg per second.

The C. G. S. unit of activity is very small. One *Watt*, the practical unit of activity or power, is equal to ten million ergs per second. (See *Watt*.)

The unit of activity generally used for mechanical power is the horse-power, or 746 watts. (See *Horse-Power*.)

**Actual Caution.**—(See *Caution, Actual*.)

**Acute Angle.**—(See *Angle, Acute*.)

**Adapter.**—A screw nozzle fitted to an electric lamp, provided with a screw thread to enable it to be readily placed on a gas bracket or chandelier in place of an ordinary gas burner.

**Adherence.**—The quality or property of adhering. (See *Adhesion*.)

**Adherence, Magnetic** — —Adhesion between surfaces due to magnetic attraction.

Magnetic adhesion has been applied, among other things, to a brake action on car wheels, either by causing them to adhere directly to the track or to a brake-block.

**Adhesion.**—The mutual attraction which exists between unlike molecules. (See *Attraction, Molecular*.)

The phenomena of adhesion are due to the mutual attraction of dissimilar molecules.

**Adhesion, Electric** — —Adhesion between surfaces due to the attraction of unlike electrostatic charges.

Molecular adhesion must be distinguished from the attraction which causes a piece of dry and warmed writing paper, that has been rubbed by a piece of india-rubber, to stick to a papered wall. In this latter case the attraction between the wall

and the paper is due to the mutual attraction of two dissimilar electrostatic charges. Molecular adhesion must also be distinguished from the attraction of opposite magnetic poles.

**Adhesion, Galvanoplastic** — —The adhesion of a galvanoplastic deposit or coating to surfaces subjected to electroplating. (See *Plating, Electro*.)

**Adiathermancy.**—Opacity to heat.

A substance is said to be *adiathermanous* when it is transparent to heat. Clear, colorless crystals of rock salt are very transparent both to light and to heat. Rock salt, covered with a layer or deposit of lampblack or soot, is quite transparent to heat. An adiathermanous body is one which is opaque to heat.

Heat transparency varies not only with different substances, but also with the nature of the source from which the heat is derived. Thus, a substance may be opaque to heat from a non-luminous source, such as a vessel filled with boiling water, while it is comparatively transparent to heat from a luminous source, such as an incandescent solid or a voltaic arc.

A similar difference exists as regards transparency to light. A colorless glass will allow light of any color to pass through it. A blue glass will allow blue light to pass freely through it, but will completely prevent the passage of any red light; and so with other colors.

**Adiathermanic.**—Possessing the quality of adiathermancy. (See *Adiathermancy*.)

**Adjustable Condenser.**—(See *Condenser, Adjustable*.)

**Adjuster, Cord** — —A device for adjusting the length of a pendant cord.

**Adjustment.**—Such a regulation of any apparatus as will enable it to properly perform its functions.

**Epinus' Condenser.**—(See *Condenser, Epinus'*.)

**Aerial Cable.**—(See *Cable, Aerial*.)

**Aerial Cable, Suspending Wire of** — — (See *Wire, Suspending, of Aerial Cable*.)

**Aerial Line.**—(See *Line, Aerial*.)

**Aerolites.**—A name sometimes given to meteorites.

Meteorites are masses of solids which pass



through the upper portions only of the earth's atmosphere on their approach to the orbit of the earth, or which fall through the air on the earth's surface from the sky. They are luminous at night and are followed by a train of fire. The luminosity is due to heat produced by friction through the air. Meteors frequently burst from the sudden expansion of their outer portions.

Some meteorites are composed of nearly pure iron alloyed with nickel. The majority of them, however, are merely stones or oxidized substances. Their average velocity is about 26 miles a second.

**Affinity, Chemical** — —Atomic attraction.

The force which causes atoms to unite and form chemical molecules.

Atomic or chemical attraction generally results in a loss of the characteristic qualities or properties which distinguish one kind of matter from another. In this respect chemical affinity differs from *adhesion*, or the force which holds unlike molecules together. (See *Adhesion*. *Attraction*, *Molecular*.) If, for example, sulphur is mixed with lampblack, no matter how intimate the mixture, the separate particles, when examined by a magnifying glass, exhibit their peculiar color, lustre, etc. If, however, the sulphur is chemically united with the carbon, a colorless, transparent, mobile liquid, called carbon bisulphide, results, that possesses a disagreeable, penetrating odor.

Chemical affinity, or atomic combination, is influenced by a variety of causes, viz.:

(1.) *Cohesion*. Cohesion, by binding the molecules more firmly together, opposes their mutual atomic attraction.

A solid rod of iron will not readily burn in the flame of an ordinary lamp; but, if the cohesion be overcome by reducing the iron rod to filings, it burns with brilliant scintillations when dropped into the same flame. In this case the increase of surface and the increased temperature of the smaller particles also contribute to the result.

(2.) *Solution*. Solution, by giving the molecules greater freedom of motion, favors their chemical combination.

(3.) *Heat*. Heat sometimes favors atomic combination possibly by decreasing the cohesion, and, possibly, by altering the electrical relations of the atoms. If too great, heat may produce decomposition. There is for most substances a critical

temperature below which chemical combination will not take place. (See *Thermolysis*.)

(4.) *Light*. Decomposition, or the lessening of chemical affinity, through the agency of light, is called *Actinism*. Light also causes the direct combination of substances. A mixture of equal volumes of hydrogen and chlorine unites explosively when exposed to the action of full sunlight. (See *Actinism*.)

(5.) *Electricity*. An electric spark will cause an explosive combination of a mixture of oxygen and hydrogen. Electricity also produces chemical decomposition. (See *Electrolysis*.)

Helmholtz accounts for the electro-chemical attraction of oxygen for zinc by supposing that all substances possess a definite amount of attraction for electricity, and that the attraction of zinc in this respect exceeds that of copper and the other metals. He thus regards the zinc as attracting its electric charge rather than as attracting the oxygen. Since both zinc and copper are dyad metals, this view, as will be seen, is at variance with later views.

Chemical affinity may be caused by the opposite attractions of electrical charges naturally possessed by the atoms of matter. This would appear to be rendered probable by the law of electro-chemical equivalence. (See *Equivalence*, *Electro-Chemical*, *Law of*. *Electricity*, *Atom of*.)

**After Currents**.—(See *Currents*, *After*.)

**Aging of Alcohol, Electric** — —(See *Alcohol*, *Electric Aging of*.)

**Agonal**.—Pertaining to the agone. (See *Agone*.)

**Agone**.—A line connecting places on the earth's surface where the magnetic needle points to the true geographical north.

The line of no declination or variation of a magnetic needle. (See *Needle*, *Magnetic*, *Declination of*.)

As all the places on the earth where the magnetic needle points to the true north may be arranged on a few lines, it will be understood that the pointing of the magnetic needle to the true geographical north is the exception and not the rule. In many places, however, the deviation from the true geographical north is so small that the direction of the needle may be regarded as approximately due north.

**Agonic**.—Pertaining to the agone.

**Air-Blast for Commutators.**—An invention of Prof. Elihu Thomson to prevent the injurious action of destructive flashing at the commutator of a dynamo-electric machine.

A thin, forcible blast of air is delivered through suitable tubes at points on the three-part commutator cylinder of the Thomson-Houston dynamo, where the collecting brushes bear on its surface. The effect is to blow out the arc or prevent its formation and thus avoid its destructive action on the commutator segments. The use of the air-blast also permits the free application of oil, thus further avoiding wear.




Fig. 4. Air-Blast on Commutator

The blast-nozzles are shown at B<sup>a</sup>, B<sup>b</sup>, Fig. 4, near the collecting brushes.

The air-supply is obtained from a blower attached directly to the shaft of the machine. Its construction and operation will be readily understood from an inspection of Fig. 5, in which the




Fig. 5. The Thomson Blower.

top is removed for ready examination of the interior parts.

**Air Churning.**—(See *Churning, Air.*)

**Air Condenser.**—(See *Condenser, Air.*)

**Air Field.**—(See *Field, Air.*)

**Air-Gap.**—(See *Gap, Air.*)

**Air-Line Wire.**—(See *Wire, Air-Line.*)

**Air Magnetic Circuit.**—(See *Circuit, Air Magnetic.*)

**Air-Pump.**—(See *Pump, Air.*)

**Air-Pump, Geissler's Mercurial** — — (See *Pump, Air, Geissler's Mercurial.*)

**Air-Pump, Mechanical** — — (See *Pump, Air, Mechanical.*)

**Air-Pump, Mercurial** — — (See *Pump, Air, Mercurial.*)

**Air-Pump, Sprengel's Mercurial** — — (See *Pump, Air, Sprengel's Mercurial.*)

**Air-Space Cut-Out.**—(See *Cut-Out, Air-Space.*)

**Alarm, Burglar** — — A device, generally electric, for automatically announcing the opening of a door, window, closet, drawer, or safe, or the passage of a person through a hallway, or on a stairway.

Electric burglar-alarm devices generally consist of mechanism for the operation of an automatic make-and-break bell on the opening or closing of an electric circuit. The bell may either continue ringing only while the contact remains closed, or, may, by the throwing on of a local circuit or battery, continue ringing until stopped by some non-automatic device, such as a hand-switch.

The alarm-bell is stationed either in the house when occupied, or on the outside when the house is temporarily vacated, or may connect directly with the nearest police station.

Burglar-alarm apparatus is of a variety of forms. Generally, devices are provided by means of which, in case of house protection, an *annunciator* shows the exact part where an entrance has been attempted. (See *Annunciator, Burglar-Alarm.*) Switches are provided for disconnecting all or parts of the house from the alarm when so desired, as well as to permit windows to be partly raised for purposes of ventilation without sounding the alarm. A clock is frequently connected with the alarm for the purpose of automatically disconnecting any portion of the house at or for certain intervals of time.

Fig. 6 shows a burglar-alarm with annunciator, switches, switch-key, cut-off, and clock.



Fig. 6. Burglar-Alarm Annunciator.

**Alarm, Burglar, Central-Station** — — A burglar-alarm, the contact points of which are placed in the places to be protected, and



connected by suitable circuits with alarms placed in a centrally located station.

In a system of central-station burglar-alarms, a number of houses, factories, banks, etc., are all connected telegraphically with the nearest police station, or other central station, constantly provided with police officers. A series of contacts are placed on doors, windows, safes and money drawers, and connected with alarms and annunciators placed in the central station. An unauthorized entrance, therefore, is automatically telegraphed to the central station and its exact location indicated on the annunciator. Systems of central-station fire-alarms are constructed on a similar plan.

**Alarm, Electric** — —An automatic device by which attention is called to the occurrence of certain events, such as the opening of a door or window; the stepping of a person on a mat or staircase; the rise or fall of temperature beyond a given predetermined point; or, a device intended to call a person to a telegraphic or telephonic instrument.

Electric-alarms are operated by means of the ringing of an electro-magnetic or mechanical bell,

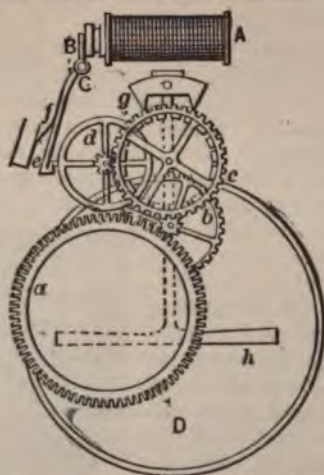


Fig. 7. Electrically Started Mechanical Alarm.

which is electrically called into action by either closing or opening an electric circuit, generally the former.

Electric-alarms may be divided into two classes, viz.:

(1.) Mechanically operated alarms, or those in

which the alarm is given by clock-work, started by means of an electric current.

(2.) Those in which the alarm is both set in action and operated by an electric current.

In Fig. 7 is shown the general construction of an electrically started mechanical alarm. The attraction of the armature B, by the electro-magnet A, moves the armature lever pivoted at C, and thus releases the catch e, and permits the spring or weight connected with the clock movement to set it in motion and strike the bell.

Electrically actuated alarm-bells are generally of the automatic make-and-break form. The striking lever is operated by the attraction of the armature of an electro-magnet, and is provided with a contact-point, so placed that when the hammer is drawn away from the bell, by the action of a spring, on the electro-magnet losing its magnetism, a contact is made, but when the hammer is drawn towards the bell the contact is opened. When, therefore, the hammer strikes the bell, the circuit is opened, and the electro-magnet releases its armature, permitting a spring to again close the contact by moving the striking lever away from the bell. Once set into action, these movements are repeated while there is battery power sufficient to energize the magnet.

In Fig. 8, in which is shown an electrically actuated alarm-bell, the battery terminals are con-




Fig. 8. Automatic Make-and-Break.

ected with the right and left hand binding-posts, P and M. The hammer, K, is connected with a striking lever, which forms part of the circuit, and which is attached to the armature of the electro-magnet e. A metallic spring, g, bears against the armature when the latter is away from the magnet, but does not touch the armature when it is moved towards the magnet. A small spring draws the lever away from the magnet when no current is passing. The movements of the arma-

ture thus automatically open and close the circuit of the electro-magnet.

This form of make-and-break is called an *automatic make-and-break*.

**Alarm, Electrically Operated** — —An alarm that is maintained in operation by the electric current. (See *Alarm, Electric*.)

**Alarm, Electro-Mechanical** — —A mechanically operated alarm that is started or set in operation by means of an electric current. (See *Alarm, Electric*.)

**Alarm, Fire, Automatic** — —An instrument for automatically telegraphing an alarm from any locality on its increase in temperature beyond a certain predetermined point.

Fire-alarms are operated by *thermostats*, or by means of *mercurial contacts*; i. e., a contact closed by the expansion of a column of mercury. (See *Thermostat, Contact, Mercurial*.)

In systems of *fire-alarm telegraphs*, the alarm is automatically sounded in a central police station and in the district fire-engine house. (See *Telegraphy, Fire-Alarm*.)

**Alarm, Mercurial Temperature** — —An instrument for automatically telegraphing an alarm by means of a mercurial contact on a predetermined change of temperature.

The action of mercurial contacts is dependent on the fact that, as the mercury expands more than glass by the action of heat, the mercury level reaches a contact-point placed in a glass tube and thus completes the circuit through its own mass, which forms the other or movable contact. Sometimes both contacts are placed on opposite sides of a tube and are closed when the mercury reaches them.

Mercurial temperature or thermostat alarms are employed in hot-houses, incubators, tanks and buildings for the purpose of maintaining a uniform temperature.

**Alarm, Telegraphic** — —An alarm-bell for calling the attention of an operator to a telegraphic instrument when the latter is of the non-acoustic or needle type.

In acoustic systems of telegraphy the sounds themselves are generally sufficient.

**Alarm, Telephonic** — —An alarm-bell for calling a correspondent to the receiving telephone.

These alarms generally consist of magneto-electric bells. (See *Bell, Magneto-Electric*.)

**Alarm, Temperature** — —An electric alarm automatically operated on a change of temperature. (See *Alarm, Fire, Automatic*.)

**Alarm, Thermostat** — —An electric alarm that is thrown into action by a thermostat. (See *Thermostat*.)

**Alarm, Water or Liquid Level** — —A device for electrically sounding an alarm when a water surface varies materially from a given level.

An electric bell is placed in a circuit that is automatically closed or broken by the movement of contact-points operated by the change of liquid level.

A form of electric alarm for a water-level is shown in Fig. 9. The float is provided with contacts for closing an electric circuit, when it either rings a bell, or, by its action on some form of automatic cut-off, stops the water.

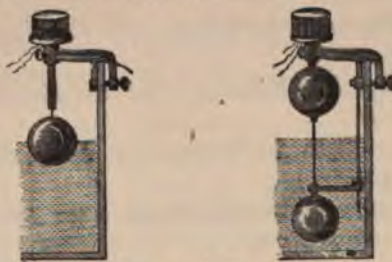


Fig. 9. Water-Level Alarm. Fig. 10.

When arranged with a double float, as shown in Fig. 10, the alarm may be made to signal either a too high or a too low water level.

**Alarm, Yale-Lock-Switch Burglar** — —An apparatus whereby the opening of a door by an authorized party provided with the regular key will not sound an alarm, but any other opening will sound such alarm.



Fig. 11. Yale-Lock-Switch.

A Yale-lock burglar-alarm switch is shown in Fig. 11.

**Alcohol, Electric Aging of** — —A process for the rapid aging of alcohol, by ex-



posing it to the action of electrically produced ozone.

Instead of the ordinary process of aging alcohol, by exposing it in partially closed vessels to the action of air, it is exposed to the action of ozone, electrically produced.

The ozone employed is obtained in substantially the usual way by the passage of a rapid succession of electric sparks through air.

#### Alcohol, Electric Rectification of —

A process whereby the bad taste and odor of alcohol, due to the presence of aldehydes, are removed by the electrical conversion of the aldehydes into true alcohols through the addition of hydrogen atoms.

An electric current sent through the liquid between zinc electrodes liberates oxygen and hydrogen from the decomposition of the water. The nascent or atomic hydrogen converts the aldehydes into alcohol and deprives the products of their fusel oil, while the oxygen forms insoluble zinc oxide.

**Algebraic Co-efficient.**—(See *Co-efficient, Algebraic*.)

**Algebraic Notation.**—(See *Notation, Algebraic*.)

**All-Night Arc Lamp.**—(See *Lamp, All-Night Arc*.)

**All-Night Electric Lamp.**—(See *Lamp, All-Night Arc*.)

**Allotropic.**—Pertaining to allotropy. (See *Allotropy*.)

**Allotropic State.**—(See *State, Allotropic*.)

**Allotropy.**—A variation of the physical properties of an elementary substance without change of composition of its molecules.—(See *State, Allotropic*.)

**Alloy.**—A combination, or mixture, of two or more metallic substances.

Alloys in most cases appear to be true chemical compounds. In a few instances, however, they may form simple mixtures.

The composition of a few important alloys is here given:

Solder, plumber's; Tin 66 parts, Lead 34 parts.

Pewter, hard; Tin 92 parts, Lead 8 parts.

Britannia metal; Tin 100 parts, Antimony 8 parts, Copper 4 parts, Bismuth, 1 part.

Type metal; Lead 80, Antimony 20 parts.

Brass, white; Copper 65, Zinc 35 parts.

Brass, red; Copper 90, Zinc 10 parts.

Speculum metal; Copper 67, Tin 33 parts.

Bell metal; Copper 78, Tin 22 parts.

Aluminium bronze; Copper 90, Aluminium 10 parts.

**Alloy.**—To form a combination or mixture of two or more metallic substances.

**Alloy, German Silver** — —An alloy employed for the wires of resistance coils, consisting of 50 parts of copper, 25 of zinc, and 25 of nickel.

German silver wire is suitable for resistance coils, because its resistance varies but slightly with changes of temperature. It is cheaper than *platinum-silver alloy*, and is therefore employed extensively. Platinum-silver alloy, however, has more resistance for a given size of wire, and its resistance varies somewhat less than German silver with changes of temperature, and is therefore used where greater accuracy is desired.

**Alloy, Palladium** — —An alloy of palladium with other metals.

Palladium forms a number of useful alloys with various metals. Some of the palladium alloys are as elastic as steel, are unaffected by moisture or ordinary corrosive agencies, and are *entirely devoid of paramagnetic properties*; that is to say, they cannot be magnetized after the manner of iron.

These properties have been utilized by their discoverer, Paillard, in their employment for the hair-springs, escapements and balance wheels of watches, in order to permit the watches to be carried into strong magnetic fields without any appreciable effects on the rate of the watch. A number of careful tests made by the author, by long continued exposure of watches, thus protected by the Paillard alloys, in extraordinary fields, show that the protection thus given the watches enables them to be carried into the strongest possible magnetic fields without appreciably affecting their rate.

The Paillard palladium alloys have the following composition, viz.:

#### *Alloy No. 1.*

Palladium.....60 to 75 parts.

Copper.....15 to 25 “

Iron.....1 to 5 “

*Alloy No. 2.*

Palladium.....	50 to 75 parts.
Copper.....	20 to 30 "
Iron.....	5 to 20 "

*Alloy No. 3.*

Palladium.....	65 to 75 "
Copper.....	15 to 25 "
Nickel.....	1 to 5 "
Gold.....	1 to 2½ "
Platinum.....	¼ to 2 "
Silver.....	3 to 10 "
Steel.....	1 to 5 "

*Alloy No. 4.*

Palladium.....	45 to 50 "
Silver.....	20 to 25 "
Copper.....	15 to 25 "
Gold.....	2 to 5 "
Platinum.....	2 to 5 "
Nickel.....	2 to 5 "
Steel.....	2 to 5 "

The great value of the palladium alloys, when employed for the hair-springs of watches, arises not only from their non-magnetizable properties, and their inoxidizability, but particularly from the fact that their elasticity is approximately the same for comparatively wide ranges of temperature.

**Alloy, Platinum-Silver** — —An alloy consisting of one part of platinum, and two parts of silver.

Platinum-silver alloy is now extensively employed for resistance coils from the fact that changes in temperature of the alloy produce but comparatively small changes in its electrical resistance. (See *Alloy, German Silver*.)

**Alphabet, Telegraphic** — —An arbitrary code consisting of dots and dashes, sounds, deflections of a magnetic needle, flashes of light, or movements of levers, following one another in a given predetermined order, to represent the letters of the alphabet and the numerals.

**Alphabet, Telegraphic: International Code** — —The code of signals for letters, etc., employed in England and on the European continent generally.

Similar symbols are employed for the numerals and the punctuation marks.

It will be observed that it is mainly in the

characters of the American Morse, in which spaces are used, that the Continental characters differ from the American. This is due to the use of the needle instrument, with which a space cannot well be represented. A movement or deflection of the

Single		Single	
Printing	Needle	Printing	Needle
a . —	↘	n — —	↘
b — —	↘	o — — —	///
c — — —	↘	p — — —	///
d — —	↘	q — — —	///
e .	↘	r — —	↘
f — — —	↘	s — —	///
g — — —	///	t — —	///
h — — —	///	u — —	///
i — —	///	v — — —	///
j — — —	///	w — — —	///
k — — —	///	x — — —	///
l — — —	///	y — — —	///
m — — —	///	z — — —	///

*International Telegraphic Code.*

needle to the left signifies a dot; a movement to the right, a dash.

**Alphabet, Telegraphic: Morse's** — — Various groupings of dots and dashes, or deflections of a magnetic needle to the right and left, which represent the letters of the alphabet or other signs.

In the Morse alphabet dots and dashes are employed in recording systems, and sounds of varying intervals, corresponding to the dots and dashes, in the sounder system.

A dash is equal in length of time to three dots. The space between the separate characters of a single letter is equal to one dot, except in the American Morse, in which the following letters contain longer spaces: C, O, R, Y, and Z. The lengthened spaces are equal to two dots. L is one and a half times the length of T.

The sound produced by the down stroke of the sounding lever in the Morse sounder is readily distinguishable from the up stroke. When these differences are taken in connection with the intervals between successive sounds there is no difficulty in reading by sound.

(For methods of receiving the alphabet, see *Sounder, Morse Telegraphic. Recorder, Morse. Recorder, Bain's Chemical. Recorder, Siphon. Relay. Magnet, Receiving*.) In the *needle telegraph*, the code is similar to that used in the Morse Alphabet. (See *Telegraphy, Single-Needle*.)



AMERICAN MORSE CODE.  
ALPHABET.

a —	n —
b — — —	o —
c — —	p — — —
d — —	q — — —
e —	r —
f — —	s — —
g — — —	t —
h — — —	u — —
i — —	v — — —
j — — —	w — — —
k — — —	x — — —
l — —	y — — —
m — —	z — — —

& — — —

NUMERALS.

1 — — —	6 — — —
2 — — —	7 — — —
3 — — —	8 — — —
4 — — —	9 — — —
5 — — —	0 — — —

PUNCTUATION MARKS.

Period — — — —	Interrogation — — — —
Comma — — — —	Exclamation — — — —

	Printing	Single Needle
1	— — — — —	* \ / / / /
2	— — — — —	\\ / / / /
3	— — — — —	\\ \ / / /
4	— — — — —	\\ \ \ / /
5	— — — — —	\\ \ \ \ /
6	— — — — —	/ \ \ \ \
7	— — — — —	/ / \ \ \
8	— — — — —	/ / / \ \
9	— — — — —	/ / / / \
10	— — — — —	/ / / / /
Period	— — — — —	\\ \\ \\
Comma	— — — — —	\\ / / / /
Interrogation	— — — — —	\\ / / \
Exclamation	— — — — —	/ / \ / /
Colon	— — — — —	/ / / \ \
Semicolon	— — — — —	/ \ / /

**Alteration Theory of Muscle or Nerve Current.**—(See *Theory, Alteration, of Muscle or Nerve Current.*)

**Alternating Arc.**—(See *Arc, Alternating.*)

**Alternating Current Circuit.**—(See *Circuit, Alternating Current.*)

**Alternating Current Condenser.**—(See *Condenser, Alternating Current.*)

**Alternating Current Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Alternating Current.*)

**Alternating Current Electric Motor.**—(See *Motor, Electric, Alternating Current.*)

**Alternating Currents.**—(See *Currents, Alternating.*)

**Alternating Currents, Distribution of Electricity by** — — — (See *Electricity, Distribution of, by Alternating Currents.*)

**Alternating Discharge.**—(See *Discharge, Alternating.*)

**Alternating Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Alternating Current.*)

**Alternating Electrostatic Field.**—(See *Field, Alternating Electrostatic.*)

**Alternating Electrostatic Potential.**—(See *Potential, Alternating Electrostatic.*)

**Alternating Field.**—(See *Field, Alternating.*)

**Alternating Influence Machine, Wimschurst's** — — — (See *Machine, Wimschurst's Alternating Influence.*)

**Alternating Magnetic Field.**—(See *Field, Alternating Magnetic.*)

**Alternating Magnetic Potential.**—(See *Potential, Alternating Magnetic.*)

**Alternating Potential.**—(See *Potential, Alternating.*)

**Alternating Primary Currents.**—(See *Currents, Alternating Primary.*)

**Alternating Secondary Currents.**—(See *Currents, Alternating Secondary.*)

**Alternation.**—A change in direction or phase.

**Alternations.**—Changes in the direction of a current in a circuit.

A current that changes its direction 300 times per second is said to possess 300 alternations per second.

**Alternations, Complete** — — — A change in the direction of a current in a circuit from its

former direction and back again to that direction. A complete to-and-fro change.

Complete alternations are sometimes indicated by the symbol  $\sim$ .

**Alternations, Frequency of** — —A phrase employed to denote the number of alternations per second.

**Alternative Path.**—(See *Path, Alternative*.)

**Alternatives, Voltaic** — —A term used in medical electricity to indicate sudden reversals in the polarity of the electrodes of a voltaic battery.

An alternating current from a voltaic battery, obtained by the use of a suitable commutator.

Sudden reversals of polarity produce more energetic effects of muscular contraction than do simple closures or completions of the circuit.

The muscular contraction produced by a voltaic current is much stronger when the direction of the current is rapidly reversed by means of a commutator than when the current is more slowly broken and the poles then reversed.

The effect of voltaic alternatives is to produce quick contractions that are in strong contrast to the prolonged contractions that result from the faradic current. In the faradic machine, the reversals are so rapid that the muscle fails to return to rest before it is again contracted.

Voltaic alternatives are sometimes indicated by the contraction V. A.

**Alternator.**—A name commonly given to an alternate current dynamo. (See *Machine, Dynamo-Electric, Alternating Current*.)

**Alternator, Compensated Excitation of** — —An excitation of an alternating current dynamo-electric machine, in which the field is but partially excited by separate excitement, the remainder of its exciting current being derived from the commuted currents of a small transformer placed in the main circuit of the machine.

The object of compensated excitation of an alternator is to render the machine self-governing.

**Amalgam.**—A combination or mixture of a metal with mercury.

**Amalgam, Electric** — —A substance

with which the rubbers of the ordinary frictional electric machines are covered.

Electric amalgams are of various compositions. The following formula produces an excellent amalgam:

Melt together five parts of zinc and three of tin, and gradually pour the molten metal into nine parts of mercury. Shake the mixture until cold, and reduce to a powder in a warm mortar. Apply to the cushion by means of a thin layer of stiff grease.

*Mosaic gold*, or bisulphide of tin, and powdered graphite, both act as good electric amalgams.

An electric amalgam not only acts as a conductor to carry off the negative electricity, but, being highly negative to the glass, produces a far higher electrification than would mere leather or chamois.

**Amalgamate.**—To form into an amalgam.

**Amalgamating.**—Forming into an amalgam.

**Amalgamation.**—The act of forming into an amalgam, or effecting the combination of a metal with mercury.

**Amalgamation of Zinc Plates of Voltaic Cell.**—(See *Plates, Zinc, of Voltaic Cell, Amalgamation of*.)

**Amber.**—A resinous substance, generally of a transparent, yellow color.

Amber is interesting electrically as being believed to be the substance in which the properties of electric attractions and repulsions, imparted by friction or rubbing, were first noticed. It was called by the Greeks *ἡλεκτρον*, from which the word electricity is derived. This property was mentioned by the Greek, Thales of Miletus, 600 B. C., as well as by Theophrastus.

**American System of Telegraphy.**—(See *Telegraphy, American System of*.)

**American Twist-Joint.**—(See *Joint, American Twist*.)

**American Wire Gauge.**—(See *Gauge, Wire, American*.)

**Ammeter.**—A form of galvanometer in which the value of the current is measured directly in amperes. (See *Galvanometer*.)

An ampere-meter or ammeter is a commercial form of galvanometer in which the deflection of



a magnetic needle are calibrated or valued in amperes. As a rule the coils of wire in an ammeter are of lower resistance than in a voltmeter. The magnetic needle is deflected from its zero position by the field produced by the current whose strength in amperes is to be measured. This needle is held in the zero position by the action of a magnetic field, either of a permanent or an electro-magnet, by the action of a spring, or by a weight under the influence of gravity. There thus exist a variety of ammeters, viz.: *permanent-magnet* ammeters, *electro-magnetic* ammeters, *spring* ammeters and *gravity* ammeters.

In the form originally devised by Ayrton and Perry, the needle came to rest almost immediately, or was *dead-beat* in action. (See *Damping*.) It moved through the field of a permanent magnet. The instrument was furnished with a number of coils of insulated wire, which could be connected either in *series* or in *multiple-arc* by means of a *commutator*, thus permitting the scale reading to be verified or calibrated by the use of a single voltaic cell. (See *Circuits*, *Varieties of Commutator*. *Calibration*, *Absolute*. *Calibration*, *Relative*.) In this case the coils were turned to series, and a plug pulled out, thus introducing a resistance of one ohm.



Fig. 12. Ayrton and Perry Ammeter.

Fig. 12 represents an ampère-meter devised by Ayrton and Perry. A device called a *commutator* for connecting the coils either in series or parallel is shown at C. Binding posts are provided at P, PS, and S. The dynamo terminals are connected at the posts P, PS, and the current will pass only when the coils are in multiple, thus avoiding accidental burning of the coils. In this case the entire current to be measured passes through the coils so coupled. The posts S and PS, are for connecting the single battery cell current.

A great variety of ampère-meters, or ammeters, have been devised. They are nearly all, how-

ever, constructed on essentially the same general principles.

Commercial ammeters are made in a great variety of forms. When the currents to be measured are large, as is generally the case in electric light or power stations, they consist of a coil of insulated wire, often of a single turn, or even of but a part of a turn, having a balanced core of iron or steel capable of moving freely within it.

**Ammeter, Electro-Magnetic** — — A form of ammeter in which a magnetic needle is moved against the field of an electro-magnet by the field of the current it is measuring. (See *Ammeter*.)

**Ammeter, Gravity** — — A form of ammeter in which a magnetic needle is moved against the force of gravity by the field of the current it is measuring. (See *Ammeter*.)

**Ammeter, Magnetic-Vane** — — An ammeter in which the strength of a magnetic field produced by the current that is to be measured is determined by the repulsion exerted between a fixed and a movable iron vane, placed in said field and magnetized thereby. (See *Voltmeter*, *Magnetic-Vane*.)

**Ammeter, Permanent-Magnet** — — A form of ammeter in which a magnetic needle is moved against the field of a permanent magnet by the field of the current it is measuring. (See *Ammeter*.)

**Ammeter, Reducteur for** — — (See *Reducteur*, or *Shunt for Ammeter*.)

**Ammeter, Spring** — — A form of ammeter in which a magnetic needle is moved against the action of a spring by the field of the current it is measuring. (See *Ammeter*.)

**Amorphous**.—Having no definite crystalline form.

Mineral substances have certain crystalline forms, that are as characteristic of them as are the forms of animals or plants. Under certain circumstances, however, they occur without definite crystalline form, and are then said to be amorphous solids.

**Ampèreage**.—The number of amperes passing in a given circuit.

The current strength in any circuit as indicated by an ampère-meter placed in the circuit.



**Ampère.**—The practical unit of electric current.

Such a rate-of-flow of electricity as transmits one coulomb per second.

Such a current (or rate-of-flow or transmission of electricity) as would pass with an electromotive force of one volt through a circuit whose resistance is equal to one ohm.

A current of such a strength as would deposit .005084 grain of copper per second.

A current of one ampère is a current of such definite strength that it would flow through a circuit of a certain resistance and with a certain electromotive force. (See *Force, Electromotive. Volt. Resistance. Ohm.*)

Since the ohm is the practical unit of resistance, and the volt the practical unit of electromotive force, the ampère, or the practical unit of current, is the current that would flow through unit resistance, under unit pressure or electromotive force.

To make this clearer, take the analogy of water flowing through a pipe under the pressure of a column of water. That which causes the flow is the *pressure or head*; that which resists the flow is the *friction* of the water against the pipe, which will vary with a number of circumstances. The *rate-of-flow* may be represented by *so many cubic inches of water per second*.

As the pressure or head increases, the flow increases proportionally; as the resistance increases, the flow diminishes.

Electrically, electromotive force corresponds to the pressure or head of the water, and resistance to the friction of the water and the pipe. The ampère, which is the *unit rate-of-flow per second*, may therefore be represented as follows,

viz.:  $C = \frac{E}{R}$ , as was announced by Ohm in his law. (See *Law of Ohm.*)

This expression signifies that C, the *current in ampères*, is equal to E, the *electromotive force in volts*, divided by R, the *resistance in ohms*.

We measure the rate-of-flow of liquids as so many *cubic inches or cubic feet per second*—that is, in units of quantity. We measure the rate-of-flow of electricity as so much electricity per second. The electrical unit of quantity is called the *Coulomb*. (See *Coulomb.*) The coulomb is such a quantity as would pass in one second through a circuit in which the rate-of-flow is one ampère.

An *ampère* is therefore equal to *one coulomb per second*.

The electro-magnetic unit of current is such a current that, passed through a conducting wire bent into a circle of the radius of one centimetre, would tend to move perpendicular to its plane a *unit magnetic pole* held at its centre, and sufficiently long to practically remove the other pole from its influence, with unit force, *i. e.*, the force of one *dyne*. (See *Dyne.*) The ampère, or practical electro-magnetic unit, is *one-tenth of such a current*; or, in other words, the *absolute unit of current* is ten ampères.

An ampère may also be defined by the chemical decomposition the current can effect as measured by the quantity of hydrogen liberated, or metal deposited.

Defined in this way, an ampère is such a current as will deposit .00111815 gramme, or .017253 grain, of silver per second on one of the plates of a silver *voltameter*, from a solution of silver nitrate containing from 15 to 30 per cent. of the salt (See *Voltameter*), or which will decompose .00009326 gramme, or .001439 grain of dilute sulphuric acid per second, or pure sulphuric acid at 59 degrees F. diluted with about 15 per cent. of water, that is, dilute sulphuric acid of Sp. Gr. of about 1.1. The present scientific and commercial practice is to take the ampère to be such a current as will deposit 4.024 grammes of silver in one hour.

**Ampère Arc.**—(See *Arc, Ampère.*)

**Ampère-Foot.**—(See *Feet, Ampère.*)

**Ampère-Hour.**—(See *Hour, Ampère.*)

**Ampère-Meter.**—An ammeter. (See *Ammeter.*)

**Ampère-Meter, Balance or Neutral Wire**  
—An ampère-meter placed in the circuit of the neutral wire, in the three-wire system of electric distribution, for the purpose of showing the excess of current passing over one side of the system as compared with the other side, when the central wire is no longer neutral.

**Ampère-Minute.**—(See *Minute, Ampère.*)

**Ampère Ring.**—(See *Ring, Ampère.*)

**Ampère-Second.**—(See *Second, Ampère.*)

**Ampère Tap.**—(See *Tap, Ampère.*)

**Ampère-Turn.**—(See *Turn, Ampère.*)

**Ampère-Turn, Primary** — (See *Turn, Ampère, Primary.*)



**Ampère-Turn, Secondary** — — (See *Turn, Ampère, Secondary*.)

**Ampère-Volt.**—A watt, or the  $\frac{1}{746}$  of a horse-power.

This term is generally written *volt-ampère*. (See *Volt-Ampère*.)

**Ampère-Winding.**—(See *Winding, Ampère*.)

**Ampère's Rule for Effect of Current on Needle.**—(See *Rule, Ampère's, for Effect of Current on Needle*.)

**Ampère's Theory of Magnetism.**—(See *Magnetism, Ampère's Theory of*.)

**Ampèrian Currents.**—(See *Currents, Ampèrian*.)

**Amplitude of Vibration or Wave.**—(See *Vibration or Wave, Amplitude of*.)

**Ammunition-Hoist, Electric** — — An electrically operated hoist for raising ammunition to the deck of a ship.

In the electric ammunition-hoist the electric motor which moves the hoist is made to follow the motions of the operator's hand, both as regards direction and speed. The motion of a crank, or wheel, causes a switch to start an electric motor in a certain direction, which tends to close the switch, thus necessitating a race between the operator and the motor. Should the operator begin to close the switch more slowly, the motor will overtake him, will partially close the switch, and thus lower the speed of the motor.

**Analogous Pole.**—(See *Pole, Analogous*.)

**Analysis.**—The determination of the composition of a compound substance by separating it into the simple or elementary substances of which it is composed.

**Analysis, Electric** — — The determination of the composition of a substance by electrical means.

Various processes have been proposed for electric analysis; they consist essentially in decomposing the substance by means of electric currents, and are either qualitative or quantitative. (See *Electrolysis*.)

**Analysis, Electrolytic** — — A term sometimes used instead of electric analysis. (See *Analysis, Electric*.)

**Analysis, Qualitative** — — A chemical

analysis which merely ascertains the kinds of elementary substances present.

**Analysis, Quantitative** — — A chemical analysis which ascertains the relative proportions in which the different components enter into a compound.

**Analyzable.**—Separable into component parts.

**Analyze.**—To separate into component parts.

**Analyze, Electrically** — — To separate electrically into component parts.

**Analyzer, Electric** — — A gridiron of metallic wires which is transparent to electromagnetic waves, when its length is perpendicular to them, but opaque to them—*i. e.*, possessing the ability to reflect them—when rotated 90 degrees from its former position.

The electric analyzer, it will be observed, is analogous to an analyzer for polarized light. A reflecting surface, for example, being able to reflect polarized light in a given position, and unable to reflect it when rotated 90 degrees from such position, is capable of acting as an analyzer for polarized light.

**Analyzer, Gray's, Harmonic Telegraphic** — — An electro-magnet, the armature of which consists of a steel ribbon stretched in a metallic frame and capable through regulation, as to tension, by means of a screw, of being tuned to a certain note.

The steel ribbon is thrown into vibration whenever pulsations from the transmitting instruments are sent over the line corresponding to the rate of motion of the ribbon, but is not set into vibration by any others. If, therefore, a number of different analyzers, tuned to different notes, are placed on the same line, each will be operated only by the pulsations sent into the line corresponding to its rate of motion, and thus multiple transmission in the same direction is possible. In order to strengthen the tones of the analyzers, each is provided with a resonant air column. (See *Resonator. Telegraphy, Multiplex*.)

**Analyzing.**—Separating into component parts.

**Anelectric.**—A word formerly applied to bodies (conductors) which it was believed could not be electrified by friction.

This term is now obsolete. Conductors are easily electrified, when insulated.

**Anelectrotonic State.**—(See *State, Anelectrotonic*.)

**Anelectrotonic Zone.**—(See *Zone, Anelectrotonic*.)

**Anelectrotonus.**—In electro-therapeutics, the decreased functional activity which occurs in a nerve in the neighborhood of the anode, or positive electrode, when applied therapeutically. (See *Electrotonus*.)

**Anemometer, Electric** — — An apparatus to electrically record or indicate the direction and intensity of the wind.

In the electric recording anemometer, the force or velocity of the wind, or both, are recorded on a moving sheet of paper, on which the time is marked, so that the exact time of any given change is known.

**Anemoscope.**—An instrument which indicates, but does not measure the intensity or record the direction of the wind.

The word is often, though improperly, used interchangeably for anemometer.

**Angle.**—The deviation in direction between two lines or planes that meet.

Angles are measured by arcs of circles. The angle at B A C, Fig. 13, is the deviation of the straight line A B, from A C. In reading the lettering of an angle the letter placed in the middle indicates the angle referred to. Thus B A C, means the angle between A B and A C; B A D, the angle between B A and A D. Angles are valued in degrees, there being 360 degrees in an entire circumference or circle. Degrees are indicated thus: 90°, or ninety degrees.

**Angle, Acute** — — An angle whose value is less than a right angle or 90 degrees.

B A E, or E A D, in Fig. 13, is an acute angle.

**Angle, Complement of** — — What an angle needs to make its value 90 degrees, or a right angle.

Thus in Fig. 13, B A E, is the complement of the angle E A D, since B A E + E A D = 90 degrees.




Fig. 13. Angles.

**Angle, Obtuse** — — An angle whose value is greater than a right angle or 90 degrees.

E A C, Fig. 13, is an obtuse angle.

**Angle of Declination or Variation.**—(See *Declination, Angle of. Variation, Angle of*.)

**Angle of Difference of Phase Between Alternating Currents of Same Period.**—(See *Phase, Angle of Difference of, Between Alternating Currents of Same Period*.)

**Angle of Dip.**—(See *Dip. Dip or Inclination, Angle of*.)

**Angle of Inclination.**—(See *Dip or Inclination, Angle of*.)

**Angle of Lag of Dynamo-Electric Machine.**—(See *Lag, Angle of, of Dynamo-Electric Machine*.)

**Angle of Lead.**—(See *Lead, Angle of*.)

**Angle of Variation.**—(See *Variation, Angle of*.)

**Angle, Plane** — — An angle contained between two straight lines.

**Angle, Solid** — — An angle contained between two surfaces.

**Angle, Supplement of** — — What an angle needs to make its value 180 degrees, or two right angles.

Thus in Fig. 13, E A C, is the supplement of E A D, because E A D + E A C = 180 degrees, or two right angles.

**Angle, Unit** — — An angle of 57.29578° or 57° 17' 44.8" nearly.—(See *Velocity, Angular*.)

**Angular Currents.**—(See *Currents, Angular*.)

**Angular Velocity.**—(See *Velocity, Angular*.)

**Animal Electricity.**—(See *Electricity, Animal*.)

**Animal Magnetism.**—(See *Magnetism, Animal*.)

**Anion.**—The electro-negative radical of a molecule.

Literally, the term *ion* signifies a group of wandering atoms. An *anion* is that group of atoms of an electrically decomposed or electrolyzed



molecule which appears at the *anode*. (See *Electrolysis. Anode*.)

As the anode is connected with the electro-positive terminal of a source, the *anion* is the *electro-negative radical* or *group of atoms*, and therefore appears at the *electro-positive terminal*.

A *kathion*, or *electro-positive radical*, appears at the *kathode*, which is connected with the *electro-negative terminal* of the battery. Oxygen and chlorine are *anions*. Hydrogen and the metals are *kathions*.

**Anisotropic Conductor.**—(See *Conductor, Anisotropic*.)

**Anisotropic Medium.**—(See *Medium, Anisotropic*.)

**Annealing, Electric** — — A process for annealing metals in which electric heating is substituted for ordinary heating.

**Annual Inequality of Earth's Magnetism.**—(See *Inequality, Annual, of Earth's Magnetism*.)

**Annual Variation of Magnetic Needle.**—(See *Needle, Magnetic, Annual Variation of*.)

**Annunciator, Burglar-Alarm** — — An annunciator used in connection with a system of burglar-alarms. (See *Alarm, Burglar*.)

**Annunciator Clock, Electric** — — (See *Clock, Electric Annunciator*.)

**Annunciator Drop.**—(See *Drop, Annunciator*.)

**Annunciator Drop, Automatic** — — (See *Drop, Automatic Annunciator*.)

**Annunciator, Electro-Magnetic** — — An electric device for automatically indicating the points or places at which one or more electric contacts have been closed.

The character of the annunciator depends, of course, on the character of the places at which these points, places or stations are situated.

Annunciators are employed for a variety of purposes. In hotels they are used for indicating the number of a room the occupant of which desires some service, which he signifies by pushing a button, thus closing an electric circuit. This is indicated or announced on the annunciator by the falling of a *drop*, on which is printed a number corresponding with the room, and by the

ringing of a bell to notify the attendant. The number is released by the movement of the armature of an electro-magnet. The drops are replaced in their former position by some mechanical device operated by the hand. In the place of a drop a

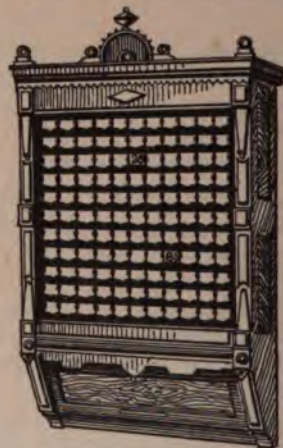


Fig. 14. Electro-Magnetic Annunciator.

needle is sometimes used, which, by the attraction of the armature of an electro-magnet, points to the number signaling.

Annunciators for houses, burglar-alarms, fire-alarms, elevators, etc., are of the same general construction.

Annunciators are generally operated by electro-magnetic attraction or repulsion, and are therefore sometimes called *electro-magnetic annunciators*.

Fig. 14 shows an annunciator suitable for use in hotels.

The numbers 28 and 85 are represented as having been dropped by the closing of the circuit connected with them.



Fig. 15. Elevator Annunciator.

**Annunciator, Elevator** — — An annunciator connected with an elevator to indicate the floor signaling.

One form of elevator annunciator is shown in Fig. 15.

**Annunciator, Fire-Alarm** — —An annunciator used in connection with a system of fire-alarms.

**Annunciator, Gravity-Drop** — —An annunciator whose signals are operated by the fall of a drop.



Fig. 16. Gravity-Drop Annunciator.

A form of gravity-drop annunciator is shown in Fig. 16. The armature mechanism for the release of the drop will be understood by an inspection of the drawing.

**Annunciator, Hotel** — —An annunciator connected with the different rooms of a hotel.

A hotel-annunciator is generally provided with a return bell and guest-call.

**Annunciator, House** — —An annunciator connected with the rooms of a house.

**Annunciator, Needle** — —An annunciator, the indications of which are given by the movements of a needle instead of the fall of a drop.

A form of needle-annunciator is shown in Fig. 17.

**Annunciator, Oral or Speaking Tube** — —An annunciator electrically operated

by means of a puff of breath transmitted through an ordinary speaking tube.

The oral-annunciator is a contrivance whereby a central office is placed in communication with a number of speaking tubes coming from different points in a hotel or other place. A person in any room, who wishes to communicate with the central office, blows through the speaking tube in his room, and thus, by effecting an electric contact, rings a bell and operates a drop at the annunciator, thus indicating the exact tube at which the attendant is to receive the message. The attendant can thus be placed in easy communication with each of the rooms whose speaking tubes connect with the annunciator.

**Annunciator, Pendulum or Swinging** — —An annunciator, the indicating arm of which consists of a pendulous, or swinging arm,



Fig. 17. Needle-Annunciator.

which, when at rest, points vertically downward, and which is moved to the right or left by the action of the current.

Pendulous, or swinging-annunciators are generally so arranged as to need no replacement.



On the cessation of the current the indicator arm drops vertically downward.

A relay is preferably used with pendulum-annunciators, since the rapid makes and breaks of the current by the bell alarm interfere with their satisfactory action.

**Anodal.**—Pertaining to the anode. (See *Anode*.)

**Anodal Diffusion.**—(See *Diffusion, Anodal*.)

**Anode.**—The conductor or plate of a decomposition cell connected with the positive terminal of a battery, or other electric source.

That terminal of an electric source out of which the current flows into the liquid of a decomposition cell or voltameter is called the anode.

That terminal of an electric source into which the current flows from a decomposition cell or voltameter is called the kathode.

The anode is connected with the carbon or positive terminal of a voltaic battery, and the kathode with the zinc, or negative terminal. Therefore the word anode has been used to signify the positive terminal of an electric source, and kathode, the negative terminal, and in this sense is employed generally in electro-therapeutics. It is preferable, however, to restrict the use of the words anode and kathode to those terminals of a source at which electrolysis is taking place.

The terms anode and kathode in reality refer to the electro-receptive devices through which the current flows. Since it is assumed that the current flows out of a source from its positive pole or terminal, and back through the source at its negative pole or terminal, the pole of any device which is connected with the positive pole of a source is the part or place at which the current enters and flows through it, and that connected with the negative pole, the part at which it leaves. Hence, probably, the change in the use of the words already referred to.

Since the *anion*, or the *electro-negative* radical, appears at the *anode*, it is the anode of an *electro-plating bath*, or the plate connected with the positive terminal of the source, that is dissolved.

When the term *anode* was first proposed by Faraday, voltaic batteries were the only available electric source, and the term referred only to the

*positive terminal of a voltaic battery when placed in an electrolyte.*

**Anodic.**—Pertaining to the anode. (See *Anode*.)

**Anodic Electro-Diagnostic Reactions.**—(See *Reactions, Kathodic and Anodic Electro-Diagnostic*.)

**Anodic Opening Contraction.**—(See *Contraction, Anodic Opening*.)

**Anomalous Magnet.**—(See *Magnet, Anomalous*.)

**Anomalous Magnetization.**—(See *Magnetization, Anomalous*.)

**Anti-Induction Cable** — — (See *Cable, Anti-Induction*.)

**Anti-Induction Conductor.**—(See *Conductor, Anti-Induction*.)

**Antilogous Pole.**—(See *Pole, Antilogous*.)

**Anvil.**—The front contact of a telegraphic key that limits its motion in one direction. (See *Key, Telegraphic*.)

**Aperiodic Galvanometer.**—(See *Galvanometer, Aperiodic*.)

**Apparatus, Faradic-Induction** — —  
An induction coil apparatus for producing faradic currents.

A voltaic battery is connected with the primary of an induction coil, and its current rapidly broken by an *automatic break*, or by a hand break. The alternating or faradic currents thus produced in the secondary coils are used for electro-therapeutic purposes. (See *Coil, Induction*.)

Faradic induction apparatus is made in a great variety of forms. They all operate, however, on essentially the same principles.

**Apparatus, Faradic, Magneto-Electric** — —  
—A small magneto-electric machine employed in electro-therapeutics for producing faradic currents.

Magneto-electric faradic machines consist essentially of a coil of wire wrapped on an armature core that is rotated before the poles of permanent magnets. No commutator is employed, since it is desired to obtain rapidly alternating currents.

**Apparatus, Interlocking** — —  
—Devices for mechanically operating from a distant signal

tower, railroad switches and semaphore signals for indicating the position of such switches, by means of a system of interlocking levers, so constructed that the signals and the switches are so interlocked as to render it impossible, after a route has once been set up and a signal given, to clear a signal for a route that would conflict with the one previously set up. (See *Block System for Railroads*.)

**Apparatus, Magneto-Electric Medical**

—A term applied to small magneto-electric machines employed in medical electricity for the production of uncommuted or faradic currents. (See *Apparatus, Faradic, Magneto-Electric*.)

**Apparatus, Registering, Electric** —

Devices for obtaining permanent records by electrical means.

**Apparatus, Registering, Telegraphic** —

—A name sometimes given to a telegraphic recorder. (See *Recorder, Chemical, Bain's, Recorder, Morse, Recorder, Siphon*.)

**Apparent Co-efficient of Induction.**—

(See *Induction, Apparent Co-efficient of*.)

**Arago's Disc.**—(See *Disc, Arago's*.)

**Arc.**—A voltaic arc. (See *Arc, Voltaic*.)

**Arc.**—To form a voltaic arc.

A dynamo-electric machine is said to arc at the commutator, when the current passes as visible sparks across the spaces between adjacent segments.

This action at the commutator is more generally called *sparking* or *burning*.

**Arc, Alternating** — —A voltaic arc formed by means of an alternating current.

In order to avoid the extinction of the arc a certain number of alternations per second is necessary. The alternating arc produces a loud singing noise. At very high frequencies, however, the noise disappears.

The alternating arc, not possessing a fixed positive crater, requires to be covered by a good reflector to throw the light downward.

**Arc, Ampère** — —A single conductor bent in an arc of a circle, and used in electric balances for measuring the electric current.

**Arc Blow-Pipe.**—(See *Blow-Pipe, Electric Arc*.)

**Arc, Compound** — —An arc formed between more than two separate electrodes.

**Arc, Counter Electromotive Force of**

— —An electromotive force generally believed to be set up on the formation of a voltaic arc, opposed in direction to the electromotive force maintaining the arc. (See *Force, Electromotive, Counter*.)

This counter electromotive force is believed to have its origin partly in the energy absorbed at the crater of the positive carbon, where the carbon is volatilized, and given out at the nipple on the negative carbon, where it is deposited or solidified. It is to be noted in this connection that the apparent resistance of the carbon voltaic arc is not directly proportional to the length of the arc.

**Arc, Electric** — —A term sometimes used for the voltaic arc. (See *Arc, Voltaic*.)

**Arc, Frying of** — —A frying sound attending the formation of a voltaic arc when the carbons are too near together.

The cause of the frying sound is probably the same as that of hissing. (See *Arc, Hissing of*.)

**Arc, Hissing of** — —A hissing sound attending the formation of voltaic arcs when the carbons are too near together.

The cause of the hissing is not entirely understood. Prof. Elihu Thomson suggests that it is due to a too rapid volatilization of the carbons.

**Arc Lamp.**—(See *Lamp, Arc*.)

**Arc Lamp, Electric** — —(See *Lamp, Electric Arc*.)

**Arc Lamp, Triple Carbon Electric** —

—(See *Lamp, Arc, Triple Carbon Electric*.)

**Arc Lighting.**—(See *Lighting, Arc*.)

**Arc, Metallic** — —A voltaic arc formed between metallic electrodes.

When the voltaic arc is formed between metallic electrodes instead of carbon electrodes, a flaming arc is obtained, the color of which is characteristic of the burning metal; thus copper forms a brilliant green arc. The metallic arc, as a rule is much longer than an arc with the same current taken between carbon electrodes.

**Arc Micrometer.**—(See *Micrometer, Arc*.)



**Arc, Noisy** — —A voltaic arc, the maintenance of which is attended by frying, hissing, or spluttering sounds.

**Arc, Quiet** — —A voltaic arc which is maintained without sensible sounds.

**Arc, Roaring of** — —A roaring sound attending the formation of a voltaic arc when the carbons are too near together and a very powerful current is used.

**Arc, Simple** — —An arc formed between two electrodes.

**Arc, Spluttering of** — —A spluttering sound attending the formation of a voltaic arc.

Prof. Elihu Thomson suggests that the cause of spluttering is due to the presence of impurities in the carbons, or from the sudden evolution of gas from insufficiently baked carbons.

**Arc, Voltaic** — —The brilliant arc or bow of light which appears between the electrodes or terminals, generally of carbon, of a sufficiently powerful source of electricity, when separated a short distance from each other.

The source of light of the electric arc lamp.

It is called the voltaic arc because it was first obtained by the use of the battery invented by Volta. The term arc was given to it from the shape of the luminous *bow* or *arc* formed between the carbons.

To form the voltaic arc the carbon electrodes are first placed in contact and then gradually separated. A brilliant arc of flame is formed between them, which consists mainly of volatilized carbon. The electrodes are consumed, first, by actual combination with the oxygen of the air; and, second, by volatilization under the combined influence of the electric current and the intense heat.

As a result of the formation of the arc, a crater is formed at the end of the positive carbon, and appears to mark the point out of which the greater part of the current flows.

The crater is due to the greater volatilization of the electrode at this point than elsewhere. It marks the position of highest temperature of the electrodes, and is the main source of the light of the arc. When, therefore, the voltaic arc is employed for the purposes of illumination with vertically opposed carbons, the positive carbon should be made the upper carbon, so that the

focus of greatest intensity of the light may be favorably situated for illumination of the space below the lamp. When, however, it is desired to illumine the side of a building *above* an arc lamp, the lower carbon should be made positive.

The positive carbon is consumed about twice as rapidly as the negative, both because the negative oxygen attacks the points of the positive carbon, and because the positive carbon suffers the most rapid volatilization.

The electric current passes through the space occupied by the voltaic arc because—

(1.) The heated arc is a partial conductor of electricity.

(2.) Because small charges of electricity are carried bodily forward from the positive to the negative carbon through the space of the voltaic arc, by means of the minute particles which are volatilized at the positive electrode.

S. P. Thompson has shown that the temperature of the light-emitting surface of the carbon is the temperature of the volatilization of carbon, and is therefore constant.

Dr. Fleming found that "A rise of potential along the arc takes place very suddenly, just in the neighborhood of the crater."



Fig. 18. Voltaic Arc.

The rounded masses or globules that appear on the surface of the electrodes are due to deposits of molten foreign matters in the carbon.

The carbon, both of the crater and its opposed nipple, is converted into pure, soft graphite.

**Arc, Voltaic, Resistance of** — —The resistance offered by the voltaic arc to the passage of the current.

As in all other conductors, the ohmic resistance of the arc increases with its length, and decreases with its area of cross-section. The apparent resistance, however, is not directly proportional to the length. An increase of temperature decreases the resistance of the voltaic arc.

\* The total apparent resistance of the voltaic arc is composed of two parts, viz.:

(1.) The true ohmic resistance. (See *Resistance, Ohmic.*)

(2.) The counter electromotive force, or spurious resistance. (See *Resistance, Spurious.*)

**Arc, Watt** — —A voltaic arc, the electric power of which is equal to a given number of watts.

The ordinary long-arc, as employed in arc lighting, has a difference of potential of about 45 volts and a current strength of about 10 amperes. It is, therefore, a 450-watt arc.

**Arch, Auroral** — —The archlike form sometimes assumed by the auroral light. (See *Aurora Borealis.*)

**Arceing**.—Discharging by means of voltaic arcs. (See *Arc, Voltaic.*)

Arceing at the commutator of a dynamo-electric machine not only prevents the proper operation of the machine, but eventually leads to the destruction of the brushes and the commutator.

**Areometer, Bead** — —A form of areometer suitable for rapidly testing the density of the liquid in a storage cell.

The bead areometer consists of a glass tube, open at both top and bottom, containing a few glass beads, so weighted as to float at liquid densities such as 1.105, 1.170, 1.190 and 1.200. To use the instrument, it is immersed in the liquid of the storage cell, and then withdrawn. The finger being kept in the upper opening, the liquid does not escape through the small opening at the bottom. The density is then ascertained by noting the beads that float.

**Areometer or Hydrometer**. —An instrument for determining the specific gravity of a liquid.

A common form of hydrometer consists, as shown in Fig. 19, of a closed glass tube, provided with a bulb, and filled at the lower end with mercury or shot, so as to insure its vertical position when floating in a liquid. When placed in different liquids, it floats with part of the tube out of the liquid. The lighter the liquid, the

smaller is the portion that remains out of the liquid when the instrument floats. The specific gravity is determined by observing the depth to which the instrument sinks when placed in different liquids, as compared with the depth it sinks when placed in water.

**Areometry**.—The measurement of specific gravity by means of an areometer.

**Argand Burner, Electric Hand-Lighter** — —(See *Burner, Argand, Electric Hand-Lighter.*)

**Argand Burner, Electric Plain-Pendant** — —(See *Burner, Plain Pendant, Argand, Electric.*)

**Argand Burner, Electric Ratchet-Pendant** — —(See *Burner, Ratchet-Pendant, Argand, Electric.*)

**Argyrometry**.—The art of determining the weight of electrolytically deposited silver. (See *Balance, Plating.*)

**Arm, Balance** — —One of the resistances of an electric balance. (See *Arms, Bridge or Balance, Bridge, Electric.*)

**Arm, Bridge** — —A bridge arm. (See *Arms, Bridge or Balance.*)

**Arm, Cross** — —A horizontal beam attached to a pole for the support of the insulators for telegraph, electric light or other electric wires.

A telegraphic arm. (See *Arm, Telegraphic.*)

**Arm, Rocker** — —An arm on which the brushes of a dynamo or motor are mounted for the purpose of shifting their position on the commutator.

**Arm, Semaphore** — —The movable arm of the signal apparatus employed in block systems for railroads, for the purpose of informing engineers of trains of the condition of the road as regards other trains.

In the absolute block system, as used on some roads, there are two positions for the semaphore arm, viz.:

- (1.) For Danger—when in a horizontal position, or at 90 degrees with the vertical supporting pole.
- (2.) Clear—when dropped below the horizontal position through an angle of 75 degrees.

In the Permissive Block System, a third position




Fig. 19. Hydrometer.



intermediate between the 1st and the 2d, or at an angle of 37 degrees 30 minutes with the horizontal position, is used for caution. (See *Block System for Railroads*.)

**Arm, Signal** — —A semaphore arm. (See *Arm, Semaphore*.)

**Arm, Telegraphic** — —A cross-arm placed on a telegraphic pole for the support of the insulators.

These arms are generally called cross-arms.

**Armature**—A mass of iron or other magnetizable material placed on or near the pole or poles of a magnet.

In the case of a *permanent magnet*, the armature, when used as a *keeper*, is of soft iron and is placed directly on the magnet poles. In this case it preserves or keeps the magnetism by closing the *lines of magnetic force* of the magnet through the soft iron of the armature, and is then called a *keeper*. (See *Force, Magnetic, Lines of*.)

In the case of an electro-magnet, the armature is placed near the poles, and is moved toward them whenever the magnet is energized by the passage of the current through the magnetizing coils. This movement is made against the action of a spring or weights, so that on the loss of magnetism by the magnet, the armature moves from the magnet poles. (See *Magnet, Permanent, Magnet, Keeper of*.)

When the armature is of soft iron it moves toward the magnet on the completion of the circuit through its coils, no matter in what direction the current flows, and is then called a *non-polarized armature*. (See *Armature, Non-Polarized*.)

When made of *steel*, or of another electro-mag-

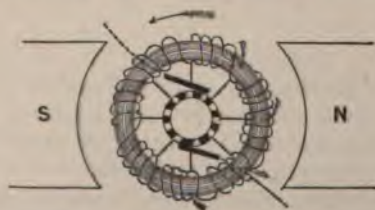


Fig. 20. Bi-polar Armature.

net, it moves from or toward the poles, according to whether the poles of the armature are of the same or of a different polarity from those of the magnet. Such an armature is called a *polarized armature*. (See *Armature, Polarized*.)

**Armature, Bi-polar** — —An armature of a dynamo-electric machine the polarity of which is reversed twice in every revolution through the field of the machine.

A form of bi-polar armature is shown in Fig. 20. The word bi-polar armature is not generally employed. The term applies rather to the field-magnet poles than to the armature.

**Armature Bore**.—(See *Bore, Armature*.)

**Armature Bore, Elliptical** — —(See *Bore, Elliptical Armature*.)

**Armature Chamber**.—(See *Chamber, Armature*.)

**Armature Coils, Dynamo** — —(See *Coils, Armature, of Dynamo-Electric Machine*.)

**Armature Core, Dynamo** — —(See *Core, Armature, of Dynamo-Electric Machine*.)

**Armature, Cylindrical** — —A term sometimes applied to a drum armature. (See *Armature, Drum, Armature, Dynamo-Electric Machine*.)

**Armature, Cylindrical Ring**—A ring armature with a core in the shape of a comparatively long cylinder.

**Armature, Disc** — —An armature of a dynamo-electric machine, in which the armature coils consist of flat coils, supported on the surface of a disc. (See *Armature, Dynamo-Electric Machine*.)

**Armature, Dissymmetrical Induction of** — —Any induction produced in the armature of a dynamo-electric machine that is unequal in amount on opposite halves, or in symmetrically disposed portions of the armature.

Dissymmetrical induction in the armature may cause annoying or injurious sparking at the commutator. It may arise—

- (1.) From a lack of symmetry in the amount of the armature windings.
- (2.) From a lack of symmetry in the arrangement of the armature windings on the armature core.
- (3.) From a lack of symmetry of the pole pieces of the machine.
- (4.) From an improper position of the brushes

as regards the neutral point on the commutator, causing a temporary short-circuiting of one or more of the armature coils.

**Armature, Drum** — An armature of a dynamo-electric machine, in which the armature coils are wound longitudinally over the surface of a cylinder or drum. (See *Armature, Dynamo-Electric Machine*.)

A form of drum-armature is shown in Fig. 21.

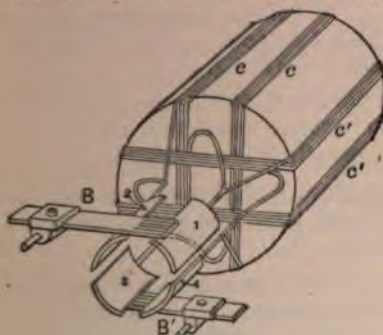


Fig. 21. Drum-Armature.

**Armature, Dynamo-Electric Machine** — The coils of insulated wire together with the iron armature core, on or around which the coils are wound.

That part of a dynamo-electric machine in which the differences of potential which cause the useful currents are generated.

Generally, that portion of a dynamo-electric machine which is revolved between the pole pieces of the field magnets.

The armature of a dynamo-electric machine usually consists of a series of coils of insulated wire or conductors, wrapped around or grouped on a central core of iron. The movement of these wires or conductors through the magnetic field of the machine produces an electric current by means of the *electromotive forces* so generated. Sometimes the field is rotated; sometimes both armature and field rotate.

The armatures of dynamo-electric machines are of a great variety of forms. They may for convenience be arranged under the following heads, viz.:

*Cylindrical or drum-armatures, disc-armatures, pole-or-radial armatures, ring-armatures, and spherical-armatures.* For further particulars see above terms. Armatures are also divided

into classes according to the character of the magnetic field through which they move—viz.: unipolar, bipolar, and multipolar armatures.

The English sometimes use the word *cylindrical armature* as a synonym of *ring-armature*.

A unipolar-armature is one whose polarity is never reversed. A bipolar-armature is one in which the polarity is reversed twice in every rotation; multipolar armatures have their polarity reversed a number of times in every rotation.

The term armature as applied to a dynamo-electric machine was derived from the fact that the iron core acts to magnetically connect the two poles of the field magnets in the same manner that an ordinary armature connects the poles of a magnet.

**Armature, Flat Ring** — A ring-armature with a core in the shape of a short cylindrical ring.

**Armature, Girder** — An armature with an H-shaped or girder-like core.

An H-shaped armature.

**Armature, Intensity** — An old term for an armature with coils of many turns and of a comparatively high resistance.

**Armature, Lamination of Core of** — A division of the iron core of the armature of a dynamo-electric machine or motor, so as to avoid the formation of eddy-currents therein. (See *Core, Lamination of. Currents, Eddy*.)

**Armature, Multipolar** — A dynamo-electric machine armature whose polarity is reversed more than twice during each rotation in the field of the machine.

**Armature, Neutral** — A non-polarized armature. (See *Armature, Non-Polarized*.)

**Armature, Neutral-Relay** — A relay armature, consisting of a piece of soft iron, which closes a local circuit whenever its electro-magnet receives an impulse over the main line. (See *Armature, Polarized*.)

This term is applied in contradistinction to a polarized relay armature.

**Armature, Non-Polarized** — An armature of soft iron, which is attracted toward the poles of an electro-magnet on the comple-



tion of the circuit, no matter in what direction the current passes through the coils.

The term non-polarized is used in contradistinction to polarized armature. (See *Armature, Polarized*.)

The non-polarized armature of a relay magnet is generally called the *neutral-relay armature*.

#### **Armature of a Cable, or Cable-Armature.**

—A term sometimes employed for the sheathing or protecting coat of a cable.

The term armor sheathing or coating is preferable.

#### **Armature of a Condenser, or Condenser**

**Armature.**—A term sometimes applied to the metallic plates of a condenser or Leyden jar.

The use of this term is unnecessary and ill-advised. The term coating or plate would appear to be preferable.

#### **Armature of Holtz Machine, or Holtz-**

**Machine Armature.**—The pieces of paper that are placed on the stationary plate of the Holtz and other similar electrostatic induction machines.

**Armature Pockets.**—(See *Pockets, Armature*.)

**Armature, Polarized** — —An armature which possesses a polarity independent of that imparted by the magnet pole near which it is placed.

In permanent magnets the armatures are made of soft iron, and therefore, by *induction*, become of a polarity opposite to that of the magnet poles that lie nearest them. They have, therefore, only a motion of attraction toward such poles. (See *Induction, Magnetic*.)

In electro-magnets the armatures may either be made of soft iron, in which case they are attracted only on the passage of the current; or they may be formed of permanent steel magnets, or may be electro-magnets themselves, in which case the passage of the current through the coils of the electro-magnet, or electro-magnets, may cause either attraction or repulsion, according as the adjacent poles are of opposite polarity or are of the same polarity.

**Armature, Pole** — —An armature the coils of which are wound on separate poles

that project radially from the periphery of a disc, drum or ring.

A pole-armature showing the arrangement of



Fig. 22. Pole-Armature.

the coils and their connection to the commutator segments is seen in Fig. 22.

**Armature, Quantity** — —An old term for an armature wound with but a few coils of comparatively low resistance.

**Armature, Radial** — —A term sometimes used instead of pole-armature. (See *Armature, Pole*.)

**Armature, Ring** — —A dynamo-electric machine armature, the coils of which are wound on a ring-shaped core.




Fig. 23. Ring-Armature.

A ring-armature is shown in Fig. 23, together with the disposition of the coils and their connection to the segments of the commutator.

**Armature, Shuttle** — —A variety of drum armature in which a single coil of wire is wound in an H-shaped groove formed in a bobbin shaped core.

The old form of Siemens-armature.

**Armature, Single-Loop** — —A closed conducting circuit consisting of a single loop, capable of revolving in a magnetic field so as to cut its lines of force.

**Armature, Spider.**—(See *Spider, Armature*.)

**Armature, Spherical** — —A dynamo-electric machine armature, the coils of which are wound on a spherical iron core.

The Thomson-Houston dynamo, which is the only machine employing an armature of this type, has its armature formed by wrapping three coils of insulated wire on a core of iron so shaped as to insure an approximately spherical armature when wrapped.

**Armature, Toothed-Ring** — —An armature, the core of which is in the shape of a ring, provided with a number of teeth in the spaces between which the armature coils are placed.

**Armature, Unipolar** — —A dynamo-electric machine armature whose polarity is not reversed during its rotation in the field of the machine.

**Armature, Ventilation of** — —A process for insuring the free passage of air through the armature of a dynamo-electric machine in order to prevent overheating.

**Armor of Cable.**—(See *Cable, Armor of*.)

**Armored Cable.**—(See *Cable, Armored*.)

**Armored Conductor.**—(See *Conductor, Armored*.)

**Arms, Bridge or Balance** — —The electric resistances, in the electric balance or bridge. (See *Bridge, Electric*.)




Fig. 24. Arms of Balance.

An unknown resistance, such, for example, as D, Fig. 24, is measured by proportioning the known resistances, A, C and B, so that no current flows through the galvanometer G, across the circuit or bridge M G N.

**Arms, Proportionate** — —The two resistances or arms of an electric bridge whose relative or proportionate resistances only are required to be known in order to determine,

in connection with a known resistance, the value of an unknown resistance placed in the remaining arm of the bridge.

Thus is Fig. 24, A and B, are the proportionate arms.

**Arrangement or Device, Electromotive** — —A term sometimes employed to represent a dynamo-electric machine, voltaic cell or other electric source, by means of which electromotive force can be produced.

Electric sources do not produce electric currents, but differences of potential or electromotive force. Electric sources are therefore very properly termed electromotive devices.

**Arrester, Lightning** — —A device by means of which the apparatus placed in any electric circuit is protected from the destructive effects of a flash or bolt of lightning.

In the phenomena of *lateral induction* and *alternative path*, we have seen the tendency of a *disruptive* discharge to take a short-cut across an intervening air space, rather than through a longer though better conducting path. Most lightning arresters are dependent for their operation on this tendency to lateral discharge. (See *Induction, Lat. ral. Path, Alternative*.)

A form of lightning arrester is shown in Fig. 25.




Fig. 25. Comb Lightning-Arrester.

The line wires, A and B, are connected by two metallic plates to C and D, respectively.

These plates are provided with points, as shown, and placed near a third plate, connected to the ground by the wire G. Should a bolt strike the line, it is discharged to the earth through the wire G.

Various forms are given to lightning arresters of this type. The projections are sometimes placed on the ground-connected plate as well as on the plates connected to line wires. This form is sometimes called a *comb arrester*, or *protector*.



**Arrester, Lightning, Comb** — —A term sometimes applied to a lightning arrester in which both the line and ground plates are furnished with a series of teeth, like those on a comb. (See *Arrester, Lightning*.)

**Arrester, Lightning, Counter-Electromotive Force** — —A lightning arrester, in which the passage of the discharge through the instruments to be protected is opposed by a counter-electromotive force, generated by induction on the passage of the discharge of the bolt to earth.

The counter-electromotive force lightning arrester is an invention of Professor Elihu Thomson.

It assumes a variety of forms. In the shape shown in Fig. 26, the line circuit of the dynamo,




Fig. 26. Counter-Electromotive Force Lightning Arrester.

D, has one end connected to ground, and the other end has two conducting paths to ground. One of these paths is through the ordinary comb protector at P, by the ground plate E; this circuit includes a few turns of wire C'.




Fig. 27. Counter-Electromotive Force Lightning Arrester.

The induction coils C and C', are thoroughly insulated from each other.

Should a lightning flash or other static discharge pass through the circuit C', which is of comparatively low self-induction, a counter-electromotive force is produced in the other coil C, which protects the line circuit.

In the form of lightning arrester shown in Fig. 27, the coil in the path of the direct lightning discharge is formed into an exterior mesh or net work surrounding the dynamo to be protected. In this case, the coils of the dynamo act as the secondary coils in which the counter electromotive force is set up.

**Arrester, Lightning, Transformer** — —A form of lightning arrester designed for the protection of transformers.

The Thomson arrester for transformers operates on the same principle as his arc-line protector. In the latter the arc, when formed, is blown out by the action of the field of an electro-magnet. This arc is formed on curved metallic bows, one of which is connected to line and the other to earth. The arc is formed at the smallest interval between the bows, and is extinguished by being driven by action of a magnetic field toward greatest interval.

**Arrester Plate of Lightning Protector.** — (See *Plate, Arrester, of Lightning Protector*.)

**Arrester Plates.** — (See *Plates, Arrester*.)

**Articulate Speech.** — (See *Speech, Articulate*.)

**Artificial Carbons.** — (See *Carbons, Artificial*.)

**Artificial Illumination.** — (See *Illumination, Artificial*.)

**Artificial Line.** — (See *Line, Artificial*.)

**Artificial Magnet.** — (See *Magnet, Artificial*.)

**Asphyxia.** — Suspended respiration, resulting eventually in death, from non-aeration of the blood.

In cases of insensibility by an electric shock a species of asphyxia is sometimes brought about. This is due, probably, to the failure of the nerves and muscles that carry on respiration. The exact manner in which death by electrical shock results is not known. (See *Death, Electric*.)

**Assymmetrical Resistance.** — (See *Resistance, Assymmetrical*.)

**Astatic.** — Possessing no directive power.

Usually applied to a magnetic or electro-magnetic device which is free from any tendency to take a definite position on account of the earth's magnetism.



**Astatic Cirenit.**—(See *Circuit, Astatic.*)

**Astatic Couple.**—See *Couple, Astatic.*)

**Astatic Galvanometer.**—(See *Galvanometer, Astatic.*)

**Astatic Needle.**—(See *Needle, Astatic.*)

**Astatic Pair.**—(See *Pair, Astatic.*)

**Astatic System.**—(See *System, Astatic.*)

**Astronomical Meridian.**—(See *Meridian, Astronomical.*)

**Asymptote of Curve.**—(See *Curve, Asymptote of.*)

**Atmosphere, An** — — A unit of gas or fluid pressure equal to about 15 pounds to the square inch.

At the level of the sea the atmosphere exerts a pressure of about 15 pounds avoirdupois, or, more accurately, 14.73 pounds, on every square inch of the earth's surface. This value has therefore been taken as a unit of fluid pressure.

For more accurate measurements pounds to the square inch are employed.

In the metric system of weights and measures an atmosphere is considered equal to 1,033 grammes per square centimetre.

Atmospheric pressures are measured by instruments called *Manometers*. (See *Manometer.*)

**Atmosphere, Residual** — — The traces of air or other gas remaining in a space which has been exhausted of its gaseous contents by a pump or other means.

It is next to impossible to remove all traces of air from a vessel by any known form of pump or other appliance. (See *Vacuum, Absolute.*)

**Atmosphere, The** — — The ocean of air which surrounds the earth.

The atmosphere is, approximately, composed, by weight, of oxygen 23 parts, and nitrogen 77 parts. Besides these there are from 4 to 6 parts in 10,000 of carbonic acid gas (or about a cubic inch of carbonic acid to a cubic foot of air), and varying proportions of the vapor of water.

The oxygen, nitrogen and carbonic acid form the constant ingredients of the atmosphere, the vapor of water the variable ingredient. There are in most localities a number of other variable ingredients present as impurities.

**Atmospheric Electricity.**—(See *Electricity, Atmospheric.*)

**Atmospheric Electricity, Origin of** — — (See *Electricity, Atmospheric, Origin of.*)

**Atom.**—The smallest quantity of elementary or simple matter that can exist.

An ultimate particle of matter.

Atom means that which cannot be cut. It is generally believed that material atoms are absolutely unalterable in size, shape, weight and density; that they can neither be cut, scratched, flattened, nor distorted; and that they are unaffected in size, density, or shape, by heat or cold, or by any known physical force.

Although almost inconceivably small, atoms nevertheless possess a definite size and mass. According to Sir William Thomson, the smallest visible organic particle, 1-4000 of a millimetre in diameter, will contain about 30,000,000 atoms.

**Atom, Closed-Magnetic Circuit of** — — (See *Circuit, Closed-Magnetic, of Atom.*)

**Atom, Gramme** — — Such a number of grammes of any elementary substance as is numerically equal to the atomic weight of the substance.

The gramme-atom of a substance represents the number of *calories* required to raise the temperature of one gramme of that substance through 1 degree C. (See *Heat, Atomic. Caloric.*) Thus, in the case of chlorine, whose atomic weight is 35.5, its gramme-atom is 35.5; consequently 35.5 small calories of heat would be required to raise one gramme-atom of chlorine through 1 degree C.

**Atom of Electricity.**—(See *Electricity, Atom of.*)

**Atom, Vortex** — — A number of particles of the universal ether moving in the manner of a vortex ring.

The theory of vortex atoms, so formed from vortex rings, was propounded by Sir William Thomson in order to explain how a readily movable substance, like the universal ether, could be made to possess the properties of a rigid solid. If it be granted that a vortex motion has once been imparted to the universal ether, Thomson shows that such rings would be indestructible. (See *Matter, Thomson's Hypothesis of.*)

**Atomic Attraction.**—(See *Attraction, Atomic.*)

**Atomic Capacity.**—(See *Capacity, Atomic.*)

**Atomic Currents.**—(See *Currents, Atomic.*)

**Atomic Energy.**—(See *Energy, Atomic.*)

**Atomic Heat.**—(See *Heat, Atomic.*)

**Atomic or Molecular Induced Currents.**—(See *Currents, Induced, Molecular or Atomic.*)

**Atomic Weight.**—(See *Weight, Atomic.*)

**Atomicity.**—The combining capacity of the atoms.

The relative equivalence of the atoms or their atomic capacity.

The elementary atoms do not always combine atom for atom. Some single atoms of certain elements will combine with two, three, four, or even more atoms of another element.

The value of the atomic capacity of an atom is also called its *quantivalence* or *valency*.

Elements whose atomic capacity is—

One,	are called Monads,	or Univalent.
Two,	" Dyads,	" Bivalent.
Three,	" Triads,	" Trivalent.
Four,	" Tetrads,	" Quadrivalent.
Five,	" Pentads,	" Quinivalent.
Six,	" Hexads,	" Sexivalent.
Seven,	" Heptads,	" Septivalent.

**Atomization.**—The act of obtaining liquids in a spray of finely divided particles.

In most cases the term is not literally correct, as each of the smallest particles so obtained usually consist of many thousands of atoms.

**Atomize.**—To separate into a fine spray by means of an atomizer. (See *Atomizer.*)

**Atomizer.**—An apparatus for readily obtaining a finely divided jet or spray of liquid.

A jet of steam, or a blast of air, is driven across the open end of a tube that dips below the surface of the liquid to be atomized. The partial vacuum so formed draws up the liquid, which is then blown by the current into a fine spray.

**Attract.**—To draw together.

**Attracted-Disc Electrometer.**—(See *Electrometer, Attracted-Disc.*)

**Attracting.**—Drawing together.

**Attraction.**—Literally the 'act of drawing together.

In science the name attraction is given to a series of unknown causes which effect, or are assumed to effect, the drawing together of atoms, molecules or masses.

Attraction and repulsion underlie nearly all natural phenomena. While their effects are well known, it is doubtful if anything is definitely known of their true causes.

Since attraction, pure and simple, necessitates the belief in action at a distance, an action which is now generally discredited, we must, strictly speaking, regard the term attraction as being but a convenient substitution of the effect for the cause.

It would appear much more reasonable to regard the effects of attraction as produced by a true push exerted from the outside of the bodies. According to this notion, two masses of matter undergoing attraction are pushed together rather than drawn or attracted together.

It has been suggested that gravitation may perhaps be an effect of a longitudinal motion or vibratory thrust in the universal ether. If this is the case, and the ether is sensibly incompressible, the velocity of gravitation, it would appear, should be almost infinite.

**Attraction, Atomic** — —The attraction which causes the atoms to combine. (See *Affinity, Chemical.*)

In the opinion of Lodge, atomic attraction is the result of the attraction of dissimilar charges of electricity possessed by all atoms, which are capable of uniting or entering into chemical combination. (See *Electricity, Atom of.*)

**Attraction, Capillary** — —The molecular attractions that are concerned in capillary phenomena. (See *Capillarity.*)

**Attraction, Electro-Dynamic** — —The mutual attraction of electric currents, or of conductors through which electric currents are passing. (See *Dynamics, Electro.*)

**Attraction, Electro-Magnetic** — —The mutual attraction of the unlike poles of electro-magnets. (See *Magnet, Electro.*)

**Attraction, Electrostatic** — —The mutual attraction exerted between unlike electric charges, or bodies possessing unlike electric charges.



For example, the pith ball supported on an insulated string is attracted, as shown at A, Fig. 28,



Fig. 28. Electrostatic Attraction.



Fig. 29. Electrostatic Repulsion.

by a bit of sulphur which has been briskly rubbed by a piece of silk. As soon, however, as the ball touches the sulphur and receives a charge, it is repelled, as shown at B, Fig. 29.

These attractions and repulsions are due to the effects of *electrostatic induction*. (See *Induction, Electrostatic*.)

**Attraction, Magnetic** — The mutual attraction exerted between unlike magnet poles.

Magnetic attractions and repulsions are best shown by means of the *magnetic needle* N S, Fig. 30. The N. pole of an approached magnet

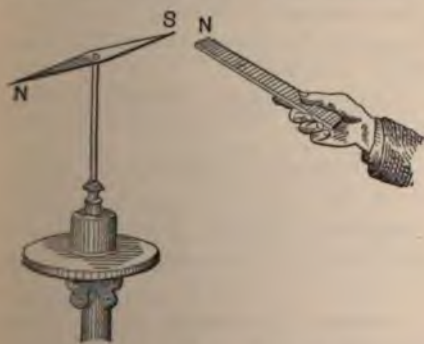


Fig. 30. Magnetic Attraction.

attracts the S. pole of the needle but repels the N. pole.

The laws of magnetic attraction and repulsion may be stated as follows, viz.:

(1.) Magnet poles of the same name repel each other; thus, a north pole repels another north pole, a south pole repels another south pole.

(2.) Magnet poles of unlike names attract each other; thus a north pole attracts a south pole, or a south pole attracts a north pole.

A small bar magnet, N S, Fig. 31, laid on the top of a light vessel floating on the surface of a liquid, may be readily employed to illustrate the laws of magnetic attraction and repulsion.



Fig. 31. Floating Magnet.

**Attraction, Mass** — The mutual attraction exerted between masses of matter. (See *Gravitation*.)

**Attraction, Molar** — A term sometimes employed for mass attraction.

Gravitation is an example of mass attraction, where the mass of the earth attracts the mass of some body placed near it. (See *Gravitation*.)

**Attraction, Molecular** — The mutual attraction exerted between neighboring molecules.

The attraction of like molecules, or those of the same kind of matter, is called *Cohesion*; that of unlike molecules, *Adhesion*.

The tensile strength of iron or steel is due to the cohesion of its molecules. Paint adheres to wood, or ink to paper, by cohesion or the attraction between the unlike molecules.

**Attraction of Gravitation**.—A term generally applied to the mutual attraction between masses. (See *Gravitation*.)

**Attractions and Repulsions of Currents**.—(See *Currents, Attractions and Repulsions of*.)

**Audiphone**.—A thin plate of hard rubber held in contact with the teeth, and maintained at a certain tension by strings attached to one of its edges, for the purpose of aiding the hearing.

The plate is so held that the sound-waves from a speaker's voice impinge directly against its flat surface. It operates by means of some of the waves being transmitted to the ear directly through the bones of the head.

The audiphone is sometimes called a *denti-phones*.

**Aural Electrode**.—(See *Electrode, Aural*.)

**Aurora Australis**.—The Southern Light. A name given to an appearance in the south-



ern heavens similar to that of the Aurora Borealis. (See *Aurora Borealis*.)

**Aurora Borealis.**—The Northern Light.

Luminous sheets, columns, arches, or pillars of pale, flashing light, generally of a red color, seen in the northern heavens.

The auroral light assumes a great variety of appearances, to which the terms *auroral arch, bands, corona, curtains* and *streamers* are applied.

The exact cause of the aurora is not as yet known. It would appear, however, beyond any reasonable doubt, that the auroral flashes are due to the passage of electrical discharges through the upper, and therefore rarer, regions of the atmosphere. The intermittent flashes of light are probably due to the discharges being influenced by the earth's magnetism.

Auroras are frequently accompanied by *magnetic storms*. (See *Storm, Magnetic*.)

The occurrence of auroras is nearly always simultaneous with that of an unusual number of *sun spots*. Auroras are therefore probably connected with outbursts of the solar energy. (See *Spots, Sun*.)

The auroral light examined by the spectroscope gives a *spectrum* characteristic of luminous gaseous matter, *i. e.*, contains a few bright lines; but, according to S. P. Thompson, this spectrum is produced by matter that is not referable with certainty to that of any known substance.

Whatever may be the exact cause of auroras, their appearance is almost exactly reproduced by the passage of electric discharges through vacua.

**Aurora Polaris.**—A general term sometimes applied to aurora in the neighborhood of either pole, or in either the northern or the southern hemisphere.

**Auroral Arch.**—(See *Arch, Auroral*.)

**Auroral Bands.**—(See *Bands, Auroral*.)

**Auroral Coronæ.**—(See *Coronæ, Auroral*.)

**Auroral Curtain.**—(See *Curtain, Auroral*.)

**Auroral Flashes.**—(See *Flashes, Auroral*.)

**Auroral Light.**—(See *Light, Auroral*.)

**Auroral Storm.**—(See *Storm, Auroral*.)

**Auroral Streamer.**—(See *Streamer, Auroral*.)

**Auroras and Magnetic Storms, Peri-**

**odicity of** — — Observed coincidences between the occurrence of auroras, magnetic storms, and sun-spots.

The occurrence of auroras, or magnetic storms, at periods of about eleven years apart, corresponds to the well-known *eleven-year sun-spot period*.

The period also agrees with a variation in the magnetic declination of any place, which, according to Sabine, occurs once in every eleven years.

**Austral Magnetic Pole.**—(See *Pole, Magnetic, Austral*.)

**Autographic Telegraphy.**—(See *Telegraphy, Autographic*.)

**Automatic Annunciator Drop.**—(See *Drop, Annunciator, Automatic*.)

**Automatic Bell.**—(See *Bell, Automatic Electric*.)

**Automatic Contact Breaker.**—(See *Contact Breaker, Automatic*.)

**Automatic Cut-Out.**—(See *Cut-Out, Automatic*.)

**Automatic Cut-Out for Multiple-Connected Electro-Receptive Devices.**—(See *Cut-Out, Automatic, for Multiple-Connected Electro-Receptive Devices*.)

**Automatic Cut-Out for Series-Connected Electro-Receptive Devices.**—(See *Cut-Out, Automatic, for Series-Connected Electro-Receptive Devices*.)

**Automatic Drop.**—(See *Drop, Automatic*.)

**Automatic Electric Burner.**—(See *Burner, Automatic Electric*.)

**Automatic Electric Safety System for Railroads.**—(See *Railroads, Automatic Electric Safety System for*.)

**Automatic Fire-Alarm.**—(See *Alarm, Fire, Automatic*.)

**Automatic Gas Cut-Off.**—(See *Cut-Off, Automatic Gas*.)

**Automatic Indicator.**—(See *Indicator, Automatic*.)

**Automatic Make-and-Break.**—(See *Make-and-Break, Automatic*.)

**Automatic Oiler.**—(See *Oiler, Automatic*.)

**Automatic Paper-Winder.**—(See *Winder, Telegraphic Paper.*)

**Automatic Regulation.**—(See *Regulation, Automatic.*)

**Automatic Regulator.**—(See *Regulator, Automatic.*)

**Automatic Search-Light.**—(See *Light, Search, Automatic.*)

**Automatic Switch for Incandescent Electric Lamp.**—(See *Switch, Automatic, for Incandescent Electric Lamp.*)

**Automatic Telegraphy.**—(See *Telegraphy, Automatic.*)

**Automatic Telephone Switch.**—(See *Switch, Telephone, Automatic.*)

**Automatic Time Cut-Outs.**—(See *Cut-Out, Automatic Time.*)

**Automatic Variable Resistance.**—(See *Resistance, Variable, Automatic.*)

**Automatically Regulable.**—(See *Regulable, Automatically.*)

**Automobile Torpedo.**—(See *Torpedo, Automobile.*)

**Average or Mean Electromotive Force.**—(See *Force, Electromotive, Average, or Mean.*)

**Axes of Co-ordinates.**—(See *Co-ordinates, Axes of.*)

**Axial Magnet.**—(See *Magnet, Axial.*)

**Axis, Magnetic** — — The line around which a magnetic needle, free to move, but which has come to rest in a magnetic field, can be turned without changing the set or direction in which it has come to rest.

**Axis, Magnetic, of a Straight Needle** — — A straight line drawn through the magnet, joining its poles.

The magnetic axis of a straight needle may be regarded as a straight line passing through the poles of the needle and its point of support.

The magnetic axis may not correspond with the geometric axis of the needle. This leads to an error in reading the true direction in which the needle is pointing, which must be corrected. Thus, the needle N S, Fig. 32, points to 31 degrees on the scale. In reality, if the magnetic axis of the needle lies in the line N' S', the true deflection of the needle is only 28 degrees.



Fig. 32. Magnetic Axis.

**Axis of Abscissas.**—(See *Abscissas, Axis of.*)

**Axis of Ordinates.**—(See *Ordinates, Axis of.*)

**Azimuth.**—In astronomy, the angular distance between an azimuth circle and the meridian.

The azimuth of a heavenly body in the Northern Hemisphere is measured on the arc of the horizon intercepted between the north point of the horizon and the point where the great circle that passes through the heavenly body cuts the horizon.

**Azimuth Circle.**—(See *Circle, Azimuth.*)

**Azimuth Compass.**—(See *Compass, Azimuth.*)

**Azimuth, Magnetic** — — The arc intercepted on the horizon between the magnetic meridian and a great circle passing through the observed body.

## B

**B.**—A contraction used in mathematical writings for the internal magnetization, or the magnetic induction, or the number of lines of force per square centimetre in the magnetized material.

This contraction for internal magnetization is,

in most mathematical treatises, printed in bold-faced type.

**B. A. Ohm.**—(See *Ohm, B. A.*)

**B. A. U.**—A contraction sometimes employed for the British Association unit or ohm.



**B. W. G.**—A contraction for Birmingham wire gauge. (See *Gauge, Birmingham Wire*.)

A contraction sometimes used for the new British wire gauge.

**Back Electromotive Force.**—(See *Force, Electromotive, Back*.)

**Back-Stroke of Lightning.**—(See *Lightning, Back-Stroke of*.)

**Bain's Chemical Recorder.**—(See *Recorder, Chemical, Bain's*.)

**Bain's Printing Solution.**—(See *Solution, Bain's Printing*.)

**Balance Arms.**—(See *Arms, Bridge or Balance*.)

**Balance, Bi-filar Suspension** — — An instrument similar in construction to Coulomb's torsion balance, but in which the needle is hung by two separate fibres instead of by a single one. (See *Balance, Coulomb's Torsion, Suspension, Bi-filar*.)

**Balance, Centi-Ampère** — — An ammeter in the form of a balance, whose scale is graduated to give direct readings in centi-ampères.

Ampère balances giving readings in various decimals or multiples of ampères have been devised by Sir William Thomson. The strength of current passing is determined by the action on a movable ring or coil, placed between two fixed rings or coils.

The movable ring is in a horizontal plane nearly midway between the two fixed rings. The fixed rings are traversed by the current in opposite directions, so that one attracts and the other repels the movable ring. The movable ring is attached to one end of a horizontal balance arm, and a similar movable ring, also provided with attracting and repelling fixed rings, is attached to the opposite end of the balance arm. In order to avoid disturbance of horizontal components of terrestrial, or of local magnetic force, the current is sent in the same direction through the two movable rings. The balancing is effected by means of a weight, sliding on a nearly horizontal arm attached to the balance. A counterpoise weight is used in connection with the sliding weight.

A standard Thomson centi-ampère balance is shown in Fig. 33. In measuring a current,

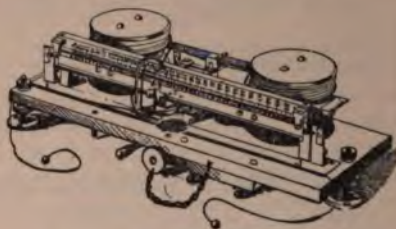


Fig. 33. Centi-Ampère Balance.

the weight is moved along the scale until the balance comes to rest.

**Balance, Composite** — — A balance form of ammeter devised by Sir William Thomson, which can be used for an ampère-meter, a watt-meter, or a volt-meter, according to the manner in which its sets of fine and coarse wire coils are connected. (See *Balance, Centi-Ampère*.)

**Balance, Coulomb's Torsion** — — An apparatus to measure the force of electric or magnetic repulsion between two similarly charged bodies, or between two similar magnet poles, by opposing to such force the torsion of a thin wire.

The two forces *balance* each other ; hence the origin of the name.



Fig. 34. Coulomb's Torsion Balance.

Fig. 34 represents a Coulomb torsion balance, adapted to the measurement of the force

of electrostatic repulsion. A delicate needle of shellac, having a small gilded pith ball at one of its ends, is suspended by a fine metallic wire. A *proof-plane*, B, is touched to the electrified surface whose charge is to be measured, and is then placed as shown in the figure. (See *Plane, Proof*.) There is a momentary attraction of the needle, and then a repulsion, which causes the needle to be moved a certain distance from the ball on the proof-plane. This distance is measured in degrees on a graduated circle *a*, marked on the instrument. The force of the repulsion is calculated by determining the amount of torsion required to move the needle a certain distance toward the ball of the electrified proof-plane.

This torsion is obtained by the movement of the *torsion head* D, the amount of which motion is measured on a graduated circle at D. The measurement is based on the fact that the force required to twist a wire is proportional to the angle of torsion.

**Balance, Deci-Ampère** — — An ammeter in the form of a balance, whose scale is graduated to give direct readings in deci-ampères. (See *Balance, Centi-Ampère*.)

**Balance, Deka-Ampère** — — An ammeter in the form of a balance, whose scale is graduated to give direct readings in deka-ampères. (See *Balance, Centi-Ampère*.)

**Balance, Electric** — — A term frequently used for Wheatstone's electric bridge. (See *Bridge, Electric*.)

The electric bridge is sometimes called a balance because, when in use in measuring resistances, one resistance or set of resistances balances another resistance or set of resistances.

**Balance, Hekto-Ampère** — — An ammeter in the form of a balance, whose scale is graduated to give direct readings in hekto-ampères. (See *Balance, Centi-Ampère*.)

**Balance Indicator.**—(See *Indicator, Balance*.)

**Balance, Induction, Hughes'** — — An apparatus for the detection of the presence of a metallic or conducting substance by the aid of induced electric currents.

Hughes' induction balance is shown in Fig. 35.

A, B, C and D are bobbins, wound with about 300 feet of No. 32 copper wire. The coils are

connected as shown, A and B, in the circuit of a battery, and C and D, in the circuit of a telephone. The coils, A and B, and C and D, are placed at




Fig. 35. Hughes' Induction Balance.

such a distance apart as to prevent any mutual induction occurring between them. The coils are so joined that the direction of the induction of A, on C, is opposite to that of B, on D.

The coils, A and B, then act as primaries, and C and D, as secondaries. In the battery circuit is an interrupter I, which is caused to continually make and break the circuit.

The coils are so adjusted that the opposing secondary coils produce but little noise to one listening at the telephone. This can readily be done by the adjusting of a single pair of coils.

If a single coin or mass of metal be introduced between either A and C, or B and D, or even above one of the coils, as at *d*, the balance will be disturbed, since some of the induction is now expended in producing electric currents in the interposed metal, and a sound will therefore be heard in the telephone. But if precisely similar metals are placed in similar positions, between A and C, and B and D, no sound is heard in the telephone, since the inductive effects due to the two metals are the same.

The slightest difference, however, either in composition, size or position, destroys the balance, and causes a sound to be heard in the telephone.

A spurious coin is thus readily detected when compared with a genuine coin.

A somewhat similar instrument has been employed to detect and locate a bullet or other foreign metallic substance in the human body.

In order to determine the amount of the disturbance, an instrument called a sonometer is used (See *Sonometer, Hughes'*), in which a single secondary coil, placed in the circuit of a telephone, slides on a graduated bar between two fixed primary coils, so wound as to exert equal and opposite inductions on the secondary. When, therefore, the secondary is exactly in the middle of the



graduated bar, and consequently exactly midway between the two fixed primary coils, no sounds are heard in the telephone, but when moved to one side or the other the sounds are heard. Switches are so arranged that the telephone can be readily switched from the induction balance to the telephone, or *vice versa*. When, therefore, a metallic disc is placed in one of the coils of the induction balance, and a noise is heard in the telephone, the coil of the sonometer is shifted so that the noise heard in this telephone is judged by the ear to be equal, and the comparison can then be made by means of simple calculations.

The following table gives, in arbitrary values, the results of various experiments as to the sensitiveness in this respect of discs of different metals, of various sizes and shapes:

Silver, chemically pure.....	125
Gold.....	117
Silver, commercial.....	115
Aluminium.....	112
Copper.....	100
Zinc.....	80
Bronze.....	75
Tin.....	74
Iron, ordinary.....	53
German silver.....	50
Iron, pure.....	40
Copper, alloyed.....	40
Lead.....	58
Antimony.....	35
Bismuth.....	10
Zinc, alloyed.....	6
Carbon.....	2

—(Fleming.)

An inspection of this table shows that the values found for different metals do not correspond with their electric conducting power, although, roughly speaking, the best conductors stand at the top of the table, and the worst at the bottom. The effects appear to be dependent for their action on the phenomena of magnetic screening, for—

(1.) If slots are cut in the middle of the plate its disturbing action is either removed or very much decreased.

(2.) If a flat coil of copper wire replaces a disc of metal no effect is produced on the induction balance when its ends are open, but when closed the coil acts just like a disc, or continuous plate of metal.

(3.) The difference between various metals in-

serted as discs in the induction balance is less at high speeds of reversal than at low speeds.

**Balance, Kilo-Ampère** — — — An ammeter in the form of a balance, whose scale is graduated to give direct readings in kilo-amperes. (See *Balance, Centi-Ampère*.)

**Balance of Induction in Cable.**—(See *Induction, Balance of, in Cable*.)

**Balance, Plating** — — — An automatic device for disconnecting the current from the article to be plated, as soon as a certain increase in weight has been obtained.

The objects to be plated are suspended at one end of a balance, and when a certain increase in weight has been gained, the balance tips and breaks the circuit. Edison's electric meter is based on this principle.

**Balance, Thermic, or Bolometer.**—An apparatus constructed on the principle of the differential galvanometer, devised by Professor Langley for determining small differences of temperature. (See *Galvanometer, Differential*.)

A coil composed of two separately insulated wires, wound together, is suspended in a magnetic field, and has a current sent through it. Under normal conditions, this current separates into two equal parts, and runs through the wires in opposite directions. It therefore produces no sensible field, and suffers no deflection by the field in which it is suspended.

Any local application of heat producing a difference in temperature in these coils, causing a difference in resistance, prevents this equality. A field is therefore produced in the suspended coil, which, though extremely small, is rendered measurable by means of the powerful field produced in the coil, within which the double coil is suspended.

Differences of temperature as small as one-fourteen thousandth of a degree Fahrenheit are detected by the instrument.

**Balance, Wheatstone's Electric** — — — A name often given to the electric bridge or balance. (See *Bridge, Electric*.)

**Balanced-Metallic Circuit.**—(See *Circuit, Balanced-Metallic*.)

**Balanced Resistances.**—(See *Resistances, Balanced*.)

**Balata.**—An insulating material.

**Balata**, when prepared for use as an insulating material, is somewhat like gutta-percha.

**Ball, Electric Time** — —A ball, supported in a prominent position on a tall pole, and caused to fall at the exact hour of noon, or at any other predetermined time, for the purpose of thus giving correct time to an entire neighborhood.

The release of the ball is effected by the closing of an electric circuit, either automatically, or through the agency of an observer.

**Ball, Fire** — —A term sometimes applied to globular lightning. (See *Lightning, Globular*.)

**Ball Lightning.**—(See *Lightning, Ball*.)

**Ballistic Curve.**—(See *Curve, Ballistic*.)

**Ballistic Galvanometer.**—(See *Galvanometer, Ballistic*.)

**Balloon, Electric** — —A balloon, or air ship, provided with electric power so as to be able to be steered or moved against the direction of the wind.

Electric balloons have been moved against the wind and steered with a certain amount of success, by the use of electric motors driven by storage batteries. All that is needed to make aerial navigation a commercial success is the ability to obtain great power with a small weight. The storage battery does this to a limited extent.

Bearing in mind the high efficiency of the electric motor, it would appear that the problem of successful aerial navigation will be solved when the discovery is made of means for directly converting the chemical potential energy of coal into electrical energy.

**Balloon Signaling for Military Purposes.**—(See *Signaling, Balloon, for Military Purposes*.)

**Balls, Pith** — —Two balls of pith, suspended by conducting threads of cotton to insulated conductors, employed to show the electrification of the same by their mutual repulsion.

The pith balls connected with the insulated cylinder A B, Fig. 36, not only show the electrification of the cylinder, but serve also to roughly

indicate the peculiarities of distribution of the charge thereon.

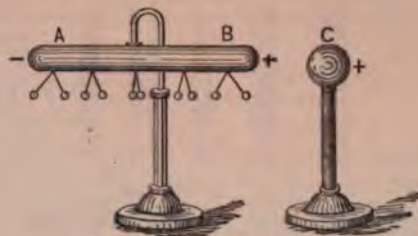


Fig. 36. Pith Ball Cylinder.

**Bands, Auroral** — —Approximately parallel streaks of light sometimes seen during the prevalence of the aurora. (See *Aurora Borealis*.)

**Bank of Lamps.**—(See *Lamps, Bank of*.)

**Banked Battery.**—(See *Battery, Banked*.)

**Bar, Detorsion** — —A bar placed in a magnetic instrument called a declinometer for the purpose of removing the torsion of the suspending thread of the magnet.

The detorsion bar of the declinometer is generally made of gun metal of the same weight as that of the suspended magnet. A small magnet is placed in a rectangular aperture in the middle of the bar.

**Bar Electro-Magnet.**—(See *Magnet, Electro, Bar*.)

**Barad.**—A unit of pressure proposed by the British Association.

One barad equals one dyne per square centimetre.

**Barometer.**—An apparatus for measuring the pressure or weight of the atmosphere.

**Barometric Column.**—(See *Column, Barometric*.)

**Bars, Bus** — —Omnibus bars. (See *Bars, Omnibus*.)

**Bars, Krizik's** — —Cores of various shapes, provided for solenoids, in which the distribution of the metal in the bar is so proportioned as to insure as nearly as possible a uniform attraction or pull while in different positions in the solenoid.



Krizik's bars of various shapes are shown in Fig. 37. It will be observed that in all cases the



Fig. 37. Krizik's Bars.

mass of metal is greater toward the middle of the core than near the ends.

When a core of uniform diameter is drawn into a solenoid, the attraction or pull is not uniform in strength for different positions of the bar. When the bar is just entering the solenoid, the pull is strongest; as soon as the end passes the middle of the core the attraction decreases, until, when the centres of the bar and core coincide, the motion ceases, since both ends of the solenoid attract equally in opposite directions. By proportioning the bars, as shown in the figure, a fairly uniform pull for a considerable length may be obtained.

**Bars, Negative-Omnibus** — —The bus-bars that are connected with the negative terminal of the dynamos. (See *Bars, Omnibus*.)

**Bars, Neutral-Omnibus** — —The bus-bars that are connected with the neutral dynamo terminal in a three-wire system of distribution.

**Bars, Omnibus** — —Heavy bars of conducting material connected directly to the poles of dynamo-electric machines, in electric incandescent light or electric railway installations, and therefore receiving the entire current produced by the machine.

Main conductors common to two or more dynamos in an electrical generating plant.

The terms bus and omnibus bars refer to the fact that the entire or whole current is carried by them.

**Bars, Positive-Omnibus** — —The bus-bars that are connected with the positive terminal of the dynamos.

**Bath, Bi-polar** — —An electro-therapeutic bath, the current applied to which enters at one part of the tub, and leaves at another part.

The electrodes for the bi-polar bath consist of suitably shaped copper plates, generally called *shovel electrodes*.

**Bath, Copper** — —An electrolytic bath containing a readily electrolyzable solution of a copper salt, and a copper plate acting as the anode, and placed in the liquid near the object to be electro-plated, which forms the kathode. (See *Plating, Electro*.)

The sulphate, the cyanide and the acetate of copper are used for copper baths. The use of the sulphate is objectionable. The cyanide is expensive. The acetate is therefore very generally employed. Wahl gives the following formula for a copper bath, viz.:

Water.....	1,000 parts.
Acetate of copper, crystallized.....	20 "
Carbonate of soda.....	20 "
Bisulphite of soda.....	20 "
Cyanide of potassium (pure).....	20 "

**Bath, Electro-Plating** — —Tanks containing metallic solutions in which articles are placed so as to be electro-plated. (See *Plating, Electro*.)

Strictly speaking a plating bath includes not only the vessel and its metallic solution, but also the metallic plate acting as the anode and the article to be plated forming the kathode.

**Bath, Electro-Therapeutic** — —A bath furnished with suitable electrodes and used in the application of electricity to curative purposes.

Such baths should be used only under the advice of a regular physician.

**Bath, Gold** — —An electrolytic bath containing a readily electrolyzable solution of a gold salt and a gold plate acting as the anode, and placed in the liquid opposite the object to be plated, which forms the kathode. (See *Plating, Electro*.)

Electro gilding may be accomplished either with or without the aid of heat. Hot gilding appears to give a smoother and cleaner deposit.

The following is a fairly good solution for a gold bath:

Water.....	1,000 parts.
Cyanide of potassium, pure..	20 "
Gold.....	10 "

—(Wahl.)

The gold is first converted into neutral chloride by dissolving it in 25 parts of pure hydrochloric acid to which 12.5 parts of pure nitric acid has been added. When the gold is completely dissolved, the liquid is heated until of a dark red color, in order to expel any excess of acid.

**Bath, Head, Electric** — —A variety of electric breeze, applied therapeutically to the head of the patient.

The patient is placed on an insulating stool and connected with one pole of an electrostatic induction machine, the other pole of which is connected to a circle of insulated points suspended over the head.

**Bath, Hydro-Electric** — —A bath in which electro-therapeutic treatment is given by applying one electrode to the metallic lining of the tub, and the other electrode to the body of the bather.

**Bath, Multipolar-Electric** — —An electro-therapeutic bath, in which more than two electrodes are employed.

It is not clear that the multipolar-electric bath possesses any decided advantages over the bi-polar bath.

**Bath, Nickel** — —An electrolytic bath containing a readily electrolyzable salt of nickel, a plate of nickel acting as the anode of a battery and placed in the liquid near the object to be coated, which forms the kathode. (See *Plating, Electro.*)

The double sulphate of nickel and ammonium (from 5 to 8 parts dissolved in 100 parts of water) is used for the bath. Some prefer to add sulphate of ammonium and citric acid to the above solution.

**Bath, Shower, Electric** — —A shower bath in which the falling drops carry electric charges to the patient subjected thereto.

The water is rendered slightly alkaline. One pole is immersed in the alkaline water and the other connected to a metallic stool on which the patient is placed.

**Bath, Silver** — —An electrolytic bath containing a readily electrolyzable salt of silver and a plate of silver acting as the anode of an electric source and placed in the liquid near the object to be coated, which forms the kathode. (See *Plating, Electro.*)

The double cyanide of silver and potassium is the salt usually employed in the silver bath.

The following bath is recommended by Roseleur:

Water .....	1,000 parts.
Cyanide of potassium (pure) .....	50 "
Pure silver .....	25 "

The silver (granulated) is treated with pure nitric acid (43 degrees Beaumé) and converted into nitrate of silver. The solution is then heated to dryness and subsequently fused. The fused nitrate so obtained is dissolved in fifteen times its weight of distilled water and treated with a solution of cyanide of potassium (10 per cent. of the cyanide), by means of which silver cyanide is thrown down as a precipitate. This precipitate is then separated and washed. It is added to the 1,000 parts of water, dissolved, and the cyanide of potassium afterward added, thus forming the double cyanide required for the bath.

**Bath, Stripping** — —A bath for removing an electro-plating of gold, silver, or other metal, either by simple dipping or by electric action.

**Bath, Ungilding** — —A stripping bath suitable for the removal of a coating of gold. (See *Bath, Stripping.*)

**Bath, Unipolar-Electric** — —An electro-therapeutic bath, the water of which forms one of the electrodes of the source, and the other electrode is attached to a metallic rod fixed at a convenient height above the tub.

The bath tub is formed of non-conducting substances. The terminals of the electrode connected with the water terminate in metal plates located at suitable points in the tub. The current is applied by the patient making and breaking contact at the vertical metal rod with his hands.

The unipolar-electric bath is employed instead of local galvanization where it is desired to limit the application to especial organs or particular parts of the body. In general galvanization the patient is placed on an electrode of large surface, formed of a large sponge-covered metallic plate, on which he sits or rests. This electrode is connected with the kathode of the battery. The anode is connected with a large sponge electrode, which is moved regularly over the body of the patient; sometimes the moistened hand of the operator is used in place of the sponge electrode.



**Bath, Unsilvering** — —A stripping bath suitable for the removal of a coating of silver. (See *Bath, Stripping*.)

**Bathometer.**—An instrument invented by Siemens for obtaining deep-sea soundings without the use of a sounding line.

The bathometer depends for its operation on the varied attraction of the earth for a suspended weight in parts of the ocean differing in depth. As the vessel passes over deep portions of the ocean, the solid land of the bottom, being further from the ship, exerts a smaller attraction than it would in shallow parts, where it is nearer; for, although in the deep parts of the ocean the water lies between the ship and the bottom, the smaller density of the water as compared with the land causes it to exert a smaller attraction than in the shallower parts, where the bottom is nearer the ship. The varying attraction of the earth is caused to act on a mercury column, the reading of which is effected by means of an electric contact.

**Battery, Banked** — —A term sometimes applied to a battery from which a number of separate circuits are supplied with currents.

The term banked-battery is sometimes applied to a multiple-arc connected battery.

**Battery, Caution** — —A term sometimes employed in electro-therapeutics, for a multiple connected voltaic battery adapted for producing electric incandescence for cautery effects.

**Battery, Closed-Circuit** — —A voltaic battery which may be kept constantly on closed-circuit without serious polarization.

The gravity battery is a closed circuit battery. As employed for use on most telegraph lines, it is maintained on a closed circuit. When an operator wishes to use the line he opens his switch, thus breaking the circuit and calling his correspondent. Such batteries should not polarize. (See *Cell, Voltaic, Polarization of*.)

**Battery, Connection of, for Quantity** — —A term, now generally in disuse, formerly employed to indicate the grouping of voltaic cells, now known as parallel or multiple.

The arrangement or coupling of a number of voltaic cells in multiple reduces the internal resist-

ance of the battery, and thus permits a greater current, or quantity, of electricity to pass; hence the origin of the term.

**Battery, Dynamo** — —The combination or coupling together of several separate dynamo-electric machines so as to act as a single electric source.

The dynamos may be connected to the leads either in series, in multiple, in multiple-series or in series-multiple.

**Battery, Dynamo, Electric Machine** — —A dynamo battery. (See *Battery, Dynamo*.)

**Battery, Electric** — —A general term applied to the combination, as a single source, of a number of separate electric sources.

The separate sources may be coupled either in series, in multiple, in multiple-series, or in series-multiple. (See *Circuits, Varieties of*.)

The term battery is sometimes incorrectly applied to a single voltaic couple or cell.

**Battery, Floating, De la Rive's** — —A floating voltaic cell, the terminals of which are connected with a coil of insulated wire, employed to show the attractions and repulsions between magnets and movable electric circuits.

The cell, shown in Fig. 38, consists of a vol-



Fig. 38. Floating Cell.

taic couple of zinc and copper, the terminals of which are connected to the circular coil of insulated wire, as shown, and the whole floated by means of a cork, in a vessel containing dilute sulphuric acid.

When the current flows through the coil in the direction shown by the arrows, the approach of the N-seeking pole of a magnet will cause the cell to be attracted or to move towards the magnet pole, since the south face or end of the coil is nearer the north pole of the magnet. If the other

end were nearer, repulsion would occur, the cell turning round until the south face is nearer the magnet, when attraction occurs.

This is, strictly speaking, a floating cell, and not a battery. (See *Battery, Voltaic*.)

**Battery, Galvanic** — —Two or more separate voltaic cells so arranged as to form a single source.

This is more correctly called a *Voltaic Battery*. (See *Battery, Voltaic*.)

**Battery, Gas** — —A battery in which the voltaic elements are gases as distinguished from solids.

The electrodes of a gas battery generally consist of plates of platinum, or other solid substance which possesses the power of occluding oxygen and hydrogen. The lower parts of these plates dip into dilute sulphuric acid, and the upper parts are respectively surrounded by oxygen and hydrogen gas derived from the electrolytic decomposition of the dilute acid.

A gas battery consisting of plates of platinum dipping below into acid liquid, and surrounded in the space above the liquid by hydrogen and oxygen H, H' and O, O', etc., respectively is shown in Fig. 39.




Fig. 39. Gas Battery.

In charging this battery an electric current is sent through it until a certain quantity of the gases has been produced. If, then, the charging current be discontinued, a current in the opposite direction is produced by the battery. The gas battery is in reality a variety of storage battery. (See *Electricity, Storage of. Cell, Secondary. Cell, Storage.*)

Gas batteries can also be made by feeding continually into the cell a gas capable of acting on the positive elements.

**Battery Gauge.**—(See *Gauge, Battery*.)

**Battery, Leyden Jar** — —The combination of a number of separate Leyden jars so as to act as one single jar.

A Leyden jar battery is shown in Fig. 40.

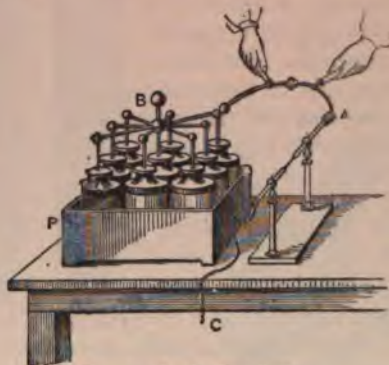


Fig. 40. Leyden Jar Battery.

where nine separate Leyden jars are connected as a single jar by joining their outer coatings by placing them in the box P, the bottom of which is lined with tin foil. The inner coatings are connected together by the metal rods B, as shown.

A discharging rod A, may be employed for connecting the opposite coatings. The handles are made of glass or any other good insulating material.

A number of Leyden jars can be coupled in series by connecting the inner coating of the first jar to the outer coating of the second, the inner coating of the second to the outer coating of the third, and so on. The battery so obtained is then discharged by connecting the outer coating of the first jar with the inner coating of the last.

**Battery, Local** — —A voltaic battery used at a station on a telegraph line to operate the Morse sounder, or the registering or recording apparatus, at that point only. (See *Telegraphy, American or Morse System of*.)

The local battery is thrown into or out of action by the telegraphic relay. (See *Relay*.)

**Battery, Magnetic** — —The combination, as a single magnet, of a number of separate magnets.

A magnetic battery, or compound magnet, is



shown in Fig. 41. It consists of straight bars of steel, p, p, p, with their similar poles placed near together and inserted in masses of soft iron, N and S, as shown.

#### Battery, Main —

The battery, in a system of telegraphic communication, that is employed for sending the signals over the main line, as distinguished from any battery employed for any other particular work, such, for example, as that of the local battery. (See *Battery, Local*.)

**Battery, Multiple-Connected —**—A battery the single cells of which are connected to one another and to the mains or conductors in multiple. (See *Circuit, Multiple*.)

**Battery, Open-Circuit —**—A voltaic battery which is normally on open-circuit, and which is used continuously only for comparatively small durations of time on closed-circuit.

Leclanché-cells form an excellent open-circuited battery. They have a comparatively high electromotive force, but rapidly polarize. They cannot therefore be economically used for furnishing currents continuously for long durations of time. When left on open-circuit, however, they readily depolarize. They therefore form an excellent battery for such work as annunciator bells, burglar alarms, etc., where the current is only required for short periods of time, separated by comparatively long intervals of rest. (See *Cell, Voltaic, Leclanché*.)

**Battery Plates of Secondary or Storage Cell, Forming of —**—(See *Plates of Secondary or Storage Cell, Forming of*.)

**Battery, Plunge —**—A number of separate voltaic cells connected so as to form a single cell or electric source, the plates of which are so supported on a horizontal bar as to be capable of being simultaneously placed in, or removed from, the exciting liquid.



Fig. 41. Magnetic Battery, or Compound Magnet.

The plunge battery shown in Fig. 42, consists



Fig. 42. Plunge Battery.

of a number of zinc-carbon elements immersed in an electrolyte of dilute sulphuric acid, or in *electropon liquid*, contained in separate jars, J, J. (See *Liquid, Electropon*.)

The mode of support to the horizontal bar will be understood from an inspection of the drawing.

**Battery, Primary —**—The combination of a number of separate primary cells so as to form a single source.

The term *primary battery* is used in order to distinguish it from secondary or storage battery. (See *Cell, Secondary. Cell, Storage*.)

**Battery, Secondary —**—The combination of a number of separate secondary or storage cells, so as to form a single electric source. (See *Electricity, Storage of*.)

**Battery, Selenium —**—The combination of a number of separate selenium cells so as to form an electric source. (See *Cell, Selenium*.)

**Battery, Series-Connected —**—A battery, the separate cells of which are connected to one another and to the line or conductor in series. (See *Circuit, Series*.)

**Battery Solution.**—(See *Solution, Battery*.)

**Battery, Split —**—A voltaic battery connected in series, but having one of its middle plates connected with the ground.

By the employment of the device of a split-battery, the poles of the battery are maintained at potentials differing in opposite directions from the potential of the earth.

**Battery, Storage —**—A number of separate storage cells connected so as to form a single electric source.

A cell of a storage battery is shown in Fig. 43.



Fig. 43. Storage Battery.

**Battery, Storage, Element of** — — A single set of positive and negative plates of a storage cell connected so as to be ready for placing in the acid liquid of the jar or cell.

A term sometimes applied to one of the storage cells in a storage battery.

This latter use of the term element is unfortunate, since from the analogous case of a primary cell, an element would consist of a single plate, either positive or negative, and not of both. That is, every voltaic couple consists of two elements, the positive and the negative.

**Battery, Thermo** — — A term often applied to a thermo-electric battery. (See *Battery, Thermo-Electric*.)

**Battery, Thermo-Electric** — — The combination, as a single thermo-electric cell, of a number of separate thermo-electric cells or couples. (See *Couple, Thermo-Electric*.)

**Battery, Voltaic** — — The combination, as a single source, of a number of separate voltaic cells.

**Battery, Water** — — A battery formed of zinc and copper couples immersed in an electrolyte of ordinary water.

Any voltaic couple can be used, the positive element of which is slightly acted on by water. When numerous couples are employed considerable difference of potential can be obtained.

Water batteries are employed for charging electrometers. They are not capable of giving any considerable current, owing to their great internal resistance.

**Bead Areometer or Hydrometer.** — (See *Areometer, Bead*.)

**Bec-Carcel.** — The Carcel, or French unit of light. (See *Carcel*.)

**Bell, Automatic-Electric** — — An electric bell furnished with an automatic contact-breaker. (See *Contact-Breaker, Automatic*.)

A form of automatic-electric bell is shown in Fig. 44. The relation of the electro-magnet, its armature and the bell lever, will be readily understood from an inspection of the drawing.



Fig. 44. Automatic Electric Bell.

**Bell, Call** — — An electric bell used to call the attention of an operator to the fact that his correspondent wishes to communicate with him.

**Bell, Circular** — — A bell so constructed that all its moving parts are contained in the gong.

**Bell, Continuous-Sounding Electric** — — An electric bell, which, on the completion of the circuit, continues striking until stopped either by hand or automatically.

On the completion of the circuit, the attraction of an armature throws a catch off from a lever, and thus permits the lever to fall and complete a contact and allows the current to ring the bell; or the bell is rung by clockwork, which is thrown into action by the passage of a current through an electro-magnet. (See *Bell, Electro-Mechanical*.)

**Bell, Differential Electric** — — An electric bell, the magnetizing coils of which are differentially wound.

Differential winding is of advantage where a very strong current is required, as this winding decreases the sparking at the contacts, on the opening of the circuit.

**Bell, Electro-Magnetic, Siemens-Armature Form** — — A form of electro-mag-



netic bell in which the movements of the bell armature are obtained by the reversal of polarity that takes place when alternating currents are passed through the coils of a simple, single coil, Siemens-armature.



Fig. 45. Siemens-Armature Form of Electro-Magnetic Bell.

The details will be readily understood from an examination of Fig. 45.

**Bell, Electro-Mechanical** — — A bell, the striking apparatus of which is driven by a weight or spring, called into action by the movement of the armature of an electro-magnet. (See *Alarm, Electric*.)

**Bell, Extension-Call** — — A device for prolonging the sound of a magneto call.

An alarm bell is automatically connected with



Fig. 46. Extension-Call Bell.

the circuit of a local battery by means of the current generated by the magneto-call, and continues sounding after the current of the magneto-call has ceased.

A form of extension-call bell is shown in Fig. 46.

**Bell, Indicating** — — An electric bell in which, in order to distinguish between different bells in the same office, a number is displayed by each bell when it rings.

**Bell, Magneto-Electric** — — An electric bell, the current employed to operate or strike which is obtained by the motion of a magneto-electric machine.

**Bell, Night** — — In a telephone exchange, a bell, switched into connection with the shunted circuit of an annunciator case, and intended, by its constant ringing, to call the attention of the night operator to the falling of a drop.

**Bell, Relay, Electric** — — An electric bell in which a relay magnet is employed to switch a local battery into the circuit of the sounding apparatus of the bell.

The relay bell is suitable for use when the bell to be sounded is situated at a great distance. As the current from the line, when this is long, is too weak to ring the bell, it throws into action a local battery by the action of a relay.

Relay bells were used in the early forms of acoustic telegraphs as employed in England with relay sounders.

The dots and dashes of the Morse alphabet were indicated by the sounds of two bells, a tap on one bell indicating a dot, and a tap on the other a dash. This system is now practically abandoned.

**Bell-Shaped Magnet.** — (See *Magnet, Bell-Shaped*.)

**Bell, Shunt, Electric** — — An electric bell, the magnetizing coils of which are placed on the line in shunt.

In the case of shunt-connected electric bells, one of the bells must make and break the circuit for all the rest. The series-connected electric bell is used where the distance between the separate bells is great, in order to save the expense of multiple connections.

In most cases, where a number of electric bells are to be simultaneously sounded, connection in multiple is adopted.

**Bell, Single-Stroke Electric** — — An electric bell that gives a single stroke only for each make of the circuit.



Fig. 47. Single-Stroke Bell.

Since the bell gives a single stroke for each completion of the circuit, its use permits of ready communication between any two places by any

system of prearranged signals. A buzzer may be used for the same purpose. A form of single-stroke bell is shown in Fig. 47. On completing the circuit, the current, through its coils, attracts the armature and causes a single stroke of the bell.

**Bell, Telephone-Call** — —A call bell used to call a correspondent to the telephone.

The telephone-call bell is generally a magneto-electric bell.

**Bell, Trembling** — —A name sometimes given to a vibrating or an automatic make-and-break bell. (See *Make-and-Break, Automatic.*)

**Bell, Vibrating** — —A trembling bell. (See *Bell, Trembling.*)

**Bias of Relay Tongue.**—(See *Tongue, Relay, Bias of.*)

**Bichromate Voltaic Cell.**—(See *Cell, Voltaic, Bichromate.*)

**Bi-filar Suspension.**—(See *Suspension, Bi-filar.*)

**Bi-filar Suspension Balance.**—(See *Balance, Bi-filar Suspension.*)

**Bi-filar Winding.**—(See *Winding, Bi-filar.*)

**Binary Compound.**—(See *Compound, Binary.*)

**Binding Coils.**—(See *Coils, Binding.*)

**Binding-Post.**—(See *Post, Binding.*)

**Binding-Screw.**—(See *Screw, Binding.*)

**Binding Wire for Telegraph Lines.**—(See *Wire, Binding, for Telegraph Lines.*)

**Biology, Electro** — —That branch of electric science which treats of the electric conditions of living animals and plants, and the effects of electricity upon them.

Electro-Biology includes:

(1.) Electro-Physiology.

(2.) Electro-Therapy, or Electro-Therapeutics.

**Bioplasm.**—Any form of living matter possessing the power of reproduction.

**Bioscopy, Electric** — —The determination of the presence of life or death by the passage of electricity through the nerves and muscles.

**Bi-polar.**—Having two poles.

**Bi-polar Armature.**—(See *Armature, Bi-polar.*)

**Bi-polar Bath.**—(See *Bath, Bi-polar.*)

**Birmingham Wire Gauge.**—(See *Gauge, Wire, Birmingham.*)

**Bi-Telephone.**—(See *Telephone, Bi.*)

**Bitite.**—A variety of insulating material.

**Black Electro-Metallurgical Deposit.**—(See *Deposit, Black Electro-Metallurgical.*)

**Black Lead.**—A variety of carbon employed in various electrical processes.

Black lead is also termed *plumbago* or *graphite*. (See *Plumbago, Graphite.*)

The term black lead is a misnomer, since the substance is carbon and not lead. The term is an old one, and is still very generally used.

**Blasting, Electric** — —The electric ignition of powder or other explosive material in a blast. (See *Fuse, Electric.*)

The current required for the ignition of the fuse is generally obtained by means of a magneto-electric machine. In the form of magneto-blasting machine, shown in Fig. 48, the movement



Fig. 48. Magneto-Blasting Machine.

of the handle shown at the top of the figure causes the rapid rotation of a cylindrical armature constructed on the Wheatstone and Siemens principle. The magnets are of iron, and are furnished



with coils of insulated wire. On the rotation of the armature the current developed therein increases the field of the field magnet, and, when of the proper degree of intensity, is thrown into the outer circuit, and ignites the fuse.

**Bleaching, Electric** — — Bleaching processes in which the bleaching agents are liberated, as required, by the agency of electrolytic decomposition.

In the process of Naudin and Bidet, the current from a dynamo-electric machine is passed through a solution of common salt between two closely approached electrodes. The chlorine and sodium thus liberated react on each other and form sodium hypochloride, which is drawn off by means of a pump and used for bleaching. (See *Electrolysis*.)

**Block, Branch** — — A device employed in electric wiring for taking off a branch from a main circuit. (See *Wiring*.)

A form of branch-block, with its fuses attached, is shown in Fig. 49.

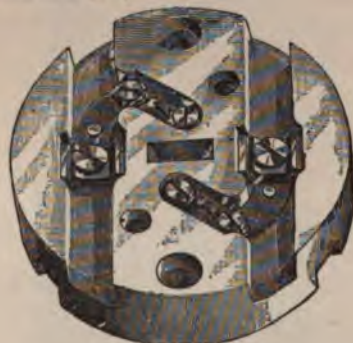


Fig. 49. Branch-Block.

**Block, Cross-Over** — — A device to permit the safe crossing of one wire over another in molding or cleat wiring.

**Block, Fuse** — — A block containing a safety fuse or fuses for incandescent light circuits. (See *Fuse, Safety*.)

**Block System for Railroads.** — (See *Railroads, Block System for*.)

**Block Wire.** — (See *Wire, Block*.)

**Blow-Pipe, Electric** — — A blow-pipe in which the air-blast is obtained by a stream of air particles produced at the point of a

charged conductor by a convection discharge.

The candle flame, Fig. 50, is blown in the di-

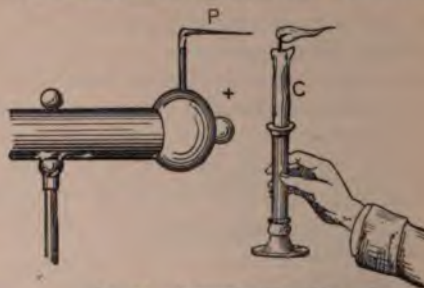


Fig. 50. Convection Blow-Pipe.

rection of the stream of air particles passing off from the point P. (See *Convection, Electric*.)

**Blow-Pipe, Electric-Arc** — — A device of Werdermann for cutting rocks, or other refractory substances, in which the heat of the voltaic arc is directed, by means of a magnet, or a blast of air, against the substance to be cut.

The carbons are placed parallel, so as to readily enter the cavity thus cut or fused. This invention has never been introduced into extensive practice.

In the welding process of Benardos and Olzewski, the welding temperature is obtained by means of an electric arc taken between two suitably shaped electrodes.

In the electric-arc blow-pipe, shown in Fig. 51, the voltaic arc, taken between two vertical carbon electrodes, is deflected into a horizontal position under the influence of the inclined poles of a powerful electro-magnet.

The highly heated carbon vapor which constitutes the voltaic arc is deflected by the magnet in the same direction as would be any other movable circuit or current.



Fig. 51. Electric-Arc Blow-Pipe.

**Board, Cross-Connecting** — — In a system of telegraphic or telephonic communication, a board to which the line terminals are run before entering the switchboard, so as to

readily place any subscriber in connection with any desired section of the switchboard.

**Board, Fuse** — —A board of slate or other incombustible material on which all the safety fuses in an installation are assembled.

The fuse board is used for avoiding accidents from the firing of the fuses.

**Board, Hanger** — —A form of board provided for the ready placing or removal of an arc lamp from a circuit.



Fig. 52. Hanger-Board.

A hanger-board contains a switch or cut-out for the ready opening or closing of the circuit. A form of hanger-board is shown in Fig. 52.

**Board, Key** — —Any board to which are connected electric keys or switches.

**Board, Legging-Key** — —A key board employed for the purpose of legging an operator into a circuit connecting two or more subscribers. (See *Leg.*)

**Board, Multiple Switch** — —A board to which the numerous circuits employed in systems of telegraphy, telephony, annunciator or electric light and power circuits are connected.

Various devices are employed for closing these circuits, or for connecting or cross-connecting them with one another, or with neighboring circuits.

A multiple switchboard, for example, for a telephone exchange, will enable the operator to connect any subscriber on the line with any other subscriber on that line, or on another neighbor-

ing line provided with a multiple switchboard. To this end the following parts are necessary:

(1.) Devices whereby each line entering the exchange can readily have inserted in its circuit a loop connecting it with another line. This is accomplished by placing on the switchboard a separate *spring-jack* connection for each separate line. This connection consists essentially of one or two springs made of any conducting metal, which are maintained in metallic contact when the plug key is not inserted, but which are readily separated from one another by the introduction of the *plug-key*, Fig. 53, the terminals, a and b, of which are insulated from each other, and are connected to the ends of a loop coming from another line. As the key is inserted, the metallic spring or springs of the spring-jack are separated and the metallic pieces, a and b, are brought into good sliding contact therewith, thus introducing the loop into the circuit. (See *Spring-Jack*.)



Fig. 53. Plug-Key.

(2.) As many separate annunciator-drops as there are separate subscribers. These are provided so as to notify the Central Office of the particular subscriber who desires a connection. Alarm-bells to call the operator's attention to the calling subscriber, or to the falling of a drop, are generally added. (See *Bell, Call*.)

(3.) Connecting cords and keys for connecting the operator's telephone, and means for ringing subscribers' bells, and clearing out drops.

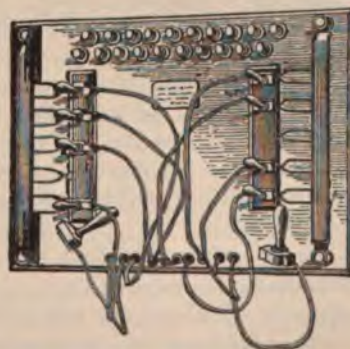


Fig. 54. Multiple Switchboard for Electric Light.

In *Multiple Switchboards* for the *Electric Light* or *Distributing Switches*, spring-jack contacts are connected with the terminals of different circuits.



and plug switches with the dynamo terminals. By these means, any dynamo can be connected with any circuit, or a number of circuits can be connected with the same dynamo, or a number of separate dynamos can be placed in the same circuit without interference with the lights.

**Board, Switch** — —A board provided with a switch or switches, by means of which electric circuits connected therewith may be opened, closed, or interchanged.

**Board, Switch, Telegraphic** — —A device employed at a telegraph station by means of which any one of a number of telegraph instruments, in use at that station, may be placed in or removed from any line connected with the station, or by means of which one wire may be connected to another.

The ability to readily connect one wire with another is of use in case of interruption to telegraph lines, in which case a through circuit may be made up of sections of different circuits.

In the switchboard shown in Fig. 55, the upper left-hand binding-post is connected to earth; the four remaining binding-posts are connected to two separate instruments—the second and third from the top to one instrument, and the fourth and fifth to another instrument. The four posts at the top of the figure are connected to two lines running east and west.

Various connections are made by the insertion of plug keys in the various openings.

**Board, Switch, Trunking** — —A switchboard in which a few subscribers only are connected with the operator, thus enabling him to obtain any other subscriber by means of trunk wires extending to the other sections. (See *Wire, Trunk*.)

**Boat, Electric** — —A boat provided with electric motive power.

Electric power has been applied both to ordinary vessels and to submarine torpedo boats.

**Boat, Submarine Electric** — —A boat capable of being propelled and steered while entirely under water.

The motive power of such boats is generally

electricity. The requisite buoyancy is obtained by means of an air chamber. Artificial ventilation is maintained, the fresh air requisite for breathing being derived from a compressed air cylinder.

**Boat, Torpedo** — —A boat used for carrying and discharging torpedoes. (See *Torpedo*.)

**Bobbin, Electric** — —An insulated coil of wire for an electro-magnet.

**Body, Charged** — —A body containing an electric charge.

Charges are bound or free. (See *Charge, Bound, Charge, Free*.)

**Body, Electrified** — —A body containing an electric charge.

**Body, Human, Resistance of** — —The resistance which the human body offers to the passage of an electric current.

The resistance of the human body to the passage of a current varies with the time. The resistance rapidly decreases after a short time.

"The resistance diminishes because of the conduction of water in the epidermis under the action of the constant current and the congestion of the cutaneous blood vessels in consequence of the stimulation." (*Landois and Stirling*.)

The resistance also varies markedly with the condition of the surface, the condition of the skin, and with the shape, area, position and material of the electrodes by which the current is led into and carried out of the parts. It very seldom is less than 1,000 ohms under the most favorable conditions, and with ordinary contacts is many times that amount.

The muscles offer nearly nine times the resistance in a direction transverse to the fibres than longitudinally to them. (*Hermann*.)

The resistance of the epidermis is greater than that of any other tissue of the body.

The human body probably possesses a true asymmetrical resistance; that is to say, when taken after the current has been passing for some time, its resistance is different in different directions. This variation in the apparent resistance is believed by some to be due to polarization effects.

**Body, Insulated** — —A body supported on an insulator, or non-conductor of electricity.




Fig. 55. Telegraphic Switchboard.



**Body-Protector, Electric** — — A device for protecting the human body against the accidental passage of an electric discharge.

To protect the human body from the accidental passage through it of dangerous electric currents, Delany places a light, flexible, conducting wire, A A B L L, in the position shown in Fig. 56, for the purpose of leading the greater part of the current around instead of through the body. The body-protector thus provides a by-path, or shunt of low resistance, around the body, and protects it from the effects of an accidental discharge. The resistance of the contacts of the protecting conductor with the skin may interfere somewhat with the efficacy of the device. Inside insulating shoe-soles for lessening the danger from accidental contacts through grounded circuits have also been proposed.



Fig. 56. Electric Body-Protector.

**Boiler-Feed, Electric** — — A device for automatically opening a boiler-feed apparatus electrically when the water in the boiler falls to a certain predetermined point.

**Boiling of Secondary or Storage Cell.** — (See *Cell, Secondary, or Storage, Boiling of.*)

**Bole.** — A unit, seldom or never used, proposed by the British Association.

One bole is equal to one gramme-kine. (See *Kine.*)

**Bolometer.** — An apparatus devised by Langley for measuring small differences of temperature.

A thermal balance. (See *Balance, Thermic.*)

**Bombardment, Molecular** — — The forcible rectilinear projection from the negative electrode, of the gaseous molecules of the residual atmospheres of exhausted vessels on the passage of electric discharges. (See *Matter, Radiant, or Ultra-Gaseous.*)

**Bonsalite.** — An insulating substance.

**Bore, Armature** — — The space provided between the pole pieces of a dynamo or motor for the rotation of the armature.

**Boreal Magnetic Pole.** — (See *Pole, Magnetic, Boreal.*)

**Bot.** — A term sometimes used as a contraction for Board of Trade unit of electric supply, or the energy contained in a current of 1,000 amperes flowing in one hour under a pressure of one volt.

The term appears inadmissible. If used at all, it should be B. O. T. The usage of giving the names of distinguished dead electricians to new units is a good one, and should be followed here.

**Boucherize.** — To subject to the boucherizing process. (See *Boucherizing.*)

**Boucherizing.** — A process for the preservation of wooden telegraph poles, by injecting a solution of copper sulphate into the pores of the wood. (See *Pole, Telegraphic.*)

**Bound Charge.** — (See *Charge, Bound.*)

**Box Bridge.** — (See *Bridge, Box.*)

**Box, Cable** — — A box placed on a large terminal pole and provided to receive the separate conductors where the air-line wires join a cable.

The wires are distributed in the cable box so as to be readily attached to the air-line wires.

**Box, Cooling, of Hydro-Electric Machine.** — A box provided in Armstrong's hydro-electric machine for the steam to pass through before leaving the nozzle.

In passing through the cooling-box some of the steam suffers condensation. The cooling-box, therefore, always contains some water, the presence of which seems to be necessary to the operation of the machine.

**Box, Distributing, of Conduit.** — A name generally applied to a handhole of a conduit. (See *Handhole of Conduit.*)

**Box, Distribution, for Arc Light Circuits.** — A device by means of which arc and incandescent lights may be simultaneously employed on the same line from a constant-current dynamo-electric machine or other source of constant currents.

A portion of the line circuit, whose difference of potential is sufficient to operate the electro-receptive device, as, for example, an incandescent lamp, is divided into such a number of multiple



circuits as will provide a current of the requisite strength for each of the devices. For example, if the normal current on the line is seven amperes, then each of the seven multiple-connected electro-




Fig. 57. Series-Multiple Circuit.

receptive devices shown in Fig. 57 will have a current of one ampere passing through it, provided the resistance of each branch is the same.

In order to protect the remaining devices from variations in the current on the extinguishment of any of the devices, automatic cut-outs are provided, which divert the current thus cut off through a resistance equivalent to that of the device.

A variety of distribution boxes are in use. (See *Circuits, Varieties of.*)

**Box, District-Call** — A box by means of which an electric signal is automatically sent over a telegraphic line and received by an electro-magnetic device at the other end of the line.



Fig. 58. District Call Box.

A system of district calls includes a number of call boxes connected by telegraphic lines with a central station. A wheel, or its equivalent, set in

motion by the pulling of a lever, makes and breaks an electric circuit and sends over the line a succession of electric impulses of varying length, separated from one another by varying intervals of time. These impulses may be received at the central station as a series of dots and dashes, or may, by means of a Morse sounder, produce successive sounds. By pulling the lever or handle through different distances, different signals may be sent to the central station and serve as calls for various services, such as messenger boys, fire alarm, police, special, etc.

The general appearance of a four-call district box is shown in Fig. 58. In order to transmit a call for any particular one of these four services the handle is pulled until it comes opposite to the letters indicating the required service, and is then released. The service required is then indicated at the receiving, or central station, through the varying signals sent over the line by the movement of the break-wheel, on the release of the handle.

**Box, Fire-Alarm Signal** — A signal box provided for the purpose of automatically sending an alarm of fire.

The fire-alarm box shown in Fig. 59, operates



Fig. 59. Fire-Alarm Signal-Box.

on the same principle as the district call box. The movement of the handle in the direction of the arrow drives a wheel that makes and breaks a circuit at certain intervals.

The fire-alarm signal boxes are connected

either with a central station, or with the engine houses of the district in which the alarm is sounded, or with both.

**Box, Fire-Alarm Telegraph** — An automatic-call signal-box employed for sending an alarm of fire to a central station.

A form of fire-alarm telegraph box is shown in Fig. 60. It consists essentially of a circuit-breaker



Fig. 60. Fire-Alarm Telegraph Box.

that is moved by pulling down a lever. The release of the lever repeats the signal to the fire department at the central station a certain number of times. The box also contains a relay bell, lightning arrester and signal-bell key.

**Box, Fishing** — A term sometimes used instead of junction box. (See *Box, Junction*.)

**Box, Flush** — A box or space, flush with the surface of a road-bed, provided in a system of underground wires or conduits, to facilitate the introduction of the conductors into the conduit, or for the examination of the conductors.

**Box, Fuse** — The box in which the fuse-wire of a safety-fuse is placed.

The fuse-box should be formed of moisture-proof, incombustible, insulating materials.

**Box, Junction** — A moisture-proof box provided in a system of underground con-



Fig. 61. Junction Box.

ductors to receive the terminals of the feeders, in which connection is made between

the feeders and the mains, and from which the current is distributed to the individual consumer. (See *Feeder, Main, Electric*.)

A form of junction box for coupling lengths of conductors is shown in Fig. 61.

**Box, Patrol Alarm** — An automatic-signal call-box provided for use on the outside of buildings.

The call-box is placed inside a box, the outer door of which is furnished with a Yale lock.

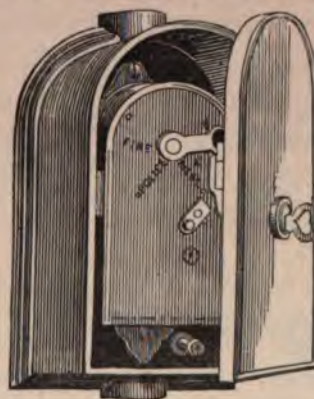


Fig. 62. Patrol Box.

A form of patrol box is shown in Fig. 62.

**Box, Resistance** — A box containing a number of separate coils of known resistances employed for determining the value of an unknown resistance, and for other purposes. (See *Bridge, Electric, Box Form of*.)

**Box-Sounding Relay**.—(See *Relay, Box-Sounding*.)

**Box-Sounding Telegraphic Relay**.—(See *Relay, Box-Sounding Telegraphic*.)

**Box, Splice** — A box provided for holding splice joints and loops, and so arranged as to be readily accessible for examination, re-arranging, cross-connecting, etc.

Splice-boxes vary in shape and construction according to the purposes for which they are designed.

**Box, Splice, Four-way** — A splice-box provided with four ways or tubular conduits.

**Box, Splice, Two Way** — A splice-



box provided with but two tubular conduits or ways.

**Box, Tumbling** — — A rotating box in which metallic articles that are to be electroplated are placed so as to be polished by attrition against one another.

**Boxing the Compass.** — (See *Compass, Boxing the.*)

**Bracket, Lamp, Electric** — — A device similar to a bracket for a gas burner for holding or supporting an electric lamp.



Fig. 63. Lamp Bracket. Fig. 64. Lamp Bracket.

Lamp brackets are either fixed or movable.



Fig. 65. Lamp Bracket, Movable Arms.

Those shown in Figs. 63 and 64 are fixed. That shown in Fig. 65 is movable.

**Bracket, Telegraphic** — — A support or cross piece placed on a telegraph pole for the support of the insulators of telegraphic lines.

Telegraphic insulators are supported either on wooden *arms*, or on iron or metal *brackets*.

Fig. 66 shows a form of iron bracket. Fig. 67 shows a form of wooden arm.



Fig. 66. Telegraphic Bracket.



Fig. 67. Telegraphic Cross-Arm.

Various well known modifications of these shapes are in common use. (For details, see *Fole, Telegraphic.*)

**Braid, Tubular** — — A braid of fibrous insulating material, woven in the form of a tube, and provided for drawing over a splice after two wires have been connected.

**Braided Wire.** — (See *Wire, Braided.*)

**Brake, Electro-Magnetic** — — A brake for car wheels, the braking power for which is either derived entirely from electro-magnetism, or is thrown into action by electro-magnetic devices.

Electro-magnetic car brakes are of a great variety of forms. They may, however, be arranged in two classes, viz.:

(1.) Those in which magnetic adhesion, or the magnetic attraction of the brake to the wheels, is employed.

(2.) Ordinary brake mechanism in which the force operating the brake is thrown into action by an electro-magnet.

**Brake, Friction** — — A name sometimes given to a Prony brake. (See *Brake, Prony.*)

**Brake, Magneto-Electric** — — A device for checking the swing of a galvanometer, in which a slight inverse current is sent through the coils of the galvanometer.

The Frey magneto-electric brake, as shown in Fig. 68, consists of a small coil, connected by a

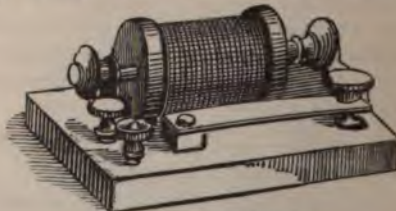


Fig. 68. Electric Brake.

contact-key with the galvanometer terminals. A small adjustable magnet coil is provided for regulating the action of the inverse current. To avoid disturbance, the brake is placed at least 4 or 5 feet from the galvanometer. Manipulation of the ordinary galvanometer key attains the same end in a much simpler manner.

**Brake, Prony** — — A mechanical device for measuring the power of a driving shaft.

An inflexible beam, Fig. 69, is provided at one end with a clamping device for clamping the driving shaft or pulley, and at the other end A, with a pan for holding weights.

If the brake be arranged as shown in Fig. 69, and the shaft rotate in the direction of the arrow, the tendency will be to carry the beam around with the shaft, placing it at some given moment



Fig. 69. Prony Brake.

in the position shown by the dotted line. If a sufficiently heavy weight be placed at x, in a pan hung at A, the beam will assume a position vertically downwards. If, however, the torque, or




Fig. 70. Prony Brake.

twisting force of the driving shaft, be balanced by the weight, the bar will remain horizontal. The power can then be calculated by multiplying the weight in pounds by the circumference in feet of the circle of which the bar is a radius, and this product by the number of turns of the driving shaft per minute. The product will be the num-




Fig. 71. Prony Brake.

ber of foot-pounds per minute, and, when divided by 33,000, will give the *horse-power*.

Some modified forms of the Prony brake are shown in Figs. 70 and 71.

A simple form of brake consists of a cord passed over the pulley of the machine to be tested. A weight is hung at one end of the cord. The other

end of the cord is attached to the top of a spring balance, the other end of which is fastened to the floor. A reading of the spring balance is taken while the pulley is at rest and when it is in motion, and the result calculated.

**Branch.**—A term applied to any principal distributing conductor from which outlets are taken or taps made.

**Branch-Block.**—(See *Block, Branch*.)

**Branch Conductors.**—(See *Conductor, Branch*.)

**Branch Fuse.**—(See *Fuse, Branch*.)

**Branch, Sub** — — A distributing conductor taken from a branch.

**Branding, Electric** — — A process whereby the branding tool is heated by electrical incandescence instead of by ordinary heat.

The branding tool consists essentially of a small transformer with devices for regulating the current strength by switches and choking coils.

**Brassing, Electro** — — Coating a surface with a layer of brass by electro-plating. (See *Plating, Electro*.)

The plating bath contains a solution of copper and zinc; a brass plate is used as an anode.

**Break.**—A want of continuity in a circuit.

**Break, Circuit Loop** — — A device for introducing a loop in any part of a line circuit.

A form of circuit loop-break is shown in Fig. 72.



Fig. 72. Circuit Loop Break.

It consists essentially of a rigid frame with two porcelain or other suitable insulators for the support of the loop wires.



**Break-Down Switch.**—(See *Switch, Break-Down.*)

**Break-Induced Current.**—(See *Current, Break-Induced.*)

**Break, Mercury** — — — A form of circuit breaker operated by the removal of a conductor from a mercury surface.

Mercury breaks assume a variety of forms. One end of the circuit is connected with the mercury, and the other with the conductor.

**Break Shock.**—(See *Shock, Break.*)

**Breaker, Circuit** — — — Any device for breaking a circuit.

**Breaking the Primary.**—(See *Primary, Breaking the.*)

**Breaking Weight of Telegraph Wires.**—(See *Wires, Telegraph, Breaking Weight of.*)

**Breath Figures.**—(See *Figures, Breath.*)

**Breeze, Electric** — — — A term sometimes employed in electro-therapeutics for a brush discharge.

One of the electrodes, consisting of a single point or a number of points, is held near the parts to be treated so that the convective discharge is received thereon. The other electrode is connected to the body of the patient.

**Breeze, Electro-Therapeutic** — — — An electric breeze. (See *Breeze, Electric.*)

**Breeze, Head, Electro-Therapeutic** — — — A form of electric convective discharge, or electric breeze, applied to the head. (See *Breeze, Electric.*)

**Breeze, Static** — — — An electric breeze obtained by the convective discharge of an electrostatic charge.

**Bridge-Arms.**—(See *Arms, Bridge or Balance.*)

**Bridge, Box** — — — A box of resistance coils so arranged as to be capable of being used directly as a Wheatstone electric balance. (See *Bridge, Electric, Box Form of.*)

The commercial form of Wheatstone's balance.

**Bridge, Electric** — — — A device for measuring the value of electric resistances.

The electric bridge is also called the Electric Balance.

This is called a bridge because the wire M, G, N, bridges or joins points of equal potential.

A, B, C and D, Fig. 73, are four electric resistances, any one of which can be determined in ohms, provided the absolute value of one of the others, and the relative values of any two of the remaining three are known in ohms.

A voltaic battery, Zn C, is connected at Q and P, so as to branch at P, and again unite at




Fig. 73. Electric Balance.

Q, after passing through the conductor D C, and B A.

A sensitive galvanometer, G, is connected at M N, as shown.

The passage of a current through any resistance is attended by a fall of potential proportional to the resistance. (See *Potential, Electric.*) If, then, the resistances A, C and B, are so proportioned to the value of the unknown resistance D, that no current passes through the galvanometer G, the two points, M and N, in the two circuits, Q M P and Q N P, are at the same potential. That is to say, the fall of potential along Q M P and Q N P, at the points M and N, is equal. Since the fall of potential is proportional to the resistance, it follows that

$$\begin{aligned} A : B &:: C : D, \\ \text{or } A \times D &= B \times C, \\ \text{or } D &= \left(\frac{B}{A}\right) C. \end{aligned}$$

If then we know the values of A, B and C, the value of D, can be readily calculated.

By making the value  $\frac{B}{A}$ , some simple ratio, the value of D, is easily obtained in terms of C.

The resistances A, B and C, may consist of coils of wire whose resistance is known. To avoid their magnetism affecting the galvanometer needle during the passage of the current through them, they should be made of wire bent into two

parallel wires and wrapped in coils called *resistance coils*; or a *resistance box* may be used. (See *Coil, Resistance*. *Box, Resistance*.)

There are two general forms of Wheatstone's Bridge, the box form, and the sliding form.

**Bridge, Electric, Arms of** — The resistances of an electric bridge or balance. (See *Bridge, Electric*.)

**Bridge, Electric, Box Form of** — A commercial form of bridge or balance in which all the known arms or branches of the bridge, except the unknown arm, consist of standardized resistance coils, whose values are given in ohms. (See *Coil, Resistance*.)

The box form of bridge or balance is shown in




Fig. 74. Box Balance.

perspective in Fig. 74, and in plan in Fig. 75. The bridge arms, corresponding to the resistances




Fig. 75. Box Balance.

A and B, of Fig. 73, consist of resistance coils of 10, 100 and 1,000 ohms each, inserted in the arms  $qz$ , and  $qx$ , of Fig. 75. These are called the *proportional coils*. The arm corresponding to resistance C, of Fig. 73, is composed of separate resistances of 1, 2, 2, 5, 10, 10, 20, 50, 100, 100, 200, 500, 1,000, 1,000, 2,000 and 5,000 ohms. In some forms of box bridges additional decimal resistances are added.

The resistance coils are wound, as shown in Fig. 76, after the wire has been bent on itself in the middle. This is done in order to avoid the effects of induction, among which are a disturbing action on a galvanometer used near them, and the introduction of a spurious resistance in the coils themselves. (See *Resistance, Spurious*.)

3—Vol. 1

To avoid the effects of changes of resistance occasioned by changes of temperature, the coils are made of German silver, or, preferably, of alloys called *Platinoid* or *Platinum silver*. Even when these alloys are used, care should be taken not to allow the currents to pass continuously through the resistance coils longer than a few moments.

The coils, C, C', are connected with one another in series by soldering their ends to the short




Fig. 76. Resistance Coils.

thick pieces of brass, E, E, E, Fig. 76. On the insertion of the plug-keys, at S, S, the coils are cut-out by short-circuiting. Care should be taken to see that the plug-keys are firmly inserted and free from grease or dirt, as otherwise the coil will not be completely cut out. As each plug-key is inserted it should be turned slightly in the opening, so as to insure good contact.

The following are the connections, viz.: The galvanometer is inserted between  $q$  and  $r$ , Fig. 77,




Fig. 77. Electric Balance.

the unknown resistance between  $z$  and  $r$ ; the battery is connected to  $x$  and  $z$ . A convenient proportion being taken for the value of the proportional coils, resistances are inserted in the arm C, until no deflection is shown by the galvanometer G. The similarity between these connections and those shown in Fig. 75 will be seen from an inspection of Fig. 77. The arms, A and B, correspond to  $qx$  and  $qz$ , of Fig. 75; C, to the arm



x r, Fig. 75; and D, to the unknown resistance. We then have as before:

$$A:B::C:D, \text{ or } A \times D = B \times C. \therefore D = \left(\frac{B}{A}\right) C.$$

The advantage of the simplicity of the ratios, A and B, or 10, 100 and 1,000 of the bridge box, will therefore be manifest. The battery terminals may also be connected to q and r, and the galvanometer terminals to x and z, without disturbing the proportions.

#### Bridge, Electric, Commercial Form of

—A name sometimes given to the box form of Wheatstone's electric balance. (See *Bridge, Electric, Box Form of*.)

**Bridge, Electric Duplex** —An arrangement of telegraphic circuits in the form of a Wheatstone electric bridge for the purposes of duplex telegraphy. (See *Telegraphy, Duplex, Bridge Method of*.)

**Bridge, Electric, Proportionate Arms of** —(See *Arms, Proportionate*.)

#### Bridge, Electric, Slide-Form of

A balance in which the proportionate arms of the bridge are formed of a single thin wire, of uniform diameter, generally of German silver, of comparatively high resistance. The length of this wire is usually one metre; hence this apparatus is often called the metre bridge.

A *Sliding Contact Key* slides over the wire; one terminal of the key is connected with the galvanometer and the other with the wire when the key is depressed. As the wire is of uniform diameter the resistances of the arms, A and B, Fig. 78, will




Fig. 78. Slide Bridge.

be directly proportional to the lengths. A scale placed near the wire serves to measure these lengths. A thick metal strip connected with the slide wire has four gaps at P, Q, R and S.

When in ordinary use, the gaps at P and S, are either connected by stout strips of conducting material or by known resistances, in which latter case they act simply as ungraduated extensions of the slide wire, and, like lengthening the slide wire, increase the sensibility of the instrument.

The unknown resistance is then inserted in the gap at Q, and a known resistance, generally the *resistance box*, in that at R. The galvanometer has one of its terminals connected to the metal strip between Q and R, and its other terminal to the sliding key. The battery terminals are connected to the metal strips between P and Q, and R and S, respectively.

These connections are more clearly seen in the form of bridge shown in Fig. 79. The slide wire, w w, consists of three separate wires each a metre



Fig. 79. Slide Form of Bridge.

in length, so arranged that only one wire, or two in series, or all three in series, can be used. Matters being now arranged as shown, the sliding key is moved until no current passes through the galvanometer when the key is depressed.

The slide form of bridge is not entirely satisfactory, since the uncertainty of the spring-contact causes a lack of correspondence between the point of contact and the point of the scale on which the index rests.

The loss of uniformity in the diameter of the wire, due to constant use, causes a lack of correspondence between the resistance of the wire and its length. With care, however, very accurate results can be obtained by the slide form.

**Bridge, Inductance** —An apparatus for measuring the inductance of a circuit similar to a Wheatstone bridge. (See *Inductance*.)

Professor Hughes employed an inductance bridge of the following description:

Four resistances, Q, S, R and P, arranged as shown in Fig. 80, form the bridge. The resistances, Q, S and R, consist of sections of German silver wire, one metre in length, each of the resistance of 4 ohms. P, is a coil of wire possessing sensible inductance. The object of the

bridge is to measure the value of this inductance.  $I$ , is an interrupter placed in the circuit of the battery  $B$ .

Suppose the interrupter,  $I$ , be placed in the telephone circuit between  $T$  and  $c$ . By shifting the sliding contact so as to alter the value of  $R$ , a bal-




Fig. 80. Inductance Bridge.

ance can be effected and silence obtained in the telephone.

Now remove the interrupter and place it in the battery circuit between  $b$  and  $a$ , as shown in Fig. 80. If now, the interrupter,  $I$ , be made to rapidly interrupt the battery current, this balance is destroyed, and cannot be again obtained by any variation in the value of the resistance,  $R$ .

The reason of this is evident. On the closing or opening of the battery current, the inductance of  $P$ , produces a counter electromotive force in  $P$ , which produces differences of potential between  $a$  and  $c$ . If an attempt be made to prevent this,




Fig. 81. Hughes' Inductance Bridge.

by altering the value of  $R$ , the steady balance is destroyed, and the telephone will be traversed by a current during the time the currents have become steady. In order to obtain a balance during rapid alternations of the battery current, Professor Hughes placed a pair of mutually in-

ductive coils in the battery and the telephone circuits, as shown in Fig. 81.

The resistances,  $Q$ ,  $S$ ,  $R$  and  $P$ , are the same as already described. The mutually inductive coils,  $M_1$  and  $M_2$ , are placed respectively in the telephone and battery circuits in the manner shown. The coil  $M_2$ , in the battery circuit is fixed, while that in the telephone circuit is so arranged that it can be maintained, with its centre coincident with that of  $M_2$ , while its axis can be placed at any desired angle with  $M_2$ . When the axes of the coils are at right angles, the inductance is zero. When they are co-linear, the inductance is at its maximum.

When the coils  $M_1$ , and  $M_2$ , are in any intermediate position, the inductive electromotive force produced in the telephone circuit can, if the value of  $R$ , be changed, be made to balance the impulsive electromotive force due to the inductance of  $P$ , and the value of this latter can, therefore, be inferred.

**Bridge, Magnetic** — An apparatus invented by Edison for measuring magnetic resistance, similar in principle to Wheatstone's electric bridge.

The magnetic bridge is based on the fact that two points at the same magnetic potential, when connected, fail to produce any action on a magnetic needle. The magnetic bridge consists, as shown in Fig. 82, of four arms or sides made of

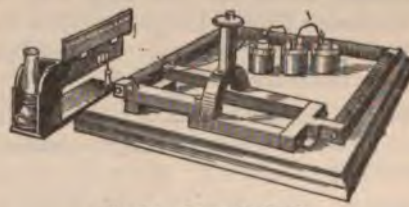


Fig. 82. Magnetic Bridge.

pure, soft iron. The poles of an electro-magnet are connected to projections at the middle of the short side of the rectangle. By this means a difference of magnetic potential is maintained at these points. The two long sides are formed of two halves each, which form the four arms of the balance. Two of these only are movable.

Two curved bars of soft iron, of the same area of cross-section as the arms of the bridge, rest on the middle of the long arms, in the arched shape shown. Their ends approach near the top of the



arch within about a half inch. A space is hollowed out between these ends, for the reception of a short needle of well-magnetized hardened steel, suspended by a wire from a torsion head.

The movements of the needle are measured on a scale by a spot of light reflected from a mirror.

The electro-magnet maintains a constant difference of magnetic potential at the two shorter ends of the rectangle. If, therefore, the four bars, or arms of the bridge, are magnetically identical, there will be no deflection, since no difference of potential will exist at the ends of the bars between which the needle is suspended. If, however, one of the bars or arms be moved even a trifle, the needle is at once deflected, the motion becoming a maximum when the bar is entirely removed. If replaced by another bar, differing in cross-section, constitution, or molecular structure, the balance is likewise disturbed.

The magnetic bridge is very sensitive. It was designed by its inventor for testing the magnetic qualities of the iron used in the construction of dynamo-electric machines.

**Bridge Method of Duplex Telegraphy.**—(See *Telegraphy, Duplex, Bridge Method of.*)

**Bridge Method of Quadruplex Telegraphy.**—(See *Telegraphy, Quadruplex, Bridge Method of.*)

**Bridge, Metre** — —A slide form of Wheatstone's electric bridge, in which the slide wire is one metre in length. (See *Bridge, Electric, Slide Form of.*)

**Bridge, Resistance** — —A term sometimes applied to an electric bridge or balance. (See *Bridge, Electric.*)

**Bridge, Reversible** — —A bridge or balance so arranged that the proportionate coils can be readily interchanged, thus permitting the bridge coils to be readily tested by reversing.

**Bridge, Wheatstone's Electric** — —A name given to the electric bridge or balance. (See *Bridge, Electric.*)

**Bridges.**—Heavy copper wires suitably shaped for connecting the dynamo-electric machines in an incandescent light station to the bus-rods or wires.

**Bright Dipping.**—(See *Dipping, Bright.*)

**Bright Dipping Liquid.**—(See *Liquid, Bright Dipping.*)

**Britannia Joint.**—(See *Joint, Britannia.*)

**Broken Circuit.**—(See *Circuit, Broken.*)

**Bronzing, Electro** — —Coating a surface with a layer of bronze by electro-plating. (See *Plating, Electro.*)

The plating bath contains a solution of tin and copper.

**Brush-and-Spray Discharge.**—(See *Discharge, Brush-and-Spray.*)

**Brush Discharge.**—(See *Discharge, Brush.*)

**Brush Electrode.**—(See *Electrode, Brush.*)

**Brush, Faradic** — —An electrode in the form of a brush employed in the medical application of electricity.

The bristles are generally made of nickellized copper wire.

**Brush-Holders for Dynamo-Electric Machines.**—Devices for supporting the collecting brushes of dynamo-electric machines.

As the brushes require to be set or placed on the commutator in a position which often varies with the speed of the machine, and with changes in the resistance of the external circuit, all brush-holders are provided with some device for moving them concentrically with the commutator cylinder.

**Brush Rocker.**—(See *Rocker, Brush.*)

**Brush, Scratch** — —A brush made of wire or stiff bristles, etc., suitable for cleaning the surfaces of metallic objects before placing them in the plating bath.

Scratch brushes are made of various shapes and are provided with wires or bristles of varying coarseness.

Some forms of scratch and finishing brushes are shown in Fig. 83. They are circular in outline



Fig. 83. Scratch Brushes.

and are adapted for use in connection with a lathe.

**Brush, Scratch, Circular** — — A scratch brush of a circular shape, so fitted as to be capable of being placed in a lathe and set in rapid rotation.

**Brush, Scratch, Hand** — — A scratch brush operated by hand, as distinguished from a circular scratch brush operated by a lathe.

**Brushes, Adjustment of Dynamo-Electric Machines** — — Shifting the brushes into the required position on the commutator cylinder, either non-automatically by hand, or automatically by the current itself. (See *Regulation, Automatic, of Dynamo-Electric Machines*.)

**Brushes, Carbon, for Electric Motors** — — Plates of carbon for leading current to electric motors. (See *Brushes of Dynamo-Electric Machine*.)

These are generally known simply as brushes.

**Brushes, Collecting, of Dynamo-Electric Machine** — — Conducting brushes which bear on the commutator cylinder, and take off the current generated by the difference of potential in the armature coils. (See *Brushes of Dynamo-Electric Machine*.)

**Brushes, Lead of** — — The angle through which the brushes of a dynamo-electric machine must be moved forward, or in the direction of rotation, in order to diminish sparking and to get the best output from the dynamo.

The necessity for the lead arises from the counter magnetism or magnetic reaction of the armature, and the magnetic lag of its iron core. (See *Lead, Angle of*.)

The position of the brushes on the commutator to insure the best output is practically the same in a series dynamo for any current strength. In shunt and compound dynamos it varies with the lead.

**Brushes of Dynamo-Electric Machine.** — Strips of metal, bundles of wire, slit plates of metal, or plates of carbon, that bear on the commutator cylinder of a dynamo-electric machine, and carry off the current generated.

Rotary brushes consisting of metal discs are sometimes employed. Copper is almost univer-

sally used for the brushes of dynamo-electric machines. Carbon brushes are often used for dynamo-electric motors.

The brush shown at B, Fig. 84, is formed of copper wires, soldered together at the non-bearing end. A copper plate, slit at the bearing end, is shown at C, and bundles of copper plates, soldered together at the non-bearing end, are shown at D.

The brushes should bear against the commutator cylinder with sufficient force to prevent jumping, and consequent burning, and yet not so hard as to cause excessive wear.

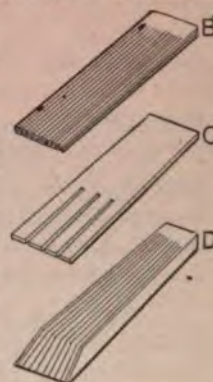


Fig. 84. Brushes.

**Brushes, Rotating, of Dynamo-Electric Machines** — — Discs of metal, employed in place of the ordinary brushes for carrying off the current from the armatures of dynamo-electric machines.

**Brushing, Scratch** — — Cleansing the surface of an article to be electroplated, by friction with a scratch brush.

Scratch brushing is generally done with the brushes wet by various solutions.

**Buckling.** — Irregularities in the shape of the surfaces of the plates of storage cells, following a too rapid discharge.

**Bug.** — A term originally employed in quadruplex telegraphy to designate any fault in the operation of the apparatus.

This term is now employed, to a limited extent, for faults in the operation of any electric apparatus.

**Bug-Trap.** — A device employed to overcome the "bug" in quadruplex telegraphy.

**Bulb, Lamp** — — The chamber or globe in which the filament of an incandescent electric lamp is placed.

The chamber or globe of a lamp must be of such construction as to enable the high vacuum necessary to the operation of the lamp to be maintained.



**Bunched Cable.**—(See *Cable, Bunched.*)

**Bunched Cable, Straightaway** — —  
(See *Cable, Bunched, Straightaway.*)

**Bunched Cable, Twisted** — —(See  
*Cable, Bunched, Twisted.*)

**Bunsen Voltaic Cell.**—(See *Cell, Voltaic, Bunsen's.*)

**Buoy, Electric** — —A buoy on which luminous electric signals are displayed.

**Burglar Alarm.**—(See *Alarm, Burglar.*)

**Burglar Alarm Annunciator.**—(See *Annunciator, Burglar Alarm.*)

**Burglar Alarm Contacts.**—(See *Contacts, Burglar Alarm.*)

**Burglar Alarm, Yale Lock Switch for** —  
(See *Alarm, Yale-Lock-Switch Burglar.*)

**Burner, Argand Electric** — —An argand gas-burner that is lighted by means of an electric spark.

The argand electric burner assumes a variety of forms, such as the *plain pendant*, the *ratchet-pendant* and the *automatic*. They are also used in systems of multiple gas lighting.

**Burner, Argand Electric, Automatic** — —  
—An argand burner arranged for automatic electric lighting. (See *Burner, Automatic-Electric.*)

**Burner, Argand Electric, Hand-Lighter** — —  
—A plain-pendant electric burner adapted for lighting an argand gas-burner. (See *Burner, Plain-Pendant Electric.*)

**Burner, Argand-Electric, Plain-Pendant** — —  
—A plain-pendant electric burner adapted for lighting an argand gas burner. (See *Burner, Plain-Pendant Electric.*)

**Burner, Argand-Electric, Ratchet-Pendant** — —  
—A ratchet-pendant electric burner adapted for lighting an argand gas-burner. (See *Burner, Ratchet-Pendant Electric.*)

**Burner, Automatic-Electric** — —An electric device for both turning on the gas and lighting it, and turning it off, by alternately touching different buttons.

The gas-cock is opened or closed by the motion of an armature, the movements of which are controlled by two separate electro-magnets. One push-button, usually a white one, turns the gas on

by energizing one of the electro-magnets and, at the same time, lights it by means of a succession of sparks from a spark coil. Another push-button, usually a black one, turns the gas off by energizing the other electro-magnet. The turning on or off of the gas is accomplished by positive motions. Automatic burners are also made with a single button.

An Argand Electric Burner is shown in Fig. 85.

**Burner, Electric Candle** — —A device for electrically lighting a gas jet in a burner surrounded by a porcelain tube in imitation of a candle.

Electric candle burners are either simple or ratchet candle burners.

**Burner, Hand-Lighting Electric** — —A name sometimes applied to a plain-pendant electric burner. (See *Burner, Plain-Pendant Electric.*)

**Burner, Jump-Spark** — —A term sometimes applied to a gas burner in which the issuing gas is ignited by a spark that jumps between the metallic points placed on it.

Jump-spark burners are used in systems of multiple gas lighting. (See *Lighting, Electric Gas.*)

**Burner, Plain-Pendant Electric** — —A gas-burner provided with a pendant for the purpose of lighting the gas by means of a spark, after the gas has been turned on by hand.

The gas is first turned on by hand at the ordi-



Fig. 85. Argand Electric Burner.



Fig. 86. Plain-Pendant Burner.

nary key, and is then lighted by pulling the pendant C, Fig. 86. A spark from a spark coil ignites the gas.

This is sometimes called an *electric hand-lighting burner*.

**Burner, Ratchet-Pendant Candle Electric** — — A burner for both lighting and extinguishing a candle gas jet.

**Burner, Ratchet-Pendant Electric** — — A gas-burner in which one pulling of a pendant turns on the gas and ignites it by means of an electric spark from a spark coil, and the next pulling of the pendant turns off the gas.

A ratchet-wheel and pawl are operated by the motion of the pendant. The first pull of the pendant chain moves the ratchet so as to open a four-way gas cock, and at the same time light the gas at the burner tip by a *wipe-spark* from a spark coil. On the next pull of the pendant, the four-way cock is turned so as to turn off the gas. Alternate pulls, therefore, light and extinguish the gas.

**Burner, Simple Candle Electric** — — A plain-pendant electric burner. (See *Burner, Plain Pendant Electric*.)

**Burner, Thumb-Cock Electric** — — An electric gas-burner, in which the turning of an ordinary thumb-cock turns on the gas, and ignites it by a spark produced by a wiping contact actuated by the motions of the thumb-cock.

A form of thumb-cock burner is shown in Fig. 87.

**Burner, Vibrating-Electric** — — An electric gas-burner in which the gas is lighted after it is turned on by hand, by means of the spark from a spark coil produced on the rapid



Fig. 87. Thumb-Cock Burner.

making and breaking of the circuit by a vibrating contact.

The vibrating-electric burner has a single electro-magnet. It is operated by means of a button or switch, and may be used on single lights or on groups of lights. It bears the same relation to the automatic burner that the plain-pendant burner does to the ratchet burner.

**Burnetize.**—To subject to the Burnetizing process. (See *Burnetizing*.)

**Burnetizing.**—A method adopted for the preservation of wooden telegraph poles by injecting a solution of zinc chloride into the pores of the wood. (See *Pole, Telegraphic*.)

**Burning at Commutator of Dynamo.**—An arcing at the brushes of a dynamo-electric machine, due to their imperfect contact, or improper position, which results in loss of energy and destruction of the commutator segments.

**Bus.**—A word generally used instead of omnibus. (See *Omnibus*.)

**Bus-Bars.**—(See *Bars, Bus*.)

**Bus-Rod Wires.**—(See *Wires Bus-Rod*.)

**Bus-Wire.**—(See *Wire, Bus*.)

**Butt Joint.**—(See *Joint, Butt*.)

**Button, Carbon** — — A resistance of carbon in the form of a button.

A button of carbon is used as an electric resistance in a variety of apparatus; its principal use, however, is in the transmitting instrument of the electric telephone. In the telephone transmitter, the button is so placed between contact-plates that when the plates are pressed together by the sound-waves, the electrical resistance is decreased by a decrease in the thickness of the carbon button, an increase in its density, and an increase in the number of points where the carbon touches the plates. Rheostats, or resistances, have been made by the use of a number of carbon buttons or discs piled one on another and placed in a glass tube. Discs of carbonized cloth form excellent resistances for such purposes.

**Button, Press** — — A push button. (See *Button, Push*.)

**Button, Push** — — A device for closing



in electric circuit by the movement of a button.

A button, when pushed by the hand, closes the



Fig. 88. Push Button.



Fig. 89. Push Button.

contact, and thus completes a circuit in which some electro-receptive device is placed. This circuit is opened by a spring, on the removal of the pressure. Some forms of push-buttons are shown in Figs. 88, 89 and 90.

A floor-push for dining-rooms and offices is shown in Fig. 90.

Fig. 88 shows the general appearance of an ordinary bell-push. The arrangement of the interior spring contacts will be understood by an inspection of Fig. 91.



Fig. 90. Floor Push.



Fig. 91. Spring Contact of Bell Push.

automatic make-and-break. (See *Make-and-Break, Automatic.*)

The buzzer is generally placed inside a resonant



Fig. 92. Buzzer.

case of wood in order to strengthen the sound by resonance. A form of buzzer is shown in Fig. 92.

## C

**C.**—An abbreviation for centigrade.

Thus, 20 degrees C. means 20 degrees of the centigrade thermometric scale. (See *Scale, Centigrade Thermometer.*)

**C.**—A contraction for current.

Generally a contraction for the current in amperes, as  $C = \frac{E}{R}$ .

**C. C.**—A contraction for cubic centimetre. (See *Weights and Measures, Metric System of.*)

**C. G. S. Units.**—A contraction for centimetre-gramme-second units. (See *Units, Centimetre-Gramme-Second.*)

**C. P.**—A contraction for candle power. (See *Candle, Standard.*)

**Cable.**—An electric cable. (See *Cable, Electric.*)

**Cable.**—To send a telegraphic dispatch, by means of a cable.

**Cable, Aerial** — —A cable suspended in the air from suitable poles.

**Cable, Anti-Induction, Waring** — —A form of anti-induction cable.

In the Waring anti induction cable the separate conductors are covered with a fibrous insulator, from which all air and moisture is expelled, and the fibre then saturated with an insulating ma

terial called ozite. The conductors are then protected from the inductive effects of neighboring conductors by a continuous sheath of lead alloyed with tin.

Where the cables are bunched, the bunches are sometimes again surrounded by insulating material, and the whole then covered by a continuous lead sheathing; generally, however, the separately insulated conductors are bunched, and then covered by a single sheathing of lead alloyed with tin.

**Cable, Armature of** — — The armor of a cable. (See *Armature of a Cable*.)

**Cable, Armor of** — — The protecting sheathing or metallic covering on the outside of a submarine or other electric cable.

**Cable, Armored** — — An electric cable provided, in addition to its insulating coating, with a protective coating or sheathing, generally of metal tubing or wire.

**Cable-Box.** — (See *Box, Cable*.)

**Cable, Bunched** — — A cable containing more than a single wire or conductor.

Some forms of bunched, lead-covered cables, are shown in Fig. 93.



Fig. 93. Bunched Cables.

**Cable, Bunched, Straightaway** — — A bunched cable the separate conductors of which extend in the direction of the length of the cable without any twisting, being placed in successive layers.

In arranging the separate conductors in successive layers an advantage is gained in testing for a given wire in order to make a loop, splice, or branch with the next adjoining section. This is rendered still easier by giving the conductors of the successive layers some distinctive form of braiding in the fibrous insulating material, or some distinctive color.

**Cable, Bunched, Twisted** — — A bunched cable, the separate conductors of which are twisted-pairs placed in successive layers.

Each twisted-pair of a bunched cable acts as a metallic circuit, and, moreover, possesses the advantage of avoiding the ill effects of induction, so disadvantageous in telephone circuits.

In laying up the twisted-pairs in successive layers in a bunched cable, the direction of twisting is reversed in each successive layer. This form is especially desirable on all long cable lines.

In the case of twisted cables for telephone lines, the twists are sometimes made as frequent as one in every three or four inches. In such cases the cross-talk of induction is inappreciable.

**Cable, Capacity of** — — The quantity of electricity required to raise a given length of a cable to a given potential, divided by the potential.

The amount of charge for a given potential that any single conductor will take up with the rest of the conductors grounded. (See *Capacity, Electrostatic*.)

The ability of a wire or cable to permit a certain quantity of electricity to be passed into it before acquiring a given difference of potential.

Before a telegraph line or cable can transmit a signal to its further end, its difference of potential must be raised to a definite amount dependent on the character of the instruments and the nature of the system.

The first effect of electricity being passed into a line is to produce an accumulation of electricity on the line, similar to the charge in a condenser. Cables especially act as condensers, and from the high specific inductive capacity of the insulating materials employed, permit considerable induction to take place between the core and the metallic armor or sheathing, or the ground.

The capacity of a cable depends on the capacity of the wire; *i. e.*, on its length and surface, on the specific inductive capacity of its insulation, and its neighborhood to the earth, or to other conducting wires, casings, armors, or metallic coatings. Submarine or underground cables therefore have a greater capacity than air lines.

This accumulation of electricity produces a retardation in the speed of signaling, because the wire must be charged before the signal is received at the distant end, and discharged or neutralized before a current can be sent in the reverse direction. This latter may be done by connecting each end to earth, or by the action of the reverse current itself.



*The smaller the electrostatic capacity of a cable, therefore, the greater the speed of signaling. (See Retardation.)*

The capacity of a cable is measured in *microfarads*. (See *Farad, Micro*.)

**Cable Clip.**—(See *Clip, Cable*.)

**Cable-Core.**—(See *Core of Cable*.)

**Cable, Core-Ratio of** — — The ratio between the diameter of the insulation of a cable and the mean diameter of the strand.

The core-ratio is represented by  $\frac{D}{d}$ ; where D, is the diameter of the insulation, and d, the mean diameter of the strand. Should the extreme diameter of the strand of a cable be used in calculations for insulation resistance, inductive capacity, etc., erroneous values would be obtained. The measured diameter of the copper conductor is consequently decreased some five per cent., and, in this way, correct values are approximately obtained.—(Clark & Sabine.)

**Cable, Duplex** — — A conductor consisting of two separate cables placed parallel to each other.

The duplex cable is used especially in the alternating current system.

**Cable, Electric** — — The combination of an extended length of a single insulated conductor, or two or more separately insulated electric conductors, covered externally with a metallic sheathing or armor.

Strictly speaking, the word cable should be limited to the case of more than a single conductor. Usage, however, sanctions the employment of the word to indicate a single insulated conductor.

The conducting wire may consist of a single wire, of a number of separate wires electrically connected, or of a number of separate wires insulated from one another.

An electric cable consists of the following parts, viz.:

- (1.) The conducting wire or *core*.
- (2.) The insulating material for separating the several wires; and
- (3.) The *armor* or protecting covering, consisting of strands of iron wire, or of a metallic coating or covering of lead.

As to their position, cables are *aerial*, *submarine*, or *underground*. As to their purpose,

they are *telegraphic*, *telephonic*, or *electric light and power cables*. As to the number of their conductors they are *single-wire* or *bunched* cables. Bunched cables are *straightaway* or *twisted*.

Fig. 94 shows a form of submarine cable the



Fig. 94. Electric Cable.

armor of which is formed of strands of iron wire.

**Cable, Electric Light or Power** — — A cable designed to distribute the electric current employed in electric light or power systems.

Electric light cables are generally *underground*. They may be *submarine*. (See *Cable, Electric*.)

**Cable, Flat** — — A cable, the separate conductors of which are laid-up side by side so as to form a flat conductor.

A flat cable is suitable for house work as being less objectionable in appearance when placed on the outside of ceilings or walls.

**Cable, Flat Duplex** — — A flat, laid-up cable containing two wires.

**Cable-Grip.**—(See *Grip, Cable*.)

**Cable-Hanger.**—(See *Hanger, Cable*.)

**Cable-Hanger Tongs.**—(See *Tongs, Cable-Hanger*.)

**Cable Laid-Up in Layers.**—A term applied to a cable, all the conducting wires of which are in layers.

**Cable Laid-Up in Reversed Layers.**—A term applied to a cable in which the conductors, in alternate layers, are twisted in opposite directions. (See *Cable, Bunched, Straight-away.*)

**Cable Laid-Up in Twisted Pairs.**—A term applied to a cable in which every pair of wires is twisted together. (See *Cable, Bunched, Twisted.*)

**Cable Lead.**—(See *Lead, Cable.*)

**Cable, Multiple-Core** — —A cable containing more than a single core.

**Cable-Protector.**—(See *Protector, Cable.*)

**Cable-Serving.**—(See *Serving, Cable.*)

**Cable, Single-Wire** — —A cable containing a single wire or conductor.

**Cable, Sub-Aqueous** — —An electric cable designed for use under water.

The term submarine is more frequently employed.

**Cable, Submarine** — —A cable designed for use under water.

Submarine cables are either *shallow-water*, or *deep-sea cables*. Gutta-percha answers admirably for the insulating material of the core. Various other insulators are also used.

Strands of tarred hemp or jute, known as the *cable-serving*, are wrapped around the insulated core in order to protect it from the pressure of the galvanized iron wire armor afterwards put on. To prevent corrosion the iron wire is covered with tarred hemp, galvanized, or otherwise coated.

Submarine cables are generally employed for telegraphic or telephonic communication. (See *Cable, Electric.*)

**Cable, Submarine, Deep-Sea** — —A submarine cable designed for use in deep water.

This form of cable is not so heavily armored as the shallow-water submarine cable.

**Cable, Submarine, Shallow-Water** — —A submarine cable designed for use in shallow water.

This cable is provided with a heavier armor or sheathing than a deep-sea cable to protect it from chafing due to the action of the waves and tides in shallow water. (See *Cable, Submarine.*)

**Cable Support, Underground** — —(See *Support, Underground Cable.*)

**Cable Tank.**—(See *Tank, Cable.*)

**Cable, Telegraphic** — —A cable designed to establish telegraphic communication between different points.

Telegraphic cables may be *aerial*, *submarine*, or *underground*. (See *Cable, Electric.*)

**Cable, Telephonic** — —A cable designed to establish telephonic communication between different points.

Telephonic cables may be *aerial*, *submarine*, or *underground*. (See *Cable, Electric.*)

**Cable-Terminal.**—(See *Terminal, Cable.*)

**Cable, Torpedo** — —A cable, in the circuit of which a torpedo is placed. (See *Torpedo, Electric.*)

**Cable, Twisted-Pair** — —A cable containing a single twisted pair, suitable for use as a lead and return, thus affording a metallic circuit.

**Cable, Two, Three, Four, etc., Conductor** — —A cable containing two, three, four, or more separate conducting wires.

**Cable, Underground** — —An electric cable placed underground.

The conducting wires of an underground cable are surrounded by a good insulating, water-proof substance, and protected by a sheathing or armor. A coating of lead is very generally employed for the sheathing or armor. Underground cables, in order to be readily accessible, should be placed in an underground conduit or subway. (See *Cable, Electric, Conduit, Underground Electric, Subway, Electric.*)

**Cable-Worming.**—(See *Worming, Cable.*)

**Cablegram.**—A message received by means of a submarine telegraphic cable.

**Cables, Laying-Up** — —The placing or disposing of the separate cables or conductors in a bunched cable.

The separate conductors in cables may be laid-up "*straightaway*" or "*twisted*." (See *Cable, Bunched, Twisted, Cable, Bunched, Straight-away.*)

**Cabling.**—Sending a telegraphic dispatch by means of a cable.



**Calahan's Stock Printer.**—(See *Printer, Stock, Calahan's*.)

**Calamine, Electric** — — A crystalline variety of silicate of zinc that possesses pyro-electric properties. (See *Electricity, Pyro*.)

**Cal-Electricity.**—(See *Electricity, Cal*.)

**Calibrate.**—To determine the absolute or relative value of the scale divisions, or of the indications of any electrical instrument, such as a galvanometer, electrometer, voltmeter, wattmeter, etc.

**Calibrating.**—The act of determining the absolute or relative value of the deflections, or indications of an electric instrument.

**Calibration, Absolute** — — The determination of the absolute values of the reading of an electrometer, galvanometer, voltmeter, ampèremeter, or other similar instrument.

The calibration of a galvanometer, for example, consists in the determination of the law which governs its different deflections, and by which is obtained in ampères, either the absolute or the relative currents required to produce such deflections.

For various methods of calibration, see standard works on electrical testing, or on electricity.

**Calibration, Invariable, of Galvanometer** — — In galvanometers with absolute calibration, a method for preventing the occurrence of variations in the intensity of the field of the galvanometer, due to the neighborhood of masses of iron, etc.

**Calibration, Relative** — — The determination of the relative values of the reading of an electrometer, voltmeter, ampèremeter, or other similar instrument.

**Caliper, Micrometer** — — A name sometimes given to a vernier wire gauge. (See *Gauge, Vernier Wire*.)




Fig. 95. Micrometer Caliper.

A form of micrometer caliper is shown in Fig. 95.

**Call-Bell, Extension** — — (See *Bell, Extension Call*.)

**Call-Bell, Magneto-Electric** — — An electric call-bell operated by currents produced by the motion of a coil of wire before the poles of a permanent magnet.

A well known form of magneto call-bell is shown



Fig. 96. Magneto Call Bell.

in Fig. 96. The armature is driven by the rotation of the handle.

**Call-Bell, Telephone** — — An electric bell, the ringing of which is used to call a person to a telephone.

**Call, Electric Bell** — — An electric bell sometimes used to call the attention of an operator to the fact that his correspondent wishes to communicate with him, or to notify an attendant that some service is desired.

**Call, Messenger** — — A district call-box. (See *Box, District Call*.)

**Call, Thermo-Electric** — — An instrument for sounding an alarm when the temperature rises above, or falls below, a fixed point.

In one form of thermo-electric call a needle is moved over a dial by a simple thermic device and rings a bell when the temperature for which it has been set is attained. The thermo-call is applicable to the regulation of the temperature of

dwellings, incubators, hot houses, breweries, drying rooms, etc.

**Callaud Voltaic Cell.**—(See *CeH*, *Voltaic*, *Callaud's*.)

**Calling-Drop.**—(See *Drop*, *Calling*.)

**Calorescence.**—The transformation of invisible heat-rays into luminous rays, when received by certain solid substances.

The term was proposed by Tyndall. The light from a voltaic arc is passed through a hollow glass lens filled with a solution of iodine in bisulphide of carbon.

This solution is opaque to light but quite transparent to heat.

If a piece of charred paper, or thin platinum foil, is placed in the *focus* of these invisible rays, it will be heated to brilliant incandescence. (See *Focus*.)

**Calorie.**—A term formerly applied to the fluid which was believed to be the cause or essence of heat.

The use of the word caloric at the present time is very unscientific, since heat is now known to be an effect of a wave motion and not a material thing. (See *Heat*.)

**Calorie.**—A heat unit.

There are two calories, the small and the large calorie.

The amount of heat required to raise the temperature of one gramme of water from 0 degree C. to 1 degree C. is called the *small calorie*.

The amount of heat required to raise 1,000 grammes, or a kilogramme, of water from 0 degree C. to 1 degree C. is called the *great calorie*. The first usage of the word is the commoner.

This word is sometimes spelled *calory*.

**Calorie, Great** — —The amount of heat required to raise the temperature of one kilogramme of water from 0 degree C. to 1 degree C.

**Calorie, Small** — —The amount of heat required to raise the temperature of one gramme of water from 0 degree C. to 1 degree C.

**Calorimeter.**—An instrument for measuring the amount of heat or thermal energy contained or developed in a given body.

Thermometers measure temperature only. A

thermometer plunged in a cup full of boiling water shows the same temperature that it would in a tub full of boiling water. The quantity of heat energy present in the two cases is of course greatly different, and can be measured by a calorimeter only.

Various forms of calorimeters are employed.

In order to determine the quantity of heat in a given weight of any body, this weight may be heated to a definite temperature, such as the boiling point of water, and placed in a vessel containing ice. The quantity of ice melted by the body in cooling to the temperature of the ice, is determined by measuring the amount of water derived from the melting of the ice. Care must be observed to avoid the melting of the ice by external heat.

In this way the amount of heat required to raise the temperature of a given weight of a body a certain number of degrees, or the capacity of the body for heat, may be compared with the capacity of an equal weight of water. This ratio is called the specific heat. (See *Heat*, *Specific*.)

The heat energy, present in a given weight of any substance at a given temperature, can be determined by means of a calorimeter; for, since a pound of water heated 1° F. absorbs an amount of energy equal to 772 foot-pounds, the energy can be readily calculated if the number of pounds of water and the number of degrees of temperature are known. (See *Heat*, *Mechanical Equivalent of*.)

**Calorimeter, Electric** — —An instrument for measuring the heat developed in a conductor or any piece of electrical apparatus, in a given time, by an electric current.




Fig. 97. Electric Calorimeter.

A vessel containing water is provided with a thermometer T, Fig. 97. The electric current



passes for a measured time through a wire immersed in the liquid.

The quantity of heat is determined from the increase of temperature, and the weight of the water heated.

According to Joule, the number of *heat units* developed in a conductor by an electric current is proportional:

- (1.) To the resistance of the conductor.
- (2.) To the square of the current passing.
- (3.) To the time the current is passing.

(See *Heat Unit, English.*)

The heating power of a current is as the square of the current only when the resistance remains the same. (See *Heat, Electric.*)

**Calorimetric.**—Pertaining to or by means of the calorimeter.

Calorimetric measurement is the measurement of heat energy made by means of the calorimeter. (See *Calorimeter.*)

**Calorimetrically.**—In a calorimetric manner.

**Calorimetric Photometer.**—(See *Photometer, Calorimetric.*)

**Calorimotor.**—A name applied to a deflator. (See *Deflator.*)

**Calory.**—A term used for *calorie*.

*Calorie* is the preferable orthography. (See *Calorie.*)

**Cam, Electro-Magnetic** — —A form of magnetic equalizer, which depends for its operation on the lateral approach of a suitably shaped polar surface. (See *Equalizer, Magnetic.*)

**Cam, Listening** — —In a telephone exchange system, a metallic cam by means of which an operator is placed in circuit with a subscriber.

**Candle.**—The unit of photometric intensity.

Such a light as would be produced by the consumption of two grains of a standard candle per minute.

An electric lamp of 16 candle-power, or one of 2,000 candle-power, is a light that gives respectively 16 or 2,000 times as much light as one standard candle.

**Candle Burner, Electric** — —(See *Burner, Electric Candle.*)

**Candle, Electric** — —A term applied to the Jablochhoff candle, and other similar devices. (See *Candle, Jablochhoff.*)

**Candle, Foot** — —A unit of illumination equal to the illumination produced by a standard candle at the distance of 1 foot.

According to this unit, the illumination produced by a standard candle at the distance of 2 feet would be but the one-fourth of a foot-candle; at 3 feet, the one-ninth of a foot-candle, etc.

The advantage of the proposed standard lies in the fact that knowing the illumination in foot-candles required for the particular work to be done, it is easy to calculate the position and intensity of the lights required to produce the illumination.

**Candle, Jablochhoff** — —An electric arc light in which the two carbon electrodes are placed parallel to each other and maintained a constant distance apart by means of a sheet of insulating material placed between them.

The Jablochhoff electric candle consists of two parallel carbons, separated by a layer of kaolin or other heat-resisting insulating material, as shown in Fig. 98. The current is passed into and out of the carbons at one end of the candle, and forms a voltaic arc at the other end. In order to start the arc, a thin strip called the *igniter*, consisting of a mixture of some readily ignitable substance, connects the upper ends of the carbons.

An alternating current is employed with these candles, thus avoiding the difficulty which would otherwise occur from the more rapid consumption of the positive than the negative carbon. (See *Current, Alternating.*)

**Candle, Metre** — —The illumination produced by a standard candle at the distance of one metre. (See *Candle, Foot.*)

**Candle-Power.**—(See *Power, Candle.*)

**Candle-Power, Rated** — —(See *Power, Candle, Rated.*)

**Candle-Power, Spherical** — —(See *Power, Candle, Spherical.*)

**Candle, Standard** — —A candle of



Fig. 98. Jablochhoff Candle.

definite composition which, with a given consumption in a given time, will produce a light of a fixed and definite brightness.

A candle which burns 120 grains of spermaceti wax per hour, or 2 grains per minute, will give an illumination equal to *one standard candle*.

Unless considerable care is taken, erroneous results will be obtained from the use of the standard candle. According to Slingo and Brooker the following are among the most important causes of these errors:

(1.) Defective forms of candle which cause a varying consumption of the material per second, and consequently a varying light for the standard candle.

(2.) Variations in the composition of the spermaceti of which the candle is composed. Spermaceti is not a definite chemical compound, but consists of a mixture of various substances; therefore, even if the consumption is maintained constant, the light-giving power is not necessarily constant.

(3.) Variations in the composition and character of the wick, such as the number and size of the threads of which it is formed and the closeness of the strands, all of which circumstances influence the amount of light given off by the candle.

(4.) The light emitted in certain directions varies in a marked degree with the shape of the wick. The mere bending of a wick may, therefore, cause the amount of light to vary considerably.

(5.) The light varies with the thickness of the wick. Thick wicks give less light than thin wicks.

(6.) The light given by the standard candle varies with the temperature of the testing-room. As the temperature rises the light given by the standard candle increases.

(7.) Currents of air, by producing variations in the amount of melting wax in the cup of the candle, vary the amount of light emitted.

These difficulties in obtaining a fixed amount of light from a standard candle, together with the difficulty of comparing the feeble light of a single candle with the light of a much more powerful source, such as an arc lamp, coupled with the additional difficulty arising from the difference in the colors of the lights, have led to the use of other standards of light than those furnished by the standard candle.

**Caoutchouc. or India-Rubber.**—A resin-

ous substance obtained from the milky juices of certain tropical trees.

Caoutchouc possesses high powers of electric insulation, and is used either pure or combined with sulphur.

**Cap, Insulator** — —A covering or cap placed some distance above an insulator, but separated from it by an air space.

Insulator caps are intended for protection of the insulators from injury by the throwing of stones or other malicious acts. Insulator caps are generally made of iron. They are highly objectionable, owing to the facility they offer for the accumulation of dust and dirt.

**Capacity, Atomic** — —The quantivalence or valency of an atom. (See *Atomicity*.)

**Capacity, Dielectric** — —A term employed in the same sense as specific inductive capacity. (See *Capacity, Specific Inductive*.)

**Capacity, Electro-Dynamic** — —A term formerly employed by Sir William Thomson for self-induction. (See *Induction, Self*.)

**Capacity, Electrostatic** — —The quantity of electricity which must be imparted to a given body or conductor as a charge, in order to raise its potential a certain amount. (See *Potential, Electric*.)

The electrostatic capacity of a conductor is not unlike the capacity of a vessel filled with a liquid or gas. A certain quantity of liquid will fill a given vessel to a level dependent on the size or capacity of the vessel. In the same manner a given quantity of electricity will produce, in a conductor or condenser, a certain difference of electric level, or difference of potential, dependent on the electrical capacity of the conductor or condenser.

Or, taking the analogous case of a gas-tight vessel, the quantity of gas that can be forced into such a vessel depends on the size of the vessel and the pressure with which it is forced in. A tension or pressure is thus produced by the gas on the walls of the vessel, which is greater the smaller the size of the vessel and the greater the quantity of gas forced in.

In the same manner, the smaller the capacity of a conductor, the smaller is the charge required



to raise it to a given potential, or the higher the potential a given charge will raise it.

The capacity  $K$ , of a conductor or condenser, is therefore directly proportional to the charge  $Q$ , and inversely proportional to the potential  $V$ ; or,

$$K = \frac{Q}{V}.$$

From which we obtain  $Q = KV$ ; or,

*The quantity of electricity required to charge a conductor or condenser to a given potential is equal to the capacity of the conductor or condenser multiplied by the potential through which it is raised.*

#### Capacity, Electrostatic, Unit of —

Such a capacity of a conductor or condenser that an electromotive force of one volt will charge it with a quantity of electricity equal to one coulomb.

The farad. (See *Farad*.)

**Capacity of Cable.**—(See *Cable, Capacity of*.)

**Capacity of Condenser.**—(See *Condenser, Capacity of*.)

**Capacity of Leyden Jar.**—(See *Jar, Leyden, Capacity of*.)

**Capacity of Line.**—(See *Line, Capacity of*.)

**Capacity of Polarization of a Voltaic Cell.**—(See *Cell, Voltaic, Capacity of Polarization of*.)

**Capacity, Safe Carrying, of a Conductor** — — The maximum electric current the conductor will carry without becoming unduly heated.

**Capacity, Specific Inductive** — — The ability of a dielectric to permit induction to take place through its mass, as compared with the ability possessed by a mass of air of the same dimensions and thickness, under precisely similar conditions.

The relative power of bodies for transmitting electrostatic stresses and strains analogous to permeability in metals.

The ratio of the capacity of a condenser whose coatings are separated by a dielectric of a given substance to the capacity of a similar condenser whose plates are separated by a plate or layer of air.

The inductive capacity of a dielectric is compared with that of air.

According to Gordon and others, the specific inductive capacities of a few substances, compared with air, are as follows:

Air.....	1.00
Glass.....	3.013 to 3.258
Shellac.....	2.740
Sulphur.....	2.580
Gutta-percha.....	2.462
Ebonite.....	2.284
India-rubber.....	2.220 to 2.497
Turpentine.....	2.160
Petroleum.....	2.030 to 2.070
Paraffin (solid).....	1.994
Carbon bisulphide.....	1.810
Carbonic acid.....	1.00036
Hydrogen.....	0.99967
Vacuum.....	0.99941

Faraday, who proposed the term *specific inductive capacity*, employed in his experiments a condenser consisting of a metallic sphere A, Fig. 99, placed inside a large hollow sphere B.

The concentric space between A and B was filled with the substance whose specific inductive capacity was to be determined.

**Capacity, Specific Magnetic** — — A term sometimes employed in the sense of magnetic permeability.

Conductibility for lines of magnetic force in the same sense that specific inductive capacity is conductibility for lines of electrostatic force.

This term has received the name of *specific magnetic capacity* in order to distinguish it from *specific inductive capacity*. The velocity of propagation of waves in any elastic medium is proportional to the quotient obtained by extracting the square root of the elasticity of the medium divided by the square root of its density; or,

$$v = \sqrt{\frac{E}{D}}$$



Fig 99. Condenser.

Similarly, the speed with which inductive waves travel depends on the relation between the elasticity and the density of the medium. Calling  $\frac{1}{K}$ , the electric elasticity, then its reciprocal,  $K$ , corresponds with the dielectric capacity. The electrical density,  $\mu$ , corresponds with the magnetic permeability. The velocity of wave transmission is therefore,

$$V = \sqrt{\frac{\frac{1}{K}}{\mu}} = \frac{1}{\sqrt{K \times \mu}}$$

**Capacity, Storage, of Secondary Cell** —  
—(See *Cell, Secondary or Storage, Capacity of*.)

**Capillarity.**—The elevation or depression of liquids in tubes of small internal diameter.

The liquid is elevated when it wets the walls, and depressed when it does not wet the walls of the tube.

The phenomena of capillarity are due to the mutual attractions existing between the molecules of the liquid for one another, and the mutual attraction between the molecules of the liquid and those of the walls of the tube.

In capillarity, therefore, the approximately level surface caused by the equal attraction of all the molecules towards the earth's centre is disturbed by the unequal attraction exerted on each molecule by the walls of the tube and by the remaining molecules.

**Capillarity, Effects of, on Voltaic Cell** —  
—Effects caused by capillary action which disturb the proper action of a voltaic cell.

These effects are as follows:

(1.) Creeping, or efflorescence of salts. (See *Creeping, Electric. Efflorescence*.)

(2.) Oxidation of contacts and consequent introduction of increased resistance into the battery circuit. The liquid enters the capillary spaces between the contact surfaces and oxidizes them.

**Capillary.**—Of a small or hair-like diameter or size.

A capillary tube is a tube of small hair-like diameter. (See *Capillarity*.)

**Capillary Attraction.**—(See *Attraction, Capillary*.)

**Capillary Contact-Key.**—(See *Key, Capillary Contact*.)

**Capillary Electrometer.**—(See *Electrometer, Capillary*.)

**Carbon.**—An elementary substance which occurs naturally in three distinct allotropic forms, viz.: charcoal, graphite and the diamond. (See *Allotropy*.)

**Carbon-Brushes for Electric Motors.**—  
(See *Brushes, Carbon, for Electric Motors*.)

**Carbon Button.**—(See *Button, Carbon*.)

**Carbon-Clutch or Clamp of Arc Lamp.**—  
(See *Clutch, Carbon, of Arc Lamp*.)

**Carbon-Electrodes for Arc Lamps.**—(See *Electrodes, Carbon, for Arc Lamps*.)

**Carbon-Holders for Arc Lamps.**—(See *Holders, Carbon, for Arc Lamps*.)

**Carbon Points.**—(See *Points, Carbon*.)

**Carbon Transmitter for Telephones.**—  
(See *Transmitter, Carbon, for Telephones*.)

**Carbonic Acid Gas.**—(See *Gas, Carbonic Acid*.)

**Carbonizing Lamps.**—(See *Lamps, Carbonizing*.)

**Carbonizable.**—Capable of being carbonized. (See *Carbonization, Processes of*.)

**Carbonization.**—The act of carbonizing. (See *Carbonization, Processes of*.)

**Carbonization, Processes of** — —  
Means for carbonizing material.

The carbonizable material is placed in suitably shaped boxes, covered with powdered plumbago or lamp-black, and subjected to the prolonged action of intense heat while out of contact with air.

The electrical conducting power of the carbon which results from this process is increased by the action of the heat, and, probably, also, by the deposit in the mass, of carbon resulting from the subsequent decomposition of the hydro-carbon gases produced during carbonization.

When the carbonization is for the purpose of producing conductors for incandescent lamps, in order to obtain the uniformity of conducting power, electrical homogeneity, purity and high refractory power requisite, selected fibrous material, cut or shaped in at least one dimension



prior to carbonization, must be taken, and subjected to as nearly uniform carbonization as possible.

**Carbonize.**—To reduce a carbonizable material to carbon. (See *Carbonization, Processes of.*)

**Carbonized Cloth Discs for High Resistances.**—(See *Cloth Discs Carbonized, for High Resistances.*)

**Carbonizer.**—Any apparatus suitable for reducing carbonizable material to carbon.

**Carbonizing.**—Subjecting a carbonizable substance to the process of carbonization. (See *Carbonization, Processes of.*)

**Carbons, Artificial** — —Carbons obtained by the carbonization of a mixture of pulverized carbon with different carbonizable liquids.

Powdered coke, or gas-retort carbon, sometimes mixed with lamp-black or charcoal, is made into a stiff dough with molasses, tar, or any other hydro-carbon liquid. The mixture is molded into rods, pencils, plates, bars or other desired shapes by the pressure of a powerful hydraulic press. After drying, the carbons are placed in crucibles and covered with lamp-black or powdered plumbago, and raised to an intense heat at which they are maintained for several hours. By the carbonization of the hydro-carbon liquids, the carbon paste becomes strongly coherent, and by the action of the heat its conducting power increases.

To give increased density after baking, the carbons are sometimes soaked in a hydro-carbon liquid, and subjected to a re-baking. This may be repeated a number of times.

**Carbons, Concentric-Cylindrical** — — A cylindrical rod of carbon placed inside a hollow cylinder of carbon but separated from it by an air space, or by some other insulating, refractory material.

Jablochkoff candles sometimes are made with a solid cylindrical electrode, concentrically placed in a hollow cylindrical carbon.

**Carbons, Cored** — — A cylindrical carbon electrode for an arc lamp that is molded around a central core of charcoal, or other softer carbon.

Much of the unsteadiness of the arc light is due to changes in the position of the arc. Cored carbons, it is claimed, render the arc light steadier, by maintaining the arc always at the softer carbon and hence at the central point of the electrode.

A core of harder carbon, or other refractory material, is sometimes provided for the negative carbon.

**Carbons, Flashed** — —Carbons which have been subjected to the flashing process. (See *Carbons, Flashing Process for.*)

**Carbons, Flashing Process for** — — A process for improving the electrical uniformity of the carbon conductors employed in incandescent lighting, by the deposition of carbon in their pores, and over their surfaces at those places where the electric resistance is relatively great.

The carbon conductor or filament is placed in a vessel filled with the vapor of a hydrocarbon liquid called rhigolene, or any other readily decomposable hydrocarbon liquid, and gradually raised to electric incandescence by the passage through it of an electric current. A decomposition of the hydrocarbon vapor occurs, the carbon resulting therefrom being deposited in and on the conductor.

As the current is gradually increased, the parts of the conductor first rendered incandescent are the places where the electric resistance is the highest, these parts, therefore, and practically these parts only, receive the deposit of carbon. As the current increases, other portions become successively incandescent and receive a deposit of carbon, until at last the filament glows with a uniform brilliancy, indicative of its electric homogeneity.

A carbon whose resistance varies considerably at different parts could not be successfully employed in an incandescent lamp, since if heated by a current sufficiently great to render the points of comparatively small resistance satisfactorily incandescent, the temperature of the points of high resistance would be such as to lower the life of the lamp, while if only those portions were safely heated, the lamp would not be economical. The flashing process is therefore of very great value in the manufacture of an incandescent lamp.

The name "flashing" was applied to the process by reason of the flashing light emitted by the

carbons when they have been sufficiently treated. The process requires so little time that the dull red which first appears soon flashes to the full luminosity required.

The term "flashing" is sometimes applied to the electrical heating to incandescence, while the carbons are in the lamp chambers, and on the pumps. This flashing is for the purpose of driving off all the gases occluded by the carbon, so that these gases may be carried off by the operation of pumping. This process is more properly called the process for driving off the occluded gases.

The carbons are sometimes flashed in the liquid itself instead of in its vapor.

**Carbons, Paper** — Carbons, of textile or fibrous origin, obtained from the carbonization of paper.

The carbonization of paper is readily effected by submitting the paper to the prolonged action of a high temperature while out of contact with air.

For this purpose the paper is packed in retorts or crucibles, and covered with lamp-black, or powdered plumbago, in order to exclude the air.

Since paper consists of a plane of material uniformly thin in one direction, formed almost entirely of fibres of pure cellulose, the greatest length of which extends in a direction nearly parallel to that in which the paper is uniformly thin, it is clear that sheets of this substance, when carbonized, should yield flexible carbons of unusual purity and electrical homogeneity, since such carbons are structural in character, and are uniformly affected by the heat of carbonization to an extent that would be impossible by the carbonization of any material in a mass.

**Carcase of Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Carcase of*.)

**Carcel.**—The French unit of light. The light emitted by a lamp burning 42 grammes of pure colza oil per hour, with a flame 40 millimetres in height.

The bec-carcel. One carcel = 9.5 to 9.6 standard candles.

**Carcel Lamp.**—(See *Lamp, Carcel*.)

**Carcel Standard Gas Jet.**—(See *Jet, Gas, Carcel Standard*.)

**Card, Compass** — A card used in the mariner's compass, on which are marked the

four cardinal points of the compass N, S, E and W, and these again divided into thirty-two points called Rhumbs. (See *Compass, Azimuth*.)

**Cardew Voltmeter.**—(See *Voltmeter, Cardew*.)

**Carriage, Pen** — The carriage in an electric chronograph which holds the pen and moves over the sheet of paper on which the record is made. (See *Chronograph, Electric*.)

**Carriers of Replenisher.**—(See *Replenisher, Carriers of*.)

**Cascade, Charging Leyden Jars by** — A method of charging jars or condensers by means of the free electricity liberated by induction from one coating, when a charge is passed into the other coating.

The jars are placed as shown in Fig. 100, with the inside coating of the first jar connected with the outside coating of the one next it. There is in



Fig. 100. Cascade Charging of Leyden Jars.

reality no increase in the entire charge obtained in charging by cascade, since the sum of the charges given to the separate jars is equal to the same charge given to a single jar separately charged.

The energy of the discharge in cascade can be shown to be less than that of the same charge when confined to a single jar. This is of course to be expected, since it is energy that is charged in the jar and not electricity, and, of course, the energy charged in the jar can never exceed the energy employed in charging the jar. There is a small loss for each jar, and this increases necessarily with each jar added.

**Cascade, Connection of Electric Sources in** — A term sometimes used for series-connection of electric sources.

The term series-connection is the preferable one. (See *Connection, Series*.)

**Case-Hardening, Electric** — Superficially converting a piece of wire into steel by electrically produced heat.



In electric case-hardening, the superficial layers of a piece of iron are converted into steel by electrically heating the same, while surrounded by a layer of case-hardening flux and carbonaceous substances such as animal charcoal, shavings of horn, leather cuttings or other similar substances.

In the case of a readily oxidizable metal like iron, oxidation is prevented by surrounding the metal by a hydrocarbon gas, which, when sufficiently heated, deposits on the surfaces a protective coating of carbon. This layer of carbon gradually carbonizes the iron.

**Case Wiring.**—(See *Wiring, Case*.)

**Cataphoresis.**—A term sometimes employed in place of electric osmose. (See *Osmose, Electric*.)

The word cataphoresis applies to the cases where medicinal substances, such as iodine, cocaine, quinine, etc., are caused to pass through organic tissues in the direction of flow of an electric current, or from the anode to the kathode. This action is probably due to an electrolytic action.

**Cataphoric Action.**—(See *Action, Cataphoric*.)

**Catch, Safety** — —A wire, plate, strip, or box of readily fusible metal, capable of conducting, without fusing, the current ordinarily employed on the circuit, but which fuses and thus breaks the circuit on the passage of an abnormally large current.

Safety-catches are generally placed on multiple-arc and multiple-series circuits. (See *Fuse, Safety*.)

**Catelectrotonus.**—An orthography sometimes applied to Kathelectrotonus. (See *Kathelectrotonus*.)

**Cathetometer.**—An instrument for the accurate measurement of vertical height.

The cathetometer consists essentially of an accurately divided vertical rod which carries a sliding support for a telescope. The telescope is provided with two spider lines at right angles to one another, so placed as to be seen in front of the object whose height is to be measured. From observations taken in different positions, the measurement of the true vertical height is readily obtained.

**Cathion.**—A term sometimes used instead of Kathion.

More correctly written Kathion. (See *Kathion*.)

**Cathode.**—A term sometimes used instead of Kathode.

**Catoptrics.**—That branch of optics which treats of the reflection of light.

**Causty, Galvano** — —A term sometimes used for galvano-cautery. (See *Cautery, Galvano*.)

**Cauterization.**—The act of cauterizing, or burning with a heated solid or caustic substance.

**Cauterization, Electric** — —Subjecting to cauterization by means of a wire electrically heated. (See *Cautery, Electric*.)

**Cauterize.**—To subject to cauterization, or burning with a heated solid or caustic substance.

**Cauterizer, Electric** — —A term sometimes applied to an electric cautery. (See *Cautery, Electric*.)

**Cautery, Actual** — —A burning or searing with a white-hot metal.

**Cautery Battery.**—(See *Battery, Cautery*.)

**Cautery, Electric** — —An instrument used for electric cauterization.

In electro-therapeutics, the application of variously shaped platinum wires heated to incandescence by the electric current in place of a knife, for removing diseased growths, or for stopping hemorrhages.

The operation, though painful during application, is afterward less painful than that with a knife, since secondary hemorrhage seldom occurs, and the wound rapidly heals.

Electric cautery is applicable in cases where the knife would be inadmissible owing to the situation of the parts or their surroundings.

**Cautery, Galvano** — —A term frequently employed in place of electric cautery. (See *Cautery, Electric*.)

**Cautery, Galvano Electric** — —An electric cautery. (See *Cautery, Electric*.)

**Cautery, Galvano Thermal** — —A term sometimes used for an electric cautery. (See *Cautery, Electric*.)

**Cautery-Knife Electrode.**—(See *Electrode Cautery-Knife*.)

**Cautery, Thermal** — —A cautery heated by heat other than that of electric origin, as distinguished from an electric cautery. (See *Cautery, Electric*.)

**Ceiling Rose.**—(See *Rose, Ceiling*.)

**Cell, Depositing** — —An electrolytic cell in which an electro-metallurgical deposit is made. (See *Metallurgy, Electro*.)

**Cell, Electrolytic** — —A cell or vessel containing an electrolyte, in which electrolysis is carried on.

An electrolytic cell is called a *voltameter* when the value of the current passing is deduced from the weight of the metal deposited.

**Cell, Impulsion** — —A photo-electric cell whose sensitiveness to light may be restored or destroyed by slight impulses given to the plates, such as by blows or taps, or electro-magnetic impulses.

An impulsion cell may be prepared by pasting pieces of tin-foil, the opposite faces of which are respectively polished and dull, on the opposite faces of a plate of glass, so as to expose dissimilar sides to the light, when the cells are dipped in alcohol.

**Cell, Photo-Electric** — —A cell capable of producing differences of potential when its opposite faces are unequally exposed to radiant energy.

Photo-voltaic cells are made in a variety of forms, both with selenium and with different metallic substances. (See *Cell, Selenium*.)

**Cell, Porous** — —A jar of unglazed earthenware, employed in double-fluid voltaic cells, to keep the two liquids separated.

The use of a porous cell necessarily increases the internal resistance of the cell, from the decrease it produces in the area of cross section of liquid between the two elements. When the battery is dismantled, the porous cells should be kept under water, otherwise the crystallization of the zinc sulphate or other salt is apt to produce serious exfoliation, or scaling off, or even to crumble the porous cell.

A porous cell is sometimes called a *diaphragm*, but only properly so when the cell is reduced to a single separating plate. (See *Cell, Voltaic*.)

**Cell, Secondary** — —A term sometimes used instead of storage cell.

The term secondary cell is used in contradistinction to primary or voltaic cell.

**Cell, Secondary or Storage, Boiling of** — —A term sometimes applied to the gassing of a storage cell. (See *Cell, Storage, Gassing of*.)

**Cell, Secondary or Storage, Capacity of** — —The product of the current in amperes, by the number of hours the battery is capable of furnishing said current, when fully charged, until exhausted.

The capacity of storage cells is given in ampere-hours. A storage battery with a capacity of 1,000 ampere-hours can furnish, say a current of fifty amperes for twenty hours, or a current of one hundred amperes for ten hours; or a current of twenty-five amperes for forty hours.

**Cell, Secondary or Storage, Gassing of** — —An escape of gas due to the decomposition of water on passage of too strong a charging current.

**Cell, Secondary or Storage, Renovation of** — —The revivifying or recharging of a run-down, or discharged storage cell.

**Cell, Secondary or Storage, Time-Fall of Electromotive Force of** — —(See *Force, Electromotive of Secondary or Storage Cell, Time-Fall, of*.)

**Cell, Secondary or Storage, Time-Rise of Electromotive Force of** — —(See *Force, Electromotive of, Secondary or Storage Cell, Time-Rise, of*.)

**Cell, Selenium** — —A cell consisting of a mass of selenium fused in between two conducting wires or electrodes of platinized silver or other suitable metal.

A convenient manner of forming a selenium cell is to wind two separate spirals of platinized silver wire around a cylinder of hard wood, taking care to maintain them a constant distance apart, so as to avoid contact between them. The space between these wires is filled with fused selenium, which is allowed to cool gradually.

Exposure to sunlight reduces the resistance of a selenium cell to about one-half its resistance in



the dark, but neither the resistance nor the reduction ratio long remains constant.

A selenium cell produces a difference of potential, or electromotive force, when one of its electrode faces is exposed to light, while the other is kept in darkness.

According to Von Uljanin, who experimented with selenium melted in between two parallel platinized plates, cooled under pressure, and then reduced from the amorphous to the sensitive crystalline variety by gradual cooling after two or three heatings in a paraffine bath up to 195 degrees, the following peculiarities were observed:

(1.) Exposure of one of the electrodes to sunlight produced an electromotive force which causes a current to flow from the dark to the illuminated electrode.

(2.) The maximum electromotive force was 0.12 volt.

(3.) The electromotive force disappeared instantaneously and completely on the darkening of the electrodes.

(4.) A slight difference in the electromotive force was observed when the positive and negative electrodes were alternately exposed to the light, the maximum electromotive force being attained by the exposure of the negative electrode.

(5.) If both electrodes are similarly illuminated the resulting current strength is decreased and may reach zero.

(6.) The action of light is instantaneous.

(7.) Most of the selenium cells experimented with exhibited an electromotive force of polarization.

(8.) The electromotive force of polarization is diminished by exposure to light.

(9.) The electrical resistance and sensitiveness to light as regards the production of an electromotive force decrease with time. This is probably due to a gradual change in the allotropic state of the selenium. (See *State, Allotropic*.)

(10.) The electromotive force produced is proportional to the intensity of the illumination only when the obscure rays or heat rays are absent.

(11.) Of different wave lengths the orange-yellow rays in the diffraction spectrum, and the greenish-yellow in the prismatic spectrum produced the greatest effect.

Among some of the more recent applications of selenium cells are the following:

(1.) A selenium cell is so placed in a circuit containing an electro-magnet and switch, that on

one of its electrodes being exposed to the decreased illumination of coming night it automatically turns on an electric lamp, and, conversely, on the approach of daylight, and the consequent illumination of the electrode, turns it off.

(2.) A device whereby the presence of light, as for example that carried by a burglar, automatically rings an alarm and thus calls the attention of the watchman of the building.

**Cell, Standard** — — (See *Cell, Voltaic Standard*.)

**Cell, Storage** — — Two relatively inert plates of metal, or of metallic compounds, immersed in an electrolyte incapable of acting considerably on them until after an electric current has been passed through the liquid from one plate to the other and has changed their chemical relations.

A single one of the cells required to form a secondary battery.

Sometimes, the jar containing a single cell is called a storage cell.

This latter use of the word is objectionable.

A storage cell is also called an accumulator.

On the passage of an electric current through the electrolyte, its decomposition is effected and the electro-positive and electro-negative radicals are deposited on the plates, or unite with them, so that on the cessation of the charging current, there remains a voltaic cell capable of generating an electric current.

A storage cell is *charged* by the passage through the liquid from one plate to the other of an electric current, derived from any external source. The *charging current* produces an electrolytic decomposition of the inert liquid between the plates, depositing the *electro-positive radicals*, or *kathions*, on the plate connected with the negative terminal of the source, and the electro-negative radicals, or *anions*, on the plate connected with the positive terminal.

On the cessation of the charging current, and the connection of the charged plates by a conductor outside the liquid, a current is produced, which flows through the liquid from the plate covered with the electro-positive radicals, to that covered with the electro-negative radicals, or in the *opposite direction to that of the charging current*.

The simplest storage cell is Planté's cell, which, as originally constructed, consists of two plates of

sed in dilute sulphuric acid,  $H_2SO_4$ . At the close of the charging current, the plates (fig. 101, dipped in  $H_2SO_4$ ), are covered with lead peroxide,  $PbO_2$ , and finely spongy lead. The peroxide is formed on the positive plate, and the metallic lead on the negative plate. The acid and water should have a gravity of about 1.170. When the cell is discharged the acid solution loses its clearness, becomes milky in appearance, and the




fig. 101 and 102. Storage Cell.

gravity increases to 1.195. This increase is the sign of a full charge.

When the charging current ceases to pass, the current reverses in the opposite direction, viz., from A' to B', that is, from the spongy lead plate to the oxide plate through the electrolyte, as shown in fig. 102.

At the close of this discharging current the peroxide on A', gives up one of its atoms of oxygen to the spongy lead on B', thus leaving the spongy lead coated with a layer of  $PbO$ , lead monoxide or litharge. When this change is effected, the cell becomes inert, and no further current until again charged by the passage of a current from some external

source. To increase the capacity of the storage cell, it is necessary to prolong the time of their discharge, and the amount of lead monoxide thus left on each plate, when neutral, is made as great as possible. To effect this, a process called "forming" is employed, which consists in first charging the plates as already described, and then reversing the direction of the charging current, sending it through the cell in the opposite directions, until a considerable amount of the lead plates has been acted on. It is noticed that during the action of the charging current, the oxygen is transferred from one plate, to the  $PbO$ , on the other plate, leaving one  $Pb$ , and the other  $PbO_2$ ; on discharging, one atom of oxygen is

transferred from the  $PbO_2$ , to the  $Pb$ , thus leaving both plates covered with  $PbO$ . In reality this is but the final result of the action, hydrated sulphate of lead,  $PbO$ ,  $H_2SO_4$ , being formed, and subsequently decomposed. Other compounds are formed that are but imperfectly understood.

In order to decrease the time required for forming, accumulators, or secondary cells, have been constructed, in which metallic plates covered with red lead  $Pb_3O_4$  replace the lead plates in the original Planté cell. On charging, the  $Pb_3O_4$  is peroxidized at the anode, i. e., converted into  $PbO_2$ , and deoxidized, and subsequently converted into metallic lead at the cathode. Or, in place of the above  $Pb_3O_4$ , red lead is placed on the anode and  $PbO$ , or litharge, on the cathode.

Plates of compressed litharge have also been recently used for this purpose. Storage cells so formed have a greater storage capacity per unit weight than those in which a grid is employed, but a higher resistance.

In all cases where a metal plate is employed various irregularities of surface are given to the plates, in order to increase their extent of surface and to afford a means for preventing the separation of the coatings. The metallic form thus provided is known technically as a *grid*.

Unless care is exercised, the plates will buckle from the difference in the expansion of the lead and its filling of oxide. This buckling is attended with an increase in the resistance of the cell and the gradual separation of the oxides that cover or fill it.

**Cell, Thermo-Electric** — —A name applied to a thermo-electric couple. (See *Couple, Thermo-Electric*.)

**Cell, Voltaic** — —The combination of two metals, or of a metal and a metalloid, which, when dipped into a liquid or liquids called electrolytes, and connected outside the liquid or liquids by a conductor, will produce a current of electricity.

Different liquids or gases may take the place of the two metals, or of the metal and metalloid. (See *Battery, Gas*.)

Plates of zinc and copper dipped into a solution of sulphuric acid and water, and connected outside the liquid by a conductor, form a simple voltaic cell.

If the zinc be of ordinary commercial purity,



and is not connected outside the liquid by a conductor, the following phenomena occur:

(1.) The sulphuric acid or hydrogen sulphate,  $H_2SO_4$ , is decomposed, zinc sulphate,  $ZnSO_4$ , being formed, and hydrogen,  $H_2$ , liberated.

(2.) The hydrogen is liberated mainly at the surface of the zinc plate.

(3.) The entire mass of the liquid becomes heated.

If, however, the plates are connected outside the liquid by a conductor of electricity, then the phenomena change and are as follows, viz.:

(1.) The sulphuric acid is decomposed as before; but,

(2.) The hydrogen is liberated at the surface of the copper plate only.

(3.) The heat no longer appears in the liquid only, but in all parts of the circuit.

(4.) An electric current now flows through the entire circuit, and will continue so to flow as long as there is any sulphuric acid to be decomposed, and zinc with which to form zinc sulphate.

*The energy which previously appeared as heat only, now appears in part as electric energy.*

Therefore, although the mere contact of the two metals with the liquid will produce a difference of potential, it is the *chemical potential energy* which became *kinetic* during chemical combination that supplies the energy required to maintain the electric current. (See *Energy, Kinetic, Energy, Potential.*)

A voltaic cell consists of two plates of different metals, or of a metal and a metalloid (or of two gases, or two liquids, or of a liquid and a gas), each of which is called a *voltaic element*, and which, taken together, form what is called a *voltaic couple*.

The *voltaic couple* dips into a liquid called an *electrolyte*, which, as it transmits the electric current, is decomposed by it. The elements are connected outside the electrolyte by any conducting material.

*Direction of the Current.*—In any voltaic cell the current is assumed to flow *through the liquid*, from the metal most acted on to the metal least acted on, and *outside the liquid*, through the outside circuit, from the metal least acted on to the metal most acted on.

In Fig. 103 a *zinc-copper* voltaic couple is shown, immersed in dilute sulphuric acid. Here, since the zinc is dissolved by the sulphuric acid, the zinc is positive, and the copper negative in the liquid. The zinc and copper are of opposite polarities out of the liquid.

There is still a considerable difference of opinion as to the exact cause of the potential difference of the voltaic cell. There can be no doubt that a true contact force exists, but the chemical potential energy of the positive plate is the source of energy which maintains the potential difference.

The difference in the polarity of the zinc and copper in and out of the liquid is generally denied by most of the later writers on electricity, since tests by a sufficiently delicate electrometer show that the entire zinc plate is negative and the entire copper plate positive. Remembering, however, the convention as to the direction of the flow of the current, since the current flows from the zinc to the copper through the liquid, we may still fairly regard the zinc as positive and the copper as negative in the liquid. It will be remembered, that in every source the polarity within the source is necessarily opposite to the polarity outside it. The copper plate is therefore called the *negative plate*, and the wire connected to its end out of the liquid, the *positive electrode*. Similarly, the zinc plate is called the *positive plate*, and the wire connected to it the *negative electrode*.

It will of course be understood that in the above sketch the current flows only on the completion of the circuit outside the cell; that is, when the conductors attached to the zinc and copper plates are electrically connected.

*Amalgamation of the Zinc Plate.*—When zinc is used for the positive element, it will, unless chemically pure, be dissolved by the electrolyte when the circuit is open, or will be irregularly dissolved when the circuit is closed, producing currents in little closed circuits from minute voltaic couples formed by the zinc and such impurities as *carbon, lead, or iron*, etc., always found in commercial zinc. (See *Action, Local, of Voltaic Cell.*) As it is practically impossible to obtain chemically pure zinc, it is necessary to *amalgamate* the zinc plate; that is, to cover it with a thin layer of zinc amalgam.

*Polarisation of the Negative Plate.*—Since the evolved hydrogen appears at the surface of the negative plate, the surface of this plate, unless




Fig. 103. Voltaic Couple.

means are adopted to avoid it, will, after a while, become coated with a film of hydrogen gas, or as it is technically called, will become polarized. (See *Cell, Voltaic, Polarization of.*)

The effect of this polarization is to cause a falling off or weakening of the current produced by the battery, due to the formation of a counter-electromotive force produced by the hydrogen-covered plate; that is to say, the negative plate, now being covered with hydrogen, a very highly electro-positive element, tends to produce a current in a direction opposed to that of the cell proper. (See *Force, Electromotive, Counter.*)

This decrease in current strength is rendered still greater by the increased resistance in the cell, due to the bubbles of hydrogen, and to the decreased electromotive force, due to the increase in the density of the zinc sulphate, in the case of zinc in hydrogen sulphate.

In the case of *storage cells*, the counter-electromotive force of polarization is employed as the source of *secondary currents*. (See *Electricity, Storage of. Cell, Secondary. Cell, Storage.*)

In order to avoid the effects of polarization in voltaic cells, and thus insure constancy of current, the bubbles of gas at the negative plate are mechanically carried off either by roughening its surface, by forcing the electrolyte against the plate as by shaking, or by a stream of air; or else the negative plate is surrounded by some liquid or solid substance which will remove the hydrogen, by entering into combination with it. (See *Cell, Voltaic, Polarization of.*)

Voltaic cells are therefore divided into cells with one or with two fluids, or electrolytes, or into:

- (1.) Single-fluid cells; and
- (2.) Double-fluid cells.

Very many forms of voltaic cells have been devised. The following are among the more important, viz.: Of the Single-Fluid Cells, the *Gravet*, *Poggendorff*, or *Bichromate*, the *Zinc-Copper*, the *Zinc-Carbon* and the *Smee*. Of the Double-Fluid Cells, *Grove's*, *Bunsen's*, *Callaud* or *Gravity*, *Daniell's*, *Leclanché*, *Siemens-Halske* and the *Meidinger*.

Of all the voltaic cells that have been devised two only, viz., the *Gravity*, a modified *Daniell*, and the *Leclanché*, have continued until now in very general use, the gravity cell being used on *closed-circuited lines*, and the *Leclanché* on *open-circuited lines*; the former being the best suited

of all cells to furnish the *continuous constant currents* employed in most systems of telegraphy, and the latter for furnishing the *intermittent currents* required for ringing bells, operating annunciators, or for similar work.

**Cell, Voltaic, Absorption and Generation of Heat in** — (See *Heat, Absorption and Generation of, in Voltaic Cell.*)


**Cell, Voltaic, Bichromate** — — A zinc-carbon couple used with an electrolyte known as *electropoion*, a solution of bichromate of potash and sulphuric acid in water. (See *Liquid, Electropoion.*)

Bichromate of sodium or chromic acid are sometimes used instead of the bichromate of potassium.

The zinc, Fig. 104, is amalgamated and placed between two carbon plates. The terminals connected with the zinc and carbon are respectively *negative* and *positive*. In the form shown in the figure, the zinc plate can be lifted out of the liquid when the cell is not in action.

The bichromate cell is excellent for purposes requiring strong currents where long action is not necessary. As this cell readily polarizes it cannot be advantageously employed continuously for any considerable period of time. It becomes depolarized, however, when left for some time on open circuit.

The following chemical reaction probably takes place when the cell is furnishing current, viz.:



This cell gives an electromotive force of about 1.9 volts.

**Cell, Voltaic, Bunsen's** — — A zinc-carbon couple, the elements of which are immersed respectively in electrolytes of dilute sulphuric and strong nitric acids.

Bunsen's cell is the same as *Grove's*, except that the platinum is replaced by carbon. The zinc surrounds the porous cell containing the car-





bon. The polarity is as indicated in Fig. 105. (See *Cell, Voltaic, Grove.*)




Fig. 105. Bunsen Cell.

The Bunsen cell gives an electromotive force of about 1.96 volts.

**Cell, Voltaic, Callaud's** — — A name sometimes given to the gravity cell. (See *Cell, Voltaic, Gravity.*)

**Cell, Voltaic, Capacity of Polarization of** — — The quantity of electricity required to be discharged by a voltaic cell in order to produce a given polarization. (See *Cell, Voltaic, Polarization of.*)

During the discharge of a voltaic cell an electromotive force is gradually set up that is opposed to that of the cell. The quantity of electricity required to produce a given polarization depends, of course, on the condition and size of the plates. Such a quantity is called the capacity of polarization.

**Cell, Voltaic, Closed-Circuit** — — A voltaic cell that can be left for a considerable time on a closed circuit of comparatively small resistance without serious polarization.

The term closed-circuit voltaic cell is used in contradistinction to open-circuit cell, and applies to a cell that can only be kept on closed circuit for a comparatively short time.

Daniell's cell and the gravity cell are closed-circuit cells. Leclanché's is an open-circuit cell.

**Cell, Voltaic, Contact Theory of** — — A theory which accounts for the production of difference of potential or electromotive force in the voltaic cell by the contact of the elements of the voltaic couple with one another by means of the electrolyte.

The mere contact of two dissimilar substances through the electrolyte will produce a difference of potential, but the cause of the current which a voltaic cell is able to maintain is the chemical potential energy which becomes kinetic during combination. (See *Cell, Voltaic, Series, Contact.*)

Most authorities explain the difference of potential produced by the contact of different metals by the fact that the metals are surrounded by air. They point out the fact that the order of the metals in the contact-series is almost identical with the order of their electrochemical power as deduced from their chemical equivalents, and their heat of combination with oxygen. It would appear, therefore, that the difference of potential between a metal and the air which surrounds it, is a measure of the tendency of the metal to become oxidized.

The origin of the electromotive force of a zinc-copper couple, in an electrolyte of hydrogen sulphate, is the superior affinity of the zinc for the oxygen, over that of the copper for the oxygen.

**Cell, Voltaic, Creeping in** — — The formation, by efflorescence, of salts on the sides of the porous cup of a voltaic cell, or on the walls of the vessel containing the electrolyte.



Paraffining the portions of the walls out of the liquid, or covering the surface of the liquid with a neutral oil, obviates much of this difficulty. (See *Efflorescence.*)

**Cell, Voltaic, Daniell's** — — A zinc-copper couple, the elements of which are immersed respectively in electrolytes of dilute sulphuric acid, and a saturated solution of copper sulphate.

In the form of Daniell's cell, shown in Fig. 106, the copper element is made in the form of a cylinder c, and is placed in a porous cell. The copper cylinder is provided with a wire basket near the top, filled with crystals of blue vitriol, or copper sulphate, so as to maintain the strength of the solution while the cell is in use. The zinc is in the shape of a cylinder and is placed so as to surround the porous cell. This cell gives a nearly constant electromotive force.

The constancy of action of Daniell's cell depends on the fact that for every molecule of sulphuric acid decomposed in the outer cell, an additional molecule of sulphuric acid is supplied by the decomposition of a molecule of copper sulphate in the inner cell. This will be better un-

produced from the following reactions which take place, viz.:



The  $\text{H}_2\text{SO}_4$ , thus formed in the inner cell, passes through the porous cell, and the copper is deposited on the surface of the copper plate.



Fig. 106. Daniell's Cell.

The Daniell cell gives an electromotive force of about 1.072 volts.

A serious objection to this form of cell arises from the fact that the copper is gradually deposited over the surface and in the pores of the porous cell, thus greatly increasing its resistance. This difficulty is avoided in the gravity cell. (See *Cell, Gravity*.)

**II. Voltaic, Double-Fluid** — A voltaic cell in which two separate fluids or electrolytes are employed.

One of the elements of the voltaic couple is placed into one of the fluids and the other element into the other fluid. In order to keep the elements separate and distinct, they are either separated by means of porous cells, or by the action of gravity. (See *Cell, Porous Cell, Voltaic, Gravity*.)

In the double-fluid cell the negative element is surrounded by a liquid which is capable of preventing polarization by combining chemically with the substance that tends to collect on its surface. In the Daniell cell this substance is the zinc, as that of the negative plate. (See *Cell, Voltaic, Polarization of*.)

**II. Voltaic, Dry** — A voltaic cell in which a moist material is used in place of an ordinary fluid electrolyte.

The term *dry cell* is in reality a misnomer, since all such cells are moistened with liquid electrolytes.

The dry cell, like other cells, is made in a variety of forms. The absence of free liquid permits the cell to be closed. A well known form of dry cell is shown in Fig. 107.

**Cell, Voltaic, Effects of Capillarity in** — (See *Capillarity, Effects of, in Voltaic Cell*.)

**Cell, Voltaic, Excluding Liquid of** — The electrolyte of a voltaic cell.



Fig. 107. Dry Cell.

A voltaic cell may have a single electrolyte, in which case it is called a single-fluid cell, or it may have two electrolytes, in which case it is called a double-fluid cell.

**Cell, Voltaic, Fuller's Mercury Bichromate** — A zinc-carbon couple immersed in an electrolyte of electropositive liquid.

The zinc is attached to a copper rod by being cast thereto, and is placed at the bottom of a porous cell, where it is covered by a layer of mercury. The carbon plate is placed in electro-

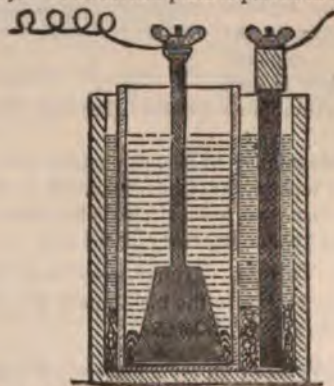


Fig. 108 Fuller's Mercury Bichromate Cell.

positive liquid, diluted with water in the proportion of three of the former to two of the latter. The zinc is generally placed in pure water, which rapidly becomes acid.

The mercury effects the continuous amalgamation of the zinc.

A Fuller mercury bichromate cell is shown in Fig. 108.



**Cell, Voltaic, Gravity** — — A zinc-copper couple, the elements of which are employed with electrolytes of dilute sulphuric acid or dilute zinc sulphate, and a concentrated solution of copper sulphate respectively.

The use of a porous cell is open to the objection of increased internal resistance. Moreover, the porous cell is apt to receive a coating of copper which often deposits on the cell instead of on the copper plate. The gravity cell was devised in order to avoid the use of a porous cell. As its name indicates, the two fluids are separated from each other by gravity.

The copper plate is the lower plate, and is surrounded by crystals of copper sulphate. The zinc, generally in the form of an open wheel, or crow-foot, is suspended near the top of the liquid, as shown in Fig. 109.

When the cell is set up with sulphuric acid, the reactions are the same as in the Daniell cell. When copper sulphate and zinc sulphate alone are used, zinc replaces the copper in the copper sulphate. The action is then merely a substitution process. (See *Cell, Voltaic, Daniell's*.)




Fig. 109. The Gravity Cell.

A dilute solution of zinc sulphate is generally used to replace the dilute sulphuric acid. It gives a somewhat lower electromotive force, but ensures a greater constancy for the cell.


**Cell, Voltaic, Grenet** — — A name sometimes given to the bichromate cell. (See *Cell, Voltaic, Bichromate*.)

**Cell, Voltaic, Grove** — — A zinc-platinum couple, the elements of which are used with electrolytes of sulphuric and nitric acids respectively.


The zinc, Z, Fig. 110, is amalgamated and placed in dilute sulphuric acid, and the platinum, P, in strong nitric acid ( $\text{HNO}_3$ ) in a porous cell to separate it from the sulphuric acid. (See *Cell, Porous*.) In the Grove cell the current is moderately constant, since the polarization of the plat-

inum plate is prevented by the nitric acid, which oxidizes and thus removes the hydrogen that tends to be liberated at its surface. The constancy of the current is not maintained for any considerable time, since the two liquids are rapidly decomposed, or consumed, zinc sulphate forming in the sulphuric acid, and water in the nitric acid.

The chemical reactions are as follows, viz.:



Nitrate of ammonium is sometimes formed when the nitric acid becomes dilute by decomposition. The reaction is as follows:



The cell gives an electromotive force of 1.93 volts.

When the porous cell is good, the resistance of the Grove cell may be calculated according to the following formula of Ayrton:

$$R = \frac{3.6 \times d}{A} \text{ ohms,}$$

where d, is the distance in inches between the platinum and zinc plates, and A, the square inches of the immersed portion of the platinum plate.

**Cell, Voltaic, Leclanché** — — A zinc-carbon couple, the elements of which are used in a solution of sal-ammoniac and a finely divided layer of black oxide of manganese respectively.

The zinc is in the form of a slender rod and dips into a saturated solution of sal-ammoniac,  $\text{NH}_4\text{Cl}$ .

The negative element consists of a plate of carbon, C, Fig. 111, placed in a porous cell, in which is a mixture of black oxide of manganese and broken gas-retort carbon, tightly packed around the carbon plate. By this means a greatly extended surface of carbon surrounded by black

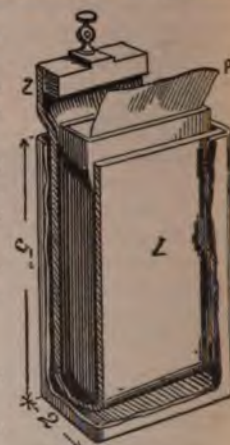


Fig. 110. Grove's Cell.

oxide of manganese,  $\text{MnO}_2$ , is secured. The entire outer jar, and the spaces inside the porous cell are filled with the solution of sal-ammoniac.


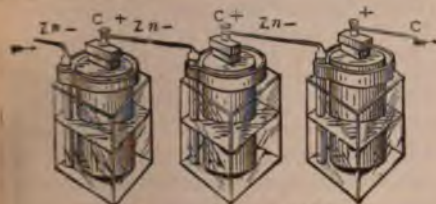



Fig. 111. The Leclanché Cell.

This cell, though containing but a single fluid, belongs, in reality, to the class or type of *double-fluid cells*, being one in which the negative element is surrounded by an oxidizing substance, the black oxide of manganese, which replaces the nitric acid or copper sulphate in the other double-fluid cells.



This reaction is generally given :



This reaction is denied by some, who believe the following to take place :



The  $\text{ZnCl}_2$  and  $\text{NH}_3$  react as follows :



or, possibly,  $4\text{H} + 3\text{MnO}_2 = \text{Mn}_2\text{O}_3 + 2\text{H}_2\text{O}.$

The Leclanché cell gives an electromotive force of about 1.47 volts. It rapidly polarizes, and cannot, therefore, give a steady current for any prolonged time. When left on open circuit, however, it quickly depolarizes.

**Cell, Voltaic, Local Action of** — — (See *Action, Local, of Voltaic Cell*.)

**Cell, Voltaic, Meidinger** — — A zinc-copper couple, the elements of which are employed with dilute sulphuric acid, or solution of sulphate of magnesia, and strong nitric acid, respectively.

The Meidinger cell is a modification of the Daniell cell. The zinc-copper couple is thus arranged : Z Z, Fig. 112, is an amalgamated zinc ring placed near the walls of the vessel, A A, constricted at b b. The copper element, c, is similarly placed with respect to the walls of the vessel d d. The glass cylinder h, filled with

crystals of copper sulphate, has a small hole in its bottom, and keeps the vessel, d d, supplied with saturated solution of copper sulphate. The cell is charged with dilute sulphuric acid, or a dilute solution of Epsom salts, or magnesium sulphate.

**Cell, Voltaic, Open-Circuit**

— — A voltaic cell that cannot be kept on closed circuit, with a comparatively small resistance, for any considerable time without serious polarization.

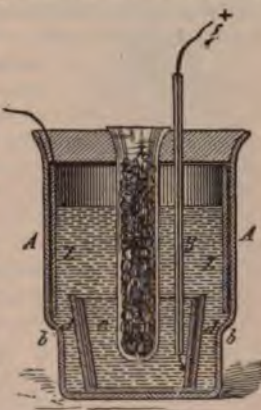


Fig. 112. The Meidinger Cell.

A Leclanché cell is an open-circuit cell. The term open-circuit cell is used in contradistinction to closed-circuit cell, such as the Daniell. (See *Cell, Voltaic, Closed-Circuit*.)

**Cell, Voltaic, Poggendorff** — — A name sometimes given to the Grenet cell. (See *Cell, Voltaic, Grenet*.)

**Cell, Voltaic, Polarization of** — — The collection of a gas, generally hydrogen, on the surface of the negative element of a voltaic cell.

The collection of a positive substance like hydrogen on the negative element or plate of a voltaic cell sets up a *counter-electromotive force*, which tends to produce a current in the opposite direction to that produced by the cell. (See *Force, Electromotive, Counter*.)

Polarization causes a decrease in the normal current of a voltaic cell:

(1.) On account of the *increased resistance* of the cell from the bubbles of gas which form part of its circuit.

(2.) On account of the *counter-electromotive force*, produced by polarization.

There are three ways in which the ill effects of the polarization of a voltaic cell can be avoided. These are :

(1.) *Mechanical*. — The negative plate is furnished with a roughened surface which enables the



bubbles of gas to escape from the points on such surface; or, a stream of gas, or air, is blown through the liquid against the plate and thus mechanically brushes the bubbles off.

(2.) *Chemical*.—The surface of the negative plate is surrounded by some powerful oxidizing substance, such as chromic or nitric acid, which is capable of oxidizing the hydrogen, and thus thoroughly removing it from the plate.

The oxidizing substance may form the entire electrolyte, as is the case of the bichromate solution employed in the zinc-carbon couple. Generally, however, it has been found preferable to employ a separate liquid, like nitric acid, to completely surround the negative plate, and another liquid for the positive plate, the two liquids being generally kept from mixing by a porous cell, or diaphragm. Such cells are called *double-fluid cells*. (See *Cell, Voltaic, Double-Fluid*.)

(3.) *Electro-Chemical*.—This also necessitates a double-fluid cell. The negative element is immersed in a solution of a salt of the same metal as that forming the negative plate. Thus, a copper plate, immersed in a solution of copper sulphate, cannot be polarized, since metallic copper is deposited on its surface by the action of the hydrogen which tends to be liberated there.

The constancy of action of a Daniell cell depends on a deposition of metallic copper on its copper plate as well as on the formation of hydrogen sulphate, and the solution of additional copper sulphate from the crystallized salt placed in the cell. (See *Cell, Voltaic, Daniell's*.)

**Cell, Voltaic, Primary, Exhaustion of** —The inability of a primary voltaic cell to furnish any further current, unless fresh electrolyte, or fresh positive element, or both, are supplied to it.

In the case of exhaustion of a primary voltaic cell the stock of fresh energy is supplied to the cell from the chemical potential energy of the positive element, or of the electrolyte or electrolytes. (See *Energy, Chemical Potential*.)

In most voltaic cells a marked decrease in the current strength is observed soon after the circuit is closed, and, therefore, long before the cell is exhausted. This decrease is due—

(1.) To the increased internal resistance due to the bubbles of hydrogen on the negative plate.

(2.) To the counter-electromotive force of polarization, where zinc is employed with an electrolyte of sulphuric acid.

(3.) To the decrease in the electromotive force due to an increase in the density of the zinc sulphate.

**Cell, Voltaic, Secondary, Exhaustion of** —The inability of a secondary cell to furnish any further current, unless fresh electro-positive and electro-negative materials are formed in it by the passage of the charging current.

In the case of the exhaustion of a secondary voltaic cell, the stock of fresh energy supplied to the cell is derived from the electric energy of the charging current. (See *Energy, Electric*.)

**Cell, Voltaic, Siemens-Halske** —A zinc-copper couple, the elements of which are employed with dilute sulphuric acid and saturated solution of copper sulphate respectively.

The Siemens-Halske cell is a modification of Daniell's. A ring of zinc, Z Z, Fig. 113, sur-



Fig. 113. Siemens-Halske Cell.

rounds the glass cylinder, c c. The porous cell is replaced by a diaphragm, f f, of porous paper, formed by the action of sulphuric acid on a mass of paper pulp. Crystals of copper sulphate are placed in the glass jar, c c, and rest on the copper plate, k, formed of a close copper spiral. Terminals are attached at b and h. The entire cell is charged with dilute sulphuric acid. The resistance of the cell is high.

**Cell, Voltaic, Silver Chloride** —A zinc and silver couple immersed in electrolytes of sal-ammoniac or common salt and silver chloride.

The zinc acts as the positive element, and a silver wire, around which a cylinder of fused silver chloride is cast, as the negative element. The zinc, and the silver wire and silver chloride, are placed in a small glass test-tube and covered with the sal-ammoniac or common salt, and the tube closed by a cork of paraffin, to prevent the evaporation of the electrolyte. When sal-ammoniac is used, the strength of the solution is that obtained by dissolving 23 grammes of pure sal-ammoniac in 1 litre of water. The silver chloride acts as a depolarizer.

This cell is used as a standard cell, known as De la Rue's standard cell, from its inventor, Warren De la Rue. Its electromotive force is 1.068 volts.

**Cell, Voltaic, Simple** — —Any voltaic cell formed of a single couple immersed in a single exciting liquid.

**Cell, Voltaic, Single-Fluid** — —A voltaic cell in which but a single fluid or electrolyte is used.

Single-fluid voltaic cells possess the disadvantage of polarizing during action. This polarization is due to the electro-positive element of the electrolyte collecting on the surface of the negative plate, or within its mass. For example, where dilute sulphuric acid is the electrolyte, hydrogen gas collects on the negative plate and lowers the electromotive force produced by the cell, by a counter-electromotive force thereby generated. (See *Force, Electromotive. Force, Electromotive, Counter.*)

**Cell, Voltaic, Smee** — —A zinc-silver couple used with an electrolyte of dilute sulphuric acid,  $H_2SO_4$ .


A form of Smee cell is shown in Fig. 114. Here the plate of silver is placed between two zinc plates.

The silver plate is roughened and covered with a coating of metallic platinum, in the condition known as *platinum black*. (See *Platinum Black*.) This cell was formerly extensively employed in *electro-metallurgy* but is now replaced by *dynamo-electric-machines*. (See *Metallurgy, Electro. Machine, Dynamo-Electric.*)

A zinc-carbon couple is sometimes used to replace the zinc-silver couple. A couple of zinc-lead is also used, though not very advantageously.

The Smee cell was one of the earliest forms of voltaic cells.

In the zinc-silver couple the chemical reaction that takes place when the cell is furnishing current is as follows, viz.:



The Smee cell gives an electromotive force of about .65 volt.

**Cell, Voltaic, Standard** — —A voltaic cell the electromotive force of which is constant, and

which, therefore, may be used in the measurement of an unknown electromotive force.

Absolute constancy of electromotive force is impossible to attain, but if the current of the standard cell is closed but for a short time the electromotive force may be regarded as practically invariable.

**Cell, Voltaic, Standard, Clark's** — — The form of standard cell shown in Fig. 115.

Latimer Clark's standard cell assumes a variety of forms. The H-form is arranged as shown in Fig. 115. The vessel to the left contains, at A, an amalgam of pure zinc. The other vessel contains, at M, mercury covered with pure mercurous sulphate,  $Hg_2SO_4$ . Both vessels are then filled, above the level of the cross tube, with a saturated solution of zinc sulphate Z, Z, to which a few crystals of the same are added. Tightly fitting corks C, C, prevent loss by evaporation.

The voltage of this cell in legal volts is 1.438 [1 - 0.00077 (t - 15 degrees C.)] — (Ayrton.)

The value t, is the temperature in degrees of the centigrade scale.

**Cell, Voltaic, Standard, Rayleigh's Form of Clark's** — —A modified form of Clark's cell.





Lord Rayleigh's form of Clark's standard cell is shown in Fig. 116. The electrodes pass respectively through the bottom and top of the test tube of glass. On the lower electrode a layer of mercury, Hg, is placed. On this rests a layer of mercurous sulphate paste made sufficiently semi-fluid with a solution of zinc sulphate to form an approximately level surface. The zinc, Zn, is attached to the upper electrode and is immersed in this semi-fluid paste.

The mercurous sulphate appears to act to keep the mercury free from impurities.

The electromotive force of this cell has been carefully determined by Rayleigh. Its value in true volts is:

$E = 1.435 [1 - .00077 (t - 15)]$  when  $t$ , is the temperature in degrees Centigrade.

This cell is often called Clark's normal element.

**Cell, Voltaic, Standard, De la Rue's** —

—A form of silver-chloride cell. (See *Cell, Voltaic, Silver-Chloride*.)

**Cell, Voltaic, Standard, Fleming's** —

The form of standard cell shown in Fig. 117.

The U-tube, Fig. 117, is connected, as shown, by means of taps, with two vessels filled with chemically pure solutions of copper sulphate of sp. gr. 1.1 at 15 degrees C., and zinc sulphate of sp. gr. 1.4 at 15 degrees C., respectively. To use the cell the zinc rod Zn, connected with a wire passing through a rubber stopper, is placed in the left-hand branch. The tap A, is opened and the entire U-tube is filled with the denser zinc sulphate solution. The tap at C, is then



Fig. 116. Rayleigh's Form of Clark's Standard Cell.

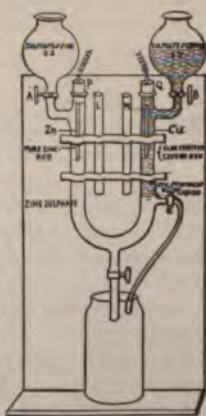


Fig. 117. Fleming's Standard Cell.

opened, and the liquid in the right-hand branch above the tap is discharged into the lower vessel, but, from this part only. The tap C, is then closed, and the tap B, opened, and the lighter copper sulphate allowed to fill the right-hand branch above the tap C. The copper rod Cu, fitted to a rubber stopper and connected with a conducting wire, is then placed in the copper solution.

Tubes are provided at L and M, for the reception of the zinc and copper rods when not in use. The copper rod is prepared for use by freshly electro-plating it with copper. The electromotive force of this cell is 1.074 volts. If the line of demarkation between the two liquids is not sharp, the arms of the vessels are emptied, and fresh liquid is run in.

**Cell, Voltaic, Standard, Lodge's** — — A form of standard Daniell cell.

Lodge's standard cell is shown in Fig. 118. Through the tube T, in a wide mouthed bottle, is passed the glass tube, in the mouth of which is placed a zinc rod. To the bottom of the tube T, a small test-tube t, containing crystals of copper sulphate, is fastened by means of a string or rubber band. The uncovered end of a gutta-percha insulated copper wire projects at the bottom of t, through a tube in a tightly fitting cork, and forms the copper electrode. The bottle is partly filled as shown with a solution of zinc sulphate.

The internal resistance of this cell is so high that it is only employed in the use of zero methods with a condenser.

**Cell, Voltaic, Standard, Sir William Thomson's** — — A form of standard Daniell cell.



Fig. 119. Thomson's Form of Daniell's Cell.

Sir Wm. Thomson's standard cell is shown in Fig. 119. A zinc disc is placed at the bottom of the



Fig. 118. Lodge's Form of Daniell's Cell.

cylindrical vessel and a solution of zinc sulphate of sp. gr. 1.2 poured over it. By means of the funnel F, a half-saturated solution of copper sulphate is carefully poured over this and floats on it owing to its smaller density. The electromotive force of this cell is 1.072 *true volts* at 15 degrees C.

**Cell, Voltaic, Standardizing a** — — Determining the exact value of the electromotive force of a voltaic cell, in order to enable it to be used as a standard in determining the electromotive force of any other electric source.

**Cell, Voltaic, Two-Fluid** — — A term sometimes employed in place of double-fluid cell. (See *Cell, Voltaic, Double-Fluid*.)

**Cell, Voltaic, Water** — — A voltaic cell in which the exciting liquid is merely water.

Any voltaic couple can be used, the positive element of which is acted on by water. (See *Battery, Voltaic*.)

**Cell, Voltaic, Zinc-Carbon** — — A cell in which zinc and carbon form the positive and negative elements respectively.

A name sometimes given to the bichromate cell.

**Cell, Voltaic, Zinc-Copper** — — A cell in which zinc and copper form the positive and negative elements respectively.

**Cell, Voltaic Zinc-Lead** — — A zinc-lead couple sometimes used, though not very advantageously, to replace the zinc-silver couple in a Smee cell. (See *Cell, Voltaic, Smee*.)

**Cells, Coupled** — — A number of separate cells connected in any way so as to form a single source.

**Cells, Voltaic, Series-Connected** — — A number of separate voltaic cells connected in series so as to form a single source. (See *Circuit, Series*.)

**Cement-Lined Conduit** — (See *Conduit, Cement-Lined*.)

**Cements, Insulating** — — Various mixtures of gums, resins and other substances, possessing the ability to bind two or more  
—Vol. I

substances together and yet to electrically insulate one from the other.

**Centi** — (As a prefix) — The one-hundredth part of.

**Centi-Ampère** — One-hundredth of an ampère.

**Centi-Ampère Balance** — (See *Balance, Centi-Ampère*.)

**Centigrade Thermometer Scale** — (See *Scale, Centigrade Thermometer*.)

**Centigramme** — The hundredth of a gramme

One centigramme equals 0.1544 grains avoirdupoise. (See *Weights and Measures, Metric System of*.)

**Centilitre** — The hundredth of a litre.

One centilitre equals 0.6102 of a cubic inch. (See *Weights and Measures, Metric System of*.)

**Centimetre** — The hundredth of a metre. One centimetre equals 0.3937 inch. (See *Weights and Measures, Metric System of*.)

**Centimetre-Gramme-Second Units** — (See *Units, Centimetre-Gramme-Second*.)

**Central Galvanization** — (See *Galvanization, Central*.)

**Central Station** — (See *Station, Central*.)

**Central Station Burglar Alarm** — (See *Alarm, Burglar, Central Station*.)

**Central Station Lighting** — (See *Lighting, Electric Central Station*.)

**Centre of Gravity** — (See *Gravity, Centre of*.)

**Centre of Oscillation** — (See *Oscillation, Centre of*.)

**Centre of Percussion** — (See *Percussion, Centre of*.)

**Centrifugal Force** — (See *Force, Centrifugal*.)

**Centrifugal Governor** — (See *Governor, Centrifugal*.)

**Chain Lightning** — (See *Lightning, Chain*.)

**Chain, Linked Magnetic and Electric** — — A chain of three links, the separate links of which consist of the primary circuit,



the magnetic circuit, and the secondary circuit respectively, of an induction coil.

The conception of a linked magnetic and electric chain, in studying the action of an induction coil, was first developed by Kapp. A linked magnetic and electric chain is shown in Fig. 120.



Fig. 120. Linked Magnetic and Electric Chain.

If, in such a case, the magnetic core or circuit is of varying magnetization, when one of the electric circuits has a periodic current passed through it, the various phenomena of the induction coil are produced. (See *Coil, Induction*.)

**Chain, Molecular** — — A polarized chain of molecules that is supposed to exist in an electrolyte during its electrolytic decomposition, or in a voltaic cell on closing its circuit. (See *Hypothesis, Grotthuss*.)

**Chain Pull**.—(See *Pull, Chain*.)

**Chamber, Armature** — — The armature bore. (See *Bore, Armature*.)

**Chamber of Lamp**.—(See *Lamp, Chamber of*.)

**Change, Chemical** — — Any change in matter resulting from atomic combination and the consequent formation of new molecules.

Some chemical changes are caused by atomic combinations and the formation of new molecules. They are necessarily attended by a loss of the specific identity of the substances involved in the change. Thus carbon, a black solid, combined with sulphur, a yellow solid, produces carbon disulphide, a colorless, odorous liquid. (See *Atom*.)

**Change, Physical** — — Any change in matter resulting from a change in the relative position of its molecules, without the formation of new molecules.

Ice, when heated, is turned into water; steel, when stroked by a magnet, is rendered permanently magnetic; a piece of vulcanite or hard

rubber stroked by a piece of cat skin becomes electrified. In all these cases, which are instances of physical changes, the substances retain their specific identity. This is true in all cases of physical changes. (See *Molecule*.)

**Changing-over Switch**.—(See *Switch, Changing-over*.)

**Changing Switch**.—(See *Switch, Changing*.)

**Characteristic Curve**.—(See *Curve, Characteristic*.)

**Characteristic Curve of Parallel Transformer**.—(See *Curve, Characteristic, of Parallel Transformer*.)

**Characteristic Curve of Series Transformer**.—(See *Curve, Characteristic, of Series Transformer*.)

**Characteristics of Sound**.—(See *Sound, Characteristic of*.)

**Charge, Bound** — — The condition of an electric charge on a conductor placed near another conductor, but separated from it by a medium through which electrostatic induction can take place. (See *Induction, Electrostatic*.)

When a charged conductor is placed near another conductor, but separated from it by a dielectric or medium through which induction can take place, a charge of the opposite name is induced in the neighboring conductor. This charge is so held or bound on the conductor by the mutual attraction of the opposite charge that it is not discharged on connection with the earth unless both conductors are simultaneously touched by any good conductor. The bound charge was formerly called *dissimulated* or *latent electricity*. (See *Electricity, Dissimulated or Latent*.)

**Charge, Density of** — — The quantity of electricity per unit of area at any point on a charged surface.

Coulomb used the phrase *surface density* to mean the quantity of electricity per unit of area at any point on a surface.

**Charge, Dissipation of** — — The gradual but final loss of any charge by leakage, which occurs even in a well insulated conductor.

This loss is more rapid with negatively charged conductors, than with those positively charged.

Crookes, of England, has retained a charge on conductors for years, without appreciable leakage, by placing the conductors in vessels in which a high vacuum was maintained. (See *Vacuum, High*.)

**Charge, Distribution of** — —The variations that exist in the density of an electrical charge at different portions of the surface of all insulated conductors except spheres.

The density of charge varies at different points of the surface of conductors of various shapes. It is uniform at all points on the surface of a sphere.

It is greater at the extremities of the longer axis of an egg-shaped body, and greatest at the sharper end.

It is greater at the corners of a cube than at the middle of a side.

It is greatest around the edge of a circular disc.

It is greatest at the apex of a cone

**Charge, Electric** — —The quantity of electricity that exists on the surface of an insulated electrified conductor.

When such a conductor is touched by a good conductor connected with the earth, it is *discharged*. (See *Condenser*.)

**Charge, Free** — —The condition of an electric charge on a conductor isolated from any other conductor.

It is impossible to obtain a perfectly free charge, since it is impossible to completely isolate an insulated conductor. The charge, however, can be comparatively free.

The charge, on a completely isolated conductor, readily leaves it when it is put in contact with a good conductor connected with the ground. (See *Charge, Bound*.)

**Charge, Induced Electrostatic** — —The charge produced by bringing a body into an electrostatic field

In order to obtain a permanent charge, *i. e.*, a charge which will be maintained when the body is withdrawn from an electrostatic field, it is necessary to connect the body with the earth so that it may lose, or part with, a charge of the same name as the inducing charge. Then, on the withdrawal of this charge, it will possess a charge opposite in name to the inducing charge. (See *Condenser*.)

**Charge, Influence** — —A charge pro-

duced by electrostatic induction. (See *Induction, Electrostatic*.)

**Charge, Negative** — —According to the double-fluid hypothesis, a charge of negative electricity.

According to the single-fluid hypothesis, any deficit of an assumed electrical fluid.

**Charge, Positive** — —According to the double-fluid hypothesis, a charge of positive electricity.

According to the single-fluid hypothesis, any excess of an assumed electrical fluid.

**Charge, Residual** — —The charge possessed by a charged Leyden jar for a few moments after it has been disruptively discharged by the connection of its opposite coatings.

The residual charge is probably due to a species of *dielectric strain*, or a strained position of the molecules of the glass caused by the charge. Such residual charge is not present in air condensers. In other words, a Leyden jar does not give up all the electric energy charged in it, on a single disruptive discharge.

**Charge, Return** — —A charge induced in neighboring conductors by a discharge of lightning.

Under the influence of induction a lightning stroke produces during its discharge an electric shock in the human body, or a charge in neighboring bodies, which is called the back or return stroke of lightning. (See *Strokes, Lightning, Back or Return*.)

**Charged Body** — (See *Body, Charged*.)

**Charging Accumulators** — Sending an electric current into a storage battery for the purpose of rendering it an electric source.

There is, strictly speaking, no accumulation of electricity in a storage battery, such, for example, as takes place in a condenser, but a mere storage of chemical energy, which may afterward become electric. (See *Cell, Storage*.)

**Charging Leyden Jars by Cascade** — (See *Cascade, Charging Leyden Jars by*.)

**Chart, Inclination** — —A map or chart on which the isoclinic lines are marked. (See *Map or Chart, Inclination. Lines, Isoclinic*.)



**Chart, Isodynamic** — — A map or chart on which the isodynamic lines are marked. (See *Map or Chart, Isodynamic. Lines, Isodynamic.*)

**Chart, Isogonal** — — An isogonic chart. (See *Map or Chart, Isogonal.*)

**Chart, Isogonic** — — A map or chart on which the isogonic lines are marked. (See *Map or Chart, Isogonic. Lines, Isogonic.*)

**Chatterton's Compound.** — (See *Compound, Chatterton's.*)

**Chemical Change.** — (See *Change, Chemical.*)

**Chemical Effect.** — (See *Effect, Chemical.*)

**Chemical Equivalent.** — (See *Equivalent, Chemical.*)

**Chemical Galvano-Cautery.** — (See *Cautery, Galvano-Chemical.*)

**Chemical Phosphorescence.** — (See *Phosphorescence, Chemical.*)

**Chemical Photometer.** — (See *Photometer, Chemical.*)

**Chemical Potential Energy.** — (See *Energy, Chemical Potential.*)

**Chemical Recorder, Bain's** — — (See *Recorder, Chemical, Bain's.*)

**Chemistry, Electro** — — That branch of electric science which treats of chemical compositions and decompositions effected by the electric current. (See *Electrolysis. Decomposition, Electrolytic.*)

That branch of chemistry which treats of combinations and decompositions by means of electricity.

Electro-chemistry treats of the formation of new molecules, by the combination of atoms under the electric force, as well as the decomposition of molecules by electricity.

The action of a series of sparks passed through air, in forming nitric acid, is an instance of the former, and electrolytic decompositions in general afford instances of the latter.

**Chimes, Electric** — — Bells rung by the attractions and repulsions of electrostatic charges.

The bells B and B, Fig. 121, are conductively connected to the *prime* or *positive* conductor +,

of a frictional machine. The bell C, is insulated from this conductor by means of a silk thread, but is connected with the ground by the metallic chain. Under these circumstances the clappers, l, l, insulated by silk threads, t, t, are attracted to B, B, by an induced charge and repelled to C, where they lose their charge only to be again attracted to B, B. In this way the bells will continue ringing as long as the electric machine is in operation.




Fig. 121. Electric Chimes.

**Choking Coil.** — (See *Coil, Choking.*)

**Chronograph, Electric** — — An electric apparatus for automatically measuring and registering small intervals of time.

Chronographs, though of a variety of forms, generally register small intervals of time by causing a tuning fork or vibrating bar of steel, whose rate of motion is accurately known, to trace a sinuous line on a smoke-blackened sheet of paper, placed on a cylinder driven at a uniform rate of motion by clockwork. If the fork is known to produce, say, 256 vibrations per second be used, each sinuous line will represent  $\frac{1}{256}$  part of a second.

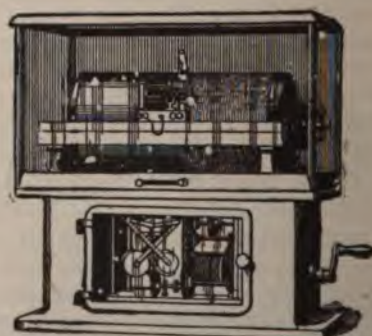


Fig. 122. Electric Chronograph.

An electro-magnet is used to make marks on the line at the beginning and the end of the observation, and thus permit its duration to be measured.

In the form of electric chronograph shows

in Fig. 122, an electro-magnet, the armature of which carries a pen, is supported on a carriage moved by clockwork over a sheet of paper wrapped on a rotating cylinder. A clock is so connected with the circuit of the electro-magnet that it makes or breaks the circuit at the end of every second second, and so moves, or displaces, the armature, as to cause an elevation or depression in the otherwise continuous sinuous line, that would be drawn on the paper by the double motion of its rotation and the movement of the pen-carriage.

When it is desired to know with great precision the exact time of occurrence of any event, such, for example, as the transit of a star over the meridian, the observer, who carries in his hand a push button, or other form of electric key, closes or opens the circuit at the exact moment and so superposes an additional mark on the sinuous line. Since the exact time of starting the clock is known, and the intervals between the regular successive marks are two seconds each, it is easy to estimate from its position between any two such marks the exact value of the additional mark interposed. Fig. 122, taken from Young, shows a form of chronograph by Warner & Swasey. The details of this apparatus will be understood from an inspection of the drawing.

**Chronograph Record.**—(See *Record, Chronograph.*)

**Chronoscope, Electric** — —An apparatus for electrically indicating, but not necessarily recording, small intervals of time.

This term is often used for chronograph.

The interval of time required for a rifle ball to pass between two points may be determined by causing the ball to pierce two wire screens placed a known distance apart. As the screens are successively pierced, an electric circuit is thus made or broken, and marks are registered electrically on any apparatus moving with a known velocity.

**Cigar-Lighter, Electric** — —(See *Lighter, Cigar, Electric.*)

**Cipher Code.**—(See *Code, Cipher.*)

**Circle, Azimuth** — —The arc of a great circle passing through the point of the heavens directly overhead, called the Zenith, and the point directly beneath, called the Nadir.

**Circle, Dipping** — —A term sometimes applied to an inclination compass. (See *Compass, Inclination.*)

**Circle, Galvanic** — —A term sometimes used for galvanic circuit. (See *Circuit, Galvanic.*)

**Circle of Reference.**—The circle, by reference to which simple harmonic motion may be studied, by comparison with uniform motion around such circuit. (See *Motion, Simple Harmonic.*)

**Circle, Voltaic** — —A name formerly employed for voltaic cell or circuit. (See *Cell, Voltaic. Circuit, Voltaic.*)


**Circuit, Air-Magnetic** — —That part of the path of a line of magnetic induction which takes place wholly through air.

**Circuit, Alternating Current** — —A circuit in which an alternating current of electricity is flowing. (See *Current, Alternating.*)

**Circuit, Astatic** — —A circuit consisting of two closed curves enclosing equal surfaces.

Such a circuit is not deflected by the action of the earth's field. The circuit disposed, as shown in Fig. 123, is astatic and produces two equal and opposite fields at S and S'.

(See *Mag. Fig. 123. Astatic Circuit. netism, Ampère's Theory of.*)



**Circuit, Balanced-Metallic** — —A metallic circuit, the two sides of which have similar electrical properties.

**Circuit Breaker.**—(See *Breaker, Circuit.*)

**Circuit, Broken** — —An open circuit. A circuit, the electrical continuity of which has been disturbed, and through which the current has therefore ceased to pass.

**Circuit, Closed** — —A circuit is closed, completed, or made when its conducting continuity is such that the current can pass.

**Circuit, Closed Iron-Magnetic** — —The name applied to the path of any line



of magnetic force, which takes place entirely through iron, steel, or other paramagnetic substance.

**Circuit, Closed-Loop Parallel** — —A variety of parallel circuit in which the lead and the return circuit are arranged in the form of concentric circuits, with the receptive devices placed radially between them.

**Circuit, Closed-Magnetic** — —A magnetic circuit which lies wholly in iron or other substance of high magnetic permeability.

All lines of magnetic force form closed circuits. The term closed-magnetic circuit is used in contradistinction to a divided circuit, or one in which an air gap exists in the substance of high mag-



Fig. 124. Closed-Magnetic Circuit.

netic permeability forming the remainder of the circuit. This introduces so high a resistance that such a circuit is sometimes called an open-magnetic circuit. An iron ring, such as shown in Fig. 124, forms a closed-magnetic circuit.

**Circuit, Closed-Magnetic, of Atom** — —A closed-magnetic circuit, or closed lines of magnetic force supposed to lie entirely in the atom itself.

The assumption of closed lines of magnetic force in atoms or molecules was made in order to explain the original polarity of the same, and to account for some of the other phenomena of magnetism.

When the atom is subjected to a magnetizing force, such, for example, as the field of an electric current, these closed lines of force are assumed to open out and produce lines of polarized atoms. According to Lodge, for every single line of force produced by the current passing through a coil of wire surrounding an iron core, some 3,000 lines of magnetic force are added to it from the iron. Therefore an iron core greatly increases the magnetic strength of a hollow coil of wire.

**Circuit, Closed-Magnetic, of Molecule** — —A closed-magnetic circuit assumed to lie wholly within the molecule.

As it is not known whether the assumed magnetic circuit lies within the atom or the molecule, it is called indifferently the closed-atomic or closed-molecular circuit. (See *Circuit, Closed-Magnetic, of Atom*.)

**Circuit, Completed** — —A closed circuit.

A circuit, the conducting continuity of which is unbroken.

A completed circuit is also called a made or closed circuit.

**Circuit, Compound** — —A circuit containing more than a single source, or more than a single electro-receptive device, or both, connected by conducting wires.

The term compound circuit is sometimes applied to a *series circuit*. (See *Circuit, Series*.) The term, however, is a bad one, and is not generally adopted.

**Circuit, Constant-Current** — —A circuit in which the current or number of amperes is maintained constant notwithstanding changes occurring in its resistance.

The series-circuit, as maintained for arc-lamps, is a constant-current circuit. (See *Regulation, Automatic*.)

**Circuit, Constant-Potential** — —A circuit, the potential or number of volts of which is maintained approximately constant.

The multiple-arc or parallel circuit is an approximately constant-potential circuit.

**Circuit, Derivative** — —A derived or shunt circuit. (See *Circuit, Shunt*.)

**Circuit, Derived** — —A term applied to a shunt circuit.

If, in addition to the galvanometer G, the conductor S, Fig. 125, be connected with the circuit of the battery B, a derived circuit will thus be established, and a current will flow through S, diminishing the current in the galvanometer. (See *Circuit, Shunt*.)




Fig. 125. Derived Circuit.

**Circuit, Divided-Magnetic** — —A magnetic circuit which lies partly in iron, or other substance of high magnetic permeability, and partly in air.

A divided-magnetic circuit is shown in Fig. 126.



Fig. 126. Divided Magnetic Circuit.

Where the iron ring is separated by the air gap, a high magnetic resistance is introduced, owing to the fact that the iron is at these points replaced by air, whose magnetic reluctance is great.

**Circuit, Double-Wire** — —A term sometimes used for a simple multiple circuit with two conductors or wires. (See *Circuit, Multiple*.)

The term double-wire circuit is used in contradistinction to *single-wire* circuit. (See *Circuit, Single-Wire*.)

**Circuit, Earth** — —A circuit in which the ground or earth forms part of the conducting path.

**Circuit, Earth, Telegraphic** — —That portion of a telegraphic circuit which is completed through the earth or ground.

**Circuit, Electric** — —The path in which electricity circulates or passes from a given point, around or through a conducting path, back again to its starting point.

All simple circuits consist of the following parts, viz.:

(1.) Of an *electric source* which may be a *voltaic battery*, a *thermopile*, a *dynamo-electric machine*, or any other means for producing electricity.

(2.) Of *leads* or *conductors* for carrying the electricity out from the source, through whatever apparatus is placed in the line, and back again to the source.

(3.) Various *electro-receptive devices*, such as *electro-magnets*, *electrolytic baths*, *electric motors*, *electric heaters*, etc., through which

passes the current by which they are actuated or operated.

**Circuit, Electrostatic** — —The circuit formed by lines of electrostatic force.

Lines of electrostatic force, like lines of magnetic force, form closed circuits. Hence the origin of the phrase *electrostatic circuit*. (See *Force, Electrostatic, Lines of*.)

**Circuit, External** — —That part of a circuit which is external to, or outside the electric source.

The circuit external to the source consists of two distinct parts, viz.:

(1.) The *conductors* or *leads*.

(2.) The *electro-receptive* or *translating devices*.

It is in the external circuit only that useful work is done by the current.

**Circuit, Forked** — —A term sometimes used in telegraphy for a number of circuits that radiate from a given central point.

**Circuit, Galvanic** — —A term sometimes employed instead of *voltaic circuit*.

The term *galvanic* in place of *voltaic* is unwarranted by the facts of electric science. (See *Circuit, Voltaic*.)

Galvani thought he had discovered the vital fluid or source of animal life. Volta first pointed out the true explanation of the phenomena observed in Galvani's frog, and devised means for producing electricity in this manner. The terms *voltaic battery*, *cell*, *circuit*, etc., are therefore preferable.

**Circuit, Ground** — —A circuit in which the ground forms part of the path through which the current passes.

As the ground is not always a good conductor, the terminals should be connected with the gas or water pipes, or with metallic plates, called *ground plates*. Such connection, or any similar ground connection, is usually termed the *ground* or *earth*.

**Circuit, Ground, Telegraphic** — —An earth circuit used in any system of telegraphy. (See *Circuit, Earth, Telegraphic*.)

**Circuit, Grounded** — —A ground circuit.

**Circuit, Incomplete** — —An open or broken circuit.



A circuit whose conducting continuity is incomplete.

**Circuit, Inductive** — — Any circuit in which induction takes place.

**Circuit, Internal** — — That part of a circuit which is included within the electric source.

The electric current passing through the internal circuit does no useful work.

**Circuit, Leg of** — — One part of a twisted or metallic circuit.

**Circuit, Line** — — The wire or other conductors in the main line of any telegraphic or other electric circuit.

**Circuit, Line, Telegraphic** — — The conductor or line connecting different telegraphic stations.

**Circuit, Local-Battery** — — The circuit, in a telegraphic system, in which is placed a local battery as distinguished from a main battery. (See *Telegraphy, American or Morse System of*.)

**Circuit, Loop** — — A term sometimes applied to a circuit in parallel or multiple-arc. (See *Circuit, Multiple*.)

**Circuit Loop Break**. — (See *Break, Circuit Loop*.)

**Circuit, Made** — — A completed circuit. A circuit, whose conducting continuity is unbroken.

A made circuit is often called a completed or closed circuit. (See *Circuit, Closed*.)

**Circuit, Magnetic** — — The path through which the lines of magnetic force pass.

All lines of magnetic force form closed circuits.

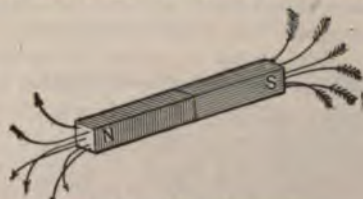


Fig. 127. Magnetic Circuit.

In the bar magnet, shown in Fig. 127, part of this path is through the air. In order to reduce or lower the resistance of a magnetic circuit, iron

is often placed around the magnet. The magnet is then said to be *iron-clad*.

The armature of a magnet lowers the magnetic resistance by affording a better path for the lines of magnetic force than the air between the poles.

The magnetic circuit always tries to shorten its path, or to render itself as compact as possible. This is seen in the action of an armature drawn towards a magnet pole.

**Circuit, Main-Battery** — — A term sometimes used for line circuit. (See *Circuit, Line*.)

**Circuit, Metallic** — — A circuit in which the ground is not employed as any part of the path of the current, metallic conductors being employed throughout the entire circuit.

**Circuit, Multiple** — — A compound circuit, in which a number of separate sources or separate electro-receptive devices, or both, have all their positive poles connected to a single positive lead or conductor, and all their negative poles to a single negative lead or conductor.

The connection of three Bunsen cells, in multiple, is shown in Fig. 128, where the three car-



Fig. 128. Batteries connected in a Multiple Circuit.

bons, C, C, C, are connected together so as to form the positive, or + terminal of the battery, and the three zincs, Zn, Zn, Zn, are similarly connected together so as to form the negative, or — terminal.

The electromotive force is the same as that of a single cell, or source. The internal resistance of the source is as much less than the resistance of any single source as the area of the combined negative or positive plates is greater than that of any single negative or positive plate; or, in other words, is less in proportion to the number of cells, or other separate sources so coupled.

The connection of six cells in multiple or parallel circuit, is shown in Fig. 129.

In the case of the six cells, the current would be,

$$C = \frac{E}{\frac{r}{6} + r'}$$

where  $E$ , is the electromotive force,  $r$ , the internal, and  $r'$ , the external resistance.




Fig. 129. Six Cells Connected in Multiple.

In the case of voltaic cells the effect of multiple connection on the internal resistance of the source is to increase the area of cross-section of the liquid in the direct proportion of the number of cells added, and consequently to decrease the resistance in the same proportion.

When strong or large currents of low electromotive force are required, connections in multiple-arc are generally employed.

The multiple-arc connection was formerly called *connection-for-quantity*. This term is now abandoned.

The total resistance for the parallel circuit is obtained as follows: calling the separate resistances of the separate electro-receptive devices,  $R'$ ,  $R''$ ,  $R'''$ , etc., etc., total resistance,

$$R = \frac{R' \times R'' \times R'''}{R' R'' + R' R''' + R'' R'''}$$

or, what is the same thing, the conductivity is the sum of the reciprocal of the separate resistances, i. e.:

$$\text{Conductivity} = \frac{1}{R'} + \frac{1}{R''} + \frac{1}{R'''}$$

The joint resistance of only two separate resistances joined in a multiple-circuit is equal to the product of the separate resistances divided by their sum.

When the separate resistances joined in multiple arc are all of the same value, the joint resistance is equal to the resistance of one of them divided by their number.

**Circuit, Multiple-Arc** — — A term often used for multiple circuit. (See *Circuit, Multiple*.)

**Circuit, Multiple-Series** — — A compound circuit in which a number of separate

sources, or separate electro-receptive devices, or both, are connected in a number of separate groups in series, and these separate groups subsequently connected in multiple.

In Fig. 130, a multiple-series circuit of six

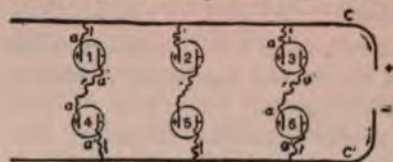


Fig. 130. Multiple-Series-Connected Cells.

sources is shown, in which three separate groups of two series-connected cells are coupled in multiple. The current takes the paths indicated by the arrows. The electromotive force of the source will be increased in proportion to the number of cells in series, and the internal resistance decreased in proportion to the number in parallel.

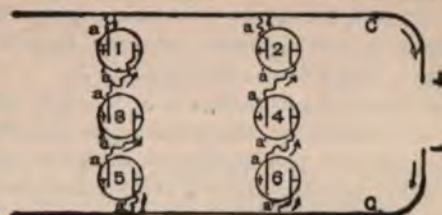


Fig. 131. Cells Connected in Multiple-Series.

$$C = \frac{3E}{\frac{3r}{2} + r'}$$

In Fig. 131, six cells are arranged in two groups of three series-connected cells, and these three groups connected in parallel.

Calling  $r$ , the resistance of each separate cell, the total resistance for the multiple-series circuit for a circuit containing three cells in parallel and two in series is,

$$R = \frac{2r}{3}$$

for three in series and two in parallel,

$$R = \frac{3r}{2}$$

If, therefore, the circuit of this battery be closed by a resistance equal to  $r$ , the current would be in the case of Fig. 130,

$$C = \frac{2E}{\frac{2r}{3} + r'}$$



**Circuit, Negative Side of** — —The side of a circuit opposite to the positive side. (See *Circuit, Positive Side of*.)

That side or half of a circuit connected to or leading from the positive terminal of the source of current.

**Circuit, Open** — —A broken circuit.

A circuit, the conducting continuity of which is broken.

**Circuit, Open-Iron Magnetic** — —

The path of a line of magnetic induction, which passes partly through iron, and partly through an air space.

The magnetic circuit is always closed, that is the lines of magnetic force always form closed paths. The term "open" is used in contradistinction only to "closed" iron magnetic circuit, in which the entire path of a line of force passes through iron. (See *Circuit, Magnetic*.)

**Circuit, Parallel** — —A name sometimes applied to circuits connected in multiple. (See *Circuit, Multiple*.)

**Circuit, Parallel-Tree** — —A form of parallel circuit in which the receptive devices are placed in parallel between the leads and returns, and the branches and sub-branches arranged in a tree-like form.

**Circuit, Positive Side of** — —That side of a circuit, bent in the form of a circle, in which, if an observer stood with his head in the positive region, he would see the current pass round him from his right hand towards his left.—(*Daniell*.)

**Circuit, Recoil** — —A term sometimes applied to the circuit that lies in the alternative path of a discharge. (See *Path, Alternative*.)

**Circuit, Return** — —That part of a circuit by which the electric current returns to the source.

In a multiple-circuit the lead that is connected to the negative terminals of the separate sources.

**Circuit, Series** — —A compound circuit in which the separate sources, or the separate electro-receptive devices, or both, are so placed that the current produced in each, or passed through each, passes successively

through the entire circuit from the first to the last.

The six cells, shown in Fig. 132, are connected in series by joining the positive pole of each cell with the negative pole of the succeeding cell, the negative and positive poles at the extreme ends




Fig. 132. Series Circuit.

being connected by conductors with the external circuit.

The connection of three Leclanché cells in series is clearly shown in Fig. 133. The carbons,

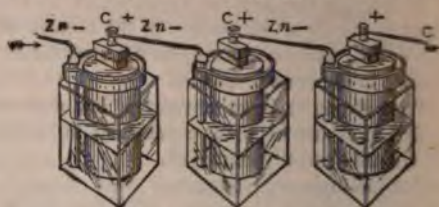


Fig. 133. Voltaic Cells Connected in Series.

C, C, of the first and second cells are connected to the zincs, Zn, Zn, of the second and third cells, thus leaving the zinc, Zn, of the first cell, and the carbon, C, of the third cell, as the terminals of the battery. The direction of the current is shown by the arrows.

The resistance of such a connection is equal to the sum of the resistances of all of the separate sources.

The electromotive force is equal to the sum of the separate electromotive forces.

If the electromotive force of a single cell is equal to  $E$ , its internal resistance to  $r$ , and the resistance of the leads and electro-receptive devices to  $r'$ , then the current in the circuit,

$$C = \frac{E}{r + r'}$$

If six of such cells are coupled in series, the current becomes

$$C = \frac{6E}{6r + r'}$$

If, however, the internal resistance of each cell be so small as to be neglected, the formula becomes

$$C = \frac{6E}{r'}$$

or the current is six times as great as with one cell.

The total resistance of the separate sources or electro-receptive devices of the series circuit is as follows, calling  $R'$ ,  $R''$ ,  $R'''$ , etc., the separate resistance and  $R$ , the total resistance,

$$R = R' + R'' + R''', \text{ etc.}$$

The series connection of battery cells is used on telegraph lines, where a high electromotive force is required in order to overcome a considerable resistance in the circuit, or in similar cases where the resistance in the external circuit is great, on account of a number of electro-receptive devices being connected to the line in series.

The series connection was formerly called *connection for intensity*. The term is now abandoned.

**Circuit, Series-Multiple** — — A compound circuit, in which a number of separate sources, or separate electro-receptive devices, or both, are connected in a number of separate groups in multiple-arc, and these separate groups subsequently connected in series.

In the series-multiple circuit the resistance of each multiple group is equal to the resistance of a single branch divided by the number of branches.

If, for example,  $r$ , is the resistance of each separate branch of say seven parallel circuits in each of the separate groups of multiple circuits, then the resistance,  $R$ , of each separate multiple group is—

$$R = \frac{r}{7}.$$

The total resistance of the series-multiple circuit is equal to the sum of the resistances of the separate multiple groups. The total resistance of the three groups is—

$$R = \frac{r}{7} + \frac{r}{7} + \frac{r}{7} = \frac{3r}{7}.$$

An example of the series-multiple circuit is shown in Fig. 134, which is the method adopted




Fig. 134. Series-Multiple Circuit.

in the use of distribution boxes. Here a number of multiple groups or circuits are connected with each other in series, as shown. (See *Box, Distribution, for Arc Light Circuits*.)

**Circuit, Short** — — A shunt, or by-path.

of comparatively small resistance, around the poles of an electric source, or around any portion of a circuit, by which so much of the current passes through the new path, as virtually to cut out the part of the circuit around which it is placed, and so prevent it from receiving an appreciable current.

**Circuit, Shunt** — — A branch or additional circuit provided at any part of a circuit, through which the current branches or divides, part flowing through the original circuit, and part through the new branch.

A shunt circuit is in multiple circuit with the circuit it shunts.

In the case of branch circuits each of the circuits acts as a shunt to the others. Any number of additional or shunt circuits may be thus provided. (See *Laws, Kirchhoff's*.)

**Circuit, Simple** — — A circuit containing a single electric source, and a single electro-receptive device, connected by a conductor.

The term *simple circuit* is sometimes applied to a multiple circuit. The term is not, however, a good one, and is not in general use.

**Circuit, Single-Wire** — — A term sometimes used for a grounded circuit. (See *Circuit, Grounded*.)

The single-wire circuit is sometimes used in the distribution of incandescent lamps in multiple-arc. One pole of the dynamo is put to ground, and the other pole to a single wire or lead. The electro-receptive devices have one of their poles connected to this lead and the other pole to earth. The single-wire circuit is a very objectionable circuit so far as safety is concerned.

It is frequently used, however, in the wiring of ships.

**Circuit, Through** — — A telephonic or telegraphic circuit that has been completed through to a given station by cutting out interruptions or breaks in the line by the connection together of sections of different wires.

**Circuit, Time-Constant of** — — The time in which a current due to a constant electromotive force will rise in a conductor to a definite fraction of its maximum value.

The ratio of the inductance of a circuit to its resistance.



The time required from the moment of closing the circuit, for a current to rise to a value equal to  $\frac{e-I}{e}$  of the full value, or .632 of the maximum value.

In the above,  $e$ , equals 2.71828, or the base of the Napierian system of logarithms.

The time-constant is proportional to the conductivity of the circuit and its formal resistance.

Approximately the time constant of a circuit is the time from closing the circuit, in which the current rises to two-thirds of its maximum value, this maximum value being determined by the formula,  $C = \frac{E}{R}$

The time-constant of a circuit may be reduced—

(1.) By decreasing the self-induction of the circuit.

(2.) By increasing the resistance.

In the case of a magnetic conductor the time-constant is proportional to a quantity (the permeability) which is determined by the capacity of the conductor to utilize part of the energy in producing magnetization of its substance.—(*Fleming*.)

**Circuit, Voltaic** — —The path through which the current flows out from a voltaic cell or battery, through the translating devices and back again to the cell or battery.

**Circuits, Forked** — —A term employed in telegraphy to indicate circuits that radiate from any single point.

Forked circuits are employed in simultaneously transmitting messages to several stations.

**Circuits, Varieties of** — —Conducting paths provided for the passage of an electric current.

Electric circuits may be divided, according to their complexity, into—

(1.) Simple.

(2.) Compound.

According to the peculiarities of their connections, into—

(1.) Shunt or derived.

(2.) Series.

(3.) Multiple, multiple-arc or parallel.

(4.) Multiple-series.

(5.) Series-multiple.

Either the circuits, the sources, or the electro-

receptive devices may be connected in series, in multiple, in multiple-series or in series-multiple.

According to their resistance, circuits are divided into—

(1.) High-resistance.

(2.) Low-resistance.

According to their relation to the electric source, into—

(1.) Internal circuits.

(2.) External circuits.

According to their position, or the work done, circuits are divided into very numerous classes; thus, in telegraphy, we have the following, viz.:

(1.) The line-circuit.

(2.) The earth or ground circuit.

(3.) The local-battery circuit.

(4.) The main-battery circuit, etc.

**Circular Bell.**—(See *Bell, Circular*.)

**Circular Units.**—(See *Units, Circular*.)

**Circular Units (Cross-Sections), Table of** — —(See *Units, Circular (Cross-Sections), Table of*.)

**Clamp, Carbon** — —A carbon clutch. (See *Clutch, Carbon, of Arc Lamp*.)

**Clamp for Arc Lamps.**—A clamp for gripping the lamp-rod, *i. e.*, the rod that supports the carbon electrodes of arc lamps. (See *Lamp, Electric, Arc*.)

**Clamp, Rod** — —A carbon clutch. (See *Clamp for Arc Lamps*.)

**Clark's Compound.**—(See *Compound, Clark's*.)

**Clark's Standard Voltaic Cell.**—(See *Cell, Voltaic, Standard, Clark's*.)

**Clark's Standard Voltaic Cell, Rayleigh's Form of** — —(See *Cell, Voltaic, Standard, Rayleigh's Form of Clark's*.)

**Clay Electrode.**—(See *Electrode, Clay*.)

**Cleansing, Fire** — —The removal of grease from metallic articles, that are to be electro-plated, by subjecting them to the action of heat.

This cleansing is for the purpose of obtaining a uniform, adherent coating.

**Clearance-Space.**—(See *Space, Clearance*.)

**Clearing-Out Drops.**—(See *Drops, Clearing-Out*.)

**Cleat, Crossing** — A cleat so arranged as to permit the crossing of one pair of wires under or over another pair without contact with each other.

**Cleat-Wiring.**—(See *Wiring, Cleat*.)

**Cleats, Electric** — Suitably shaped pieces of wood, porcelain, hard rubber or other non-conducting material used for fastening and supporting electric conductors to ceilings, walls, etc.

A simple form of wooden cleat is shown in Fig. 135.



Fig. 135. Wooden Cleat.

**Clepsydra, Electric** — An instrument for measuring time by the escape of water or other liquid under electrical control.

**Climbers, Pole** — Devices employed by linemen for climbing wooden telegraph poles.

A climber with straps for attachment to the leg and foot is shown in Fig. 136.

**Clip, Cable** — A term sometimes used for cable hanger. (See *Hanger, Cable*.)

**Clock, Electric** — A clock, the works of which are moved, controlled, regulated or wound, either entirely or partially, by the electric current.



Fig. 136. Climber and Straps.

Electric clocks may be divided into three classes, viz.:

(1.) Those in which the works are moved entirely or partially by the electric current.

(2.) Those which are controlled or regulated by the electric current.

(3.) Those which are merely wound by the current.

A clock moving independently of electric power is prevented from gaining or losing time, by means of a slight retardation or acceleration electrically imparted. The entire motion of the balance wheel is sometimes imparted by electricity.

An example of one of many forms of controlling electric clocks is shown in Fig. 137, where the split battery (See *Battery, Split*), P N, is connected, as shown, to the spring contacts S and S'. In this way currents are sent into the circuit in alternately opposite directions.

The pendulum bob, Fig. 138, of the controlled clock is formed of a hollow coil of insulated wire, which encircles one or both of two permanent magnets, A and A', placed with their opposite poles facing each other.

When the pendulum of the controlling clock is in the position shown in Fig. 137, the current passes in the direction EP Sn W, etc., and through the coil C, Fig. 138. When the pendulum of the controlling clock is in contact with S', the current flows through Wn S' N E, etc., and through the coil C in the opposite direction. In this manner a slight motion forwards or backwards is imparted to the pendulum, which is thus kept in time with the controlling clock.

Mercury contacts are sometimes employed in place of the springs S and S'. Induction currents may also be employed.

Clocks of non-electric action may be electrically

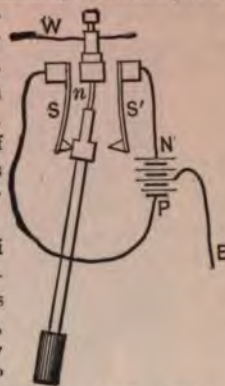


Fig. 137. Controlling Clock.




Fig. 138. Controlled Clock.

controlled, or correctly set at certain intervals, either automatically by a central clock, or by the depression of a key operated by hand from an astronomical observatory.



In a system of *time-telegraphy*, the controlling clock is called the *master clock*, and the controlled clocks, the *secondary clocks*.

Secondary clocks are generally mere dials, con-



Fig. 139. Mechanism of Secondary Clock.

taining *step-by-step* movements, for moving the hour, minute and second hands, as shown in Fig. 139.

In Speller's clock, a series of armatures H, Fig. 140, mounted on the circumference of a




Fig. 140. Speller's Electric Clock.

wheel, connected with the escapement wheel, pass successively, with a step-by-step movement, over the poles of electro-magnets. On the completion of the circuit, they are attracted towards the magnet, and on the breaking of the circuit they are drawn away by the fall of the weight F, placed on the lever D, pivoted at E. A pulley at E, runs over the surface of a peculiarly shaped cog on the escapement wheel.

**Clock, Electric Annunciator** — A clock, the hands or works of which, at certain predetermined times, make electric contacts and thus ring bells, release drops, trace records, etc.

**Clock, Electrical-Controlling** — In a system of time telegraphy, the master clock, whose impulses move or regulate the secondary clocks. (See *Clock, Electric*.)

**Clock, Electrically-Controlled** — In a system of time telegraphy, a secondary clock, that is either driven or controlled by the master clock. (See *Clock, Electric*.)

**Clock, Electrolytic, Tesla's** — A time piece in which the rotation of the wheel work is obtained by the difference in weight of the two halves of a delicately pivoted and well-balanced wheel placed in an electrolytic bath.

In the electrolytic clock of Nikola Tesla, a delicately formed and balanced disc of copper is supported on a horizontal axis at right angles to the shortest distance between the two electrodes, and placed in a bath of copper sulphate. Its two halves become respectively electro-positive and electro-negative when a current is passed through the bath, and consequently metal is deposited on one half and dissolved from the other half. The rotation of the disc under the influence of gravity is caused to mark time.

An electrolytic clock could therefore be made to answer roughly as an electric meter.

**Clock, Master** — The central or controlling clock in a system of electric time-distribution, from which the time is transmitted to the secondary clocks in the circuit. (See *Clock, Electric*.)

**Clock, Secondary** — Any clock in a system of time telegraphy that is controlled by the master clock. (See *Clock, Electric*.)

**Clock, Self-Winding** — A clock that at regular intervals is automatically wound by the action of a small electro-magnetic motor contained within it.

This motor is usually run by one or more voltaic cells, concealed in the case of the clock.

**Closed-Circuit.**—(See *Circuit, Closed*.)

**Closed-Circuit Battery.**—(See *Battery, Closed-Circuit*.)

**Closed-Circuit, Single-Current, Signaling** — (See *Signaling, Single-Current, Closed-Circuit*.)

**Closed-Circuit Thermostat.**—(See *Thermostat, Closed-Circuit*.)

**Closed-Circuit Voltaic Cell.**—(See *Cell, Voltaic, Closed-Circuit*.)

**Closed-Circuit Voltmeter.**—(See *Voltmeter, Closed-Circuit*.)

**Closed-Circuited.**—Placed in a closed or completed circuit.

A voltaic battery, or other source, is closed-circuited when its poles or terminals are electrically connected with each other.

**Closed-Circuited Conductor.**—(See *Conductor, Closed-Circuited*.)

**Closed-Circular Current.**—(See *Current, Closed-Circular*.)

**Closed-Coil Disc Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Closed-Coil Disc*.)

**Closed-Coil Drum Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Closed-Coil Drum*.)

**Closed-Coil Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Closed-Coil*.)

**Closed-Coil Ring Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Closed-Coil Ring*.)

**Closed-Iron-Circuit Transformer.**—(See *Transformer, Closed-Iron-Circuit*.)

**Closed-Loop Parallel-Circuit.**—(See *Circuit, Closed-Loop Parallel*.)

**Closed-Magnetic Circuit.**—(See *Circuit, Closed-Magnetic*.)

**Closed-Magnetic Core.**—(See *Core, Closed-Magnetic*.)

**Closure.**—The completion of an electric circuit.

**Cloth Discs, Carbonized, for High Resistances.**—Discs of cloth carbonized by heating to an exceedingly high temperature in a vacuum, or out of contact with air.

After carbonization the discs retain their flexibility and elasticity and serve admirably for high resistances. When piled together and placed in glass tubes, they form excellent variable resistances when subjected to varying pressure.

**Club-Footed Magnet.**—(See *Magnet, Club-Footed*.)

**Clutch, Carbon, of Arc Lamp.**—A clutch or clamp attached to the rod or other support of the carbon of an arc lamp, provided for gripping or holding the carbon. (See *Lamp, Electric Arc*.)

**Clutch Rod.**—(See *Rod, Clutch*.)

**Coating, Metallic.**—A covering or coating of metal, usually deposited from solutions of metallic salts by the action of an electric current. (See *Plating, Electro*.)

**Coating of Condenser.**—A sheet of tin foil on one side of a Leyden jar or condenser, directly opposite a similar sheet on the other side for the purpose of receiving and collecting the opposite charges. (See *Jar, Leyden, Condenser*.)

**Coatings of Leyden Jar.**—The sheets of tin foil or other conductor on the opposite sides of a Leyden jar or condenser. (See *Jar, Leyden, Condenser*.)

**Code, Cipher.**—A code in which a number of words or phrases are represented by single words, or by arbitrary words or syllables.

The message thus received requires the possession of the key to render it intelligible.

**Code, Telegraphic.**—The pre-arranged signals of any system of telegraphy. (See *Alphabet, Telegraphic, Alphabet, Telegraphic, Morse's, Alphabet, Telegraphic, International Code*.)

**Co-efficient, Algebraic.**—A number prefixed to any quantity to indicate how many times that quantity is to be taken.

The number 3, in the expression  $3a$ , is a co-efficient and indicates that the  $a$ , is to be taken three times, as  $a + a + a = 3a$ .

**Co-efficient, Economic, of a Dynamo-Electric Machine.**—The ratio between the electrical energy, or the electrical horse-power of the current produced by a dynamo, and the mechanical horse-power expended in driving the dynamo.

The economic co-efficient is usually called the efficiency.



The *efficiency* may be the *commercial efficiency*, which is the useful or available energy in the external circuit divided by the total mechanical energy; or it may be the *electrical efficiency*, which is the available electrical energy divided by the total electrical energy.

The *efficiency of conversion* is the total electrical energy developed, divided by the total mechanical energy applied.

If  $M$ , equals the mechanical energy,

$W$ , the useful or available electrical energy, and

$w$ , the electrical energy absorbed by the machine, and

$m$ , the *stray power*, or the power lost in friction, eddy currents, air friction, etc.

Then, since

$$M = W + w + m,$$

The Commercial Efficiency

$$= \frac{W}{M} = \frac{W}{W + w + m}.$$

The Electrical Efficiency

$$= \frac{W}{W + w}$$

The Efficiency of Conversion

$$= \frac{W + w}{M} = \frac{W + w}{W + w + m}.$$

**Co-efficient of Electro-Magnetic Inertia.**—(See *Inertia, Electro-Magnetic, Co-efficient of*.)

**Co-efficient of Expansion.**—(See *Expansion, Co-efficient of*.)

**Co-efficient of Expansion, Linear** — — — (See *Expansion, Linear, Co-efficient of*.)

**Co-efficient of Magnetic Induction.**—(See *Induction, Magnetic, Co-efficient of*.)

**Co-efficient of Magnetization.**—(See *Magnetization, Co-efficient of*.)

**Co-efficient of Mutual-Inductance.**—(See *Inductance, Mutual, Co-efficient of*.)

**Co-efficient of Mutual-Induction.**—(See *Induction, Mutual, Co-efficient of*.)

**Co-efficient of Self-Induction.**—(See *Induction, Self, Co-efficient of*.)

**Coercitive Force.**—(See *Force, Coercitive*.)

**Coercive Force.**—(See *Force, Coercive*.)

**Coil, Choking** — — — A coil of wire so

wound on a core of iron as to possess high self-induction.

Choking-coils are used to obstruct or cut off an alternating current with a loss of power less than with the use of a mere ohmic resistance.

Fig. 141 shows a choking-coil. It consists of a circular solenoid of insulated wire, wound on a core of soft iron wire. A thorough division of the core is obtained by forming it of coils of insulated iron wire. In this way, no eddy currents are produced in the coil. When a simple periodic electromotive force is applied to the terminals of such a coil, if the magnetic permeability of the coil is constant, a simple periodic current is produced, which lags behind the phase of the impressed electromotive force by a constant angle. If the impressed electromotive force is sufficiently great to more than saturate the core, the choking coil ceases to choke the current. The higher the periodicity the greater is the choking effect of a given coil, or the smaller the coil may be made to produce a given effect.



Fig. 141. Choking Coil.

Since an open-magnetic circuit requires a greater current to saturate it than a closed-magnetic circuit, the complete throttling or choking power of such a coil is increased by forming its core of a closed-magnetic circuit; *i. e.*, of a circuit in which there is no air space or gap. (See *Circuit, Divided-Magnetic, Circuit, Closed-Magnetic*.)

**Coil, Electric** — — — A convolution of insulated wire through which an electric current may be passed. (See *Magnet, Electro*.)

The term coil is usually applied to a number of turns or to a spool of wire.

**Coil, Impedance** — — — A term sometimes applied to a choking-coil. (See *Coil, Choking*.)

Such a coil has a high self-induction. Its impedance is therefore high. (See *Induction, Self, Impedance*.)

**Coil, Induction** — — — An apparatus consisting of two parallel coils of insulated wire employed for the production of currents by mutual induction. (See *Induction, Mutual, Induction, Electro-Dynamic*.)

interrupted battery current, sent through a wire called the *primary coil*, and the induced currents in a coil of wire called the *secondary coil*.

When made, the primary coil consists of a few turns of thick wire, and the secondary consists of many turns, often thousands, of fine wire. The primary is generally called *Ruhmkorff coils*, after the name of a celebrated manufacturer of such coils.

The primary coil, shown in Fig. 142, is made of wire, wound on a core formed




Fig. 142. Ruhmkorff Coil.

of iron wires, has its ends brought out at A and B. The fine wire, forming the secondary, is wrapped around an insulated core of wood, or glass, surrounding the primary wire. This wire is very thin, and in some cases is several hundred miles in length.

When an induction coil were made solid, it would heat considerably and therefore cause a break in the wire. The core is therefore laminated, made of a bundle of soft iron wire. The division of the core, however, is not perfect, and although the eddy currents are thereby avoided, yet, too great a magnetic permeability that the induced current cannot be obtained.

The secondary coil are connected to terminals A and B.

The current is rapidly broken by an automatic interrupter, shown at L and M.

The interrupter, shown to the right and front, is provided for the purpose of cutting off the current through the primary, or for changing the current.

When a battery which produces a large current of but a few volts is connected with the primary, the current rapidly interrupted, a high electromotive force of many thousands of volts of the primary cur-

rent, but of a correspondingly smaller current strength.

In such cases, excepting losses during conversion, the energy in the primary current, or  $C E$ , is equal to the energy in the secondary current, or  $C' E'$ . As much therefore as  $E'$ , the electromotive force of the secondary current, exceeds  $E$ , the electromotive force of the primary current, the current strength  $C'$ , of the secondary, will be less than the current strength  $C$ , of the primary. This is approximately true only, and only in induction coils possessing a closed magnetic circuit. (See *Transformer*.)

Fig. 143 shows diagrammatically the arrange-

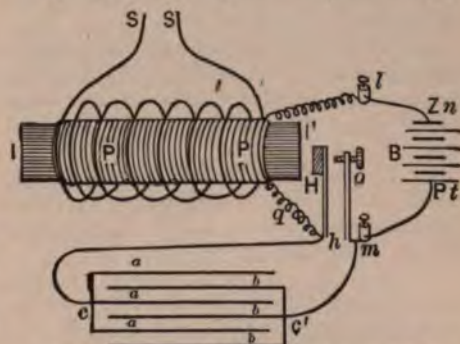


Fig. 143. Circuit Connections of Induction Coil.

ment and connection of the different parts of an induction coil.

The core  $II'$ , consists of a bundle of soft iron wires, each of which is covered with a thin insulating layer of varnish or oxide. A primary wire  $PP$ , consisting of a few turns of comparatively thick wire, is wound around the core, and a greater length of thin wire  $SS$ , is wound upon the primary. This is called the secondary. So as not to confuse the details of the figure it is represented as a few turns.

The terminals of the battery  $B$ , are connected to the primary wire, through the automatic interrupter, in the manner shown. It will be seen that the attraction of the core  $II'$ , for the vibrating armature  $H$ , will break contact at the point  $o$ , and cause a continued interruption of the battery current.

The condenser  $cc'$ , is connected as shown. It acts to diminish the sparking at the contact points on breaking contact, and thus, by making the battery current more sudden, to make its inductive action greater.

The reactions which take place when a simple



periodic electromotive force is impressed on the primary of an induction coil are substantially thus stated by J. A. Fleming:

(1.) The application of a simple periodic impressed electromotive force produces a simple periodic current, moving under an effective electromotive force of self-induction, and brings into existence a counter-electromotive force of self-induction, which causes the primary current to lag behind, by an angle called the angle of lag.

(2.) The field around the primary, and, therefore, the induction through the secondary, is *in consonance* with the primary current, and the impressed electromotive force in the secondary is *in quadrature* with the primary current. (See *Consonance. Quadrature, In.*)

(3.) The secondary-impressed electromotive force gives rise to a secondary current moving under an effective electromotive force and creating a counter electromotive force of self-induction.

(4.) This secondary current reacts in its turn on the primary, and creates what is called the back-electromotive force, or the reacting-inductive-electromotive force of the primary circuit.

(5.) There is then a phase-difference between the primary and secondary currents, and also between the primary-impressed electromotive force and the primary current.

If, as in Fig. 144, two electric circuits are



Fig. 144. Electric and Magnetic Link.

linked with a magnetic circuit, and a small periodic electromotive force be impressed on the primary, the following phenomena occur:

(1.) A periodic primary current is set up in the primary circuit, which, though of the same periodic time as the impressed electromotive force, differs from it in phase.

(2.) A wave of counter electromotive force is produced in the primary circuit by the inductive action, which does not coincide either with the impressed electromotive force, nor with the primary current.

(3.) A wave of magnetization is produced in the iron core, which lags behind the primary

current by somewhat less than 90 degrees of phase.

(4.) A wave of impressed electromotive force is produced in the secondary circuit, due to and measured by the rate of change of magnetic induction in the core, and lagging 90 degrees, or more, behind the magnetization wave.

(5.) A wave of secondary current, lagging behind the secondary electromotive force in phase, except where the circuit consists of a few turns of conductor, or is connected with an external circuit of practically no inductance.—(Fleming.)

**Coil, Induction, Inverted** — — An induction coil in which the primary coil is made of a long, thin wire, and the secondary coil of a short, thick wire.

By the use of an inverted coil, a current of high electromotive force and comparatively small current strength, *i. e.*, but of few amperes, is converted or transformed into a current of comparatively small electromotive force and large current strength. For advantages of this conversion see *Electricity, Distribution of, by Alternating Currents.*

Inverted induction coils are called *converters* or *transformers*. (See *Transformers.*)

**Coil, Induction, Medical** — — An induction coil used for medical purposes.

A form of induction coil used for medical purposes is shown in Fig. 145.



Fig. 145. Medical Induction Coil.

**Coil, Induction, Microphone** — — An induction coil, in which the variations in the circuit of the primary are obtained by means of microphone contacts. (See *Microphone.*)

The carbon-button telephone transmitter is a microphone in its action, its electric resistance varying with the varying pressure caused by the sound waves. The carbon-button is in the primary circuit of an induction coil, variations in

primary of which, under the influence of the sound waves, produce corresponding variations in the currents induced in the secondary.

**Coil, Kicking** — — A term sometimes applied to a Choking-Coil. (See *Coil, Choking*.)

The term kicking-coil has arisen from the fact that the impedance due to self-induction opposes the starting or stopping of the current somewhat in the manner of an opposing kick.

**Coil, Magnet** — — A coil of insulated wire surrounding the core of an electro-magnet, and through which the magnetizing current is passed. (See *Magnet, Electro*.)

**Coil, Primary** — — That coil or conductor of an induction coil or transformer, through which the rapidly interrupted or alternate inducing currents are sent.

In the Ruhmkorff induction coil the primary coil consists of a comparatively short length of thick wire, the secondary coil being formed of a comparatively great length of fine wire. In the transformer or converter, the primary coil consists of wire that is longer and thinner than that in the secondary coil. In other words, the transformer or converter consists of an *inverted induction coil*. (See *Coil, Induction. Transformer*.)

**Coil, Reaction** — — A magnetizing coil, surrounded by a conducting covering or sheathing, which opposes the passage of rapidly alternating currents less when directly over the magnetizing coil than when a short distance from it.

A term often used for choking-coil. (See *Coil, Choking*.)

**Coil, Reaction, Balanced** — — A coil employed in a system of distribution by means of transformers for maintaining a constant current in the secondary circuit, *Fig. 146. Balanced-Reaction Coil.* despite changes in the load placed therein.


A balanced-reaction coil is shown in *Fig. 146*.



A reaction coil is placed in the circuit of lamps in series in a constant potential system. The sheathing of this coil is maintained in a balanced position by the counter weight P, and the spring S. If now a lamp is extinguished in the circuit, the increase of current, due to decreased resistance, causes the sheath to be deflected, and, thus increasing the self-induction of the coil, reduces the lamp current to its normal value.

**Coil, Resistance** — — A coil of wire of known electrical resistance employed for measuring resistance.

In order to avoid self-induction and the magnetizing effects of the coils on the needles of the galvanometer used in electric measurements, as well as the disturbing effects of self-induction, the wire of the resistance coil is doubled on itself before being wound, and its ends connected with the brass bars, E, E, *Fig. 147*. The inser-



*Fig. 147. Connections of Resistance Coils.*

tion of the plug-key cuts the coil out of the circuit by short-circuiting. (See *Box, Resistance. Bridge, Electric. Coil, Resistance, Standard*.)

The coils are made of German silver, or platinum, the resistance of which is not much affected by heat.

**Coil, Resistance, Standard** — — A coil the resistance of which is that of the standard ohm or some multiple or sub-multiple thereof.

The standard ohm, as issued by the Electric Standards Committee of England, has the form shown in *Fig. 148*. The coil of wire is formed of an alloy of platinum and silver, insulated by silk covering and melted paraffine. Its ends are soldered to thick copper rods, r, r', for ready connection with mercury cups. The coil is at B. The space above it, at A, is filled with paraffine. A hole, at t, runs through the coil for the ready



insertion of a thermometer. The lower part of the coil, B, is immersed in water up to the shoulder of A, and the water stirred from time to



Fig. 148. Standard Ohm.

time. Since the coil is heated by the current, successive observations should be at least ten minutes apart. Only mild currents should be passed through the coils.

**Coil, Resistance, Standardized** —

Resistance coils whose resistances have been carefully determined by comparison with a standard ohm or other standard coils.

**Coil, Ruhmkorff** —

A term sometimes applied to any induction coil, the secondary of which gives currents of higher electromotive force than the primary. (See *Coil, Induction*.)

**Coil, Secondary** —

That coil or conductor of an induction coil or transformer, in which alternating currents are induced by the rapidly interrupted or alternating currents in the primary coil. (See *Coil, Induction, Transformer*.)

**Coil, Shunt** —

A coil placed in a derived or shunt circuit. (See *Circuit, Shunt*.)

**Coil, Spark** —

A coil of insulated wire connected with the main circuit in a system of electric gas-lighting, the extra spark pro-



Fig. 149. Spark Coil.

duced on breaking the circuit of which is employed for electrically igniting gas jets.

Spark coils are employed where the number of

gas jets to be simultaneously lighted is not too great. When this number exceeds certain limits, the spark from an induction coil is more advantageously used.

A spark coil is shown in Fig. 149.

**Coils, Armature, of Dynamo-Electric Machine** —

The coils, strips or bars that are wound or placed on the armature core.

To avoid needless resistance the wire, or other conductor, of the armature coils, should be as short and thick as will enable the desired electromotive force to be obtained without excessive speed of rotation.

The armature coils should enclose as many lines of force as possible (*i. e.*, they should have as nearly a circular outline as possible). In drum-armatures, the breadth of the armature is frequently made nearly equal to its length, unless other considerations prevent.

When the armature wire consists of rods or bars, it should be laminated or slit in planes parallel to the lines of force so as to avoid eddy currents. Other things being equal, the




Fig. 150. Series Connection of Armature Coils.

greater the number of coils, the more uniform the current generated. The separate coils should be symmetrically disposed; otherwise irregular induction, and consequent *sparking* at the commutator results.

The coils of pole-armatures should be wound near the poles rather than on the middle of the cores. In order to avoid undue heating, spaces for air ventilation are not inadvisable. Various connections of the armature coils are used.

In some machines all the coils are connected in a closed circuit. In some, the coils are independent of one another, and, either for the entire revolution, or for part of a revolution, are on an open-circuit.

In alternating current dynamos in order to obtain the rapid reversals or alternations of current, which in some machines are as high as 12,000 per minute, a number of poles of alternate polarity are employed. The separate coils that are used on the armature may be coupled either in series or in multiple-arc.

Where a comparatively low electromotive force is sufficient, such as for incandescent lamps in multiple-arc, the separate coils are united in parallel; but for purposes where a considerable electromotive force is necessary, as for example, in systems of alternate current distribution, with converters at considerable distances from the generating dynamo, they are often connected in series, as shown in Fig. 150.

**Coils, Binding** — Coils of wire wound on the outside of the armature coils, and at right angles thereto, to prevent the loosening of the armature wires by the action of centrifugal force.

The binding coils are generally made of hard brass wire.

**Coils, Compensating** — A term sometimes applied to the series coils placed on a shunt-wound dynamo.

**Coils, Conjugate** — Two coils so placed, as regards each other, that an interruption of the current in one produces no induced current in the other.

When two coils are conjugate to each other, the lines of force of one do not pass through the other. Consequently such coils can produce no induction in one another.

**Coils, Henry's** — A number of separate induction coils so connected that the currents induced in the secondary wire of the first coil, are caused to induce currents in the secondary wire of the second coil, with whose primary it is connected in series, and so on throughout all the coils.

A series of three of Henry's coils is shown in Fig. 151. An intermittent battery current is sent



Fig. 151. Henry's Coils.

into a, the secondary, b, of which is connected with the primary, c, of the second coil. The

secondary, d, of the second coil, is connected with the primary, e, of the third coil, and the currents finally induced in f, are employed for any useful purpose, such as the magnetization of a bar of iron at g.

The current in b, is sometimes called a *Secondary Current*, or a *Current of the Second Order*; that induced by this secondary current in d, is called a *Tertiary Current*, or a *Current of the Third Order*; that in f, a *Current of the Fourth Order*. Henry carried these successive inductions up to currents of the *Seventh Order*.

Henry's coils in reality consist of separate induction coils, connected, as above explained, in series.

In Fig. 152, the tertiary current induced in



Fig. 152. Tertiary Currents of Coils.

IV, may be employed to give shocks to a person grasping the handles, e and f.

**Coils, Proportional** — Pairs of resistance coils, generally of 10, 100 and 1,000 ohms each, forming the proportional arms of the balance or bridge, and employed in the box, or commercial form of Wheatstone's bridge. (See *Bridge, Electric, Commercial Form of*.)

**Cold, Production of, by Electricity** — An absorption of energy and consequent reduction of temperature at a thermo-electric junction by the passage of an electric current across such junction in a certain direction.

When an electric current passes across a thermo-electric junction, the junction is either heated or cooled. In the case of an antimony-bismuth couple, if the current passes from the antimony




Fig. 153. Freezing of Water by Electricity.

to the bismuth the junction is heated; if it passes from the bismuth to the antimony it is cooled. In the apparatus shown in Fig. 153, the antimony-bismuth couple is arranged as shown for the



freezing of water by means of the electric current. A and B, represent plates of antimony and bismuth respectively. A small cavity, at E, serves to hold a drop of water. When a current has passed in the direction shown by the arrows, a drop of water, previously cooled to the temperature of melting ice, is solidified by the lowering of the temperature at the junction.

**Collecting Brushes of Dynamo-Electric Machine.**—(See *Brushes, Collecting, of Dynamo-Electric Machine.*)

**Collectors, Electric** — —Devices employed for collecting or taking off electricity from a moving electric source.

**Collectors of Electric Frictional Machines.**—The metallic points that collect the charge from the glass plate or cylinder of a frictional electric machine.

**Collectors of Dynamo Electric Machines.**—The brushes that rest on the commutator cylinder, and carry off the current generated on the rotation of the armature.

Collectors are properly called commutators when they are employed to cause an alternate current to become continuous, or to flow in one and the same direction.

**Colloids.**—One of the two classes into which substances are separated by dialysis.

By dialysis bodies are separated into colloids, or bodies capable of crystallizing, and colloids or jelly-like bodies, incapable of crystallizing. Colloids possess great cohesion and but slight diffusibility. (See *Dialysis.*)

**Colombin.**—An insulating substance, consisting of a mixture of sulphate of barium and sulphate of calcium, placed between the parallel carbons of the Jablochhoff candle.

**Column, Barometric** — —A column, usually of mercury, approximately 30 inches in vertical height, sustained in a barometer, or other tube, by the pressure of the atmosphere.

The space above the barometric column contains a vacuum known as the *Torricellian vacuum*. (See *Vacuum, Torricellian.*)

**Column, Electric** — —A term formerly applied to a voltaic pile. (See *Pile, Voltaic.*)

**Colza Oil.**—(See *Oil, Colza.*)

**Combination Gas Fixtures.**—(See *Fixtures, Gas, Combination.*)

**Combined Tangent and Sine Galvanometer.**—(See *Galvanometer, Combined Tangent and Sine.*)

**Comb Lightning Arrester.**—(See *Arrester, Lightning, Comb.*)

**Comb Protector.**—(See *Protector, Comb.*)

**Commercial Efficiency.**—(See *Efficiency, Commercial.*)

**Commercial Efficiency of Dynamo.**—(See *Efficiency, Commercial, of Dynamo.*)

**Commercial Form of Electric Bridge.**—(See *Bridge, Electric, Commercial Form of.*)

**Communicator, Electric** — —A term formerly employed for a telegraphic key. (See *Key, Telegraphic.*)

**Commutating Transformers, Distribution of Electricity by** — —(See *Electricity, Distribution of, by Commutating Transformers.*)

**Commutation.**—The act of commuting, as of currents.

**Commutation, Diameter of** — —In a dynamo-electric machine a diameter on the commutator cylinder on one side of which the differences of potential, produced by the movement of the coils through the magnetic field, tend to produce a current in a direction opposite to those on the other side.

That diameter on the commutator cylinder of an open-circuited armature that joins the points of contact of the collecting brushes.

Thus in Fig. 154, the directions of the induced electromotive forces are indicated by the arrows. The *diameter of commutation* is therefore the line  $n n'$ . The term *neutral line* is also sometimes given to this line. It lies at right angles to the line of maximum magnetization  $m m$ .

In a *closed-circuited* armature, that is, in an armature the coils of which are connected in a closed circuit, the collecting brushes rest on the commutator cylinder at the *neutral line*, or on the *diameter of commutation*.

In an open-circuited armature, however, where the coils are independent of each other, the collecting brushes must be set at  $m m$ , at right angles to the neutral line  $n n$ . The term *diameter*

ter of commutation is, therefore, often applied to this second position. According to this use of the




Fig. 154. Diameter of Commutation.

term, the *diameter of commutation* is that diameter on the commutator which joins the points of contact of the collecting brushes.

The neutral line  $n'n'$ , Fig. 154, it will be noticed does not occupy a vertical position, but is displaced somewhat in the direction of rotation, thus necessitating the shifting of the brushes forward in the direction of rotation. This necessary shifting of the brushes is known technically as the *lead of the brushes*. (See *Lead, Angle of*.)

It will thus be seen that the term diameter of commutation is used in two different senses.

In reality, the term refers to the position of certain points on the commutator as distinguished from points on the armature coils. On the commutator, the diameter of commutation is the line drawn through the two commutator bars at which the currents from the two sides are opposed to each other.

It is evident that the commutator may be intentionally twisted with respect to the armature, so as to bring its diameter of commutation into any desired convenient position.

**Commutation, Dissymmetry of** — — A commutation in which the neutral line does not coincide with a diameter of the commutator. (See *Commutation, Diameter of*.)

**Commutator.**—In general, a device for changing the direction of an electric current.

**Commutator, Burning at** — — Arcing and consequent destructive action on the commutator segments of a dynamo-electric machine.


When the arcing is pronounced, the intense heat soon destroys the commutator.

**Commutator Cylinder, Neutral-Line of** — — (See *Line, Neutral, of Commutator Cylinder*.)

### Commutator, Dynamo-Electric Machine

— That part of a dynamo-electric machine which is designed to cause the alternating currents produced in the armature to flow in one and the same direction in the external circuit.

One end of an armature coil is connected with  $A'$ , Fig. 155, and the other with  $A$ . The brushes are so set that  $A$ , and  $A'$ , are in contact with  $B'$ , and  $B$ , respectively, as long as the current flows in the same direction in the armature coil connected therewith, but enter into contact with  $B$ , and  $B'$ , Fig. 155.



when the current changes its direction, and continue in such contact as long as it flows in this direction. By the use of a commutator the current will therefore flow through any circuit connected with the brushes in one and the same constant direction.




Fig. 156. Two-part Commutator

In action, the commutator is subject to wear from the friction of the brushes, and the burning action of destructive sparks. The commutator

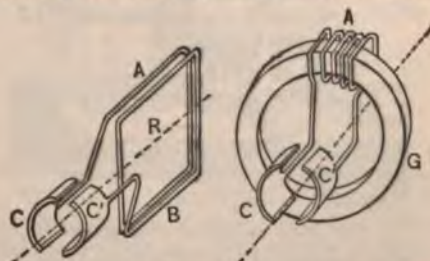


Fig. 157. Two-part Commutator.




Fig. 158. Two-part Commutator.

segments are, therefore, made of comparatively thick pieces of metal, insulated from one another



and supported on a commutator cylinder usually placed on the shaft of the armature.

The ends of the armature coils are connected to commutator strips or segments.

The number of metallic pieces or segments, A. and A', on the commutator cylinder depends on the number, arrangement and connection of the armature coils, and on the disposition of the magnetic field of the machine.

Figs. 156, 157 and 158 show the connections of an armature coil to the plates of a two-part commutator.

A four-part commutator for a ring-armature, and the connections of the coils thereto, are shown in Fig. 159.

The commutator strips may either connect the separate coils in a closed-circuited armature, in which the coils are all connected with one another, or, in an open-circuited armature, in which the separate coils are independent of one another.

**Commutator, Ruhmkorff's** — —A name given by Ruhmkorff to a device placed on his induction coil for the purpose of changing or reversing the direction of the battery current through the primary.

This reverser is shown in Fig. 160. (See *Coil, Ruhmkorff's*.)

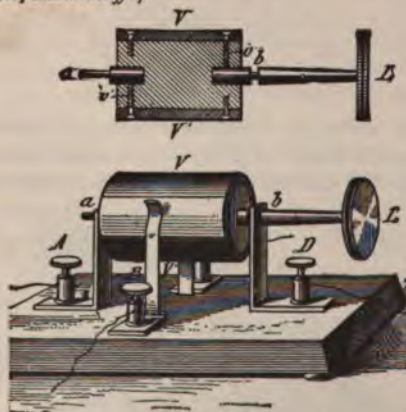


Fig. 160. Ruhmkorff's Commutator.

Two metallic strips, V, V, supported on a cylinder of insulating material, are in contact with the battery terminals A, and D, through two vertical springs that bear on them. On a half rotation of the cylinder by the thumb screw L,

the strips V, V, change places as regards the vertical springs, and thus reverse the direction of the battery current.

**Commutated Currents.** — (See *Currents, Commuted*.)

**Commuter, Current** — —Any apparatus by means of which electrical currents, flowing alternately in different directions, may be caused to flow in one and the same direction.

A Commutator.

**Commuting.** —Causing to flow in one and the same direction.

**Commuting Currents.** — (See *Currents, Commuting*.)

**Compartment Manhole of Conduit.** — (See *Manhole, Compartment, of Conduit*.)

**Compass, Azimuth** — —A compass used by mariners for measuring the horizontal distance of the sun or stars from the magnetic meridian. (See *Azimuth, Magnetic*.)

A mariner's Compass.

A single magnetic needle, or several magnetic needles, are placed parallel to one another on the lower surface of a card, called the *compass card*. This card is divided into the four cardinal points, N, S, E and W, and these again subdivided into thirty-two points called *Rhumbs*.

In the azimuth compass these divisions are supplemented by a further division into degrees.

A form of azimuth compass is shown in Fig. 161. In order to maintain the compass box in a

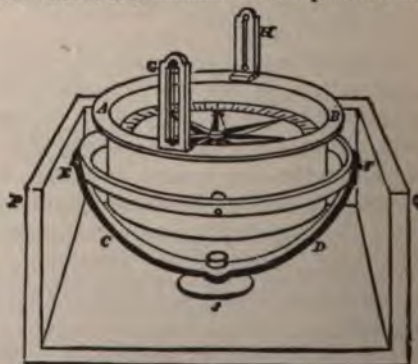


Fig. 161. Azimuth Compass.

horizontal position, despite the rolling of the ship, the box, A B, is suspended in the larger box, P Q, on two concentric metallic circles, C D, and

**E F**, pivoted on two horizontal axes at right angles to each other. This kind of support is technically termed *Gimbals*. Sights **G, H**, are provided for measuring the magnetic azimuth of any object.

**Compass, Boxing the** — — Naming, consecutively, all the different points or rhumbs of the compass from any one of them. (See *Compass, Points of*.)

**Compass-Card.**—(See *Card, Compass*.)

**Compass, Inclination** — — A magnetic needle moving freely in a single vertical plane, and employed for determining the angle of dip at any place.

**An Inclinator.** (See *Inclinometer*.)

**A dipping circle.** (See *Circle, Dipping*.)

The needle **M**, Fig. 162, is supported on knife



Fig. 162. Inclination Compass.

edges so as to be free to move only in the vertical plane of the graduated vertical circle **C C**. This circle is movable over the horizontal graduated circle **H H**. In order to determine the true angle of dip, the vertical plane in which the needle is free to move must be placed exactly in the plane of the magnetic meridian.

To ascertain this plane the vertical circle is moved until the needle points vertically downwards. It is then in a plane 90 degrees from the magnetic meridian. The vertical circle is then moved over the horizontal circle 90 degrees, in which position it is in the plane of the magnetic meridian, when the true angle of the dip is read off.

For an explanation of the reason of this see

*Component, Horizontal and Vertical, of the Earth's Magnetism.*

**Compass, Mariner's** — — A name often applied to an azimuth compass. (See *Compass, Azimuth*.)

**Compass, Points of** — — The thirty-two points into which a compass card is divided.

Sixteen of these points are shown in Fig. 163.



Fig. 163. Points of Compass.

The position of the remaining points will be readily seen by an inspection of the figures.

These points are as follows:

- |                 |                 |
|-----------------|-----------------|
| 1. North.       | 17. South.      |
| 2. N. by E.     | 18. S. by W.    |
| 3. N. N. E.     | 19. S. S. W.    |
| 4. N. E. by N.  | 20. S. W. by S. |
| 5. N. E.        | 21. S. W.       |
| 6. N. E. by E.  | 22. S. W. by W. |
| 7. E. N. E.     | 23. W. S. W.    |
| 8. E. by N.     | 24. W. by S.    |
| 9. East.        | 25. West.       |
| 10. E. by S.    | 26. W. by N.    |
| 11. E. S. E.    | 27. W. N. W.    |
| 12. S. E. by E. | 28. N. W. by W. |
| 13. S. E.       | 29. N. W.       |
| 14. S. E. by S. | 30. N. W. by N. |
| 15. S. S. E.    | 31. N. N. W.    |
| 16. S. by E.    | 32. N. by W.    |

**Boxing the Compass** consists in naming all these points consecutively from any one of them.

The direction in which the ship is sailing is determined by means of a point fixed on the inside of the compass box, directly in the line of the vessel's bow.

**Compass, Rhumbs of** — — The points of a mariner's compass. (See *Compass, Points of*.)



**Compensated Alternator.**—(See *Alternator, Compensated*.)

**Compensated Excitation of Alternator.**—(See *Alternator, Compensated Excitation of*.)

**Compensating Coils.**—(See *Coils, Compensating*.)

**Compensating Magnet.**—(See *Magnet, Compensating*.)

**Complement of Angle.**—(See *Angle, Complement of*.)

**Completed-Circuit.**—(See *Circuit, Completed*.)

**Component.**—One of the two or more separate forces into which any single force may be resolved; or, conversely, the separate forces which together produce any single resulting force.

When two or more forces act simultaneously to produce motion in a body, the body will move

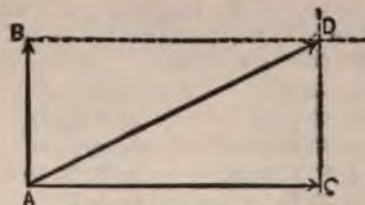


Fig. 164. Composition of Forces.

with a given force in a single direction called the *resultant*. The separate forces, or directions of motion, are called the *components*.

Two forces acting simultaneously on a body at A, Fig. 164, tending to move it in the direction

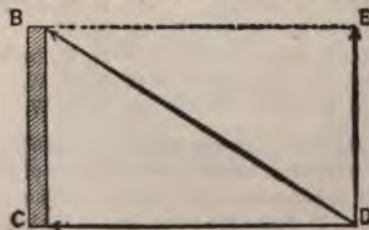


Fig. 165. Resolution of Forces.

of the arrows, along AB, and AC, with intensities proportioned to the lengths of the lines AB, and AC, respectively, will move it in the direction AD, obtained by drawing BD, and DC,

parallel to AC, and AB, respectively, and then drawing AD, through the point of intersection, D. This is called the *Composition of Forces*. AD, is the resultant force, and AB and AC, are its components.

Conversely, a single force, acting in the direction of DB, Fig. 165, against a surface, BC, may be regarded as the resultant of the two separate forces, DE, and DC, one parallel to CB, and one perpendicular to it. DE, being parallel to CB, produces no pressure, and the absolute effect of the force will, therefore, be represented by CD.

This separation of a single force into two or more separate forces is called the *resolution of forces*, the force, DB, being resolved into the components, DE and DC.

**Component Currents.**—(See *Currents, Component*.)

**Component, Horizontal, of Earth's Magnetism** — That portion of the earth's directive force which acts in a horizontal direction.

That portion of the earth's magnetic force which acts to produce motion in a compass needle free to move in a horizontal plane only.

Let AB, Fig. 166, represent the *direction* and *magnitude* of the earth's magnetic field on a magnetic needle. The magnetic force will lie in the plane of the magnetic meridian, which will be assumed to be the plane of the paper CAD. The earth's field, AB, can be resolved into two components, AD, the *horizontal* component, and AC, the *vertical* component.

In the case of a magnetic needle, like the ordinary compass needle, which is free to move in a horizontal plane only, the horizontal component alone directs the needle. A weight is applied to balance the vertical component.

When the needle is free to move in a vertical plane, and this plane corresponds with that of the magnetic meridian, the entire magnetic force, AB, acts to place the needle, supposed to be properly balanced, in the direction of the lines of force of the earth's magnetic field at that point.




Fig. 166. Components of Earth's Magnetism.

**Component, Vertical, of Earth's Magnetism** — That portion of the earth's directive force which acts in a vertical direction.

In the vertical plane at right angles to the plane of the magnetic meridian, the vertical component alone acts, and the needle points vertically downwards, in no matter what part of the earth it may be. In Fig. 166, A C, is the vertical component of the earth's directive force.

**Composite Balance.**—(See *Balance, Composite*.)

**Composite-Field Dynamo.**—(See *Dynamo, Composite-Field*.)

**Composition of Forces.**—(See *Forces, Composition of*.)

**Compound Arc.**—(See *Arc, Compound*.)

**Compound, Binary** — In chemistry, a compound formed by the union of two different elements.

Water is a binary compound, being formed by the union of two atoms of hydrogen with one atom of oxygen. Its composition is expressed in chemical symbols,  $H_2O$ , which indicates that two atoms of hydrogen are combined, or chemically united, with one atom of oxygen. Water is therefore a binary compound, because it is formed of two different elementary substances.

**Compound, Chatterton's** — A compound for cementing together the alternate coatings of gutta-percha employed on a cable conductor, or for filling up the space between the strand conductors.

The composition of Chatterton's compound is as follows:

Stockholm tar.....	1 part by weight.
Resin .....	1 " "
Gutta-percha.....	3 " "

—(Clark & Sabine.)

**Compound Circuit.**—(See *Circuit, Compound*.)

**Compound, Clark's** — A compound for the outer casing of the sheathing of submarine cables.

The composition of Clark's compound is as follows:

Mineral pitch..... 65 parts by weight.

Silica..... 30 " "

Tar..... 5 " "

—(Clark & Sabine.)

**Compound-Horseshoe Magnet.**—(See *Magnet, Compound-Horseshoe*.)

**Compound Magnet.**—(See *Magnet, Compound*.)

**Compound Radical.**—(See *Radical, Compound*.)

**Compound-Winding of Dynamo-Electric Machines.**—(See *Winding, Compound, of Dynamo-Electric Machine*.)

**Compound-Wound Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Compound-Wound*.)

**Compound-Wound Motor.**—(See *Motor, Compound-Wound*.)

**Concentration of Lines of Force.**—(See *Force, Lines of, Concentration of*.)

**Concentric Carbon Electrodes.**—(See *Electrodes, Concentric Carbon*.)

**Concentric Cylindrical Carbons.**—(See *Carbons, Concentric Cylindrical*.)

**Condenser.**—A device for increasing the capacity of an insulated conductor by bringing it near another insulated earth-connected conductor, but separated therefrom by any medium that will readily permit induction to take place through its mass.

A variety of electrostatic accumulator.

If the conductor A, Fig. 167, standing alone

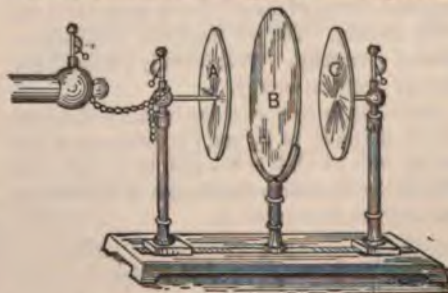


Fig. 167. *Aepinus Air Condenser.*

and separated from other conductors, be connected with an electric machine, it will receive only a very small charge.



If, however, it be placed near C, but separated from it by a *dielectric*, such as a plate of glass B, and C, be connected with the ground, A, will receive a much greater charge. (See *Dielectric*.)

Suppose, for example, that A, be connected with the positive conductor of a frictional electric machine, it will by *induction* establish a negative charge on the surface C, nearest it, and repel a positive charge to the earth. The presence of these two opposite charges on the opposed surfaces of A and C, permits A, to receive a fresh charge from the machine. (See *Induction, Electrostatic*.)

The charge in a condenser in reality resides on the opposite surfaces of the glass, or other dielectric separating the metallic coatings, as can be shown by removing the coatings after charging.

The condenser resulted from the discovery of the Leyden jar. (See *Jar, Leyden*.)

The capacity of a condenser is measured in *microfarads*. (See *Farad*.)

In practice condensers are made of sheets of tin foil, connected to A and B, respectively, and separated from one another by sheets of oiled silk, paraffined paper, or thin plates of mica, as shown in Fig. 168.




Fig. 168. Condenser.

A Leyden jar or condenser does not store electricity any more than a storage battery does. The same quantity of electricity passes out of the opposite coating of the jar that is passed into the other coating. The jar, therefore, possesses no store of electricity. What it really possesses is a store of electrical energy.

According to Ayrton, if the capacity of a condenser, in farads, be  $F$ , and the difference of potential, with which it is charged, be  $V$ , volts, the store of electric energy it possesses, or the work it can do when discharged, is,

$$\text{Work} = \frac{F \times V^2}{2.712} \text{ foot-pounds.}$$

**Condenser, Adjustable** — —A condenser, the plates of which can be readily adjusted so as to obtain the same capacity as that of the conductor to be measured.

In order to obtain a comparatively wide range of adjustability, a condenser is composed of say four separate sections: consisting of one of 2 microfarads, one of 1 microfarad and two of  $\frac{1}{4}$  microfarad, thus making in all 4 microfarads.

**Condenser, Epinus** — —A name given to an early form of condenser. (See *Condenser*.)

**Condenser, Air** — —A condenser in which layers of air act as the dielectric.

A form of air condenser is shown in Fig. 169.

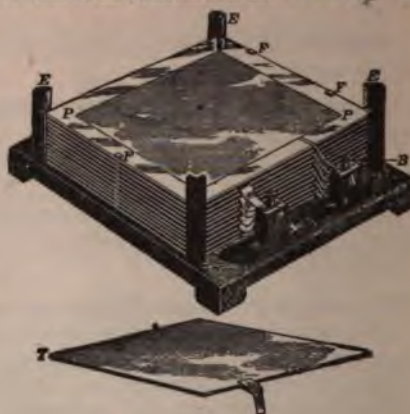


Fig. 169. Air Condenser.

It consists essentially of one set of thin plates of glass partially coated on both sides with sheets of tin foil, so as to leave uncoated a space of about one inch around the edge of the glass. The glass plates do not act as dielectrics, but merely as supports for the tin foil, hence the foil on both sides of the plates is connected electrically.

Another set of plates alternating with the above have the tin foil placed over the whole surface of the glass.

These plates are placed, alternately, over one another on a stand between guide rods of vulcanite E, E, E, E, in the manner shown, and are separated from one another by fragments of glass of the same thickness. The plates with the foil over their entire surface are all connected together and to the terminal B, to form the outer coating, and the plates with the foil over nearly all their surfaces are all connected together and to the terminal A, to form the inner coating of the condenser.

There is thus formed a condenser in which practically two extended conducting surfaces are

separated from each other by a thin layer of air, which acts as the dielectric.

**Condenser, Alternating-Current** — — A condenser suitable for use in connection with a system for the distribution of electric energy by means of alternating currents.

Alternating-current condensers must have a very thin dielectric in order to avoid too great bulk. This, of course, introduces a difficulty as regards liability of failure of insulation, which must be carefully avoided.

**Condenser, Armature of** — — (See *Armature of a Condenser*.)

**Condenser, Capacity of** — — The quantity of electricity in coulombs a condenser is capable of holding before its potential in volts is raised a given amount.

The ratio between the quantity of electricity in coulombs on one coating and the potential difference in volts between the two coatings. — (*Ayrton*.)

The capacity is directly proportional to the charge  $Q$ , and inversely proportional to the potential  $V$ , or,

$$K = \frac{Q}{V},$$

or, since  $Q = KV$ , the quantity of electricity required to charge a condenser to a given potential is equal to the capacity of the condenser multiplied by the potential through which it is carried.

The capacity of a condenser increases in direct proportion to the increase in the area of its coatings.

When the coatings are plane and parallel to each other, the capacity of the condenser is in the inverse ratio to the distance between the coatings.

**Condenser, Coating of** — — (See *Coating of Condenser*.)

**Condenser, Plate** — — A condenser, the metallic coatings of which are placed on suitably supported plates.

**Condenser, Poles of** — — (See *Poles of Condenser*.)

**Condenser, Time-Constant of** — — The time in which the charge of a condenser falls to the 1-2.71828 part of its original value.

**Condensers, Distribution of Electricity by Means of** — — (See *Electricity, Distribution of*.)

*by Alternating Currents, by means of Condensers. Electricity, Distribution of, by Continuous Currents, by means of Condensers.*)

**Conduct**. — To pass electricity through conducting substances.

To determine the general direction in which electricity shall pass through the ether or dielectric surrounding the so-called conducting substance. (See *Conduction, Electric*.)

**Conductance**. — A word sometimes used in place of conducting power.

Conductivity.

**Conductance, Magnetic** — — A word sometimes used instead of magnetic permeability. (See *Permeability Magnetic*.)

The magnetic conductance is equal to the total induction through the circuit divided by the magnetizing force.

**Conducting Cord**. — (See *Cord, Conducting*.)

**Conducting, Electrical** — — Possessing the power of passing electricity through any conducting substance.

Possessing the power of determining the direction in which electricity shall pass through the ether surrounding a substance. (See *Conductor*.)

**Conducting Power**. — (See *Power, Conducting*.)

**Conducting Power for Electricity**. — (See *Power, Conducting, for Electricity*.)

**Conducting Power for Lines of Magnetic Force**. — (See *Force, Magnetic, Lines of, Conducting Power of*.)

**Conducting Power, Tables of** — — (See *Power, Conducting, Tables of*.)

**Conduction Current**. — (See *Current, Conduction*.)

**Conduction, Disruptive** — — A species of conduction in which the resistance of the conductor is suddenly overcome.

Disruptive conduction is seen in the disruptive discharge of a condenser, or Leyden jar.

**Conduction, Electric** — — The so



called flow or passage of electricity through a metallic or other similarly acting substance.

The ability of a substance to determine the direction in which electric energy shall be transmitted through the ether surrounding it.

The ability of a substance to determine the direction in which a current of electricity passes from one point to another.

When a conducting wire has its ends connected with an electric source, a current of electricity is, in common language, said to flow through the wire, and this was formerly believed to be a correct statement. According to modern views, however, the electric energy is believed to pass through the ether or other dielectric surrounding the conductor, the so-called conductor forming merely a sink, where the electrical energy dissipates itself. The conductor simply acts to direct the current.

Since, however, the energy practically passes by means of, and in the general direction of the conductor, there is no objection in speaking of the electricity as flowing through the conductor.

**Conduction, Electric, Disruptive** — — A conduction of electric energy which accompanies a disruptive discharge. (See *Discharge, Disruptive*.)

**Conduction, Electric, Metallic** — — A conducting of electric energy of the same character as that which occurs in metallic substances.

**Conduction, Electrolytic** — — A term sometimes employed to indicate the passage of electricity through an electrolyte.

There is no passage of electricity through an electrolyte in the same sense as through an ordinary conductor.

When, through electrolysis, an electromotive force is brought to bear on a molecule of say HCl, it is assumed by some that the liberated hydrogen atoms travel on the whole in one direction, and the liberated chlorine atoms in the opposite direction. The atoms thus moving through the liquid may by their electric charges be assumed to convey electricity, and this fact has given rise to the term electrolytic conduction.

In electrolytic conduction the charges are necessarily equal, but the speeds of their motion are unequal. In a given liquid, each atom has

its own rate of motion, no matter with what it has been combined. Hydrogen travels faster than any other kind of atom. The conductivity of a liquid depends on the sum of the speeds with which the two opposed atoms travel.

This assumed double stream of oppositely moving atoms is denied by most physicists. (See *Hypothesis, Grotthus*.)

**Conductive-Discharge**.—(See *Discharge, Conductive*.)

**Conductivity, Electric** — — The reciprocal of electric resistance.

Since the conductivity is greater the less the resistance, the conductivity will be equal to the reciprocal of the resistance, and may be so defined. The conductivity is therefore equal to  $\frac{1}{R}$ .

**Conductivity, Equivalent** — — A conductivity equal to the sum of several conductivities.

**Conductivity per Unit of Mass**.—The reciprocal of the resistance of a substance per unit of mass.

**Conductivity per Unit of Volume**.—The reciprocal of the resistance of a substance per cubic centimetre or per cubic inch.

The resistance is measured from one face of the cube to the opposite face.

**Conductivity Resistance**.—(See *Resistance, Conductivity*.)

**Conductivity, Specific** — — The particular conductivity of a substance for electricity.

The specific or particular resistance of a given length and unit of cross-section of a substance as compared with the same length and area of cross-section of some standard substance.

**Conductivity, Specific Magnetic** — — The specific or particular permeability of a substance to lines of magnetic force.

The specific magnetic conductivity is measured by the ratio of the magnetization produced to the magnetizing force which produces it.

The specific magnetic conductivity is the analogue of specific inductive capacity, or conductivity for lines of electrostatic force. It is also the analogue for specific conducting power for heat.

**Conductor.**—A substance which will permit the passage of an electric current. A substance which possesses the ability of determining the direction in which electricity passes through the ether or other dielectric surrounding it.

Electrolytes, such, for example, as various mixtures of sulphuric acid and water, possess the power of conducting electricity, and therefore a specific resistance. Generally, however, the passage of the electrolyzing current is considered as different from that of a current which heats the conductor.

Space or region around a conductor in which an electric current is passing has an electric field produced in it.

A **conductor** is opposed to **non-conductor**, a substance which will not permit the passage of electric current through it after the manner of an insulator.

Electric conductors and non-conductors are relative. There are no such things as perfect conductors or perfect non-conductors.

Conductors in general, are distinguished from insulators, in that the latter do not allow the electricity to pass save by undergoing a chemical action.

**Conductor, Anisotropic** — —A conductor which, though homogeneous in structure like crystalline bodies, has different properties in different directions, just as crystals have different properties in the planes of their different crystalline axes.

Anisotropic conductors possess different powers of electric conduction in different directions. In opposite directions along the same axis their conductivity is equal. They differ in this respect from **isotropic conductors**. (See *Conductor, Isotropic*.)

**Conductor, Anti-Induction** — —A conductor so constructed as to avoid injurious inductive effects from neighboring telegraphic or electric light and power circuits.

Anti-induction conductors sometimes consist of a conductor for constant currents and a shield surrounding the conductor, and are used to prevent induction from taking place in the wire itself.

An anti-induction conductor generally consists

of twin conductors surrounded by ordinary insulation and sometimes enclosed by some form of metallic shield, in order to prevent the action of electrostatic induction.

When a periodic current is to be transmitted through a conductor, the most effective way of annulling its inductive effects on neighboring circuits is to place the lead of the conductor in the axis of another conductor, used as a return. In other words, to employ concentric cylinders, insulated from one another and from the earth. Under these conditions, calling the current in one direction positive, and in the other direction negative, the shielding action will be perfect when the algebraic sum of the currents in the core and sheath are zero.

The same effect is obtained in metallic circuits, by placing the leads parallel to the return, and crossing and recrossing the wires repeatedly. (See *Connection, Telephonic Cross*.)

Elihu Thomson renders ordinary telephone conductors, arranged as single lines with earth returns, free from induction by means of the counter-electromotive force produced in a coil of wire by the disturbing cause.

In applying this system to the case of an electric arc or power line passing alongside a telephone line, a wire coil, whose turns are proportioned in number to the induction to be balanced, is introduced into the electric light line and placed near another coil of finer wire inserted as a loop in the telephone circuit. The second coil is placed parallel to or inclined at an angle to the first coil. In practice, the second coil is inclined until the counter-induction set up in the telephone wire is equal to that produced in the main line, and silence is thus produced, so far as induction is concerned, in the telephone.

**Conductor, Armored** — —A conductor provided with a covering or sheathing of metal placed over the insulating covering for protection from abrasion or external wear.

Armored conductors are used in situations where the conductor is exposed to abrasion or other external wear.

**Conductor, Branch** — —A conductor placed in a shunt circuit. (See *Circuit, Shunt*.)

**Conductor, Closed-Circuited** — —A conductor connected as a closed or completed circuit.



**Conductor, Conjugate** — —In a system of linear conductors, any pair of conductors that are so placed as regards each other that a variation of the resistance or the electromotive force in the one causes no variation in the current of the other.

**Conductor, Earth-Circuited** — —A conductor connected to the ground, or to an earth-connected circuit.

**Conductor, House-Service** — —A term employed in a system of multiple incandescent lamp distribution for that portion of the circuit which is included between the service cut-out and the centre or centres of distribution, or between this cut-out and one or more points on house mains.

**Conductor, Isotropic** — —A conductor which possesses the same powers of electric conduction in all directions.

An electrically homogeneous conducting medium.

**Conductor, Leakage** — —A conductor placed on a telegraph circuit for the purpose of preventing the disturbing effects of leakage into a neighboring line by providing a direct path for such leakage to the earth.

The leakage conductor, as devised by Varley consists of a thick wire attached to the telegraph pole. The lower end of the conductor is grounded, and its upper end projects above the top of the pole.

There exists some doubt in the minds of experienced telegraph engineers whether it is well to apply leakage conductors to telegraphic or telephonic lines of over 12 or 15 miles in length, since such conductors greatly increase the electrostatic capacity of the line, and thus cause serious retardation.

**Conductor, Lightning** — —A term sometimes used for a lightning rod. (See *Rod, Lightning*.)

**Conductor, Open-Circuited** — —A conductor arranged as an open or broken circuit.

**Conductor, Potential of** — —The relation existing between the quantity of electricity in a conductor and its capacity.

A given quantity of electricity will raise the

potential of a conductor higher in proportion as the capacity of the conductor becomes less.

**Conductor, Potential of, Methods of Varying** — —The potential of a conductor may be varied in the following ways:

- (1.) By varying its electric charge.
- (2.) By varying its size or shape without altering its charge.
- (3.) By varying its position as regards neighboring bodies.

This resembles the case of a gas whose tension or pressure may be varied as follows, viz.:

- (1.) By varying the quantity of gas.
  - (2.) By varying the size of the gas holder in which it is kept, and
  - (3.) By varying the temperature.
- Difference of potential, therefore, corresponds—
- (1.) With difference of level in liquids.
  - (2.) With difference of pressure in gases.
  - (3.) With difference of temperature in heat.

—(*Ayrton*.)

**Conductor, Prime** — —The positive conductor of a frictional electric or electrostatic machine. (See *Machine, Frictional Electric*.)

**Conductor, To Short-Circuit a** — —To shunt a conductor with a circuit of comparatively small resistance.

**Conductor, Underground** — —An electric conductor placed underground by actual burial or by passing it through underground conduits or subways.

Underground conductors, though less unsightly than the ordinary aerial conductors, require to be laid with unusual care to render them equally safe, since, when contacts do occur, all the wires in the same conduit are apt to be simultaneously affected, thus spreading the danger in many different directions. They are, however, less liable to dangers arising from occasional accidental crosses or contacts.

**Conductors, Service** — —Conductors employed in systems of incandescent lighting connected to the street mains and to the electric apparatus placed in the separate buildings or areas to be lighted.

**Conduit, Cement-Lined** — —A cable conduit, the separate ducts of which are surrounded by any suitable cement.



**Conduit, Handhole of** — — (See *Handhole of Conduit*.)

**Conduit, Manhole of** — — (See *Manhole of Conduit*.)

**Conduit, Multiple** — — A conduit formed of concrete or other insulating material, and furnished with a number of separate ducts.

**Conduit, Open-Box** — — A conduit consisting of an open box of wood placed in a trench and closed with a wooden cover after the introduction of the cable.

Cables or wires may be drawn through such conduits in the usual manner.

**Conduit, Rodding a** — — Introducing a wire or rope into the duct of a closed conduit preparatory to drawing the cable through.

Various methods are in use for rodding a conduit. One much followed consists in using sections of gas pipe, the ends of which are furnished with screw threads.

The sections are about four feet in length. One section is pushed into the duct at one manhole and the successive sections are introduced into the duct and screwed onto the section in the duct and pushed through until a sufficient length is obtained to reach the next manhole, a rope or cable is then pulled through from one manhole to the next.

**Conduit, Underground Electric** — — An underground passageway or space for the reception of electric wires or cables. (See *Subway, Electric*.)

**Congelation**.—The act of freezing, or the change of a liquid into a solid on loss of heat, or change of pressure.

**Conjugate Coils**.—(See *Coils, Conjugate*.)

**Connect**.—To place or bring into electric contact.

**Connecting**.—Placing or bringing into electric contact.

**Connection for Intensity**.—Connection in series. (See *Connection, Series*.)

This term is now nearly obsolete.

**Connection for Quantity**.—Connection in multiple. (See *Connection, Multiple*.)

This term is now nearly obsolete.

5—Vol. 1

**Connection, Mercurial** — — A form of readily adjustable connection obtained by providing the poles of one piece of electric apparatus with cups or cavities filled with mercury, into which the terminals of another piece of apparatus are dipped in order to place the two in circuit with each other.

This form of connection is used particularly when a very perfect contact or one free from friction is desired.

**Connection, Multiple** — — Such a connection of a number of separate electric sources, or electro-receptive devices, or circuits, that all the positive terminals are connected to one main or positive conductor, and all the negative terminals are connected to one main or negative conductor.

In the multiple connection of a number of electro-receptive devices, when the devices are connected as above described to positive and negative leads that are maintained at a constant difference of potential, the current passes through the devices from one lead to the other by branching and flowing through as many separate circuits as there are separate receptive devices, and the opening or closing of one of these circuits does not affect the others. (See *Circuits, Varieties of*.)

**Connection, Multiple-Series** — — Such a connection of a number of separate electric sources, or separate electro-receptive devices, or circuits, that the sources or devices are connected in a number of separate groups in series, and each of these groups connected to main positive and negative conductors or leads in multiple arc. (See *Circuits, Varieties of*.)

**Connection of Battery for Quantity**.—(See *Battery, Connection of, for Quantity*.)

**Connection of Electric Sources in Cascade**.—(See *Cascade, Connection of Electric Sources in*.)

**Connection of Voltaic Cells for Intensity**.—(See *Intensity, Connection of Voltaic Cells for*.)

**Connection, Series** — — The connection of a number of separate electric sources, or electro-receptive devices, or cir-



cuits, so that the current passes successively from the first to the last in the circuit. (See *Circuits, Varieties of.*)

**Connection, Series-Multiple** — — Such a connection of a number of separate electro-receptive devices, that the devices are placed in multiple groups or circuits, and these separate groups connected with one another in series.

**Connection, Telephonic Cross** — — A device employed in systems of telephonic communication for the purpose of lessening the bad effects of induction, in which equal lengths of adjacent parallel wires are alternately crossed so as to alternately occupy the opposite sides of the circuit.

**Connector.**—A device for readily connecting or joining the ends of two or more wires. (See *Post, Binding.*)

**Connector, Double** — — A form of binding screw suitable for readily connecting two wires together.

A form of double connector is shown in Fig. 170.



Fig. 170. Double Connector.

**Conning Tower.** — (See *Tower, Conning.*)

**Consequent Points.**—(See *Points, Consequent.*)

**Consequent Poles.**—(See *Poles, Consequent.*)

**Conservation of Energy.**—(See *Energy, Conservation of.*)

**Consonance, "In Consonance."**—A term employed to express the fact that one simple periodic quantity, *i. e.*, a wave or vibration, agrees in phase with another.

**Constant.**—That which remains invariable.

**Constant-Current.**—(See *Current, Constant.*)

**Constant-Current Circuit.**—(See *Circuit, Constant Current.*)

**Constant-Current, Distribution of Electricity by** — — (See *Electricity, Distribution of, by Constant Currents.*)

**Constant, Dielectric** — — A term sometimes employed in place of specific inductive capacity. (See *Capacity, Specific Inductive.*)

**Constant, Galvanometer** — — The numerical factor connecting the current passing through a galvanometer with the deflection produced by such current.

Sometimes a distinction is made between the galvanometer constant and the reduction factor, the former being used to indicate the relation between the current and the geometrical constant of the galvanometer, while the latter is used in the sense just defined of galvanometer constant.

**Constant Inductance.**—(See *Inductance, Constant.*)

**Constant Potential.**—(See *Potential, Constant.*)

**Constant-Potential Circuit.**—(See *Circuit, Constant-Potential.*)

**Constant, Time, of Electro-Magnet** — — The time required for the magnetizing current to rise to the  $\frac{e-I}{e}$  of its final value.

**Contact-Breaker, Automatic** — — A device for causing an electric current to rapidly make and break its own circuit.

The spring *c*, Fig. 171, carries an armature of soft iron, *B*, and is placed in a circuit in such a manner that the circuit is closed when platinum contacts placed on the ends of *D* and *B*, touch each other. In this case the armature, *B*, is attracted to the core *A*, of the electro-magnet, thus breaking the circuit and causing the magnet to lose its magnetism. The elasticity of the spring *C*, causes it to fly back and again close the contacts, thus again energizing the electro-magnet and again attracting *B*, and breaking the circuit. The makes and breaks usually follow each other so rapidly as to produce a musical note. (See *Alarm, Electric.*)



Fig. 171. Automatic Contact Breaker.

**Contact, Dotting** — — An electric con-

tact obtained by the approach of one contact point towards another.

The term *dotting contact* is used in contradistinction to a *rubbing contact*. The rubbing contact is generally to be preferred, since it tends automatically to remove dust and keep the contact surfaces polished and free from oxides.

**Contact Dynamo.**—(See *Dynamo, Contact*.)

**Contact Electricity.**—(See *Electricity, Contact*.)

**Contact, Fire-Alarm** — —A contact so arranged that an alarm is given when any predetermined temperature is reached.

Fire-alarm contacts are generally operated by the expansion of a metal or of a conducting fluid, such as mercury. (See *Thermostat*.)

**Contact Force.**—(See *Force, Contact*.)

**Contact, Full-Metallic** — —A contact, which from its small resistance establishes a good or complete connection. (See *Contact, Metallic*.)

**Contact, Intermittent** — —The occasional contact of a telegraphic or other line with other wires or conductors by swinging, or by alternate contraction or expansion under changes of temperature.

**Contact, Metallic** — —A contact of a metallic conductor produced by its coming into firm connection with another metallic conductor.

**Contact, Partial** — —A contact of a telegraphic, or other line, arising from defective insulation, bad earths, or connection with an imperfect conductor.

**Contact, Rolling** — —A contact connected with one part of an electric circuit, that completes the circuit by being rolled over a conductor connected with and forming another part of the circuit.

Rolling contacts are employed on electric railroads. (See *Railroad, Electric*.)

**Contact, Rubbing** — —A contact effected by means of a rubbing motion.

**Contact Series.**—(See *Series, Contact*.)

**Contact, Sliding** — —A contact connected with one part of a circuit that closes

or completes an electric circuit by being slid over a conductor connected with another part of the circuit.

Sliding contacts are employed in electric railroads, in rheostats, switches, and a variety of other apparatus. (See *Railroad, Electric, Rheostat, Key, Discharge*.)

**Contact, Spring** — —A spring-supported contact connected with one part of a circuit that completes said circuit by being moved so as to touch another contact connected with the other part of the circuit.

The movement required to bring the two contacts together may be non-automatic, as in the case of a push-button, or automatic, as in the case of a thermostat. (See *Button, Push, Thermostat*.)

**Contact Theory of Voltaic Cell.**—(See *Cell, Voltaic, Contact Theory of*.)

**Contact, Vibrating** — —A spring contact, connected with one part of a circuit and so supported as to be able to vibrate towards and from another contact connected with another part of the circuit, thus automatically closing and opening said circuit.

A vibrating contact is used in the automatic contact-breaker in which the movement of an armature towards an electro-magnet is caused to break the circuit of the coils of the electro-magnet, and, on its movement away from the magnet, to close another contact which again completes the circuit of the electro-magnet. (See *Contact Breaker, Automatic*.)

**Contact, Wiping** — —A contact obtained by a wiping movement of one conductor against another.

The spark for electrically igniting a gas jet is obtained by means of a wiping contact of a spring moved by the motion of the pendant. (See *Burner, Plain-Pendant Electric*.)

**Contacts.**—A variety of faults occasioned by the accidental contact of a circuit with any conducting body.

The word contacts as employed above is in the sense of accidental contacts as distinguished from predetermined contacts.

Contacts of an accidental character are of the following varieties, viz.:

(1.) *Full, or metallic*, as when the circuit is



accidentally placed in firm connection with another metallic circuit.

(2.) *Partial*, as by imperfect conductors being placed across wires, or bad earths, or defective insulation.

(3.) *Intermittent*, as by occasional contacts of swinging wires, etc.

**Contacts, Burglar-Alarm** — — Contacts fitted to windows, doors, tills, steps, floors, etc., so that a movement of the parts from their natural position gives an alarm by sounding a conveniently located bell.

**Contacts, Lamp** — — Metallic plates or rings connected with the terminals of an incandescent lamp for ready connection with the line.

**Contacts, Mercurial** — — Electric contacts that are opened or closed by the expansion or contraction of a mercury column.

In the commonest forms of mercurial contacts, on the expansion of the mercury by heat it reaches a contact point placed in the tube, and thus completes the circuit through its own mass.

Or, on contraction it breaks a contact, and thus disturbing an electric balance, sounds an alarm.

**Continental Code Telegraphic Alphabet.** — (See *Alphabet, Telegraphic, International Code*.)

**Continuity of Current.** — (See *Current, Continuous*.)

**Continuous Current.** — (See *Current, Continuous*.)

**Continuous Current, Distribution of Electricity by** — — (See *Electricity, Distribution of, by Constant Currents*.)

**Continuous Current, Dynamo-Electric Machine** — — (See *Machine, Dynamo-Electric, Continuous Current*.)

**Continuous-Sounding Electric Bell.** — (See *Bell, Continuous-Sounding Electric*.)

**Continuous Wires or Conductors.** — (See *Wires or Conductors, Continuous*.)

**Contraction, Anodic Closure** — — The muscular contraction observed on the closing of a voltaic circuit, the anode of which is placed over a nerve, and the kathode at some other part of the body.

This term is generally written A. C. C.

**Contraction, Anodic Duration** — —

The length of time the muscle continues in contraction on the opening or closing of a circuit, the anode of which is placed over the part contracted.

This term is generally written A. D. C.

**Contraction, Anodic Opening** — —

The muscular contraction observed on the opening of a voltaic circuit, the anode of which is placed over a nerve, and the kathode at some other part of the body.

This term is generally written A. O. C.

When the anode is placed over a nerve and a weak current is employed, if the circuit be kept closed for a few minutes, it will be noticed that, on opening the circuit the contraction will be much greater than if it had been opened after being closed for only a few seconds. The effect of the A. O. C. therefore depends not only on the current strength, but also on the time during which the current has passed through the nerve.

**Contraction of Lines of Magnetic Force.** — (See *Force, Magnetic, Contraction of Lines of*.)

**Contractures.** — In electro-therapeutics, prolonged muscular spasms, or tetanus, caused by the passage of electric currents.

**Contraplex Telegraphy.** — (See *Telegraphy, Contraplex*.)

**Controlled Clock.** — (See *Clock, Electric*.)

**Controller.** — A magnet, in the Thomson-Houston system of automatic regulation, whose coils are traversed by the main current, and by means of which the regulator magnet is automatically thrown into or out of the main circuit on changes in the strength of the current passing. (See *Regulation, Automatic*.)

**Controlling Clock.** — (See *Clock, Electric*.)

**Controlling Magnet.** — (See *Magnet, Controlling*.)

**Convection Currents.** — (See *Currents, Convection*.)

**Convection, Electric** — — The air particles, or air streams, which are thrown off from the pointed ends of a charged, insulated conductor.



Convection streams, like currents flowing through conductors, act magnetically, and are themselves acted on by magnets. The same thing is true of the brush discharge, of the voltaic arc, and of convective discharges in vacuum tubes.

**Convection, Electrolytic** — —A term proposed by Helmholtz to explain the apparent conduction of electricity by an electrolyte, without consequent decomposition.

Helmholtz assumes that the atoms of oxygen or hydrogen, adhering to the electrodes during electrolysis, are mechanically dislodged and diffused through the liquid, thus carrying off the electricity by the charges received while in contact with the electrodes.

**Convection of Heat, Electric** — —(See *Heat, Electric Convection of*.)

**Convection Streams.**—(See *Streams, Convection*.)

**Convective Discharge.**—(See *Discharge, Convective*.)

**Conversion, Efficiency of, of Dynamo** — —The total electric energy developed by a dynamo, divided by the total mechanical energy required to drive the dynamo. (See *Co-efficient, Economic, of a Dynamo-Electric Machine*.)

The efficiency of conversion

$$= \frac{W + w}{M} = \frac{W + w}{W + w + m},$$

where W, equals the useful or available electrical energy, M, the total mechanical energy, w, the electrical energy absorbed by the machine, and m, the stray power, or the power lost in friction, eddy currents, air friction, etc.

**Converted Currents.**—(See *Currents, Converted*.)

**Converter.**—The inverted induction coil employed in systems of distribution by means of alternating currents.

A term sometimes used instead of transformer. (See *Transformer*.)

**Converter, Closed-Iron Circuit** — —A closed-iron circuit transformer. (See *Transformer, Closed-Iron Circuit*.)

**Converter, Constant-Current** — —A constant-current transformer. (See *Transformer, Constant-Current*.)

**Converter, Efficiency of** — —The efficiency of a transformer. (See *Transformer, Efficiency of*.)

**Converter Fuse.**—(See *Fuse, Converter*.)

**Converter, Hedgehog** — —A form of transformer. (See *Transformer, Hedgehog*.)

**Converter, Multiple** — —A multiple transformer. (See *Transformer, Multiple*.)

**Converter, Open-Iron-Circuit** — —An open-iron-circuit transformer. (See *Transformer, Open-Iron-Circuit*.)

**Converter, Series** — —A series transformer. (See *Transformer, Series*.)

**Converter, Step-down** — —A step-down transformer. (See *Transformer, Step-down*.)

**Converter, Step-up** — —A step-up transformer. (See *Transformer, Step-up*.)

**Converter, Welding** — —A welding transformer. (See *Transformer, Welding*.)

**Converting Currents.**—(See *Currents, Converting*.)

**Cooling Box of Hydro-Electric Machine.**—(See *Box, Cooling, of Hydro-Electric Machine*.)

**Co-ordinates, Axes of** — —The axes of abscissas and ordinates.

The two straight lines, usually perpendicular to each other, to which distances representing values are referred for the graphic representation of such values. (See *Abscissas, Axes of*.)

**Copper Bath.**—(See *Bath, Copper*.)

**Copper Plating.**—(See *Plating, Copper*.)

**Copper Ribbon.**—A variety of strap copper. (See *Copper, Strap*.)

**Copper, Strap** — —Copper conductors in the form of straps or flat bars.

Strap copper is used on the armatures of some dynamos. Heavy copper conductors for such purposes are divided into strap copper so as to avoid eddy currents. The straps are placed alongside one another and insulated by a coating of varnish.

**Copper Wire, Hard-Drawn** — —(See *Wire, Copper, Hard-Drawn*.)

**Copper Wire, Soft-Drawn** — —(See *Wire, Copper, Soft-Drawn*.)



**Super. Instrument—See Tulerator**  
**Super.**

**Superior. Instrument—See. Planning**  
**Superior.**

**Superior. Instrument—See. Planning**  
**Superior.**

**Superior. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**



Fig. 1. Super. Instrument.

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**



Fig. 2. Super. Instrument.

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

**Super. Instrument—See. Planning**  
**Superior.**

cores of dynamo-electric machines in order to prevent undue accumulation of heat.

A properly proportioned dynamo-armature may need no ventilation, since in such the amount of heat generated is small as compared with the extent of the radiating surface.

Since, however, in practice all armatures tend to heat at full load, especially in certain installations in heated situations, ventilation of the armature is desirable.

**Core, Closed-Magnetic** — —A magnetic core so shaped as to provide a complete iron path or circuit for the lines of magnetic force of its field.

**Core, Laminated** — —A core of iron which has been divided or laminated, in order to avoid the injurious production of Foucault or eddy currents.

**Core, Lamination of** — —Structural subdivisions of the cores of magnets, armatures, and pole-pieces of dynamo-electric machines, electric motors, or similar apparatus, in order to prevent heating and subsequent loss of energy from the production of local, eddy or Foucault currents.

These laminations are obtained by forming the cores of sheets, rods, plates, or wires of iron insulated from one another.

The cores of dynamo-electric machine armatures should be subdivided in planes at right angles to the armature coils; or in planes parallel to the direction of the lines of force and to the motion of the armature; or, in general, in planes perpendicular to the currents that would otherwise be generated in them.

Pole-pieces should be divided in planes perpendicular to the direction of the currents in the armature wires.

Magnet cores should be divided in planes at right angles to the magnetizing current.

**Core of Cable.**—The conducting wires of an electric cable. (See *Cable, Electric*.)

**Core, Open-Magnetic** — —Any magnetic core so shaped that the lines of magnetic force of its field complete their circuit partly through iron and partly through air.

**Core Ratio of Cable.**—(See *Cable, Core Ratio of*.)

**Core, Ring** — —A hollow, cylindrical core of short length.

**Core, Ring, Elongated** — —A hollow, cylindrical core of comparatively great length.

**Core, Solenoid** — —A core so arranged as to be drawn into a solenoid on the passage of the current through its coils, and to be withdrawn therefrom, on the stopping of the current by the action of a spring or weight. (See *Solenoid*.)

**Core, Stranded, of Cable** — —The conducting wire or core of a cable formed of a number of separate conductors or wires instead of a single conductor of the same weight per foot as the combined conductors.

**Core Transformer.**—(See *Transformer, Core*.)

**Cored Carbons.**—(See *Carbons, Cored*.)

**Cored Electrodes.**—(See *Electrodes, Cored*.)

**Coronæ, Auroral** — —A crown-shaped appearance, sometimes assumed by the auroral light. (See *Aurora Borealis*.)

**Corposant.**—A name sometimes given by sailors to a St. Elmo's Fire. (See *Fire, St. Elmo's*.)

**Correlation of Energy.**—(See *Energy, Correlation of*.)

**Corresponding Points.**—(See *Points, Corresponding*.)

**Cosine.**—One of the trigonometrical functions. (See *Trigonometry*.)

**Cotangent.**—One of the trigonometrical functions. (See *Trigonometry*.)

**Coulomb.**—The unit of electrical quantity. A definite quantity or amount of the thing or effect called electricity.

Such a quantity of electricity as would pass in one second in a circuit whose resistance is one ohm, under an electromotive force of one volt.

The quantity of electricity contained in a condenser of one farad capacity, when subjected to an electromotive force of one volt.

The quantity of electricity that flows per second past a cross-section of a conductor



conveying an ampère.—(*Ayrton*.) (See *Ampère*, *Farad*, *Volt*.)

**Coulomb's Torsion Balance.**—(See *Balance*, *Coulomb's Torsion*.)

**Coulomb-Volt.**—A Joule, or .7373 foot-pound.

The term is generally written *volt-coulomb*. (See *Volt-Coulomb*.)

**Counter, Electric** — —A device for counting and registering such quantities as the number of fares collected, gallons of water pumped, sheets of paper printed, revolutions of an engine per second, votes polled, etc.

Various electric devices are employed for this purpose. They are generally electro-magnetic in character.

**Counter-Electromotive Force.** — (See *Force*, *Electromotive*, *Counter*.)

**Counter Electromotive Force Lightning Arrester.**—(See *Arrester*, *Lightning*, *Counter-Electromotive Force*.)

**Counter-Electromotive Force of Convective Discharge.**—(See *Force*, *Electromotive*, *Counter*, *of Convective Discharge*.)

**Counter-Electromotive Force of Mutual Induction.**—(See *Force*, *Electromotive*, *Counter*, *of Mutual Induction*.)

**Counter-Electromotive Force of Self-Induction.**—(See *Force*, *Electromotive*, *Counter*, *of Self-Induction*.)

**Counter-Electromotive Force of Self-Induction of the Primary.**—(See *Force*, *Electromotive*, *Counter*, *of Self-Induction of the Primary*.)

**Counter-Electromotive Force of Self-Induction of the Secondary.**—(See *Force*, *Electromotive*, *Counter*, *of Self-Induction of the Secondary*.)

**Counter-Electromotive Force of the Primary.**—(See *Force*, *Electromotive*, *Counter*, *of the Primary*.)

**Counter Inductive Effect.**—(See *Effect*, *Counter Inductive*.)

**Couple.**—In mechanics, two equal parallel forces acting in opposite directions but not in the same line, and tending to cause rotation.

The moment, or effective power of a couple, is

equal to the intensity of one of the forces multiplied by the perpendicular distance between the directions of the two forces.

**Couple, Astatic** — —Two magnets of exactly equal strength so placed one over the other in the same vertical plane as to completely neutralize each other.

An astatic couple has no directive tendency. A pair of magnets combined as an astatic couple is called an astatic needle. (See *Needle*, *Astatic*.)

**Couple, Magnetic** — —The couple which tends to turn a magnetic needle, placed in the earth's field, into the plane of the magnetic meridian.

If a magnetic needle is in any other position than in the magnetic meridian, there will be two parallel and equal forces acting at A and B, Fig. 174, in the directions shown by the arrows. Their effect will be to rotate the needle until it comes to rest in the magnetic meridian N S.

The total force acting on either pole of a needle free to move in any direction, is equal to the strength of that pole multiplied by the total intensity of the earth's field at that place; or, if free to move in a horizontal direction only, is equal to the intensity of the earth's horizontal component of magnetism at that place, multiplied by the strength of that pole.

The effective power or moment of a magnetic couple is equal to the force exerted on one of the poles multiplied by the perpendicular distance, P Q, between their directions.

**Couple, Moment of** — —The effective power or force of a couple.

The moment of a couple is equal to the intensity of one of the forces multiplied by the perpendicular distance between the direction of the forces.

**Couple, Thermo-Electric** — —Two dissimilar metals which, when connected at their ends only, so as to form a completed electric circuit, will produce a difference of potential, and hence an electric current, when one of the ends is heated more than the other.

Thus if a bar of bismuth be soldered to a bar



Fig. 174. Magnetic Couple.



of antimony the combination will form a thermo-electric couple, and the circuit so formed will have a current passing through it when one junction is hotter or colder than the other.

There is, according to Lodge, a true contact force, at a thermo-electric junction, as is shown by the reversible heat effects produced when an electric current is passed across such junction; for, in one direction more heat is produced, and in the opposite direction less heat. This, as is well known, differs from the irreversible heat produced by a current through a homogeneous metallic conductor. The reversible heat effects, or as they are called the *Peltier effects*, may overpower and conceal the heating effects. But, in addition to these effects, since a difference of potential, called a *Thomson effect*, exists in a substance unequally heated, currents are so produced, and these are also influential in causing the difference of potential of a thermo-electric couple.

"There are then," says Lodge, "in a simple circuit of two metals with their junctions at different temperatures, altogether four E. M. Fs., one in each metal, from hot to cold, or *vice versa*, and one at each junction, and the current which flows around such a circuit is propelled by the resultant of these four." \* \* \* "These four forces, two Thomson forces in the metals, and two Peltier forces at their junctions, may some of them help and some hinder the current." \* \* \* "Whenever they help, the locality is to that extent cooled; whenever they hinder, it is to that extent warmed."

The action of a thermo-electric couple in producing a difference of potential is therefore a complicated one, and depends on Peltier and Thomson effects, as well as on the thermo-electric effect. (See *Effect, Peltier. Effect, Thomson. Effect, Thermo-Electric.*)

**Couple, Voltaic** — Two materials, usually two dissimilar metals, capable of acting as an electric source when dipped in an electrolyte, or capable of producing a difference of electric potential by mere contact.

Liquids and gases are capable of acting as voltaic couples.

All voltaic cells have two metals, or a metal and a metalloid, or two gaseous or liquid substances which are of such a character that, when dipped into the exciting fluid one only is chemically acted on.

Each one of these two substances is called an *element* of the cell, and the two taken collectively form a *voltaic couple*.

The elements of a voltaic couple may consist of two gases or two liquids. (See *Battery, Gas.*)

**Coupled Cells.**—(See *Cells, Coupled.*)

**Coupler, Voltaic** — Any device by means of which voltaic cells may be readily coupled or connected in different forms of circuits. (See *Circuits, Varieties of.*)

**Coupling of Voltaic Cells or Other Electric Sources.**—A term indicating the manner in which a number of separate electric sources may be connected so as to form a single source. (See *Circuits, Varieties of.*)

**Cramp, Telegrapher's** — An affection of the hand of a telegrapher due to immoderate and excessive use of the same muscles, somewhat similar to the disease known as writer's cramp.

Telegrapher's cramp, like writer's cramp, may be defined as a professional neurosis of co-ordination. It appears not only in certain groups of muscles, but is limited to such groups, only when they are performing certain complicated operations. For example, telegrapher's cramp is practically a paralysis of certain muscles of the hand and wrist of the operator. These muscles, when called on to perform the somewhat delicate movements required in sending a telegraphic dispatch, are incapable of performing their proper functions, but when called on to perform in part other similar actions, provided *all* these actions are not required to be used, appear to be unaffected.

The ability of the operator to send with either hand would lessen the liability to this disease.

**Crater in Positive Carbon.**—A depression at the end of the positive carbon of an arc lamp which appears when a voltaic arc is formed. (See *Arc, Voltaic.*)

**Creep, Diffusion** — The flow of an electric current in portions of a conducting substance, outside the parts that lie in the direct lines between the points where the terminals of the same are applied to the conducting substance.



**Creeping, Electric** — — A term sometimes applied to the creeping of a current. (See *Current, Creeping of*.)

**Creeping in Voltaic Cell.**—(See *Cell, Voltaic, Creeping in*.)

**Creeping of Current.**—(See *Current, Creeping of, Electric*.)

**Creeping, Saline** — — The formation of salts by efflorescence on the walls of a solid immersed in a solution of a salt.

**Creosoting.**—A process employed for the preservation of wood, as, for example, telegraph poles, by injecting creosote into the pores of the wood. (See *Pole, Telegraphic*.)

**Crith.**—A term proposed by A. W. Hoffman, as a unit of weight, or the weight of one litre, or cubic decimetre, of hydrogen at 0° C. and 760 mm. barometric pressure.

**Critical Current.**—(See *Current, Critical*.)

**Critical Current of a Dynamo.**—(See *Current, Critical, of a Dynamo*.)

**Critical Distance of Lateral Discharge through Alternative Path.**—(See *Distance, Critical, of Lateral Discharge through an Alternative Path*.)

**Critical Speed of Compound-Wound Dynamo.**—(See *Speed, Critical, of Compound-Wound Dynamo*.)

**Crookes' Dark Space.**—(See *Space, Dark, Crookes'*.)

**Crookes' Electric Radiometer.**—(See *Radiometer, Electric, Crookes'*.)

**Cross Arm.**—(See *Arm, Cross*.)

**Cross-Connecting Board.**—(See *Board, Cross-Connecting*.)

**Cross, Electric** — — A connection, generally metallic, accidentally established between two conducting lines.

A defect in a telegraph, telephone or other circuit caused by two wires coming into contact by crossing each other.

A *swinging or intermittent cross* is caused by wires, which are too slack, being occasionally blown into contact by the wind.

A *weather cross* arises from defective action of the insulators in wet weather.

**Cross, Swinging or Intermittent** — —

An accidental contact, generally metallic, caused by wires being brought into occasional contact with one another, or with some other conductor, by the intermittent action of the wind.

**Cross, Weather** — — A contact or leak occurring in a telegraphic or other line during wet weather, from the defective action of the insulators.

**Crossing Cleat.**—(See *Cleat, Crossing*.)

**Crossing, Live-Trolley** — — A device whereby a trolley moving over a line that crosses a second line at an angle is enabled to maintain its electrical connection with the line while crossing.

A live-trolley crossing is necessitated where one line of electric railway crosses another. The upper line must, of course, provide a space or opening for crossing the lower line at the points of intersection. This is effected in the Bagnall live-trolley crossing, shown in Fig. 175, by attach-



Fig. 175. Live-Trolley Crossing.

ing to the upper trolley wire a bridge piece of light lathe casting, provided at its centre with a gap through which the trolley wire passes. This bridge piece is insulated from the trolley wire by means of a disc of insulating material at the centre of the bridge, which is provided with a hinged curved lever, that in its normal position rests under the influence of gravity in the position shown in the figure. The passage of the trolley wheel along the wire carries the line under it and thus bridges the gap, as shown by the position of the dotted lines.

**Crossing Wires.**—(See *Wires, Crossing*.)

**Cross-Over Block.**—(See *Block, Cross-Over*.)

**Cross-Over, Trolley** — — A device by means of which a trolley is enabled to pass over the points where different lines cross one another without serious interruption.

A trolley cross-over, for trolley lines, is shown in Fig. 176.



Fig. 176. Trolley Cross-Over.

**Crow-foot Zinc.**—(See *Zinc, Crow-foot.*)

**Crucible, Electric** — —A crucible in which the heat of the voltaic arc, or of electric incandescence, is employed either to perform difficult fusions, or for the purpose of effecting the reduction of metals from their ores or the formation of alloys. (See *Furnace, Electric.*)

**Crystal.**—A solid body bounded by symmetrically disposed plane surfaces.

A definite form or shape is as characteristic of an inorganic crystalline substance as it is of an animal or plant. Each substance has a form in which it generally occurs. There are, however, certain modifications of the typical forms which cause plane surfaces to appear curved, and the symmetrical arrangement of the faces to disappear. These modifications often render it extremely difficult to recognize the true typical form.

For the different fundamental crystalline forms, or systems of crystals, see any standard work on chemistry.

**Crystal, Hemihedral** — —A crystal whose shape or form has been modified by the replacement of half its edges or solid angles.

A hemihedral crystal possesses different forms at the ends or extremities of its axes. Hemihedral crystals, when unequally heated, develop electrical charges.

Electricity produced in this way was formerly called *pyro-electricity*. (See *Electricity, Pyro.*)

**Crystal, Holohedral** — —A crystal whose shape or form has been modified by the replacement of all its edges or solid angles.

**Crystalline Electro-Metallurgical Deposit.**—(See *Deposit, Crystalline, Electro-Metallurgical.*)

**Crystallization.**—Solidification from a state of solution or fusion in a definite crystalline form.

The crystallization of a dissolved solid is favored by any cause that gives increased freedom of movement to its molecules, such for example as *solution, fusion, sublimation, or precipitation.*

**Crystallization by Electrolytical Decomposition.**—The crystalline deposition of various metals by the passage of an electric current through solutions of their salts under certain conditions.

A strip of zinc immersed in a solution of sugar of lead (acetate of lead) soon becomes covered with bright metallic plates of lead, that are electrolytically deposited by the weak currents due to minute *voltaic couples* formed with the zinc by particles of iron, carbon, or other impurities in the zinc. The deposit assumes at times a tree-like growth, and is therefore called a *lead tree*. (See *Couple, Voltaic.*)

**Crystallization, Electro** — —Crystallization effected during electrolytic deposition.

**Crystallize.**—To separate from a liquid or vapor, in the form of a crystalline solid.

**Crystalloid.**—Those portions of a mixed substance subjected to dialysis, that are capable of crystallization. (See *Dialysis.*)

**Cube, Faraday's** — —An insulated room, cubic in shape, covered on the inside with tin foil, which, when charged on the outside gives no indications to an observer on the inside, though furnished with delicate instruments.

Faraday's cube illustrates the fact that an electrostatic charge resides on the outside of an insulated conductor. (See *Net, Faraday's.*)

**Cup, Mercury** — —A cup or cavity filled with mercury and connected with the pole of an electric apparatus for the ready placing of the same in circuit with other electric apparatus.

To connect apparatus it is only necessary to insert the free terminal of one apparatus in the mercury cup of the other.

**Cup, Porous** — —A porous cell. (See *Cell, Porous.*)

**Curb, Double** — —A device for increasing the speed of signaling, by means of which the line is rid of its charge before the next signal is sent, by sending an opposite charge, then another in the same direction,



then finally another in the same direction before connecting with the ground.

The effect of the third charge is to reduce the potential of the line more nearly to zero at the end of the signal.

**Curb, Single** — —A device for increasing the speed of signaling telegraphically by ridding the line of its previous charge by sending a reversed current through it before connecting with the ground.

In single-curb signaling the operator in discharging the line before sending another signal through it, before putting the line to earth, reverses the battery, and then connects to earth.

**Current, Absolute Unit of** — —A current of 10 amperes. (See *Ampère, Units, Practical*.)

A current of such a strength that when passed through a circuit of a centimetre in length bent in the form of an arc of a circle one centimetre in radius, will act with the force of a dyne on a magnetic pole of unit strength, placed at the centre of the arc.

The ampère, the practical unit of current, is but  $\frac{1}{10}$  the value of the absolute unit of current.

**Current, Action of, on a Magnetic Pole** — —An attraction or repulsion dependent on the name of the pole and the direction of the current.

Two currents of electricity attract or repel each other according to the direction in which they are flowing, and the mutual positions of their circuits. A current and a magnetic pole exert an action on each other which, strictly speaking, is neither attraction nor repulsion, but which is rotation, that may, however, be regarded as being produced by the combined action of attraction and repulsion.

**Current, Alternating** — —A current which flows alternately in opposite directions.

A current whose direction is rapidly reversed.

The non-commuted currents generated by the differences of potential in the armature of a dynamo-electric machine are alternating or simple-periodic-currents.

In a characteristic curve of the electromotive forces of alternating currents, positive electromotive forces, or those that would produce cur-

rents in a certain direction, are indicated by values *above* a horizontal line, and negative electromotive forces, by values *below* the line.

The curves A B C, and C D E, Fig. 177, are




Fig. 177. Curve of Electromotive Forces of Alternating Currents.

often called *phases*, and represent the alternate phases of the current.

**Current, Alternative** — —A voltaic alternative. (See *Alternatives, Voltaic*.)

**Current, Assumed Direction of Flow of** — —The direction the current is assumed to take, *i. e.*, from the positive pole of the source through the circuit to the negative pole of the source.

The electricity is assumed to come out of the source at its positive pole, and to return or flow back into the source at its negative pole. This convention as to the direction of the electric current is in accordance with the assumption of the direction of flow of lines of magnetic forces.

The old idea of a dual or double current flowing in opposite directions is still maintained by some. (See *Force, Lines of, Direction of*.)

**Current, Axial** — —In electro-therapeutics a current flowing in a nerve in the opposite direction to the normal impulse in the nerve.

**Current, Break-Induced** — —The current induced by a current in its own, or in another circuit, on breaking or opening the same.

The current induced in the secondary on the breaking of the primary circuit.

The break-induced current set up by a current in its own circuit is sometimes called the *direct-induced* current.

Lord Rayleigh has shown that within certain limits the break-induced current has a greater effect in magnetizing steel needles, the smaller the number of turns of wire in the secondary. In



the case of a galvanometer, it is well known that the opposite is true. The deflection of the galvanometer needle depends on the strength of the whole current. The magnetizing power depends, for the greater part, on the strength of the current at the beginning of its formation.

**Current, Closed-Circular** — — A current flowing in a circular circuit.

A small closed-circular current may be replaced magnetically by a thin disc of steel, magnetized in a direction perpendicular to its face, and the edge of which corresponds to the edge of the circular conductor.

**Current-Commuter.** — (See *Commuter, Current*.)

**Current, Conduction** — — The current that passes through a metallic or other conducting substance, as contradistinguished from a current produced in a non-conductor or dielectric. (See *Current, Displacement*.)

**Current, Constant** — — A current that continues to flow in the same direction for some time without varying in strength.

This term is sometimes used to mean a continuous or direct current in contradistinction to an alternating current, but it ought to be applied only to unvarying currents, such, for example as a constant current of 10 amperes.

**Current, Continuous** — — An electric current which flows in one and the same direction.

Although the term continuous current is used as synonymous with constant current, it is not entirely so; a continuous current flows constantly in the same direction. A constant current not only flows continuously in the same direction, but maintains an approximately constant current strength.

This term continuous current is used in the opposite sense to alternating current, and in the same sense as a direct current.

**Current, Creeping of Electric** — — A change in the direction of path of a current from the direct line between the points of connection with the source.

When the terminals of any electric source are placed in contact with any two points of a metallic sheet of conducting material, the flow of the current is not confined to the direct line between the


points of contact, but creeps or diffuses into portions of the conducting plate surrounding this direct line. (See *Current, Diffusion of*.)

In a somewhat similar manner, the current is said to creep, or to establish a partial short-circuit around the poles of a poorly insulated voltaic battery, or other electric source.

**Current, Critical** —

— The current at which a certain result is reached.

**Current, Critical, of a Dynamo** — — That value of the current at which the characteristic curve begins to depart from a nearly straight line. — (*Silvanus P. Thompson*.)



In Fig. 178 the critical

current is shown in three different cases, as occurring where the dotted vertical line cuts the characteristic curves.

The speed at which a series dynamo excites itself is often called the *critical speed*.

**Current, Demarcation** — — A term sometimes applied to an electric current obtained from an injured muscle.

"Every injury of a muscle or nerve causes at the point of injury a dying surface, which behaves negatively to the positive intact substance." — (*Landois & Stirling*.)

**Current Density.** — The current of electricity which passes in any part of a circuit as compared with the area of cross-section of that part of the circuit.

In a dynamo-electric machine the current density in the armature wire should not, according to Silvanus P. Thompson, exceed 2,500 amperes per square inch of area of transverse section of conductor.

The current density in a dynamo wire, of necessity, depends on the sectional area of the coils. If, for example, a current of 50 amperes be safe in an armature section of eight turns it may be safely increased to 100 amperes if the conductors are cross-sectioned so as to make but four turns. — (*Urehart*.)

In electro-plating, for every definite current strength that passes through the bath, or in other words, for a definite number of coulombs, a definite weight of metal is deposited, the charac-



ter of which depends on the current density. The character of an electrolytic deposit will therefore depend on the *current density* at that part of the circuit where the deposit occurs.

The following table from Urquhart gives the practical working value for the current density for electro-metallurgical deposits :

CURRENT DENSITY (OR AMPÈRES ON CATHODE).	
Solution of	Ampères per square foot.
Copper, acid bath.....	5.0 to 10.0
Copper, cyanide bath.....	3.0 " 5.0
Silver, double cyanide.....	2.0 " 5.0
Gold, chloride in cyanide.....	1.0 " 2.0
Nickel, double sulphate.....	6.0 " 8.0
Brass, cyanide.....	2.0 " 3.0
Tin.....	...

**Current, Diacritical** — —Such a strength of the magnetizing current as produces a magnetization of an iron core equal to half-saturation.

The diacritical current is the current which, flowing through the diacritical number of ampère-turns, will bring up the magnetism produced to half-saturation.

The diacritical number of ampère-turns is such a number of ampère-turns as would reduce the magnetic permeability to half its full value.

**Current, Diffusion of** — —A term employed to designate the difference in the density of current in different portions of a conductor. (See *Current, Creeping of, Electric*.)

**Current, Diffusion of Electro-Therapeutic** — —The difference in the density of current in different portions of the human body between the electro-therapeutic electrodes.

When the electrodes are placed at any two given points of the human body, the current branches through various paths, extending in a general direction from one electrode to the other, according to the law of branched or derived circuits, and flowing in greater amount, or with greater density of current, through the relatively better conducting paths. (See *Current Density*.)

This is sometimes called the creeping of the current. (See *Current, Creeping of*.)

**Current, Direct** — —A current con-

stant in direction, as distinguished from an alternating current.

A continuous current.

**Current, Direct-Induced** — —The current induced in a circuit by induction on itself, or self-induction, on breaking or opening the circuit. (See *Currents, Extra*.)

This is called the direct-induced current because its direction is in the same direction as the inducing current.

**Current, Direction of** — —The direction an electric current is assumed to take out from one pole of any source through the circuit and its translating devices back to the source through its other pole.

Conventionally, the current is assumed to come out from the positive pole of the source and to go back to the source at the negative pole.

**Current, Displacement** — —The rate of change of electric displacement.

A brief conduction current produced in a dielectric by an electric displacement. (See *Displacement, Electric*.)

This is called a displacement current in order to distinguish it from a conduction current in any conductor.

The displacement current continues while the displacement of electricity is going on. Displacement currents have all the properties of conduction currents, and, like the latter, produce a magnetic field; in fact, they resemble extremely brief conduction currents.

The difference between conducting substances and dielectrics, lies in the fact that the conducting substances do not possess an elastic force, enabling them to resist electric displacement. In other words, conducting substances possess no *electric elasticity*, and can have no true displacement current established in them. (See *Elasticity, Electric*.)

A displacement current, like a conduction current, possesses a magnetic field, or is encircled by lines of magnetic force. (See *Field, Magnetic, of an Electric Current*.)

**Current, Electric** — —The quantity of electricity which passes per second through any conductor or circuit.

The rate at which a definite quantity of electricity passes or flows through a conductor or circuit.



The ratio existing between the electromotive force, causing the current, and the resistance which may, for convenience, be regarded as opposing it, expressed in terms of quantity of electricity per second.

The unit of current, or the ampère, is equal to one coulomb per second. (See *Ampère. Coulomb.*)

The word current must not be confounded with the mere act of flowing; electric current signifies rate of flow, and always supposes an electromotive force to produce the current, and a resistance to oppose it.

The electric current is assumed to flow out from the positive terminal of a source, through the circuit and back into the source at the negative terminal. It is assumed to flow into the positive terminal of an electro-receptive device such as a lamp, motor, or storage battery, and out of its negative terminal; or, in other words, the positive pole of the source is always connected to the positive terminal of the electro-receptive device.

Professor Lodge draws the following comparison between the motions of ordinary matter, heat and electricity: "Consider the modes in which water may be made to move from place to place; there are only two. It may be pumped along pipes, or it may be carried about in jugs. In other words, it may travel through matter, or, it may travel with matter. Just so it is with heat, also. Heat can travel in two ways: it can flow through matter, by what is called 'conduction,' or, it can travel with matter, by what is called 'convection.' There is no other mode of conveyance of heat." \* \* \* "For electricity the same is true. Electricity can travel with matter, or it can travel through matter, by convection, or by conduction, and by no other way."

In the above, the radiation of heat is apparently lost sight of.

In the opinion of some, an electric current consists of two distinct currents, one of positive and the other of negative electricity, flowing in opposite directions. Each of these currents is supposed to be equal in amount to the other.

The electric current is now regarded as passing through the dielectric surrounding the conductor, rather than through the conductor itself. (See *Current, Electric, Method of Propagation of, Through a Circuit.*)

The current that flows or passes in any circuit is, in the case of a constant current, equal to the

electromotive force, or difference of potential, divided by the resistance, as—

$$C = \frac{E}{R}$$

(See *Law of Ohm.*)

**Current, Electric, Method of Propagation of, Through a Circuit** — When an electric current is propagated through a wire or other conductor, it is not sent or pushed through the conductor, like a fluid through a pipe or other conductor, but is, so to speak, rained down on the surface of the conductor from the medium or dielectric surrounding it.

Poynting, who has carefully studied this matter, remarks as follows, viz.: "A space containing electrical currents may be regarded as the field where energy is transformed at certain points into the electric or magnetic kind, by means of batteries, dynamos, thermopiles, etc., and in other parts of the field this energy is being again transformed into heat, work done by the electromagnetic forces, or any other form yielded by currents.

"Formerly the current was regarded as something traveling in the conductor, and the energy which appeared at any part of the circuit was supposed to be conveyed thither through the conductor by the current. But the existence of induced currents and electro-magnetic actions have led us to look on the medium surrounding the conductor as playing a very important part in the development of the phenomena. If we believe in the continuity of the motion of energy, we are forced to conclude that the surrounding medium is capable of containing energy, and that it is capable of being transferred from point to point. We are thus led to consider the problem, how does the energy about an electric current pass from point to point; by what paths does it travel, and according to what laws? Let us take a specific case. Suppose a dynamo at one spot generates an electric current, which is made to operate an electric motor at a distant place. We have here, in the first place, an absorption of energy from the prime motor into the dynamo. We find the whole space between and around the conducting wires magnetized and the seat of electromagnetic energy. We have further a retransformation of energy in the motor. The question which presents itself for solution is to decide how the energy taken up by the dynamo is transmitted to the motor, by what path it travels



and according to what laws? Briefly stated, the tendency of recent views is that this energy is conveyed through the electro-magnetic medium or ether, and that the function of the wire is to localize the direction or to concentrate the flow in a particular path, and thus provide a *sink* or place in which the energy can be dissipated. \* \* \*

Taking again, for instance, the case of the discharge of a condenser by a conductor. He says: "Before the discharge we know that the energy resides in the dielectric, between the conducting plates. If these plates are connected by a wire, according to these views, the energy is transferred outwards along the electrostatic, equipotential surfaces, and moves *on* to the wire and is there converted into heat. According to this view we must suppose the lines of electrostatic induction, running from plate to plate, to move outwards, as the dielectric strain lessens, and while still keeping their ends on the plates, to finally converge in on the wire and be there broken up and their energy dissipated as heat."

In other words, some of the energy of the expanding lines of induction is changed into magnetic energy; this energy is contained in ring-shaped tubes of force, which expand outwards from between the plates and then contract on some other part of the conductor.

The time of the discharge, then, consists of the following steps, viz.:

(1.) The time during which the energy of the charge is nearly all electrostatic and is represented by the energy contained in the lines or tubes of electrostatic induction, running from plate to plate of the condenser.

(2.) The time during which the discharge is at its maximum and the energy consists of two parts, viz.: energy associated with the outward expanding lines of electrostatic induction, and energy associated with the closed lines or tubes of magnetic force, which at first are expanding and afterwards contracting.

(3.) The time when the energy has been absorbed, or the period in which the energy in the wire or the conductor has either been dissipated in the form of non-luminous radiation or obscure heat.

(4.) The time during which this non-luminous heat gives up its energy again to the surrounding medium in the shape of heat waves.

**Current, Electro-Therapeutic Polarizing**  
—The current which produces the

phenomena of electrotonus. (See *Electrotonus*.)

**Current, Element of** —A term employed in mathematical discussions to indicate a very small part of a current for ease in considering its action on a magnetic needle or other similar body.

**Current, Faradic** —In electrotherapeutics, the current produced by an induction coil, or by a magneto-electric machine.

A rapidly alternating current, as distinguished from a uniform voltaic current.

A voltaic current that is rapidly alternated by means of any suitable key or switch is sometimes called a *voltaic alternative*. The discharge from a Holtz machine is sometimes called a *Franklinic Current*. (See *Alternatives, Voltaic Current, Franklinic*.)

**Current-Filaments.** —(See *Filament, Current*.)

**Current, Franklinic** —A term sometimes used in electro-therapeutics for a current produced by the action of a frictional electric machine.

The term, Franklinic current, is used in contradistinction to Faradic current, or that produced by induction coils, or, in contradistinction to a galvanic or voltaic current, or that produced by a voltaic battery.

**Current, Generation of, by Dynamo-Electric Machine** —The difference of potential developed in the armature coils by the cutting of the lines of magnetic force of the field by the coils, during the rotation of the armature.

If a loop of wire whose ends are connected to the two-part commutator, shown in Fig. 179, be

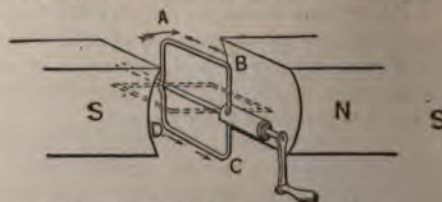


Fig. 179. Induction in Armature Loop.

rotated in the magnetic field between the magnet poles N and S, in the direction of the large arrow, differences of potential will be generated which



will cause currents to flow in the direction indicated by the small arrows during its motion past the north pole from the top to the bottom, but in the opposite direction during its motion past the south pole—from the bottom to the top. If, now, collecting brushes rest on the commutator in the positions shown in the Fig. 180, the vertical line



Fig. 180. Action of Commutator.

of the gap between the poles corresponding with the vertical gap between the commutator segments, the currents generated in the loop will be caused to flow in one and the same direction, and B', will become the positive brush, since the end of the loop is connected with it only so long as it is positive. As soon as it becomes negative, from the current in the loop flowing in the opposite direction, the other end, which is then positive, is connected with the positive brush.

A similar series of changes occur at the negative brush B.

Theoretically, the neutral points, where the brushes rest, would be in the vertical line coinciding with that of the gap between the poles. An inspection of the figure shows that the *neutral line*, or the *diameter of commutation*, is displaced in the direction of rotation. (See *Commutation, Diameter of*.) The displacement of the brushes, so necessitated, is called the *lead*.

The cause of the lead is the reaction that occurs between the magnetic poles of the field magnets



Fig. 181 Cause of Lead of Brushes.

and those of the armature, the result of which is to displace the field magnet poles, and to cause a change in the density in the field. This is shown in Fig. 181, where the density of the lines of force indicates the position of the diameter of commu-

tation as being near, or at right angles to the diameter of greatest average magnetic density. (See *Lead, Angle of. Lag, Angle of*.)

**Current-Governor.**—(See *Governor, Current*.)

**Current, Homogeneous Distribution of**

—Such a distribution of a current through any conductor in which there is an equal density of current at all portions of any cross-section of the conductor.

When the flow of a constant current is established in a solid conducting wire, there is a homogeneous distribution of current in that conductor.

**Current, Induced** — —The current produced in a conductor by cutting lines of force.

The induced current results from differences of potential produced by electro-dynamic induction. (See *Induction, Electro-Dynamic*.)

**Current-Induction.** — (See *Induction, Current*.)

**Current, Intensity of** — —An old term sometimes employed to indicate the current which resulted from a considerable difference of potential, or a great electromotive force.

This term was also formerly used as synonymous with strength of current.

This use of the term is now abandoned.

Voltaic batteries, connected in series so as to give a considerable difference of potential, were spoken of as being connected for *intensity*.

This term has also been used for the quantity of electricity conveyed per second across a unit area of cross-section.

Intensity of current is more properly called density of current. (See *Current Density*.)

**Current, Intermittent** — —A current that does not flow continually, but which flows and ceases to flow at intervals, so that electricity is practically alternately present and absent from the circuit.

**Current, Inverse-Secondary** — —The make-induced current. (See *Current, Make-Induced*.)

**Current, Jacobi's Unit of** — —Such a current that when passed through a voltmeter will liberate a cubic centimetre of



oxygen and hydrogen at 0 degrees C. and 760 mm. barometric pressure.

One Jacobi's unit of current equals  $\frac{1}{10.32}$  ampère. (Obsolete.)

**Current, Make-Induced** — —The current induced by a current in its own circuit on making or closing the same.

The current produced in the secondary of an induction coil on the making or completion of the circuit of the primary.

The make-induced current is also called the inverse-secondary current, because its direction is opposite to that of the inducing current.

**Current, Make or Break Induced, Duration of** — —The time during which the induced inverse or direct-secondary currents continue.

Blaserna made a number of experiments, which he claims shows :

(1.) The greater the distance apart of the primary and the secondary, that is, the less their mutual-induction, the less the maximum value of the secondary current, and the greater the delay in establishing that maximum.

(2.) The delay in establishing the maximum of the break or direct-secondary current is not as great as in the case of the make, or inverse-secondary current.

(3.) When the coils are near together, the induced currents at starting are established by a series of electric oscillations.

(4.) The primary current establishes itself by a series of electrical oscillations.

(5.) That the interposition of dielectric substances, such as glass between the coils, reduces the time between the making or breaking of the primary current and the beginning of the secondary current. This last conclusion was negatived by some experiments of Bernstein.

Blaserna determined in the case of certain experiments the following value for the durations of the secondary currents :

Inverse-secondary current lasts .000485 second.

Direct-secondary current lasts .000275 second.

Helmholtz contradicts the results of Blaserna, and asserts :

(1.) That no perceptible difference in the zero points of the currents is produced by varying the distance between the primary and secondary.

(2.) That the sparks produced by the breaking

of the primary last for an appreciable time, something like  $\frac{1}{18000}$  to  $\frac{1}{48000}$  of a second.

(3.) The duration of the break-spark is never constant, but depends in great part on the amount of platinum given off from the contacts at each spark.

**Current-Meter.**—A form of galvanometer. (See *Galvanometer*.)

**Current, Momentary** — —A current that continues to flow but for a short time.

**Current, Multi-Phase** — —A rotating current. (See *Current, Rotating*.)

**Current, Muscle** — —In electro-therapeutics, the current flowing through a muscle.

Muscle currents are produced either by stimulation, or during activity of a muscle. According to L. Hermann, uninjured muscles, or perfectly dead muscles, yield no currents, but such currents result only from an injury. (See *Current, Demarcation*.)

**Current, Non-Homogeneous Distribution of** — —Such a distribution of current passing through a conductor in which there is an unequal density of current at all portions of any cross-section of the conductor.

When a rapidly alternating current is passed through any solid conductor, the current density is greater at the surface and less towards the centre. The current distribution in such a conductor is non-homogeneous, and the want of uniformity of current density is greater as the rapidity of alternation or periodicity is greater.

**Current, Outgoing** — —The current sent out over the line from a station provided with a duplex or quadruplex transmission, as distinguished from the received current. (See *Current, Received*.)

**Current, Periodic** — —A simple periodic current. (See *Currents, Simple Periodic*.)

**Current, Periodic, Power of** — —An amount of work, per second, equal to the product of the electromotive force taken at successive moments of time during a complete cycle, multiplied by the current strength taken at the corresponding moments during the cycle.

Since the electromotive force and current in



a periodic circuit may be represented by two simple harmonic functions, the mean value of the two, when of different amplitude and phase, is equal to the product of their maximum value by the cosine of their difference of phase divided by two.

**Current, Polarization** — —In electrotherapeutics, the constant current which when passed through a nerve produces in it the electrotonic state. (See *Electrotonus*.)

**Current, Pulsating** — —A pulsatory current. (See *Current, Pulsatory*.)

**Current, Pulsatory** — —A current, the strength of which changes suddenly.

The pulsatory current usually consists of sudden and distinct impulses, or rushes of current, in contradistinction to an undulatory or harmonically varying current.

**Current, Received** — —The current received from the distant end of the line at a station provided with a duplex or quadruplex transmission as distinguished from the outgoing current.

A term sometimes used in telegraphy to distinguish between currents that come in over the line from a distant station, and those that are sent out to a distant station.

**Current, Rectilinear** — —A current flowing through straight or rectilinear portions of a circuit.

In studying the effects of the attractions or repulsions produced by electric currents the name expressing the peculiarity of shape of any part of the circuit is often applied to the current flowing through that part of the circuit. Thus we speak of a rectilinear current, a sinuous current.

**Current, Reverse-Induced** — —The current induced by a current in its own circuit at the moment of making or closing the circuit.

The current induced in the secondary on closing or making the circuit of the primary.

This is called the reverse-induced current, because its direction is opposite to that of the current in the inducing circuit.

**Current, Reversed** — —A current whose direction is changed at intervals. (See *Current, Alternating*.)

**Current Reverser** — (See *Reverser, Current*.)

**Current, Reversing a** — —Changing the direction of an electric current.

**Current, Rotating** — —A term applied to the current which results by combining a number of alternating currents, whose phases are displaced with respect to one another.

A rotating current is sometimes called a polyphase or *multiple-phase current*, particularly if there are three or more currents combined.

The rotating current is employed by Tesla, Dobrowolsky and others in a system of distribution by transformers in place of the ordinary alternating current. In practice, three alternating currents are combined. The currents and their combination are obtained by means of a specially constructed alternator. When three currents are combined the displacement between each set of phases is 120 degrees. A rotating current, unlike an alternating current, possesses, in a certain sense, a definite direction of flow. Its effect on a magnetic needle is to cause rotation. Hence motors constructed on the principle of rotating currents will start with a load.

**Current, Rotatory-Phase-Alternating** — —A term sometimes employed for a rotating electric current. (See *Current, Rotating*.)

**Current, Secretion** — —In electrotherapeutics, a current following stimulation of the secretory nerves.

**Current, Simple-Harmonic** — —A term sometimes used instead of simple-periodic current. (See *Currents, Simple Periodic*.)

**Current, Sinuous** — —A term sometimes applied to currents flowing through a sinuous conductor.

Sinuous currents exert the same effects of attraction or repulsion on magnets, or on neighboring circuits, as would a rectilinear current whose length is that of the axis of such sinuous current.

This can be shown by approaching the circuit A' B', Fig. 182, consisting of the sinuous conductor A', and rectilinear conductor B', to the movable conductor A B C, on which it produces no effect. The current A', therefore, neutral-



izes the effects of the current B'; or, it is equal to it in effect.

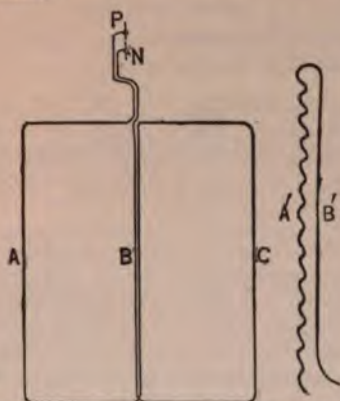


Fig. 182. Rectilinear Equivalent of Sinuous Current.

In calculating the effects of sinuous currents it is convenient to consider them as consisting of a



Fig. 183. Sinuous Currents.

succession of short, straight portions at right angles to one another, as shown in Fig. 183.

**Current, Steady** — — A current whose strength does not vary from time to time.

In a steady current the quantity of electricity flowing through each unit of area of the equipotential surface of the conductor is the same for each succeeding interval of time. Such a current is sometimes called a *uniformly distributed current*.

**Current Streamlets.**—(See *Streamlets, Current*.)

**Current Strength.**—The product obtained by dividing the electromotive force by the resistance.

The current strength for a constant current according to Ohm's law is—

$$C = \frac{E}{R}$$

Current strength is proportional to the amount of the magnetic or chemical (electrolytic) effects it is capable of producing.

For a simple-periodic current, the current strength necessarily varies from time to time.

The average current strength of a simple-periodic current is equal to the average impressed electromotive force divided by the impedance. (See *Impedance*.)

The maximum current strength is equal to the maximum impressed electromotive force divided by the impedance.

**Current, to Transform a** — — To change the electromotive force of a current by its passage through a converter or transformer.

To convert a current.

**Current, Transforming a** — — Changing the electromotive force of a current by its passage through a converter or transformer.

**Current, Undulating** — — An undulatory current. (See *Currents, Undulatory*.)

**Current, Uniformly-Distributed** — — A term sometimes employed in the same sense as steady current. (See *Current, Steady*.)

**Current, Unit Strength of** — — Such a strength of current that when passed through a circuit one centimetre in length, arranged in an arc one centimetre in radius, will exert a force of one dyne on a unit magnet pole placed at the centre.

This absolute unit is equal to ten amperes or practical units of current. (See *Ampère*.)

**Current, Variable Period of** — — The period which exists while an electric current is being increased or decreased in strength, or while it is being reversed.

**Currents, Action** — — Physiological currents obtained during the activity of a muscle or nerve.

**Currents, After** — — In electro-therapeutics, currents produced in nervous or muscular tissue when a constant current, which has been flowing through the same, has been stopped.

After currents are due to internal polarization.

**Currents, Alternating-Primary** — — The currents employed in the primary of a

er to induce alternating currents in secondary. (See *Transformer*.)

**Currents, Alternating-Secondary** — — Currents induced in the secondary of a transformer by the alternating currents in the primary. (See *Transformer*.)

**Currents, Alternating, Shifting of Phase** — — (See *Phase, Shifting of, of Alternating Currents*.)

**Currents, Ampèrian** — — The electric currents that are assumed in the ampèrian theory of magnetism to flow around the molecules of a magnet. (See *Magnetism, Ampère's Theory*.)

**Currents, Eddy** — — Eddy currents are to be distinguished from Foucault, or parasitical currents. Like them, they are directed so as to produce eddy effects. (See *Currents, Eddy*.)

**Currents, Magnetizing** — — It is not believed that the ampèrian currents are induced in magnetizable substances by the action of the magnetizing force. The atoms or molecules are magnetized originally. All the magnetizing force is to arrange the molecules or atoms, so as to have them in one and the same direction.

**Currents, Angular** — — Currents flowing in circuits that cross or are inclined to each other at any angle. (See *Dynamics, Angular*.)

**Currents, Atomic** — — A term sometimes used instead of molecular or ampèrian currents. (See *Currents, Ampèrian*.)

**Currents, Attractions and Repulsions** — — The mutual attractions or repulsions exerted by currents on one another, and the interaction of their magnetic fields. (See *Dynamics, Electro*.)

**Currents, Commuted** — — Electric currents that have been caused to flow in one direction. (See *Commutator*.)

**Currents, Commuting** — — Causing currents to flow in one and the same direction.

**Currents, Component** — — The two or more currents into which it may be conceived a single current can be divided, so as to produce the same effects of attraction or repulsion that the single current would do.

The idea of component currents is based on the similar idea of the components of any single force.

**Currents, Continuity of** — — The freedom from variation in current strength or current direction.

**Currents, Convection** — — Currents produced by the bodily carrying forward of static charges in convection streams. (See *Streams, Convection*.)

In a convection current, the static charge is bodily carried forward.

Rowland has shown experimentally that a moving electric charge is the equivalent of an electric current. He rotated a gilded ebonite disc between two gilt glass discs, near which were placed a number of delicate magnetic needles. When certain rapidity of rotation was obtained, the discs were found to affect the magnetic needles the same as would a current of electricity flowing in a circular conductor, whose form coincided with the periphery of the disc.

**Currents, Converted** — — Electric currents changed either in their electromotive force or in their strength, by passage through a converter or transformer. (See *Transformer*.)

**Currents, Converting** — — Changing the electromotive force of currents by their passage through a converter or transformer. (See *Transformer*.)

**Currents, Diaphragm** — — Electric currents produced by forcing a liquid through the capillary pores of a diaphragm. (See *Osmose, Electric*.)

**Currents, Earth** — — Electric currents flowing through the earth, caused by a difference of potential at different parts.

The causes of these differences of potential are various and are not well understood.

**Currents, Eddy** — — Useless currents produced in the pole pieces, armatures, field-magnet cores of dynamo-electric machines or motors, or other metallic masses, either by their motion through magnetic fields, or by variations in the strength of electric currents flowing near them.

Sensible eddy currents are produced in the mass



of the conducting wire on the armature of a dynamo-electric machine when the wire is comparatively heavy.

Such currents are called *eddy currents*, *local currents*, *Foucault currents*, or *parasitical currents*. They form closed-circuits of comparatively low resistance, and tend to cause undue heating of armatures or pole pieces. They not only cause a



Fig. 184. Foucault Currents in Pole Pieces.

useless expenditure of energy, but interfere with the proper operation of the device.

To reduce them as far as practicable, the pole pieces, armature cores or armature wires, are laminated. (See *Core, Lamination of*.)

These local currents are perhaps preferably called Foucault currents when they take place in magnetic cores, pole pieces or armature cores, and eddy currents when they occur in the armature wire or conductor. When the armature conductor is made up of copper bars, for example, the eddy currents in the latter are usually considerable.

Since Foucault currents in dynamo-electric machine cores are due to variations in the magnetic

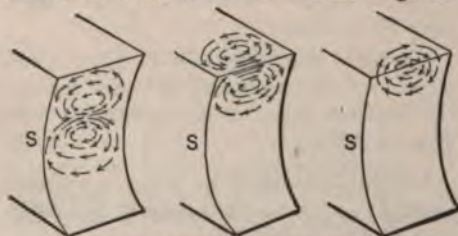


Fig. 185. Foucault Currents in Pole Pieces.

strength of the field magnets, or of the armature, they will be of greatest intensity when the changes in the magnetic strength are the greatest and most sudden.

These changes are most marked, and consequently the Foucault currents are strongest at those corners of the pole pieces of a dynamo from which the armature is moved in its rotation, as will be seen from an inspection of Fig. 184.

Fig. 185, shows Foucault currents generated in pole pieces,

**Currents, Eddy-Conduction** — — A term employed for ordinary eddy currents in conductors, in order to distinguish them from eddy-displacement currents. (See *Currents, Eddy-Displacement*.)

**Currents, Eddy Deep Seated** — — Eddy currents set up in the mass of a conductor subjected to electro-dynamic induction in contradistinction to superficially seated eddy currents. (See *Currents, Eddy, Superficial*.)

**Currents, Eddy-Displacement** — — Eddy currents produced in the mass of a dielectric or insulator, when lines of magnetic or electrostatic force pass through the dielectric or insulator.

Eddy-displacement currents are produced in a dielectric or non-conductor, when it is moved across a magnetic field, so as to cut the lines of magnetic force.

Eddy displacement currents would also occur if a dielectric is subjected to varying electrostatic induction.

**Currents, Eddy, Superficial** — — Eddy currents produced in conducting substances that are limited to the outer layers thereof.

The eddy currents produced by alternating currents are superficial if the alternating currents are sufficiently rapid. The oscillatory currents produced during the discharge of a Leyden jar are more superficial in proportion as the discharge takes place rapidly. When currents are produced in a magnetizable body by the discharge of a Leyden jar, they are more and more superficial, as the discharge of the jar is more and more rapid. The reason a slow discharge of a jar or condenser produces a greater magnetizing effect is, because of the checking or screening action the superficial eddy currents exert on the interior of the mass of the magnetizable substance when the discharge is very rapid.

**Currents, Electrotonic** — — In electrotherapeutics, currents due to internal polarization in the nerve fibre between the conducting core of the nerves and the enclosing sheaths.

**Currents, Extra** — — Currents produced in a circuit by the induction of the current on itself on the opening or closing of

cuit. (See *Currents, Extra, Induced, Self.*)

extra current induced on breaking, flows same direction as the original current and strengthen and prolong it.

extra current induced on making or closing a circuit flows in the *opposite direction* original current and tends to *oppose* or *reverse* current.

of these currents are called *induced* or *currents*. The former is called the *direct* current, and the latter the *reversed* or *induced*. (See *Current, Direct-Induced, Induced, Reversed-Induced.*)

to distinguish this induction from that induced in a *neighboring conductor* by the passage of the electric current, it is called *self-induction*. (See *Induction, Self-Induction, Mutual.*) effect on a telegraphic line of the self-induced extra currents is to decrease the speed of signaling by retarding the beginning of a signal, and prolonging its cessation.

greater the number of turns of wire in a coil or magnet, and the greater the mass of the core, the greater the strength of the induced currents.

**Currents, Foucault** — — A name sometimes applied to eddy currents, especially in iron cores. (See *Currents, Eddy.*)

**Currents, Heating Effects of** — — The heat produced by the passage of an electric current through any circuit. (See *Heat, Electric.*)

**Currents, Imbibition** — — Currents induced in tissues by the imbibition or absorption of a fluid.

imbibition currents are a species of diaphragm currents. The absorption of a fluid at the exposed surface of an injured nerve or at the contracted portion of muscles, produces imbibition currents.

currents are also produced in plants by the movement of fluids produced by bending the leaves, or by active movements of certain plants.

**Currents, Induced-Molecular or Atomic** — — Currents induced in the atoms or molecules of a magnetizable substance on its being brought into a magnetic field.

these currents are called induced-molecular or induced-atomic currents in order to distin-

guish them from the molecular, atomic or ampèrian currents, or the currents which are assumed to be always present. It is by the presence of these assumed induced-molecular currents that the phenomena of diamagnetism are explained by Weber. (See *Diamagnetism, Weber's Theory of.*)

**Currents, Local** — — A name sometimes applied to eddy currents. (See *Currents, Eddy.*)

**Currents, Molecular or Atomic** — — A term sometimes employed for ampèrian currents. (See *Currents, Ampèrian.*)

**Currents, Natural** — — A term sometimes applied to earth currents. (See *Currents, Earth.*)

**Currents, Negative** — — A term employed in single-needle telegraphy for currents sent over a line in a negative direction by depressing a key that connects the line with the negative pole of a battery and so deflects the needle to the left. (See *Telegraphy, Single-Needle.*)

**Currents, Network of** — — A term sometimes applied to a number of shunt or derived circuits. (See *Circuit, Shunt, Circuit, Derived, Laws, Kirchhoff's.*)

**Currents of Motion** — — A term sometimes employed in electro-therapeutics for the currents of electricity that traverse healthy muscle or nerve tissue during the sudden contraction or relaxation thereof.

The existence of these currents is denied by some.

**Currents of Rest** — — A term sometimes employed in electro-therapeutics for the currents of electricity that traverse healthy muscle or nerve tissue while the muscles are passive.

The existence of these currents is denied by some.

**Currents, Orders of** — — Induced electric currents named from the order in which they are induced, as currents of the first, second, third, fourth, etc., orders.

An induced current can be caused to induce another current in a neighboring circuit, and this a third current, and so on. Such currents are dis-



tinguished by the term, currents of the second, third, fourth, etc., order. (See *Coils, Henry's.*)

**Currents, Parasitical** — — A name sometimes applied to eddy currents. (See *Currents, Eddy.*)

**Currents, Positive** — — A term employed in single-needle telegraphy for currents sent over the line in a positive direction by depressing a key that connects the line with the positive pole of a battery and so deflects the needle to the right. (See *Telegraphy, Single-Needle.*)

**Currents, Reversed** — — A name sometimes applied to alternating currents. (See *Current, Alternating.*)

**Currents, Secondary** — — The currents produced by secondary batteries in contradistinction to the currents produced by primary batteries.

The currents produced by the secondary conductor of an induction coil, as distinguished from the currents sent into the primaries.

This second use of the term secondary current is more usual.

**Currents, Self-Induced** — — A current produced by self-induction.

An extra current. (See *Induction, Self-Currents, Extra.*)

**Currents, Simple Periodic** — — Currents, the flow of which is variable, both in strength and duration, and in which the flow of electricity, passing any section of the conductor, may be represented by a simple periodic curve.

A current of such a nature that the continuous variation of the flow of electricity past any area of cross-section of the conductor, or the variations in the electromotive force of which can be expressed by a simple-periodic or harmonic curve. (See *Curve, Simple-Harmonic.*)

Alternate currents are simple-periodic currents.

The average current strength of simple-periodic currents is equal to the average impressed electromotive force divided by the impedance.

The transmission of rapidly varying or simple-periodic currents through conductors differs very greatly from the transmission of steady cur-

rents. With a steady current, the current density is the same for all areas of cross-section of the conductor. For a rapidly intermittent current, the current density is greater near the surface, and when the rate of intermission is sufficiently great, the current is entirely absent at the centre of the conductor.

Lord Rayleigh has shown that when the rate of intermission is 1,050 per second, the effective resistance of a wire 160 mm. in length, and 30 mm. in diameter, is 1.84 times its resistance to steady currents. He found that the increase of resistance is greater in the case of conductors of great diameter than in those of small diameter.

As regards the character of conductor best suited for transmitting rapidly alternating currents, it can be shown:

(1.) That for transmitting alternate currents of moderate frequency, say of about 1,000 per second, copper conductors should be used in preference to rods of iron.

(2.) That the conductor should be in the form of thin strips, or if tubular, of thin walls.

(3.) That the mere stranding of the conductor, *i. e.*, forming it of separate insulated conductors connected in parallel, will be of no effect in preventing the current from acting on the outside of the conductor, unless the conductor be arranged in the form of a cable, in which one part forms a lead, and another part the return.

Stephan draws the following analogy between the flow of alternating currents in a conductor and the flow of heat in a hot wire:

"Suppose a wire or conductor, uniformly heated from centre to circumference, be suddenly taken into a space where the temperature is high, the outer portions of the wire first rise in temperature, and afterwards the inner portions. In the case of a conductor of circular cross-section, the heat penetrates successive concentric layers. The same phenomena occur when an electromotive force is suddenly set up between the ends of a cylindrical conductor. The current gradually penetrates the conductor from the outside to the centre.

"Now suppose the heated wire is carried into a cooler space, the heat waves pass out radially from the centre towards the circumference. The cooling wire corresponds to the case of a conductor in which the external electromotive force is suddenly removed."

According to this conception, the heat conducting power of any substance corresponds to its electrical conducting power.



According to Stephan, in the case of a conductor of iron of 4 mm. in diameter, traversed by an alternating current of 250 alternations per second, the current density on the surface is about twenty-five times as great as that at its axis.

Where the conductor is of non-magnetic material, the difference in the current density is not so marked.

Rapidly intermittent currents produce a real increase in the resistance of the conductor, which must not be confused with the fact that the impedance is greater than the ohmic resistance, but rather as an actual increase in the rate at which energy is dissipated per unit of current.

Since current density is greatest at the outside portions of a conductor, and the central portions are nearly, if not entirely, deserted by the current, we may regard the conductor as having the ohmic resistance of a hollow cylinder of the same diameter as the conductor, with a correspondingly smaller area of cross-section, and therefore, of greater ohmic resistance per unit of length.

The condition of affairs in the case of a conductor in which a current of electricity is beginning to flow, is now very generally regarded somewhat as follows, viz.:

The current begins at the surface of the conductor, and more or less slowly soaks through towards the centre. If the current is constant, the current soon reaches the deepest layers; but, if it is rapidly intermittent, before it can soak very far into the conductor towards its axis, it is turned back towards the surface, and so becomes confined to layers which will be more and more superficial, as the rapidity of reversal increases.

Therefore, for convenience, we may regard a solid conductor, through which a rapidly intermittent current of electricity is flowing, as being practically converted into a hollow cylinder of the same diameter as the solid conductor, the area of cross-section of which hollow cylinder becomes smaller and smaller, as the rapidity of alternation is increased.

Another, and perhaps the more correct conception of the condition of affairs in a solid conductor traversed by a rapidly alternating current of electricity, has been pointed out by Maxwell, and afterwards by Heavyside, Rayleigh and Hughes. This conception is to regard the central portions of the conductor as possessing a counter electromotive force greater than the outer portions. The entire current flowing across any section of a conductor

may be regarded as made up of little *current streamlets*, parallel to one another.

The central streamlets, or filaments, from their mutual induction on one another, experience a greater resistance in reaching their full strength than the surface filaments do. Taken in this sense, we may state generally that the transmission of rapidly alternating currents through conductors depends on the inductance, rather than on the resistance; but for steady currents, it depends more on the resistance than on the inductance.

In periodic or oscillatory currents, as those produced by the discharge of a Leyden jar, or condenser, the surface streamlets have a current density far greater than the central streamlets.

The true or ohmic resistance of the circuit is a minimum when the current is uniformly distributed through all parts of the cross-section of the conductor, and the dissipation of energy through the generation of heat is less than for any other distribution.

The conception of a periodic current flowing through a conductor, starting from the surface and gradually soaking in towards the centre, regards the energy of an electric current—not as being pushed through the conductor, as water through a pipe, but as actually being absorbed at its surface, from the surrounding dielectric, or as being, so to speak, rained down on the conductor from the space outside of it.

**Currents, Swelling** — —In electro-therapeutics, currents that begin weak and are gradually made stronger and then weaker.

**Currents, Swelling-Faradic** — —A term employed in electro-therapeutics for faradic currents that are caused to gradually increase in strength and then to gradually decrease to zero strength.

**Currents, Transient** — —Currents that are but of momentary duration.

**Currents, Undulatory** — —Currents the strength and direction of whose flow gradually change.

The term undulatory currents is used in contradistinction to pulsatory currents, in which the strength changes suddenly. In actual practice, such currents differ from undulatory currents more in degree than in kind, since, when sent into a line, the effects of *retardation* tend to obliterate, to a greater or less extent, the sudden



differences in intensity on which their pulsatory character depends.

The currents produced in the coils of the Siemens magneto-electric key, in which the mechanical to-and-fro motion of the key sends electrical impulses into the line, are, in point of fact, undulatory in character, when they follow one another rapidly.

The currents in most dynamo-electric machines, the number of whose armature coils is comparatively great, are, so far as the variations in their intensity or strength are concerned, undulatory in character even when non-commuted.

The currents on all telephone lines that transmit articulate speech are undulatory. This is true, whether the transmitter employed merely varies the resistance by variations of pressure, or actually employs makes-and-breaks that rapidly follow one another.—(See *Current, Pulsatory, Current, Intermittent.*)

**Curtain, Auroral** — —A sheet of auroral light having the shape of a curtain. (See *Aurora Borealis.*)

**Curve, Asymptote of** — —A straight line which continually approaches a curved line, but meets or becomes tangent to such curved line only at an infinite distance.

In Fig. 186, the curve C D, continually approaches the asymptote y z, but never meets it.

It is at first difficult to understand how one line can continually approach another and yet never meet it. But it will be readily understood if it is remembered that in all cases of asymptotic approach each advance becomes smaller and smaller.

This mathematical conception is like a value which, although constantly reduced to one-half of its former value, is nevertheless never reduced to zero or no value.

**Curve, Ballistic** — —The curve actually described by a projectile thrown in any other than a vertical direction through the air.

The path of a projectile in a vacuum is a parabola—that is, the path A E B, Fig. 187. In air, the effects of fluid resistances cause the projectile to take the path A C D, called a *ballistic curve*.

The ballistic curve has a smaller vertical height than the parabola. The projectile also has a




Fig. 187. Ballistic Curve.

smaller vertical range. Instead of reaching the point B, it continually approaches the perpendicular E F.

**Curve, Characteristic** — —A diagram in which a curve is employed to represent the ratio of certain varying values.

The electromotive force generated in the armature coils of a dynamo-electric machine, when the magnetic field is of a constant intensity, is theoretically proportional to the speed of rotation. In practice this is modified by a number of circumstances.

The relation existing between the speed and electromotive force may be graphically represented by referring the values to two straight lines, one horizontal and the other vertical, called respectively the *axes of abscissas and ordinates*. (See *Abscissas, Axis of.*) If, in a given case, the number of revolutions is marked off along the horizontal line from the point o, Fig. 188, in distances from o, proportional to the number of revolutions, and the corresponding electromotive forces are marked off along the vertical line in distances from o, proportional to the electromotive forces, the points where these lines intersect will form the characteristic curve as shown in Fig. 188.




Fig. 188. Characteristic Curve.

**Curve, Characteristic, of Parallel Transformer** — —A curve so drawn that its ordinate and abscissa at any point represent the secondary electromotive force and the secondary current of a multiple connected transformer, when the resistance of the secondary circuit has a certain definite value.

With a constant electromotive force in the pri-

mary circuit, *i. e.*, with the transformers in parallel, the characteristic curve is a straight line parallel to the axis of the current. This curve, as shown in Fig. 189, is practically a straight line. The parallel transformer will be practically self-regulating under a constant primary electromotive force.

According to Forbes, if a transformer has its lamp load in parallel with the secondary circuit, the extinction of its lamps will decrease the efficiency of the transformer. The efficiency is therefore less for light loads than for heavy loads of parallel lamps up to a certain point.

**Curve, Characteristic, of Series Transformer** — A curve so drawn that its ordinate and abscissa at any point represent the secondary electromotive force and secondary current of a series-connected transformer, when the resistance of the secondary current has a certain definite value.

Fig. 190 shows characteristic curve of a series




Fig. 190. Characteristic of Series Transformer.

transformer.  $Oa$ , is drawn perpendicular to the line representing the secondary current, and  $ab$ , perpendicular to  $Oa$ , represents the corresponding secondary electromotive force. The various positions of  $b$ , as different values are given to  $Oa$ , produce the elliptic curve which is the characteristic curve of the series transformer.

"A series transformer," says Fleming, "with a core sufficiently large to avoid saturation, can never be self-regulating if so used. It can only be made self-regulating with a non-saturated core, when working near the extremities of its characteristic, either with a small secondary current or a low electromotive force. Both of these conditions are uncommercial."

**Curve, Life, of Incandescent Lamp** —

—A curve in which the life of an electric lamp is represented by means of abscissas and ordinates proportional to the life in hours and the candle-power or the volts respectively.

**Curve, Logarithmic** — A curve in which the rate of increase or decrease of the ordinate is proportional to the ordinate itself.

On the line  $OX$ , Fig. 191, mark off the time

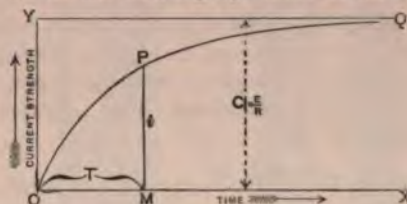


Fig. 191. Logarithmic Curve.

in lengths, reckoned from  $O$ . Represent the current strength by lines drawn vertically to the time-line. Let  $OY$ , equal  $C = \frac{E}{R}$ .

Applying the electromotive force, the current grows in the wire as represented by the graphic curve.

According to Fleming, the growth of this current takes place according to the following law, *viz.*: "The current strength at any instant, added to the rate of growth of the current strength at that instant multiplied by the time-constant, is equal to the current which would exist if induction were zero."

**Curve, Permeability** — A curve representing the magnetic permeability of a magnetic substance.

There is a certain temperature for every paramagnetic substance, at which its permeability is no greater than that of air. This temperature for iron is reached at about 750 degrees C.; for nickel, at about 400 degrees C.

**Curve, Simple-Harmonic** — The curve which results when a simple-harmonic motion in one line is compounded with a uniform motion in a straight line, at right angles thereto.

A harmonic curve is sometimes called a curve of sines, because the abscissas of the curve are proportional to the times, while the ordinates are proportional to the sines of the angles, which are themselves proportional to the times.



**Curves, Isochasmen** — —Curves drawn on the earth's surface between zones having equal frequency of auroral discharges.

The isochasmen curves are nearly at right angles to the magnetic meridian.

**Curves, Magnetic** — —Curved lines showing the direction of the lines of magnetic force in any field, formed by sprinkling iron filings on a sheet of paper or glass held in the field of a magnet, and gently tapping the support so as to permit the filings to properly arrange themselves. (See *Figures, Magnetic.*)

**Cut-In, To** — —To introduce an electro-receptive device into the circuit of an electric source by completing or making the circuit through it.

**Cut-Off, Automatic Gas** — —A device for automatically cutting out the battery from an electric gas-lighting circuit on the accidental grounding of the circuit.

Unless the battery is disconnected from the circuit on the establishing of a ground, the battery will polarize and soon become useless.

**Cut-Out, A** — —A device by means of which an electro-receptive device or loop may be thrown out of the circuit of an electric source.

In any system of light or power distribution, a cut out is generally placed outside a building into which a loop or branch of the main circuit runs, so as to permit that loop or branch to be readily disconnected therefrom. In the same way cut-out keys or switches are generally placed in the circuit of the loop and each electro-receptive device.

**Cut-Out, Air-Space** — —A modified form of paper cut-out, in which the disc of paper or mica is replaced by the resistance of an air-space.

Although the resistance of an air-space is so high as to be practically immeasurable, yet it is overcome or broken by a much lower difference of potential than an equal thickness of paper or mica. (See *Path, Alternative. Cut-Out, Film.*)

**Cut-Out, Automatic** — —Any device that will automatically cut-out, or remove, a translating device, or an electric source, from an electric circuit, whenever any predetermined effect is produced.

**Cut-Out, Automatic, for Multiple-Connected Electro-Receptive Devices** — —A device for automatically cutting an electro-receptive device, such as a lamp, out of the circuit of the leads.

Automatic cut-outs for incandescent lamps, when connected to the leads in multiple-arc, consist of strips of readily melted metal called *safety fuses*, which on the passage of an excessive current fuse, and thus automatically break the cir-



Fig. 192. Ceiling Cut-Out.

cuit in that particular branch. (See *Catch, Safety.*)

A form of ceiling cut-out, made of porcelain, is shown in Fig. 192, with the two halves separated



Fig. 193. Ceiling Cut-Out.

to show interior details, and in Fig. 193, with the two halves placed together.

**Cut-Out, Automatic, for Series-Connected Electro-Receptive Devices** — —A device whereby an electro-receptive device, such as an electric arc lamp, is, to all intents and purposes, automatically cut out, or removed from the circuit, by means of a shunt of low resistance, which permits the greater part of the current to flow past the lamp.

It will be observed that the lamp, though still in the circuit, is to all practical intents cut out from the same, since the proportion of the current that now passes through it is too small to operate it.

In most series arc lamps, cut-outs are operated by means of an electro-magnet placed in a shunt circuit of high resistance around the carbons. If the carbons fail to properly feed, the arc increases in length and consequently in resistance. More current passes through the shunt magnet, until finally, when a certain predetermined limit is reached, the armature of the electro-magnet is attracted to the magnet pole and mechanically completes the short circuit past the lamp.

In some automatic cut-outs the fusion of a readily fused wire, placed in a shunt circuit around the carbons, permits a spring to complete the short circuit.

The automatic cut-out prevents the accidental extinguishing of any single lamp in a series circuit from extinguishing the remaining lamps on that circuit.

**Cut-Out, Automatic Time** — —A device arranged so as to automatically cut out a translating device, or an electric source, from a circuit, at the end of a certain predetermined time.

**Cut-Out, Duplex** — —A cut-out so arranged that when one bar or strip is fused or melted by an abnormal current another can be immediately substituted for it.

**Cut-Out, Film** — —A cut-out in which a film, or sheet of paper or mica, is interposed between a line plate and an earth plate, which, when punctured by a spark, short circuits the instruments on the line.

**Cut-Out, Main-Line** — —An automatic cut-out placed on the main line. (See *Cut-Out, Automatic*.)

A form of main-line cut-out is shown in Fig.



Fig. 194. Main-Line Cut-Out.

194. The fuses are shown as attached to the fuse-block.

**Cut-Out, Paper** — —A term sometimes employed instead of film cut-out. (See *Cut-Out, Film*.)

**Cut-Out, Rosette** — —A rosette for an electrolier, containing a cut-out. (See *Rosette*.)

**Cut-Out, Spring-Jack** — —A device similar in general construction to a spring-jack, but employed to cut out a circuit.

An insulated plug is thrust between spring contacts, thus breaking the circuit by forcing them apart.

**Cut Out, To** — —To remove an electro-receptive device from the circuit of an electric source by disconnecting or diverting the circuit from it.

**Cutting Lines of Force.**—(See *Force, Lines of Cutting*.)

**Cycle.**—A period of time within which a certain series of phenomena regularly recur, in the same order.

**Cycle, Magnetic** — —A single round of magnetic changes to which a magnetizable



substance, such as a piece of iron, is subjected when it is magnetized from zero to a certain maximum magnetization, then decreased to zero, reversed and carried to a negative maximum, and then decreased again to zero.

**Cyclical Magnetic Variation.**—(See *Variation, Cyclical Magnetic*.)

**Cyclotrope.**—A name proposed in place of transformer or converter. (See *Transformer*.)

**Cylinder, Vortex** — —A number of vortex stream-lines grouped parallel to one another about a straight line which forms the axis or core of the vortex.

**Cylindrical Armature.**—(See *Armature, Cylindrical*.)

**Cylindrical Carbon Electrodes.**—(See *Electrodes, Cylindrical Carbon*.)

**Cylindrical Electro-Magnet.**—(See *Magnet, Electro, Cylindrical*.)

**Cylindrical Magnet.**—(See *Magnet, Cylindrical*.)

**Cylindrical Ring Armature.**—(See *Armature, Cylindrical Ring*.)

**Cymogene.**—An extremely volatile liquid which is given off from crude coal oil during the early parts of its distillation.

The two liquids which are obtained from the condensation of the vapors given off during the first parts of the distillation of coal oil are called *cymogene*, and *rhigolene*. These liquids are employed on account of their extreme volatility for the artificial production of cold.

Rhigolene is employed by some for the *treatment* or *flashing* of the carbons used in incandescent lamps. (See *Carbons, Flashing Process for*.)

**Cystoscopy, Electric** — —A name given to Hitz's method of ocular examination of the human bladder by electric illumination.

## D

**Damped Magnetic Needle.**—(See *Needle, Magnetic, Damped*.)

**Damper.**—A metallic cylinder provided in an induction coil so as to partially or completely surround the iron core, for the purpose of varying the intensity of the currents induced in the secondary.

The metallic cylinder acts as a screen or shield for the rapidly alternating currents traversing the field of the primary. (See *Screening, Magnetic*.) As the damper is pulled out, a greater length of the core is exposed to the induction.

**Damper.**—A term sometimes applied to a dash-pot or other similar apparatus provided for the purpose of preventing the too sudden movement of a lever or other part of a device. (See *Dash-Pot*.)

Some form of damper or dash-pot is used on most electric arc lamps, the upper carbon of which is fed by a direct fall.

The double use of this word is unfortunate.

**Damping.**—The act of stopping vibratory motion such as bringing a swinging mag-

netic needle quickly to rest, so as to determine the amount of its deflection, without waiting until it comes to rest after repeated swingings to and fro.

Damping devices are such as offer resistance to quick motion, or high velocities. Those generally employed in electrical apparatus are either *air* or *fluid friction*, obtained by placing vanes on the axis of rotation, or by checking the movements of the needle by means of the currents it sets up, during its motion, in the mass of any conducting metal placed near it. These currents, as Lenz has shown, always tend to produce motion in a direction opposed to that of the motion causing them. *Bell-shaped magnets* are especially suitable for this kind of damping. (See *Magnet, Bell-Shaped*.)

The needle of a galvanometer is *dead-beat* when its *moment of inertia* is so small that its oscillations in an intense field are very quick, and the mirror, acting as a vane, causes the movements to die out very rapidly, and the needle therefore moves sharply over the scale from point to point and comes quickly to a *dead stop*. When the needle or swinging coil is heavy and moves in an intense

field, as in the Deprez-d'Arsonval galvanometer, the movements are dead-beat.

**Damping**, by means of pieces of india rubber is often applied to telephone diaphragms to prevent their excessive or continued vibration.

**Damping, Electric** — — A term sometimes employed to express a decrease in the intensity of the electric oscillations produced in a conductor by electric resonance, under circumstances where higher overtones are set up in the conductor.

**Daniell's Voltaic Cell.**—(See *Cell, Voltaic, Daniell's*.)

**Dark-Space, Crookes'** — — (See *Space, Dark, Crookes'*.)

**Dark-Space, Faraday's** — — (See *Space, Dark, Faraday's*.)

**Dash-Pot.**—A mechanical device to prevent too sudden motion in a movable part of any apparatus.

The dash-pot of an automatic regulator, or of an arc-lamp, is provided to prevent too sudden movements of the collecting brushes on the commutator cylinder, or the too sudden fall of the upper carbon. Such devices consist essentially of a loose fitting piston that moves through air or glycerine.

Dash-pots are species of damping devices, and, like the damping arrangements on galvanometers or magnet needles, prevent a too free movement of the parts with which they are connected. (See *Damper, Damping*.)

**Day, Normal Magnetic** — — A day during which the value of the earth's magnetic elements does not vary greatly from their mean value. (See *Elements, Magnetic, of a Place*.)

**Day of Disturbance, Magnetic** — — A day during which the mean departure of the readings of a declinometer at any place, from the normal monthly value at that place, is once and a half the average.—(*Lloyd*.)

**Dead-Beat.**—Such a motion of a galvanometer needle in which the needle moves sharply over the scale from point to point and comes quickly to rest. (See *Damping*.)

**Dead-Beat Discharge.**—(See *Discharge, Dead-Beat*.)

**Dead-Beat Galvanometer.**—(See *Galvanometer, Dead-Beat*.)

**Dead Dipping.**—(See *Dipping, Dead*.)

**Dead Earth.**—(See *Earth, Dead or Total*.)

**Dead Turns of Armature Wire, or Dead Wire.**—(See *Turns, Dead, of Armature Wire*.)

**Death, Electric** — — Death resulting from the passage of an electric current through the human body.

The exact manner in which an electric current causes death is not known. When the current is sufficiently powerful, as in a lightning flash, or a powerful dynamo current, insensibility is practically instantaneous.

Death may be occasioned:

- (1.) As the direct result of physiological shock.
- (2.) From the action of the current on the respiratory centres.
- (3.) From the actual inability of the nerves or muscles, or both, to perform their functions.
- (4.) From an actual electrolytic decomposition of the blood or tissues of the body.
- (5.) From the polarization of those parts of the body through which the current passes.
- (6.) From an actual rupture of parts by a disruptive discharge.

The current required to cause death will depend on a variety of circumstances, among which are:

- (1.) The particular path the current takes through the body, with reference to the vital organs that may lie in this path.
- (2.) The freedom or absence of sudden variations of electromotive force.
- (3.) The time the current continues to pass through the body.

In some fatal cases, it is probably the *extra-current*, or the *induced-direct current on breaking*, that causes death, since, as is well known, its electromotive force may be many times greater than that of the original current.

A comparatively low-potential continuous-current, cannot, therefore, be properly regarded as entirely harmless, simply because its electromotive force is necessarily small. In the case of alternating currents the danger increases after a certain point with the number of alternations per second. When, however, the number of alternations per second reaches a given number, the danger decreases as the frequency of alternations



increases. This was conclusively shown by the independent investigations of Tatum and Tesla.

**Decalescence.**—A term proposed by Prof. Elihu Thomson for an absorption of sensible heat, which occurs at a certain time during the heating of a bar of steel.

Decalescence will thus be observed to be the reverse of recalescence, which is the phenomenon of the emission of sensible heat at a certain time during the cooling of a heated bar of steel. (See *Recalescence*.)

**Deci** (as a prefix).—The one-tenth.

**Deci-Ampère.**—One-tenth of an ampère.

**Deci-Ampère Balance.**—(See *Balance, Deci-Ampère*.)

**Deci-Lux.**—The one-tenth of a lux. (See *Lux*.)

**Declination.**—The variation of a magnetic needle from the true geographical north.

The magnetic declination is east or west. (See *Needle, Magnetic, Declination of*.)

**Declination, Angle of** — — The angle which measures the deviation of the magnetic needle to the east or west of the true geographical north.

The angle of variation of a magnetic needle.

In Fig. 195, if N S, represents the true north and south line, the angle of declination is N O A, and the sign of the variation is east, because the deviation of the needle is toward the east. (See *Needle, Magnetic, Declination of*.)



Fig. 195. Declination of Needle.

**Declinometer.**—A magnetic needle suitably arranged for the measurement of the value of the magnetic declination or variation at any place.

**Decomposition.**—In chemistry the separation of a molecule into its constituent atoms or groups of atoms. (See *Molecule, Atom*.)

**Decomposition, Electric** — — Chemical decomposition by means of an electric discharge or current.

This decomposition may result from an increase

of temperature produced by the electric discharge, or from the passage of the current. In the latter case it is more properly called *electrolytic decomposition*.

**Decomposition, Electric, Crystallization by** — — (See *Crystallization by Electrolytical Decomposition*.)

**Decomposition, Electrolytic** — — The separation of a molecule into its constituent atoms or groups of atoms by the action of the electric current.

These atoms or groups of atoms are either electro-positive or electro-negative in character. (See *Electrolysis, Anion, Kathion*.)

**De-energize.**—To deprive an electro-receptive device of its operating current.

**De-energizing.**—Depriving an electro-receptive device of its operating current.

**Deep-Seated Eddy Currents.**—(See *Currents, Eddy, Deep-Seated*.)

**Deep-Water Submarine Cable.**—(See *Cable, Submarine, Deep-Sea*.)

**Deflagration, Electrical** — — The fusion and volatilization of metallic substances by the electric current.

**Deflagrator.**—The name given to a voltaic battery, of small internal resistance, employed by Hare in the electric deflagration of metallic substances.

**Deflection Method.**—(See *Method, Deflection*.)

**Deflection of Magnetic Needle.**—(See *Needle, Magnetic, Deflection of*.)

**Degeneration.**—Such a degeneration of the muscular or cellular structure of any cell or organ that incapacitates it from performing its functions.

**Degeneration of Energy.**—(See *Energy, Degeneration of*.)

**Degeneration, Partial, Reaction of** — — That form of alteration to electric stimulation, in which the nerves show no abnormal reaction to electric stimulation, while the muscles, when directly stimulated by the constant current, exhibit the reaction of degeneration. (See *Degeneration, Reaction of*.)

**Degeneration, Reaction of** — —A qualitative and quantitative alteration of nerves and muscles to electric stimulation.

According to Landois and Stirling the following conditions characterize essentially the reaction of degeneration: "The excitability of the *muscles* is diminished or abolished for the faradic current, while it is increased for the galvanic current from the third to the fifty-eighth day; it again diminishes, however, with variations, from the seventy-second to eightieth day; the anodic closing contraction is stronger than the cathodic closing contraction." \* \* \* "The diminution of the excitability of the *nerves* is similar for the galvanic and faradic currents."

**Deka** (as a prefix).—Ten times.

**Deka-Ampère**.—Ten amperes.

**Deka-Ampère Balance**.—(See *Balance, Deka-Ampère*.)

**De la Rue's Standard Voltaic Cell**.—(See *Cell, Voltaic, Standard, De la Rue's*.)

**Delliquescence**.—The solution of a crystalline solid arising from its absorption of vapor of water from the atmosphere.

**Demagnetizable**.—Capable of being deprived of magnetism.

**Demagnetization**.—A process, generally directly opposite to that for producing a magnet, by means of which the magnet may be deprived of its magnetism.

A magnet may be deprived of its magnetism, or be demagnetized—

- (1.) By heating it to redness.
- (2.) By touching to its poles magnet poles of the same name as its own.
- (3.) By reversing the directions of the motions by which its magnetism was originally imparted, if magnetized by touch, by stroking it with a magnet in the opposite direction from that which would have to be given in order to produce the magnetization which is to be removed from it.
- (4.) By exposing it in a helix to the influence of currents which will impart magnetism opposite to that which it originally possessed.

Avria claims that a smaller magnetizing force is required to demagnetize a needle than is required to magnetize it.

**Demagnetization of Watches**.—(See *Watches, Demagnetization of*.)

6—Vol. I

**Demagnetize**.—To deprive of magnetism.

**Demagnetizing**.—Depriving of magnetization.

**Demarcation Current**.—(See *Current, Demarcation*.)

**Demarcation Surface**.—(See *Surface, Demarcation*.)

**Density, Electric** — —The quantity of free electricity on any unit of area of surface.

The density is said to be positive or negative according as to whether the charge is positive or negative. (See *Charge, Density of, Plane, Magnetic Proof*.)

**Density, Magnetic** — —The strength of magnetism as measured by the number of lines of magnetic force that pass through a unit area of cross-section of the magnet, *i. e.*, a section taken at right angles to the lines of force. (See *Field, Magnetic*.)

**Density of Charge**.—(See *Charge, Density of*.)

**Density of Current**.—(See *Current Density*.)

**Density of Field**.—(See *Field, Density of*.)

**Density, Surface** — —A phrase used by Coulomb to mean the quantity of electricity per unit of area at any point on a surface. (See *Charge Density, Density, Electric*.)

**Dental-Mallet, Electro-Magnetic** — —A mallet for filling teeth, the blows of which are struck by means of electrically-driven mechanism.

Electro-magnetism was first employed for this purpose by Bonwill, of Philadelphia.

**Dentiphone**.—An audiphone. (See *Audiphone*.)

**Depolarization**.—The act of reducing or removing the polarization of a voltaic cell or battery. (See *Cell, Voltaic, Polarization of*.)

**Depolarize**.—To deprive of polarization.

**Depolarizing**.—Depriving of polarization.

**Depolarizing Fluid**.—(See *Fluid, Depolarizing*.)



**Deposit, Black, Electro-Metallurgical** — —A crystalline variety of electro-metallurgical deposit. (See *Deposit, Electro-Metallurgical*.)

**Deposit, Crystalline, Electro-Metallurgical** — —A non-adherent, non-coherent film of electrolytically deposited metal. (See *Deposit, Electro-Metallurgical*.)

**Deposit, Electro-Metallurgical** — —The deposit of metal obtained by any electro-metallurgical process.

To obtain a good metallic deposit the density of the current must be regulated according to the strength of the metallic solution employed.

Electro-metallurgical deposits are either—

(1.) *Reguline*, or flexible, adherent and strongly coherent metallic films, deposited when neither the current nor the solution is too strong; or,

(2.) *Crystalline*, or non-adherent and non-coherent deposits.

The crystalline deposit may either be of a *loose, sandy character*, which is thrown down when too feeble a current is used with too strong a metallic solution, or it may consist of a *black deposit*, which is thrown down when the current is too strong as compared with the strength of the solution. This latter character of deposit is sometimes technically called *burning*, and takes place most frequently at sharp corners and edges, where the current density is greatest. (See *Current Density*.)

**Deposit, Electro-Metallurgical Nodular** — —A coherent, irregular electro-metallurgical deposit which occurs whenever the current density falls below its normal value.

**Deposit, Electro-Metallurgical, Reguline** — —A flexible, adherent and strongly coherent film of metal electrolytically deposited. (See *Deposit, Electro-Metallurgical*.)

**Deposit, Electro-Metallurgical, Sandy** — —A non-coherent electro-metallurgical deposit which occurs whenever the current density exceeds its normal value.

**Depositing Cell.**—(See *Cell, Depositing*.)

**Depositing Vat.**—(See *Vat, Depositing*.)

**Deposition, Electric** — —The depositing of a substance, generally a metal, by the action of electrolysis. (See *Electrolysis*.)

The electric deposition of a metal on any conducting surface is sometimes called an *electro-metallurgical deposition*. (See *Metal Electro*.)

**Deprez-d'Arsonval Galvanometer.**—(*Galvanometer, Deprez-d'Arsonval*.)

**Derivative Circuit.**—(See *Circuit, Derivative*.)

**Derived Circuit.**—(See *Circuit, Derived*.)

**Derived Units.**—(See *Units, Derived*.)

**Destructive Distillation.**—(See *Distillation, Destructive*.)

**Detector Galvanometer.**—(See *Galvanometer, Detector*.)

**Detector, Ground** — —In a system of incandescent lamp distribution, a device placed in the central station, for showing the candle-power of a lamp the approximate location of a ground on the system.

Fig. 196, shows a form of ground-detector




Fig. 196. Ground-Detector.

which a small transformer is placed on a connection with a lamp and a two-way switch. One terminal of the primary of the transformer is put to ground, while the other can be connected by means of the switch to one or the other of two primary mains of the distribution circuit. Should an earth exist on either main, then the testing transformer has its pole connected to the other main, the lamp in its secondary circuit will light up, providing the leak is of sufficient magnitude to permit a sufficiently great current to pass through the primary circuit.

**Detorsion Bar.**—(See *Bar, Detorsion*.)  
**Device, Electro-Receptive** — —A

devices placed in an electric circuit, and energized by the passage through them of the electric current.

A translating device.

The following are among the more important electro-receptive devices, viz.:

- (1.) Electro magnets.
- (2.) Electric motors.
- (3.) Electro-magnetic signal apparatus.
- (4.) Telegraphic or telephonic apparatus.
- (5.) An arc or incandescent lamp.
- (6.) An electric heater.
- (7.) A plating bath or voltameter.
- (8.) An uncharged storage cell.
- (9.) A converter or transformer.

#### ELECTRO-RECEPTIVE DEVICES.

##### *Motion Reproduced.*

- (1.) Electric motor.
- (2.) Telpherage system.
- (3.) Telephone receiver.
- (4.) Telegraphic apparatus.
- (5.) Telephoto receiver.

##### *Radiant Energy Produced.*

- (6.) Arc or incandescent electric lamp.
- (7.) Electric heater.
- (8.) Electric welder.
- (9.) Leyden jar or battery.

##### *Chemical Decomposition Effected.*

- (10.) Electrolytic bath.
- (11.) Uncharged storage battery.

##### *Electro-Magnetism Produced.*

- (12.) Electro-magnet.

#### **Device, Feeding, of an Arc Lamp —**

A device for maintaining the carbon electrodes of an arc lamp at a constant distance apart during their consumption. (See *Lamp, Electric Arc*.)

**Device, Magneto-Receptive —** —Any device that is capable of being energized when placed in a magnetic field.

The term magneto-receptive device is used in contradistinction to electro-receptive device. (See *Device, Electro-Receptive*.)

**Device or Arrangement, Electromotive —** —A term sometimes employed instead of an electric source. (See *Source, Electric, Arrangement or Device, Electromotive*.)

#### **Device, Safety, for Arc Lamps, or Series**

**Circuits —** —Any mechanism which automatically provides a path for the current around a lamp, or other faulty electro-receptive device in a series circuit, and thus prevents the opening of the entire circuit on the failure of such device to operate. (See *Lamp, Electric Arc*.)

#### **Device, Safety, for Multiple Circuits —**

—A wire, bar, plate or strip of readily fusible metal, capable of conducting, without fusing, the current ordinarily employed on the circuit, but which fuses and thus breaks the circuit on the passage of an abnormally great current.

The terms *safety-catch*, *safety-plug*, *safety-strip* and *safety-fuse* are also used for this *safety device*. (See *Fuse, Safety*.)

**Device, Translating —** —A term embracing electro-receptive and magneto-receptive devices. (See *Device, Electro-Receptive*.)

Translating devices are placed in an electric circuit, and when traversed by the current effect a change, or translation in the form of the electric energy whereby useful work is accomplished.

Translating devices depend for their operation on the luminous, heating, magnetic, or chemical effects of the current.

#### **Devices, Electro-Receptive, Multiple-**

**Connected —** —A connection of electro-receptive devices, in which the positive poles of a number of separate devices are all connected with a single positive lead or conductor, and the negative poles all connected with a single negative lead or conductor.

The multiple-arc-connection of electro-receptive devices is suitable for *constant potential circuits*, or those in which the electromotive force is maintained approximately constant. In such circuits the energy absorbed by each device will increase as its resistance decreases, since the energy absorbed is proportional to the current passing. (See *Circuits, Varieties of*.)

Multiple-arc-connected electro-receptive devices are employed in incandescent lamp distribution. Each device added reduces the resistance of the entire circuit.



**Devices, Electro-Receptive, Multiple-Arc-Connected** — —A term used in place of multiple-connected electro-receptive devices. (See *Devices, Electro-Receptive, Multiple-Connected.*)

**Devices, Electro-Receptive, Multiple-Series-Connected** — —A connection of electro-receptive devices in which a number of separate electro-receptive devices are connected in groups in series, and each of these separate groups afterwards connected in multiple-arc.

The multiple-series connection permits electro-receptive devices to be placed on mains whose electromotive force would be too high to permit a single service to be connected directly to them. It is of great value in the distribution of incandescent lamps by constant currents, since by permitting a higher electromotive force to be employed on the main conductors, it reduces the dimensions of the conductors required for the economical distribution of the current. (See *Circuits, Varieties of.*)

**Devices, Electro-Receptive, Series-Connected** — —The connection of electro-receptive devices in which the devices are placed consecutively in the circuit, so that the current passes successively through all of them from the first to the last.

The series-connection of electro-receptive devices is suited to *constant-current circuits*. The work done in the device is developed by the fall of potential in each device. This kind of connection is used in most systems of arc light and telegraphic lines. (See *Circuits, Varieties of.*)

**Devices, Electro-Receptive, Series-Multiple-Connected** — —A connection of electro-receptive devices in which a number of separate electro-receptive devices are joined in separate multiple groups, and each of these groups subsequently connected with one another in series.

The effect of series-multiple connections is to split up the current into a number of separate currents of smaller strength, but of the same electromotive force. It is applicable to such cases as the combination of arc and incandescent lamps in the same circuit. (See *Circuits, Varieties of.*)

**Devices, Translating, Multiple-Con-**

**nected** — —A term sometimes used for multiple-connected electro-receptive devices. (See *Devices, Electro-Receptive, Multiple-Connected.*)

**Devices, Translating, Multiple-Arc-Connected** — —A term used in place of multiple-connected electro-receptive devices. (See *Devices, Electro-Receptive, Multiple-Connected.*)

**Devices, Translating, Multiple-Series-Connected** — —A term sometimes used instead of multiple-series-connected electro-receptive devices. (See *Devices, Electro-Receptive, Multiple-Series-Connected.*)

**Devices, Translating, Series-Connected** — —A term sometimes used for series-connected electro-receptive devices. (See *Devices, Electro-Receptive, Series-Connected.*)

**Devices, Translating, Series-Multiple-Connected** — —A term sometimes used for series-multiple-connected electro-receptive devices. (See *Devices, Electro-Receptive, Series-Multiple-Connected.*)

**Dextrorsal Helix.**—(See *Helix, Dextrorsal.*)

**Dextrorsal Solenoid.**—(See *Solenoid, Dextrorsal.*)

**Diacritical Current.**—(See *Current, Diacritical.*)

**Diacritical Number.**—(See *Number, Diacritical.*)

**Diacritical Point of Magnetic Saturation.**—(See *Saturation, Magnetic, Diacritical Point of.*)

**Diagnosis, Electro.**—Diagnosis by means of the exaggeration or diminution of the reaction of the excitable tissues of the body when subjected to the varying influences of electric currents.

The electric current has also been applied in order to distinguish between forms of paralysis, and as a final test of death.

**Diagnostic, Electro** — —Pertaining to electro-diagnosis. (See *Diagnosis, Electro.*)

**Diagometer, Rousseau's** — —An apparatus in which an attempt is made to



determine the chemical composition and consequent purity of certain substances by their electrical conducting powers.

The arrangement of the apparatus is shown in Fig. 197. A dry pile, A, has its negative, or —

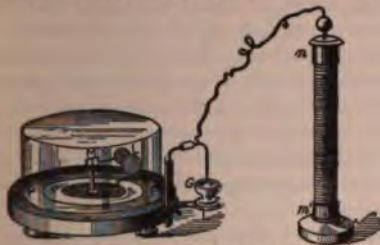


Fig. 197. Rousseau's Diagoneter.

terminal, m', grounded. Its positive, or + terminal is connected to a delicately supported, and slightly magnetized needle, M, terminated by a conducting plate, L. Opposite L, and at the same height, is a fixed plate of slightly larger size. The needle M, when at rest in the plane of the magnetic meridian, is in contact at L, with the fixed plate. If, therefore, the upper plate of the pile is connected with the needle M, both plates are similarly charged and repulsion takes place, the needle coming to rest at a certain distance from the fixed plate.

The substance whose purity is to be determined is placed in the cup G, which is connected, through L, with the fixed plate. A branch wire from the + terminal of the pile is then dipped into the substance in G, and its purity determined from the length of time required for the two plates at L, to be discharged through the material in G.

It is claimed that the instrument will detect the difference between pure coffee and chicory. Its practical application, however, is very doubtful.

**Diagram, Thermo-Electric** — — A diagram in which the thermo-electric power between different metals is designated for different temperatures.

The differences of potential, produced by the mere contact of two metals, varies, not only with the kind of metals, and the physical state of each metal, but also with their temperature. This difference of potential, maintained in consequence of the difference of temperature between the junctions of a *thermo-electric couple*, is approximately proportional to the differences of temperature of these junctions, if these differences are not great, and is equal to the product of such

differences of temperature and a number dependent on the metals in the couple. This number is called the *thermo-electric power*. (See *Couple Thermo-Electric. Thermo-Electric Power.*)

In Fig. 198 (after Tait), the thermo-electric

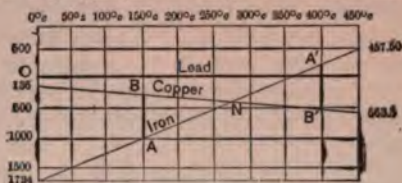


Fig. 198. Thermo-Electric Diagram.

power is shown between lead and iron, and lead and copper. The numbers at the top of the table represent degrees of the centigrade thermometer. Those at the sides represent the differences of potential in *micro-volts*.

The thermo-electric power of the copper-iron couple decreases from the freezing point of water, 0 degrees C., to a temperature of 274.5 degrees C., when it becomes zero. Beyond that temperature the thermo-electric power increases, but in the opposite direction. The point at which this occurs is called the *neutral point*.

**Dial Telegraph.**—(See *Telegraphy. Dial.*)

**Dialysis.**—The act of separating a mixture of crystalloids and colloids by diffusion through a membrane.

If, for example, the contents of a stomach, in a case of suspected poisoning, be placed in a vessel, the bottom of which is formed of a sheet of parchment paper and floated in water, the crystalloid or substances capable of crystallizing, will pass into the water and the colloid, an uncrystallized jelly-like substance, will remain in the vessel. This process has been used to detect the presence of poison in the stomach in post-mortem cases.

**Diamagnetic.**—The property possessed by substances like bismuth, phosphorus, antimony, zinc and numerous others, of being apparently repelled when placed between the poles of powerful magnets.

When diamagnetic substances in the form of rods or bars are placed, as in Fig. 199, between the poles of a powerful electro-magnet, they place themselves at right angles to the poles, or are apparently repelled.

*Paramagnetic substances* like iron or steel, on the contrary, come to rest under similar circum-



stances in a straight line joining the poles, at right angles to the position shown in Fig. 199.

Paramagnetic substances are sometimes called *ferro-magnetic*, or substances magnetic after the manner of iron. This word is unnecessary and ill-advised. The term *sidero-magnetic*, which has also been proposed in place of paramagnetic, is also unnecessary.

Paramagnetic substances appear to concentrate the lines of magnetic force on them; that is, their magnetic resistance is smaller than that of the air or other medium in which the magnet is placed. They, therefore, come to rest with their greatest dimensions in the direction of the lines of magnetic force.

Diamagnetic substances appear to have a greater magnetic resistance than that of the air around them. They, therefore, come to rest with their least dimensions in the direction of the lines of magnetic force.

The difference between paramagnetic and diamagnetic substances is generally believed to be due to the varying resistance these substances thus offer to lines of magnetic force as compared with that offered by air or by a vacuum.

Tyndall comes to the conclusion as the result of extended experimentation: "That the diamagnetic force is a polar force, the polarity of diamagnetic bodies being opposed to that of paramagnetic ones under the same conditions of excitement."

This view, however, is not generally accepted by scientists.

Diamagnetism is also possessed by certain liquid and gaseous substances.

**Diamagnetic Polarity.**—(See *Polarity, Diamagnetic.*)

**Diamagnetically.**—In a diamagnetic manner.

**Diamagnetism.**—A term applied to the magnetism of diamagnetic bodies. (See *Diamagnetic.*)



Fig. 199 Effect of Paramagnetism.

**Diamagnetism, Weber's Theory of**—A theory to account for the phenomena of diamagnetism.

Weber's theory of diamagnetism, like Ampère's theory of magnetism, supposes that magnetic substances consist of originally magnetized molecules or atoms, and that the act of magnetization consists of polarizing these atoms or molecules, or turning them in one and the same direction. That the original condition of the molecules or atoms is probably due to the passage of electricity, which continually circulates through their mass, the atoms being supposed to possess perfect conductivity.

Suppose the substance through whose molecules or atoms these currents are flowing be immersed in a magnetic field. All of the molecules or atoms which can turn so as to look along lines of force in the right direction will have the current flowing in them thereby weakened so long as they remain in the field. When drawn out of it, however, these currents will regain their normal strength.

Suppose now the case of a substance, in which the currents are normal but weak, immersed in a strong magnetic field. There may thereby be effected a complete reversal of the direction of these currents, and others may be produced which flow in the opposite direction, and which will continue so to flow as long as the substance remains in the field. Such currents would then be sufficient to explain the phenomena of diamagnetic action.

An electric current produced in a circuit near which a momentary current of electricity is suddenly brought has now the opposite direction to that which produces it, and this momentary current would tend to produce repulsion. When,



Fig. 200. Weber's Theory of Diamagnetism.

too, the circuit is drawn out of the neighborhood in which another current is flowing, another mo-

mentary current is produced in the same direction. This produces attraction.

Now, regarding the same phenomena from the standpoint of lines of magnetic force, when a conductor through which a current is passing is placed in a magnetic field, any increase in the number of lines of magnetic force passing through it tends to move the conductor out of the magnetic field, while any decrease in the number of lines of force tends to move the conductor into the field. To experimentally show the attractions and repulsions produced by magnetization or demagnetization, the following apparatus may be employed:

A stout disc of copper, Fig. 200, is supported on a horizontal arm in the position shown in front of the pole of a powerful electro-magnet. When the current is sent through the electro-magnet the disc of copper is repelled from the magnetic pole. When the magnetism is being destroyed by the opening of the circuit and by the weakening of the current, the copper disc is attracted.

**Diamagnetometer.**—An apparatus designed for studying diamagnetism. (See *Diamagnetism*.)

The apparatus for the study of paramagnetism generally receives simply the name of magnetometer.

**Diamagnets.**—Diamagnetic substances subjected to magnetic induction and formerly called diamagnets in contradistinction to ordinary magnets.

Diamagnets are supposed by some to possess a polarity the same as that of the inducing pole, instead of the opposite polarity, as in paramagnetic substances. (See *Diamagnetism*.)

**Diaphragm.**—A sheet of some solid substance, generally elastic in character and circular in shape, securely fixed at its edges and capable of being set into vibration.

The *receiving diaphragm* of a telephone is generally a thin plate or disc of iron, fixed at its edges, placed near a magnet pole and set into vibration by variations in the magnetic strength of the pole, due to variations in the current that is passed over the line.

The *transmitting diaphragm* of the telephone or of a phonograph, consists of a plate fixed at its edges and set into vibration by the sound waves striking it.

**Diaphragm.**—A term sometimes employed for a plate form of porous cell.

**Diaphragm Currents.**—(See *Currents*, *Diaphragm*, *Cell*, *Porous*.)

**Diaphragm of Voltaic Cell.**—A term sometimes used for the porous cell of a double fluid voltaic cell when in the form of a plate.

**Dice-Box Insulator.**—(See *Insulator*, *Dice-Box*.)

**Dielectric.**—A substance which permits induction to take place through its mass.

This word is sometimes, but improperly, written Di-Electric.

The substance which separates the opposite coatings of a condenser is called the dielectric. All dielectrics are non-conductors.

All non-conductors or insulators are dielectrics, but their dielectric power is not exactly proportional to their non-conducting power.

Substances differ greatly in the degree or extent to which they permit induction to take place through or across them. Thus, a certain amount of inductive action takes place between the insulated metal plates of a condenser across the layer of air between them.

A dielectric may be regarded as pervious to rapidly reversed periodic currents, but opaque to continuous currents. There is, however, some conduction of continuous currents.

According to Swinburne, there are three species of conduction that may take place in dielectrics, all of which produce a heating of the dielectric, viz.:

(1.) *Metallic Conduction*, i. e., such a conduction as takes place in a metal. This kind of conduction arises from the presence of metallic particles embedded in the dielectric.

(2.) *Disruptive Conduction*, or a momentary current accompanying a disruptive discharge.

(3.) *Electrolytic Conduction*, or that kind of conduction which accompanies the electrolysis of a conductor. This kind of conduction may take place in some kinds of glass.

Faraday regarded the dielectric as the true seat of electric phenomena. Conducting substances he considered as mere breaks in the continuity of the dielectric. This is the view now generally held.

**Dielectric Capacity.**—(See *Capacity*, *Dielectric*.)



**Dielectric Constant.**—(See *Constant, Dielectric*.)

**Dielectric Density of a Gas.**—(See *Gas, Dielectric Density of*.)

**Dielectric, Polarization of** — —A molecular strain produced in the dielectric of a Leyden jar or other condenser, by the attraction of the electric charges on its opposite faces, or by the electrostatic stress. (See *Strain, Dielectric*.)

A term formerly employed in place of electric displacement.

Faraday, in his study of the action of induction, in denying the possibility of action at a distance, thought that the dielectric through which induction takes place was polarized, and that in this way the induction was transmitted across the intervening space between the inducing and the induced body, by the action of the contiguous particles of the dielectric.

The polarization of the glass of a Leyden jar, and the accompanying strain, are seen by the frequent piercing of the glass, and by the residual charge of the jar. (See *Charge, Residual*.)

**Dielectric Resistance.**—(See *Resistance, Dielectric*.)

**Dielectric Strain.**—(See *Strain, Dielectric*.)

**Dielectric Strength of a Gas.**—(See *Gas, Dielectric Strength of*.)

**Dielectric Stress.**—(See *Stress, Dielectric*.)

**Difference of Potential.**—(See *Potential, Difference of*.)

**Differential Electric Bell.**—(See *Bell, Differential Electric*.)

**Differential Galvanometer.**—(See *Galvanometer, Differential*.)

**Differential Inductometer.**—(See *Inductometer, Differential*.)

**Differential Method of Duplex Telegraphy.**—(See *Telegraphy, Duplex, Differential Method of*.)

**Differential Relay.**—(See *Relay, Differential*.)

**Differential Thermo-Pile.**—(See *Pile, Thermo, Differential*.)

**Differential Voltameter.**—(See *Voltameter, Siemens' Differential*.)

**Differentially Wound Motor.**—(See *Motor, Differentially Wound*.)

**Diffusion, Anodal** — —A term applied to the introduction of any drug into the human body by electricity.

The cataphoretic introduction of drugs into the body. (See *Cataphoresis*.)

A sponge or other similar electrode, saturated with a solution of the drug, is connected with the anode of a source and placed over the part to be treated and its kathode connected to another part of the body in a nearly direct line with the anode and the current passed.

**Diffusion Creep.**—(See *Creep, Diffusion*.)

**Diffusion of Electric Current.**—(See *Current, Diffusion of*.)

**Diffusion of Lines of Force.**—(See *Force, Lines of, Diffusion of*.)

**Dimensions of Acceleration.**—(See *Acceleration, Dimensions of*.)

**Dimensions of Units.**—(See *Units, Dimensions of*.)

**Diminished Electric Irritability.**—(See *Irritability, Electric, Diminished*.)

**Dimmer** — —A choking coil, employed in a system of distribution by converters or transformers, for regulating the potential of the feeders.

The dimmer consists essentially of a choking coil wound around a laminated ring of soft iron,




Fig. 201. Reaction Coil Dimmer.

and provided with an envelope of heavy copper. The copper ring, by its position as regards the choking coil, adjusts or regulates the self-induction of the coil, and consequently regulates the potential of the feeders. The dimmer is used in theatres or similar situations to turn the lights up or down.

The reaction coil or dimmer is shown in Fig. 201. The choking coil is wound on a ring of iron. The copper sheath is furnished with a handle to permit its position to be readily changed with respect to the coil of insulated wire. A laminated iron drum is supported on bearings inside the ring. When the sheath is over the coil, the coil offers but a small resistance to the passage of the current. When away from it the self-induction of the coil is increased.

**Dioptré.**—A unit of refracting power.

A lens of one dioptré has a focal length of one metre. One of two dioptries has a focal length of 50 centimetres; one of four dioptries 25 centimetres. This is also spelled *dioptry*.

**Dioptric.**—Relating to dioptries.

**Dioptries.**—The science which treats of the refraction of light.

**Dioptry.**—A word sometimes used for *dioptré*. (See *Dioptré*.)

**Dip, Magnetic** — —The deviation of a magnetic needle from a true horizontal position.

The inclination of the magnetic needle towards the earth.

The magnetic needle shown in Fig. 202, though

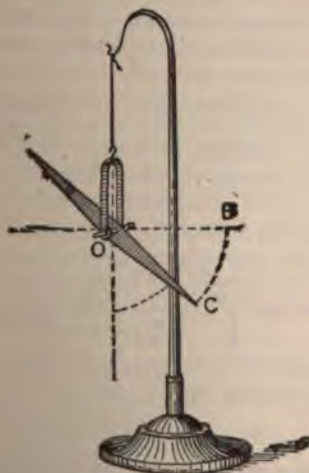


Fig. 202. Angle of Dip.

supported at its centre of gravity, will not retain a horizontal position in all places on the earth's surface.

In the northern hemisphere its *north-seeking* end will dip or incline at an angle B O C, called the *angle of dip*. In the southern hemisphere its south seeking end will dip.

The cause of the dip is the unequal distance of the magnetic poles of the earth from the poles of the needle.

The *magnetic equator* is a circle passing around the earth midway (in intensity) between the earth's magnetic poles. There is no dip at the magnetic equator. At either magnetic pole the angle of dip is 90 degrees.

**Dip, or Inclination, Angle of** — —

The angle which a magnetic needle, free to move in both a vertical and a horizontal plane, makes with a horizontal line passing through its point of support.

The angle of dip of a magnetic needle. (See *Inclination, Angle of*.)

**Diplex Telegraphy.**—(See *Telegraphy, Diplex*.)

**Dipping.**—An electro-metallurgical process whereby a deposit or thin coating of metal is obtained on the surface of another metal by dipping it in a readily decomposable metallic salt.

Cleansing surfaces for electro-plating processes by immersing them in various acid liquors.

**Dipping, Bright** — —Dipping in acid liquors for the purpose of obtaining a bright electro-metallurgical coating.

**Dipping Circle.**—(See *Circle, Dipping*.)

**Dipping, Dead** — —Dipping in acid liquors for the purpose of obtaining a dead or unpolished surface on an electro-metallurgical coating.

**Dipping, Electro-Metallurgical** — — A process for obtaining an electro-metallurgical deposit on a metallic surface by dipping it in a solution of a readily decomposable metallic salt.

A bright, polished iron surface, when simply dipped into a solution of copper-sulphate, receives a coating of metallic copper from the electrolytic action thus set up.

This process is known technically as *dipping*. The term dipping is also used in electro-metallurgy to indicate the process of cleaning the



articles, that are to be electro-plated, by dipping them in various acid or alkaline baths.

**Direct Current.**—(See *Current, Direct.*)

**Direct-Current Electric Motor.**—(See *Motor, Electric, Direct-Current.*)

**Direct Electromotive Force.**—(See *Force, Electromotive, Direct.*)

**Direct Excitation.**—(See *Excitation, Direct.*)

**Direct-Induced Current.**—(See *Current, Direct-Induced.*)

**Direct, or Break-Induced Current** —  
—(See *Current, Direct, Current, Break-Induced.*)

**Direct Working.**—(See *Working, Direct.*)

**Direction, Negative, of Electrical Convection of Heat** — —A direction in which heat is transmitted through an unequally heated conductor by electric convection, during the passage of electricity through the conductor, opposite that of the current. (See *Heat, Electric Convection of.*)

**Direction of Lines of Force.**—(See *Force, Lines of, Direction of.*)

**Direction, Positive, of Electrical Convection of Heat** — —A direction in which heat is transmitted through an unequally heated conductor by electric convection, during the passage of electricity through the conductor, the same as that of the current. (See *Heat, Electric Convection of.*)

**Direction, Positive, Round a Circuit** — —In a plane circuit looked at from one side, a direction opposite to that of the hands of a clock.

This is a convention which has been made in order to conveniently connect the direction of the electromotive force produced by induction, with the direction of the induction.

**Direction, Positive, Through a Circuit** — —In a plane circuit, looked at from one side, a direction through the circuit away from the observer.

**Directive Tendency of Magnetic Needle.** —(See *Needle, Magnetic, Directive Tendency of.*)

**Disc, Arago's** — —A disc of copper

or other non-magnetic metallic substance, which, when rapidly rotated under a magnetic needle, supported independently of the disc, causes the needle to be deflected in the direction of rotation, and, when the velocity of the disc is sufficiently great, to rotate with it.

Such disc is shown in Fig. 203 at b. The move-



Fig. 203. Arago's Disc.

ment of the needle is due to electric currents, induced by the disc moving through the field of the needle so as to cut its lines of magnetic force. To obtain the best results the disc must move very rapidly, and should be near the needle. Moreover, the needle should be powerful.

This effect was discovered by Arago, in 1824. Since a magnetic needle moving over a metallic plate produces electric currents in a direction which tends to stop the motion of the needle, a damping of the motion of a magnetic needle is sometimes effected by causing it to move near a metal plate. The induced currents, which the needle produces in the plate by its motion over it, tend to retard the motion of the needle. (See *Damping, Law, Lenz's.*)

**\* Disc Armature.**—(See *Armature, Disc.*)

**Disc, Faraday's** — —A metallic disc movable in a magnetic field on an axis parallel to the direction of the field.

Such a disc is shown in Fig. 204, and moves,




Fig. 204. Faraday's Disc.

as will be seen, so as to cut the lines of magnetic force at right angles.

The difference of potential generated by the motion of such a disc may be caused to produce a current, by providing a circuit which is completed through the portion of the disc that at any

moment of its rotation is situated between spring contacts resting on the axis of rotation and the circumference of the disc, respectively.

In *Barlow's* or *Sturgeon's wheel*, Fig. 205, the

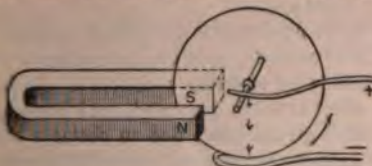


Fig. 205. *Barlow's Wheel.*

wheel itself rotates in the direction shown, when a current is sent through it in a direction indicated by the arrows.

**Discharge.**—The equalization of the difference of potential between the terminals of a condenser or source, on their connection by a conductor.

The removal of a charge from the surface of any charged conductor by connecting it with the earth, or another conductor.

The removal of a charge by means of a stream of electrified air particles.

The discharge of an insulated conductor, a cloud, a condenser, or a Leyden battery, is *oscillatory*. The oscillatory currents continue but for a short time. The discharge is therefore often spoken of as producing *momentary* currents.

The discharge of a voltaic battery, or a storage battery, is nearly continuous, and furnishes a current which is practically continuous, as distinguished from the momentary currents produced by the discharge of a condenser.

A discharge may be *alternating, brush, brush and spray, conductive, convective, dead-beat, disruptive, flaming, glow, lateral, oscillatory, periodic, stratified, streaming, impulsive and periodic.*

**Discharge, Alternating** — —An electric discharge which changes its direction at regular intervals of time.

A periodic discharge.

**Discharge, Brush** — —A faintly luminous discharge that occurs from a pointed positive conductor.

The brush discharge is a species of convective discharge. In it, the streams of electrified air particles assume the characteristic brush shape. (See *Discharge, Convective.*)

**Discharge, Brush-and-Spray** — —A form of streaming discharge obtained by increasing the frequency of the alternations of a high potential current which assumes the appearance of a spray of silver-white sparks, or a bunch of thin silvery threads around a powerful brush.

Some idea of the brush-and-spray discharge may be obtained from Fig. 206, taken from



Fig. 206. *Brush-and-Spray Discharge (Tesla).*

Tesla, who has carefully studied these phenomena.

The brush-and-spray discharge is best obtained, according to Tesla, by bringing the terminals of a source of rapidly alternating electrostatic currents of high potential somewhat nearer together, when the streaming discharge has been obtained, and preferably increasing the frequency of the alternations.

The brush-and-spray discharge, when powerful, closely resembles a gas flame from gas escaping under great pressure. Says Tesla: "But they do not only *resemble*, they are veritable flames, for they are hot. Certainly they are not as hot as a gas-burner, but they would be so if the frequency and the potential would be sufficiently high."

The brush-and-spray discharge, at higher frequencies, passes into a form of discharge for which Tesla has proposed no particular name. He describes this form, in a publication of a lecture before the American Institute of Electrical Engineers, as follows, viz.:

"If the frequency is still more increased, then the coil refuses to give any spark unless at comparatively small distances, and the fifth typical form of discharge may be observed (Fig. 207). The tendency to stream out and dissipate is then so great that when the brush is produced at one terminal no sparking occurs, even if, as I have repeatedly tried, the hand, or any conducting object, is held within the stream; and, what is more



singular, the luminous stream is not at all easily deflected by the approach of a conducting body.

"At this stage the streams seemingly pass with the greatest freedom through considerable thicknesses of insulators, and it is particularly interesting to study their behavior. For this purpose it is convenient to connect to the terminals of the coil two metallic spheres, which may be placed at any desired distance (Fig. 208). Spheres are pref-



Fig. 207. *Fifth Typical Form of Discharge (Tesla).*

erable to plates, as the discharge can be better observed. By inserting dielectric bodies between the spheres, beautiful discharge phenomena may be observed. If the spheres be quite close and a spark be playing between them, by interposing a thin plate of ebonite between the spheres the spark instantly ceases and the discharge spreads into an intensely luminous circle several inches in diameter, provided the spheres are sufficiently large. The passage of the stream heats, and, after a while, softens the rubber so much that two



Fig. 208. *Luminous Discharge with Interposed Insulators.*

plates may be made to stick together in this manner. If the spheres are so far apart that no spark occurs, even if they are far beyond the striking distance, by inserting a thick plate of glass the discharge is instantly induced to pass from the spheres to the glass in the form of luminous streams. It appears almost as though these

streams pass *through* the dielectric. In reality this is not the case, as the streams are due to the molecules of the air which are violently agitated in the space between the oppositely charged surfaces of the spheres.

"When no dielectric other than air is present, the bombardment goes on, but is too weak to be visible; by inserting a dielectric the inductive effect is much increased, and besides, the projected air molecules find an obstacle and the bombardment becomes so intense that the streams become luminous. If by any mechanical means we could effect such a violent agitation of the molecules we could produce the same phenomenon. A jet of air escaping through a small hole under enormous pressure and striking against an insulating substance, such as glass, may be luminous in the dark, and it might be possible to produce phosphorescence of the glass or other insulators in this manner.

"The greater the specific inductive capacity of the interposed dielectric, the more powerful the effect produced. Owing to this the streams show themselves with excessively high potentials even if the glass be as much as one and one-half to two inches thick. But besides the heating due to bombardment, some heating goes on undoubtedly in the dielectric, being apparently greater in glass than in ebonite. I attribute this to the greater specific inductive capacity of the glass in consequence of which, with the same potential difference, a greater amount of energy is taken up in it than in rubber. It is like connecting to a battery a copper and a brass wire of the same dimensions. The copper wire, though a more perfect conductor, would heat more by reason of its taking more current. Thus what is otherwise considered a virtue of the glass is here a defect. Glass usually gives way much quicker than ebonite; when it is heated to a certain degree the discharge suddenly breaks through at one point, assuming then the ordinary form of an arc."

**Discharge, Conductive** — — A discharge effected by leading the charge off through a conductor placed in contact with the charged body.

**Discharge, Convective** — — A discharge which occurs from the points on the surface of a highly charged conductor, through the repulsion by the conductor of air particles that in this manner carry off minute charges.

A convective discharge, though often attended by a feeble sound, is sometimes called a *silent discharge*, in order to distinguish it from the *noisy, disruptive discharge*, which is attended by a sharp snap, or when considerable, by a loud report.

A convective discharge is also called a *glow* or *brush discharge*. The latter is best seen at the small button at the end of the *prime* or *positive conductor* of a frictional electric machine.

The *positive discharge* from a point or small rounded conductor is always *brush-shaped*; the *negative discharge* is always *star-shaped*.

In rarefied gases, the discharge is convective in character and produces various luminous effects of great beauty, the color of which depends on the kind of gas, and the size, shape and material of the electrodes, and on the degree of the vacuum. Thus in the rarefied space of the vessel shown in Fig. 209, the discharge becomes an ovoidal mass of light, sometimes called the *Philosopher's Egg*.

When the discharges in rarefied gases follow one another very rapidly, alternations of light and darkness, or *stratifications*, or *striae* are produced.

The breadth of the dark bands increases as the vacuum becomes higher. The light portions start at the positive electrode, and are hotter than the dark portions.

The effects of luminous convective discharges are best seen in exhausted glass tubes, called *Geissler tubes*, containing residual atmospheres of various gases. (See *Tubes, Geissler*.)

**Discharge, Dead-Beat** — — A non-oscillatory discharge. (See *Discharge, Oscillatory*.)

**Discharge, Disruptive** — — A sudden, and more or less complete, discharge that takes place across an intervening non-conductor or dielectric.

A mechanical strain of the dielectric occurs, which suddenly breaks down as it were and per-

mits the discharge to pass as a spark, or rapid succession of sparks.

In air, the spark, when long, generally takes the zigzag path, as shown in Fig. 210.

The sparks produced by disruptive discharges consist of heated gases, together with portions of the conductor that are volatilized by the heat.

The discharge of a *Leyden jar* or *condenser* may be disruptive, as when the discharging rod is held with one knob connected with one coating, and the other near the other coating. It may be gradual, as when the two coatings are alternately connected with the ground. The discharge of a *Leyden jar* as, indeed, the disruptive discharge in general, is *oscillatory*.

The stress is often sufficient to pierce the glass.

**Discharge, Duration of** — — The time required to effect a complete disruptive discharge.

The disruptive discharge is not instantaneous; some time is required to effect it. Estimates of the duration of a flash of lightning based on the duration of a *Leyden jar* discharge, are misleading from the enormous difference in the quantity and the potential in the two cases. The fact that the disruptive discharge is oscillatory and consists of a number of discharges taking place in alternately opposite directions shows that the discharge is not instantaneous.

*Leyden jar* discharges, are, however, accomplished in very small periods of time.

**Discharge, Flaming** — — The white and flaming arc-like discharge that occurs between the terminals of the secondary of an induction coil, when, with a great number of alternations per second, the current through the primary is increased beyond that required for the sensitive-thread discharge. (See *Discharge, Sensitive-Thread*.)



Fig. 209. Discharge in Rarefied Air.



Fig. 210. Disruptive Discharge.



According to Tesla the flaming discharge is best produced when the number of alternations is not too great and certain relations between capacity, self-induction and frequency are observed. These relations must be such as will permit the flow through the circuit of the maximum current, and thus may be obtained with wide variations in the frequency. The flaming discharge develops considerable heat, and is characterized by the absence of the shrill note accompanying less powerful discharges. This is probably due to the enormous frequency.

Some idea of the flaming discharge may be had



Fig. 211. Flaming Discharge (Tesla).

from an inspection of Fig. 211, taken from Tesla.

**Discharge, Glow** — —A form of convective discharge. (See *Discharge, Convective*.)

**Discharge, Impulsive** — —A discharge produced in conductors by suddenly created differences of potential.

Impulsive discharges are influenced more by the inductance of a conductor than by its true ohmic resistance. (See *Inductance, Resistance, Ohmic*.)

A mass of guncotton simply ignited in the open air, produces but little effect on any resisting object placed below it. If, however, it be rapidly ignited by means of a detonator, and is thus fired with much greater rapidity, it may shatter anything placed beneath it.

In a similar manner, a rapidly discharged current, or impulsive discharge, produces, through the inductance of the conductor, a series of effects somewhat similar to the above, in which a great impedance is produced by a sudden change of direction.

**Discharge, Induced Currents, Effects Produced by** — —Varying classes of effects produced by the discharges of induced currents.

The effects produced by discharges of induced currents are classified by Fleming as follows:

(1.) Effects depending on the entire quantity of the discharge.

*a.* Galvanometric effects.

If the needle of the galvanometer has a period or time of oscillation that is long, as compared with the time of duration of the discharge, the sine of one-half the angle of deflection is proportional to the whole quantity of the discharge.

*b.* Electro-chemical effects.

The quantity of an electrolyte broken up is proportional to the quantity of electricity which passes through it.

(2.) Effects depending on the average of the square of the current strength at any instant during the discharge.

*a.* Heating effects.

The rate of dissipation as heat, according to Joule's law, is proportional to the square of the current strength passing.

*b.* Electro-dynamic effects.

When a discharge passes through a circuit, part of which is fixed and part movable, the forces of attraction and repulsion which take place between them at any instant are proportional to the square of the current strength.

(3.) Effects depending on rate of change of the current.

*a.* Physiological effects.

The effect of the discharge in producing physiological shock increases with the suddenness of the discharge. Of two discharges which reached the same maxima that which reached it first would produce the greatest physiological effect. Recent investigations by Tesla and others would appear to partly disprove the above statement.

*b.* Telephonic effects.

The telephone, like the body of an animal, is affected more by the rate of change than by the current strength at any instant.

*c.* Magnetic effects.

Rayleigh has shown that the magnetic effects of the discharge depend upon the maximum current strength during the discharge, or upon the initial current strength, in cases where the current dies away gradually. Since the time required for the permanent magnetizing of a steel wire is small compared with the duration of the induced current, the amount of magnetism acquired depends essentially on the initial or maximum current strength during the discharge, irrespective of the time during which said discharge lasts.

inuous effects.

are also dependent in the case of induced on the rate of change of the current.

**Discharge-Key.**—(See *Key, Discharge.*)

**Discharge, Lateral** — —A discharge, place on the discharge of a Leyden jar, disruptive discharge, between parts or conductors, not in the circuit of discharge.

A charged Leyden jar is placed on an insulator and is then discharged by the discharge. The lateral discharge is seen as a small spark passes between the outside coating of a body connected with the earth at the point of the discharge through the rod.

A lateral discharge is also seen in the sparks taken from a conductor in good contact with the earth, by holding the hand near the conductor, while it is receiving large sparks from a powerful machine in operation. These sparks are due to induction.

A Leyden jar be discharged by means of a condenser bent as shown in Fig. 212, in which




Fig. 212.

if the circuit are closely approached as at B, another spark occurs at B, another spark by a lateral discharge occurs at A. The resistance of the metallic circuit is very less than the resistance of the air through which the lateral discharge occurs, under electromotive force produced in the circuit by the impulsive discharge, its resistance far greater than that of the air. The path of a lateral discharge is the alternative path. (See *Path, Alternative.*)

**Discharge, Luminous Effects of** — — Luminous phenomena attending and produced by an electric discharge.

Luminous effects vary as to color, intensity, and accompanying acoustic phenomena to a variety of circumstances, the principles of which are as follows, viz.:

1. With the kind of gaseous medium through which the discharge passes. Thus, a spark passed through hydrogen has a crimson or reddish color;

through carbonic acid or chlorine, a greenish color.

(2.) With the density of the medium. In a partial vacuum, the discharge from an induction coil becomes an ovoidal mass of light. As the vacuum increases, the light at first grows brighter, but as a higher vacuum is reached, striae of alternate dark and light bands appear. Finally, with very high vacua the discharge fails to pass. (See *Discharge, Convective.*)

(3.) With the nature of the substances forming the points from which the discharge is taken. This is due to the partial volatilization of the material of the electrodes.

(4.) With the kind of electricity, *i. e.*, whether positive or negative. A positive charge assumes the shape of a fan; a negative discharge, that of a star.

(5.) On the density of the discharge. The introduction of a Leyden jar or condenser in the circuit of a Holtz machine, for example, causes the spark to change from the faint bluish to the silvery white.

(6.) The disruptive discharge through air is attended by snapping or crackling sound, which, in the case of lightning, reaches the intensity of thunder. When the disruptive discharge takes place through a vacuum a faint hissing sound is heard, or all sound may entirely disappear.

(7.) Luminous effects resulting from molecular bombardment occurring in comparatively high vacua. These luminous effects may result:

(a.) From actual incandescence of some refractory material produced by the blows of the molecules; or,

(b.) As a result of phosphorescence or fluorescence due to such blows.

Canary glass, or glass stained by uranium oxide, fluoresces and emits a yellowish green light; solution of sulphate of quinine emits a bluish light.

**Discharge, Non-Oscillatory** — —A dead-beat discharge. (See *Discharge, Dead-Beat.*)

**Discharge, Oscillating** — —A number of successive discharges and recharges which occur on the disruptive discharge of a Leyden jar, or condenser.

A discharge which periodically decreases by a series of oscillations.

A discharge which produces a dying-away-backwards and forwards current.



The disruptive discharge of a Leyden jar, or condenser, is not effected by a single rush of electricity. When discharged through a comparatively small resistance, a number of alternate partial discharges and recharges occur, which produce true *oscillations* or *undulatory discharges*.

These oscillations are caused by the *induction of the discharge* on itself, and are similar to the self-induction of a current.

The existence of the oscillating discharge in the case of a Leyden jar or condenser, proves, in the opinion of some, that electricity, taken along with matter, possesses a property similar to inertia.

**Discharge, Oscillatory** — —A term sometimes used for an oscillating discharge. (See *Discharge, Oscillating*.)

**Discharge, Periodic** — —An electric discharge which changes its direction at regular intervals or periods.

An alternating discharge.

**Discharge, Periodically-Decreasing** — —An oscillating discharge whose decrease is periodic. (See *Discharge, Oscillating*.)

**Discharge, Sensitive-Thread** — —The thin, thread-like discharge that occurs between the terminals of the secondary of an induction coil of high frequency.

The sensitive-thread discharge occurs, according to Tesla, when the number of alternations per



Fig. 213. Sensitive-Thread Discharge (Tesla).

second is high and the current through the primary small. This discharge has the form of a thin, feebly-colored thread. Though very sensitive, being deflected by a mere breath, it is nevertheless quite persistent, if the terminals be at one-third of the striking distance apart. Tesla ascribes its extreme sensitiveness, when long, to the motion of suspended dust particles in the air.

The general appearance of the sensitive-thread discharge is shown in Fig. 213, taken from Tesla.

**Discharge, Silent** — —A name given to a convective discharge in order to distinguish it from the more noisy disruptive discharge.

The convective discharge in reality is attended by a feeble sound, which, however, is quiet when compared with the more pronounced sound of the disruptive discharge. (See *Discharge, Convective*.)

**Discharge, Stratified** — —The form of alternate light and dark spaces assumed by the discharges of an induction coil through a partially exhausted gas. (See *Tube, Stratification*.)

The striae are explained by Curtis as follows: "Under the influence of the electric rhythm of the rapidly following discharges the molecules of the residual gas collect in alternately dense and rarefied spaces. The light bands correspond to the spaces where the molecules are comparatively crowded together, and their concomitant friction produces the luminous disturbance. The dark spaces are where the molecules are further apart, and where their collisions are consequently less frequent."

**Discharge, Streaming** — —A form assumed by the flaming discharge between the terminals of the secondary of an induction coil when the frequency of the alternations increases beyond a certain limit, and the potential has consequently increased.

The streaming discharge partakes of the general characteristics of the flaming discharge. Luminous streams pass in abundance, not only between the terminals of the secondary, but, according to Tesla, who has carefully studied these phenomena, between the primary and the secondary, through the insulating dielectric separating



Fig. 214. Streaming Discharge (Tesla).

them. The streams not only pass between the terminals, but also issue from all points and pro-

jections, as will be seen from Fig. 214, taken from Tesla.

When the streaming discharge reaches a certain higher limit it becomes a *brush-and-spray discharge*. (See *Discharge, Brush-and-Spray*.)

The streaming discharge obtained from an induction coil with high frequencies differs from that of an electrostatic machine in that it neither possesses the violet color of the positive static discharge nor the brightness of the negative, but is intermediate in color.

**Discharge, Surging** — — A term sometimes applied to an oscillatory discharge. (See *Discharge, Oscillatory*.)

**Discharge, to Electrically** — — To equalize differences of potential by connecting them by means of a conductor.

**Discharge, Undulatory** — — A discharge, the strength and direction of which gradually change. (See *Currents, Undulatory*.)

**Discharge, Unidirectional** — — An electric discharge which takes place from the beginning to the end, in one and the same direction.

**Discharge, Velocity of** — — The time required for the passage of a discharge through a given length of conductor.

According to modern views it is the ether surrounding the wire or conductor which conveys the electric pulses. All the energy which gets into the conductor is dissipated as heat.

The velocity of propagation of discharge of the pulses produced by the oscillating discharge of a Leyden jar through the inter-atomic or inter-molecular ether, *i.e.*, through the fixed ether within different substances, varies with the substance. Through free ether the velocity is that of light, or 185,000 miles a second.

The velocity of discharge through long conductors or cables is much lessened by the *capacity* of the cable, and the effects of *induction*, and will therefore vary in different cases. (See *Retardation*.)

**Discharger, Universal** — — An apparatus for sending the discharge of a powerful Leyden battery or condenser in any desired direction.

The universal discharger consists essentially of

metallic rods, supported on insulated pillars and capable of ready motion, both towards and from one another, as well as in vertical and horizontal planes. The object which is to receive the discharge is placed on an insulated table between the rods, and the latter connected with the opposite coatings of the battery or condenser, when the discharge passes through it.

The term universal discharger is sometimes applied to the discharging tongs.

**Discharging, Electrically** — — The act of equalizing differences of potential by connection with a conductor.

**Discharging Rod** — (See *Rod, Discharging*.)

**Discharging Tongs** — (See *Tongs, Discharging*.)

**Disconnect** — To break or open an electric circuit.

**Disconnecter** — A key or other device for opening or breaking a circuit.

**Disconnecting** — The act of opening or breaking an electric circuit.

**Disconnection** — A term employed to designate one of the varieties of faults caused by the accidental breaking or disconnection of a circuit.

Disconnections of this kind may be:

(1.) *Total*; as by a switch inadvertently left open; or by the accidental breaking of a part of the circuit.

(2.) *Partial*; as by a dirty contact; a loose, or badly soldered joint; a poorly clamped binding screw; a loose terminal, or a bad earth.

(3.) *Intermittent*; as by swinging joints, alternate expansions or contractions on changes of temperature; the collection of dust and dirt in dry weather, and their washing out in wet weather.

**Disconnection, Intermittent** — — Any fault in a line which occurs at intervals or intermittently.

**Disconnection, Partial** — — A partial fault in a line caused by any imperfect contact.

**Disconnection, Total** — — A fault in a line occasioned by a complete break in the circuit.

**Disguised Electricity** — (See *Electricity, Disguised*.)



**Disjunctor.**—A device employed in a system for the distribution of electric energy by means of continuous currents by condensers, for the purpose of periodically reversing the constant current sent over the line. (See *Electricity, Distribution of, by Continuous Current by Means of Condensers.*)

**Dispersion Photometer.**—(See *Photometer, Dispersion.*)

**Displacement Current.**—(See *Current, Displacement.*)

**Displacement, Electric** — A displacement of electricity in a uniform and non-crystalline dielectric when lines of electrostatic or magnetic force pass through it.

The quantity of electricity displaced in any homogeneous, non-crystallizable dielectric, by the action of an electric force through the unit area of cross-section, taken perpendicular to the direction of the electric force.

Electric displacement is produced under an elastic strain, which continues only while the electric force is acting.

**Displacement, Electric, Lines of** — Lines of electric induction along which electric displacement takes place.

**Displacement, Electric, Oscillatory** — A displacement of electricity in a dielectric or non-conductor of an oscillatory character.

**Displacement, Electric, Theory of** — A theory which regards the electricity produced on an insulated conductor, by induction through a dielectric, as displaced out of the dielectric on to the conductor, or into the dielectric from the conductor, by the influence of the electric force.

This conception was introduced into science by Maxwell, after a careful study of Faraday's denial of action at a distance.

Suppose a small insulated sphere to receive a charge of electricity  $+Q$ . It will, by induction, produce an equal and opposite charge  $-Q$ , on the inner surface, and a similar charge on the outer surface of the small hollow sphere, placed near it, but separated by the dielectric. There has, therefore, been a displacement of electricity through the dielectric. The medium of the

dielectric has connected the two bodies, and the phenomena have appeared by the action of the electric force on the substance of the dielectric; or, in other words, there has been no action at a distance.

According to this conception, an electric current, called a displacement current, exists in the dielectric, while displacement is taking place.

**Displacement Waves.**—(See *Waves, Displacement.*)

**Disruptive Electric Conduction.**—(See *Conduction, Electric, Disruptive.*)

**Dissimulated or Latent Electricity.**—(See *Electricity, Dissimulated or Latent.*)

**Dissipation of Charge.**—(See *Charge, Dissipation of.*)

**Dissipation of Energy.**—(See *Energy, Dissipation of.*)

**Dissipation of Energy, Hysteresial** — (See *Energy, Hysteresial, Dissipation of, Hysteresis.*)

**Dissipation, Specific Hysteresial** — The specific loss of energy by hysteresis in the case of a particular substance. (See *Hysteresis.*)

**Dissociate.**—To separate a compound substance into its constituents.

**Dissociation.**—The separation of a chemical compound into its constituent parts.

**Dissymmetrical Induction of Armature.**—(See *Armature, Dissymmetrical Induction of.*)

**Dissymmetrical Magnetic Field.**—(See *Field, Magnetic, Dissymmetrical.*)

**Dissymmetry of Commutation.**—(See *Commutation, Dissymmetry of.*)

**Distance, Critical, of Lateral Discharge Through an Alternative Path** — The distance at which a discharge will take place through an air space of given dimensions, in preference to passing through a metallic circuit of comparatively small resistance.

**Distance, Explosive** — A term sometimes employed for sparking distance. (See *Distance, Sparking.*)

**Distance, Sparking** — The distance

at which electrical sparks will pass through an intervening air space. (See *Spark, Length of.*)

**Distant Station.**—(See *Station, Distant.*)

**Distillation, Destructive** — —The action of heat on an organic substance, while out of contact with air, resulting in the decomposition of the substance into simpler and more stable compounds.

The different products resulting from destructive distillation may be successively collected by the ordinary processes of distillation.

**Distillation, Dry** — —A species of destructive distillation. (See *Distillation, Destructive.*)

**Distillation, Electric** — —The distillation of a liquid in which the effects of heat are aided by an electrification of the liquid.

Beccaria discovered that a liquid evaporates more rapidly when electrified than when unelectrified. Crookes has shown that evaporation is aided by negative electrification, or that evaporation takes place more rapidly at the negative terminal during a discharge than at the positive. (See *Evaporation, Electric.*)

**Distributing Box of Conduit.**—(See *Box, Distributing, of Conduit.*)

**Distributing Station.**—(See *Station, Distributing.*)

**Distributing Switch for Electric Light.**—(See *Switch, Distributing, for Electric Lights.*)

**Distribution-Box for Arc Light Circuits.**—(See *Box, Distribution, for Arc Light Circuits.*)

**Distribution, Centre of** — —In a system of multiple-distribution, any place where branch cut-outs and switches are located in order to control communication therewith.

The electrical centre of a system of distribution as regards the conducting network.

**Distribution of Charge.**—(See *Charge, Distribution of.*)

**Distribution of Electricity.**—(See *Electricity, Distribution of.*)

**Distribution of Electricity by Alternating Currents** — —(See *Electricity, Distribution of, by Alternating Currents.*)

**Distribution of Electricity by Alternating Currents by Means of Condensers.**—(See *Electricity, Distribution of, by Alternating Currents by Means of Condensers.*)

**Distribution of Electricity by Commutating Transformers.**—(See *Electricity, Distribution of, by Commutating Transformers.*)

**Distribution of Electricity by Constant Potential Circuit.**—(See *Electricity, Multiple Distribution of, by Constant Potential Circuit.*)

**Distribution of Electricity by Continuous Current by Means of Transformers.**—(See *Electricity, Distribution of, by Continuous Current by Means of Transformers.*)

**Distribution of Electricity by Motor-Generators.**—(See *Electricity, Distribution of, by Motor-Generators.*)

**Distribution, Series, of Electricity by Constant Current Circuit.**—(See *Electricity, Series Distribution of, by Constant Current Circuit.*)

**District Call-Box.**—(See *Box, District Call.*)

**Diurnal Inequality of Earth's Magnetism.**—(See *Inequality, Diurnal, of Earth's Magnetism.*)

**Divided Magnetic Circuit.**—(See *Circuit, Divided Magnetic.*)

**Door-Opener, Electric** — —A device for opening a door from a distance by electricity.

Various devices consisting of electro-magnets, acting against, or controlling springs or weights, are employed for this purpose.

**Dosage, Electro-Therapeutical** — —The apportioning of the amount of the current and the duration of its application to the body for the treatment of disease.

**Dosage, Galvanic** — —Electro-therapeutical dosage. (See *Dosage, Electro-Therapeutical.*)

**Dotting Contact.**—(See *Contact, Dotting.*)



**Double-Break Knife Switch.**—(See *Switch, Double-Break Knife.*)

**Double-Carbon Arc Lamp.**—(See *Lamp, Electric Arc, Double-Carbon.*)

**Double-Cone Insulator.**—(See *Insulator, Double-Cone.*)

**Double-Connector.**—(See *Connector, Double.*)

**Double-Contact Key.**—(See *Key, Double-Contact.*)

**Double-Cup Insulator.**—(See *Insulator, Double-Cup.*)

**Double-Curb.**—(See *Curb, Double.*)

**Double-Curb Signaling.**—(See *Signaling, Curb, Double.*)

**Double-Current Signaling.**—(See *Signaling, Double-Current.*)

**Double-Current Translator.**—(See *Translator, Double-Current.*)

**Double-Current Transmitter.**—(See *Transmitter, Double-Current.*)

**Double-Current Working** — —The employment, in systems of telegraphy, by means of suitable keys, of currents from voltaic batteries, in alternately opposite directions, thus increasing the speed of signaling. (See *Working, Reverse-Current.*)

**Double-Fluid Electrical Hypothesis.**—(See *Electricity, Double-Fluid Hypothesis of.*)

**Double-Fluid Voltaic Cell.**—(See *Cell, Voltaic, Double-Fluid.*)

**Double-Magnet Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Double-Magnet.*)

**Double-Pen Telegraphic Register.**—(See *Register, Double-Pen, Telegraphic.*)

**Double-Refraction.**—(See *Refraction, Double.*)

**Double-Refraction, Electric.**—(See *Refraction, Double, Electric.*)

**Double-Shackle Insulator.**—(See *Insulator, Double-Shackle.*)

**Double-Shed Insulator.**—(See *Insulator, Double-Shed.*)

**Double-Tapper Key.**—(See *Key, Double-Tapper.*)

**Double-Touch, Magnetization by** — — A method for producing magnetization by the simultaneous touch of two magnet poles. (See *Magnetization, Methods of.*)

**Double-Transmission.**—(See *Transmission, Double.*)

**Double-Trolley.**—(See *Trolley, Double.*)

**Doubler of Electricity.**—An early form of continuous electrophorus. (See *Electrophorus.*)

**Drifting Torpedo.**—(See *Torpedo, Drifting.*)

**Drill, Electro-Magnetic** — —A drill applied especially to blasting or mining operations, operated by means of electricity.

**Drip Loop.**—(See *Loop, Drip.*)

**Driven Pulley.**—(See *Pulley, Driven.*)

**Driven Shaft.**—(See *Shaft, Driven.*)

**Driving Pulley.**—(See *Pulley, Driving.*)

**Driving Shaft.**—(See *Shaft, Driving.*)

**Driving Spider.**—(See *Spider, Driving.*)

**Drop, Annunciator** — —A movable signal operated by an electro-magnet, and placed on an annunciator, the dropping of which indicates the closing or opening of the circuit with which the electro-magnet is connected.

The falling of the drop may be attended by the sounding of a bell or other alarm, or, it may give a silent indication.

**Drop, Annunciator, Automatic** — —A drop for an annunciator, which on the closing of a circuit, falls and holds the circuit closed until the drop is raised.

**Drop, Annunciator, Gravity** — —A drop for an annunciator, acted on by gravity when released by the movement of the armature of an electro-magnet.

**Drop, Automatic** — —A device for automatically closing the circuit of a bell and holding it closed until stopped by resetting a drop.

The automatic drop is especially applicable to burglar alarms. On the opening of a door or shutter, the closing of the circuit moves the armature of an electro-magnet, and, by the falling of a drop, closes the circuit and holds it closed until mechanically opened by the replacing of the drop. The general appearance of the automatic drop is shown in Fig. 215.



Fig. 215. Automatic Drop.

#### Drop, Calling

— An annunciator drop employed to indicate to the operator in a telegraphic or telephonic system that one subscriber wishes to be connected with another.

**Drop of Potential.**—(See *Potential, Drop of*.)

**Drops, Clearing Out** — — Restoring the drops of annunciators to their normal position after they have been thrown out of the same by the closing of the circuits of their magnets.

These clearing-out devices as placed on most forms of annunciators are generally mechanical in operation.

**Drum Armature.**—(See *Armature, Drum*.)

**Drum, Electro-Magnetic** — — A drum, used in feats of legerdemain, operated by an automatic electro-magnetic make and break apparatus.

**Dry Distillation.**—(See *Distillation, Dry*.)

**Dry Electrode.**—(See *Electrode, Dry*.)

**Dry Pile.**—(See *Pile, Dry*.)

**Dry Voltaic Cell.**—(See *Cell, Voltaic, Dry*.)

**Dub's Laws.**—(See *Laws, Dub's*.)

**Duplex Cable.**—(See *Cable, Duplex*.)

**Duplex Cut-Out.**—(See *Cut-out, Duplex*.)

**Duplex Flat Cable.**—(See *Cable, Flat Duplex*.)

**Duplex Telegraphy.**—(See *Telegraphy, Duplex*.)

**Duplex Wire.**—(See *Wire, Duplex*.)

**Duration of Electric Discharge.**—(See *Discharge, Duration of*.)

**Duration of Make-Induced Current.**—(See *Current, Make or Break Induced, Duration of*.)

**Dust Figures, Lichtenberg's** — — (See *Figures, Lichtenberg's Dust*.)

**Dyad.**—A chemical element which has two bonds by which it can unite or combine with another element.

An element whose atomicity is bivalent.

**Dyeing, Electric** — — The application of electricity either to the reduction or the oxidation of the salts used in dyeing.

Goppelsröder, in his processes of *electric dyeing*, forms and fixes aniline black on cloth as follows, viz.: the cloth, saturated with an aniline salt, is placed on an insulated metallic plate, inert to the aniline salt, and connected with one pole of a battery or other electric source. The other pole is connected with a metallic plate on which the required design is drawn. On the passage of the current, the design is traced in aniline black on the cloth. A minute or two suffices for the operation.

A species of electrolytic writing is obtained on cloths arranged as above by substituting a carbon pencil for the metallic plate. On writing with this pencil, as with an ordinary pencil, the passage of the current so directed is followed by the deposition of aniline black.

By means of a somewhat similar process writing in white on a colored ground is obtained.

**Dynamic Electricity.**—(See *Electricity, Dynamic*.)

**Dynamics, Electro** — — That branch of electric science which treats of the action of electric currents on one another and on themselves or on magnets.

The principles of electro-dynamics were discovered by Ampère in 1821.

A convenient form of apparatus, for showing experimentally the action of one current on another, consists of two upright metallic columns



or pillars, which support horizontal metallic arms containing mercury cups, y, and c, Fig. 216.

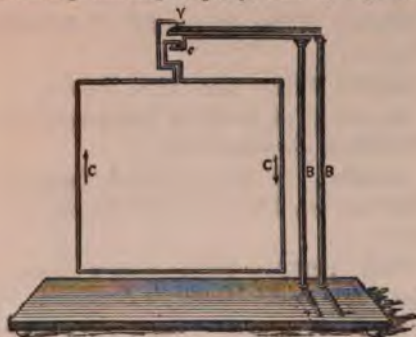


Fig. 216. Deflection of a Circuit by a Current.

The circuit is bent in the form of a rectangle, circle or solenoid, and terminates in points that dip in the mercury cups. The current is led into and out of the apparatus at the points + and — at the base of the upright supports.

When a magnet, or another circuit, is approached to the movable circuit thus provided, attractions or repulsions are produced according to the position of the magnet, or the direction of the currents in the two circuits.

If a magnet A B, Fig. 217, be placed, as shown,




Fig. 217. Deflection of Circuit by a Magnet.

below the movable circuit C C, the circuit will tend to place itself at right angles to the axis of the magnet. This movement is the same as would occur if electric currents were circulating around the magnet in the direction of the assumed *Ampèrian currents*. It also illustrates the principle of the electric motor. (See *Magnetism, Ampère's Theory of*.)

Ampère has given the results of his investigations as to the mutual attractions and repulsions of cur-

rents in the following statements, which are known as *Ampère's Laws*:

(1.) Parallel portions of a circuit attract one another if the currents in them are flowing in the same direction, and repel one another if the currents are flowing in opposite directions.

A current flowing through a spiral tends to shorten the spiral from the attraction of the parallel currents in contiguous turns.



Fig. 218. Action of Solenoid Poles.

Similar poles of two solenoids repel each other, as at A, A', Fig. 218, because, when opposed to each other, the currents that produce these poles




Fig. 219. Ampère's Stand.

are flowing in opposite directions, as may be seen from an inspection of the drawing.

Dissimilar solenoid poles, on the contrary, attract each other as at A, B, in Fig. 218, since




Fig. 220. Electro-Dynamic Attraction,

the currents which produce them flow in the same direction.

In Fig. 219, a form of Ampère's stand is shown, in which one of the circuits is in the form of the

N; its action on the movable circuit C B, repel it, since the currents, as shown, are in an opposite direction in the adjacent is of the fixed and movable circuits.

Two portions of a circuit intersecting each other mutually attract each other when the currents in both circuits flow towards or from the point of intersection, and repel each other if they flow in opposite directions from this point. As shown in Fig. 220, the currents in both circuits A B C D, flow towards the point of intersection Y, and attract one another. If the circuit A B C D, is free to move, it will have a motion until the two circuits are parallel.

If the currents flow in opposite directions they repel each other, and, if free to move, will come to rest when parallel to each other; therefore, the portions of a circuit crossing each other tend to move until they are parallel, and their currents flow in the same direction.

Successive portions of the circuit of the rectilinear current, that is, a current flowing in the same straight line, repel one another.

Circuit O A, Fig. 221, movable on O, as a




Fig. 221. Continuous Rotation of Current.

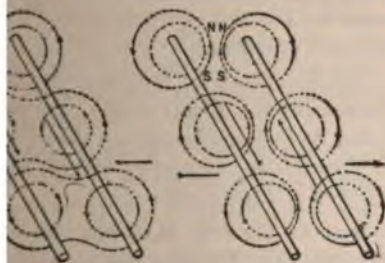


Fig. 222. Mutual Action of Magnetic Fields.

will be continuously rotated in the direction of the curved arrow by the rectilinear current Q; for, the directions of the currents being as shown by the arrows, there will be attraction between the portions (1) and (2), and repulsion in position (3). Because of the mutual attractions and repulsions of electric circuits will readily appear from consideration of the mutual action of their magnetic fields.

An inspection of Fig. 222 shows:

(1.) That parallel currents flowing in the same direction attract, because their lines of force have opposite directions in adjoining parts of the circuit of these lines.

(2.) That parallel currents flowing in opposite directions repel, because their lines of force have the same directions in adjoining parts of the circuit.

These laws may therefore be generalized thus, viz.: Lines of magnetic force extending in opposite directions attract one another; lines of magnetic force extending in the same direction repel one another.

Ampère proved that a circuit, doubled on itself so that the current flows in opposite directions in the two parts, exerts no force on external objects. This expedient is adopted in resistance coils to prevent any disturbance of the galvanometer needles. He also showed that a sinuous circuit, or one bent into zigzags, produces the same effects of attraction or repulsion as it would if it were straight. (See *Coil, Resistance*.)

The term *sinuous current* is sometimes applied to the current in a sinuous circuit. (See *Current, Sinuous*.) This must be distinguished from the term *sinusoidal current*, which applies to fluctuations in the current and not to peculiarities in the shape of the conductor.

When two inclined magnets, free to move, are left to their mutual attractions and repulsions, they gradually come to rest with their axes parallel to each other.

Two conductors through which electric currents are flowing act on one another as two magnets would.

A conductor conveying a current of electricity tends to rotate round a magnetic pole. A magnetic pole tends to rotate continuously round an electric current.

The motion of a magnet near a conductor produces an electromotive force in that conductor provided the conductor cuts the lines of force.

A magnetized substance becomes magnetized when placed in a magnetic field.

A conductor through which a current of electricity is passing tends to wrap itself around a neighboring magnetic pole. The following experiments illustrate this tendency:

(1.) The experiment suggested by Lodge: A powerful current of electricity is passed through some eight feet in length of gold thread such as is employed for making lace. The thread is hung in a vertical position, near a vertical bar



magnet. As soon as the current passes, the thread will wrap itself around the bar magnet, one half of it twisting itself round the north pole, the other half round the south pole.

(2.) The experiment suggested by Professor S. P. Thompson: An electric current is sent through a stream of mercury while it is flowing between two poles of a powerful electro-magnet; when the current is sent through the magnet, the stream is twisted in spiral directions which vary, either with the direction of the current, or with the direction of the magnetic polarity.

(3.) Somewhat similar effects can be shown by the rotation of a stream of gas round a magnetic pole placed in an exhausted glass receiver.

**Dynamo.**—The name frequently applied to a dynamo-electric machine used as a generator. (See *Machine, Dynamo-Electric.*)

**Dynamo Balancing Rheostat.**—(See *Rheostat, Dynamo Balancing.*)

**Dynamo-Battery.**—(See *Battery, Dynamo.*)

**Dynamo Brush Trimmer.**—(See *Trimmer, Dynamo Brush.*)

**Dynamo, Composite-Field** — —A dynamo whose field coils are series and separately excited.

Additional separately excited coils placed on the field of a series wound dynamo render it self-regulating.

A composite dynamo is a form of compounded dynamo.

**Dynamo, Compound-Wound.**—A compound-wound dynamo-electric machine. (See *Machine, Dynamo-Electric, Compound-Wound.*)

**Dynamo, Contact** — —A form of dynamo in which the space between the armature and field magnet poles is so reduced that they actually touch one another.

In contact dynamos both field and armature revolve. This form of dynamo has not been very successful in practice.

**Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric.*)

**Dynamo-Electric Machine, Alternating Current** — —(See *Machine, Dynamo-Electric, Alternating Current.*)

**Dynamo-Electric Machine Armature** (See *Armature, Dynamo-Electric Machine.*)

**Dynamo-Electric Machine Armature Coils.**—(See *Coils, Armature, of Dynamo-Electric Machine.*)

**Dynamo-Electric Machine Armature Core.**—(See *Core, Armature, of Dynamo-Electric Machine.*)

**Dynamo-Electric Machine Battery** (See *Battery, Dynamo-Electric Machine.*)

**Dynamo-Electric Machine, Bi-Polar.**—(See *Machine, Dynamo-Electric, Polar.*)

**Dynamo-Electric Machine, Commutator Brushes of** — —(See *Brushes, Commutator, of Dynamo-Electric Machine.*)

**Dynamo-Electric Machine Commutator** — —(See *Commutator, Dynamo-Electric Machine.*)

**Dynamo-Electric Machine, Compound-Wound** — —(See *Machine, Dynamo-Electric, Compound-Wound.*)

**Dynamo-Electric Machine, Generating Current by** — —(See *Current, Generation of, by Dynamo-Electric Machine.*)

**Dynamo-Electric Machine, Field Magnets** — —(See *Magnets, Field, of Dynamo-Electric Machine.*)

**Dynamo-Electric Machine, Method of Increasing the Electromotive Force generated by** — —(See *Force, Electromotive, Generated by Dynamo-Electric Machine, Method of Increasing.*)

**Dynamo-Electric Machine, Mouse-Sir William Thomson's** — —(See *Machine, Dynamo-Electric, Mouse-Sir William Thomson's.*)

**Dynamo-Electric Machine, Multipolar.** — —(See *Machine, Dynamo-Electric, Multipolar.*)

**Dynamo-Electric Machine, Pole-Pieces** — —(See *Pole-Pieces of Dynamo-Electric Machine.*)

**Dynamo-Electric Machine, Reversibility of** — —(See *Machine, Dynamo-Electric, Reversibility of.*)

**Dynamo-Electric Machine, Varieties of** — (See *Machine, Dynamo-Electric, Varieties of.*)

**Dynamo, Inductor** — —A dynamo-electric machine for alternating currents in which the differences of potential causing the currents are obtained by magnetic changes in the cores of the armature and field coils by the movement past them of laminated masses of iron inductors.

The coils corresponding to the armature and field magnets of the ordinary dynamo are stationary. The laminated masses of iron, employed to cause magnetic changes in the cores of the field and armature coils, are fixed on an inductor wheel which is rapidly revolved in front of them. The magnets corresponding to the field magnets are called the primary poles, and are magnetized by an exciter. The magnets corresponding to the armature are called the secondary poles and are placed so as to alternate with the primary poles. The inductors are so shaped that they carry the magnetism of one pole of the primary magnet to the secondary poles when the inductor is in one position, and of the opposite pole when in a slightly different position. The inductor wheel therefore acts as a magnetic commutator and changes the position of the secondary magnet as it rotates, thus producing electromotive force. The number of alternations per revolution is equal to twice the number of inductors placed on the inductor wheel.

**Dynamo, Inverted** — —A dynamo-electric machine in which the armature bore or chamber is placed below the field magnet coils.

The term inverted is used in contradistinction to the overttype dynamo. (See *Dynamo, Overttype.*)

**Dynamo, Mouse Mill** — —A form of dynamo-electric machine designed by Sir William Thomson to act as the replenisher of one of his electrometers. (See *Replenisher.*)

**Dynamo, Multiphase** — —A polyphase dynamo. (See *Dynamo, Polyphase. Dynamo, Rotating Current.*)

**Dynamo, Overttype** — —A dynamo-electric machine, the armature bore or chamber of which is placed above the field magnet coils instead of below them as in many forms.

The overttype form of dynamo possesses the advantage of better avoiding magnetic leakage.

**Dynamo, Polyphase** — —A name sometimes applied to a rotating current dynamo. (See *Dynamo, Rotating Current.*)

**Dynamo, Pyromagnetic** — —A name sometimes applied to a pyromagnetic generator. (See *Generator, Pyromagnetic.*)

**Dynamo, Rotary-Phase** — —A term sometimes employed for a rotating current dynamo. (See *Dynamo, Rotating Current.*)

**Dynamo, Separately-Excited** — —A separately-excited dynamo-electric machine. (See *Machine, Dynamo-Electric, Separately-Excited.*)

**Dynamo, Series** — —A series-wound dynamo-electric machine. (See *Machine, Dynamo-Electric, Series-Wound.*)

**Dynamo, Shunt** — —A shunt-wound dynamo-electric machine. (See *Machine, Dynamo-Electric, Shunt-Wound.*)

**Dynamograph.** — A term sometimes applied to a type-writing telegraph that records the message in type-written characters, both at the sending and the receiving ends.

**Dynamometer.** — A name given to a variety of apparatus for measuring the power of an engine or motor.

In all dynamometers the strain on the belt or other moving part is measured, say in pounds, and the speed of the moving part is also measured in feet per second. The product of the strain in

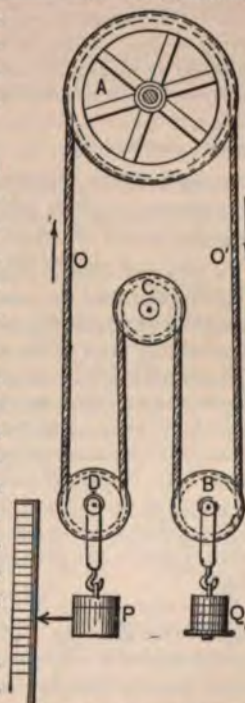


Fig. 223. Parsons' Dynamometer.



pounds by the velocity in feet per second, divided by 550, will give the horse power.

One of the many forms of dynamometers is shown in Fig. 223. It is known as Parsons' Dynamometer.

The driving pulley is shown at A, and the driven pulley at C. Weights hung at  $Q_1$ , are varied so as to maintain the axes of the suspended pulleys, D and B, as nearly as possible at the same height. Then the tension  $T_1$  and  $T_2$ , on the sides O and O', of the belts, will be represented by the following equation :

$$T_2 - T_1 = \frac{P - Q}{2},$$

from which, knowing the belt speed, the horse power may be deduced.

There are several other forms of dynamometer, such as the cradle dynamometer, in which the machine is supported on knife edges and the torque or pull exerted on or by the machine is balanced by weights sliding on a lever. In these dynamometers the power is transmitted through them and they are therefore called transmission dynamometers.

**Dynamometer, Electro** — — A form of galvanometer for the measurement of electric currents.

In Siemens' Electro-Dynamometer, shown in Fig. 224, there are two coils; a fixed coil, C, secured to an upright support, and a movable coil, L, consisting often of but a single turn of wire. The movable coil is suspended by means of a thread and a delicate spring, S, capable of being twisted by turning a milled screw-head through an angle of torsion measured on a scale by means of an index connected to the screw-head. The two ends of the movable coil dip into mercury cups so connected that the current to be measured passes through the fixed and movable coils in series.

When ready for use the movable coil is at right angles to the fixed coil. The current to be measured is then sent into the coils, and their mutual action tends to place the movable coil parallel to the fixed coil against the torsion of the spring, S. The amount of this force can be ascertained by determining the amount of torsion required to bring the movable coil back to its zero position.

Since the same current passes through both the fixed and movable coils, and they both act on each other, the deflecting force here is evidently proportional to the square of the strength of the

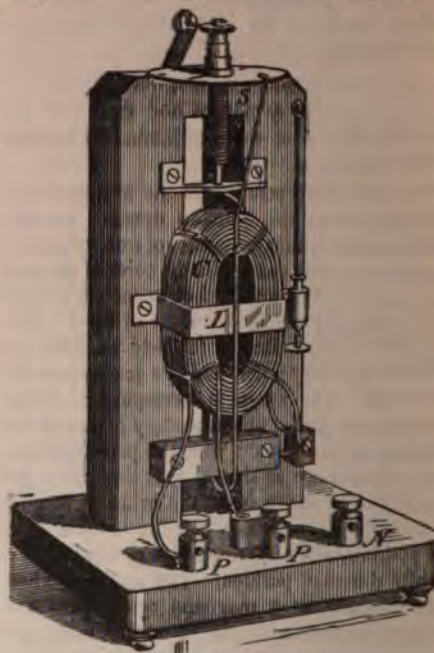


Fig. 224. Siemens' Electro-Dynamometer.

current to be measured. The deflecting force, and consequently the current strength, is therefore proportional to the square root of the angle of torsion, and not directly to the angle of torsion.

**Dyne.**—The unit of force.

The force which in one second can impart a velocity of 1 centimetre per second to a mass of 1 gramme.

The dyne is the unit of force, or a force capable, after acting for one second on a mass of 1 gramme, of giving it a velocity of 1 centimetre per second. The weight of a body in dynes, or the force with which it gravitates, is equal to its mass in grammes, multiplied by the acceleration imparted to it in centimetres per second. For this latitude the acceleration is about 981 centimetres per second.

## E

**E.**—A contraction sometimes used for earth.

A contraction sometimes used for electromotive force, or E. M. F., as in the well-known formula for Ohm's law,

$$C = \frac{E}{R}$$

**E. M. D. P.**—A contraction for electromotive difference of potential. (See *Potential, Difference of, Electromotive.*)

**E. M. F.**—A contraction generally used for electromotive force. (See *Force, Electromotive.*)

**Earth.**—A fault in a telegraphic or other line, caused by accidental contact of the line with the ground or earth, or with some conductor connected with the latter.

This is more frequently called a ground.

Earths are of three kinds, viz.:

(1.) *Dead or Total Earth.*

(2.) *Partial Earth.*

(3.) *Intermittent Earth.*

The term earth is also applied to a plate buried in the ground, and intended to make a good contact between the earth and a wire circuit, which is connected with the plate.

**Earth Circuit.**—(See *Circuit, Earth.*)

**Earth-Circuited Conductor.**—(See *Conductor, Earth-Circuited.*)

**Earth Currents.**—Electric currents flowing through different parts of the earth caused by a difference of potential at different points.

The causes of these differences of potential are various and are not well understood.

**Earth, Dead or Total** — —A fault in a telegraphic or other line in which the line is thoroughly grounded or connected with the earth.

Dead earth is sometimes called *total earth*.

**Earth-Grounded Wire.**—(See *Wire, Earth-Grounded.*)

**Earth, Intermittent** — —A swinging earth. (See *Earth, Swinging or Intermittent.*)

**Earth or Ground.**—That part of the earth

or ground which forms part of an electric circuit.

A circuit is put to *earth* or *ground* when the earth is used for a portion of the circuit.

The resistance of an earth connection may vary in time from the following causes, viz.:

(1.) The corrosion of the ground plate. This is especially apt to occur in the case of a copper plate.

(2.) From polarization, a counter-electromotive force being produced, thus introducing a *spurious resistance* into the circuit. (See *Resistance, Spurious.*)

**Earth, Partial** — —A fault in a telegraphic or other line in which the line is in partial connection with the earth.

The term partial earth is used in contradistinction to dead or total earth.

**Earth, Return** — —A circuit in which the return current passes back to the source through the earth.

**Earth, Swinging or Intermittent** — —A fault in a telegraphic or other line in which the action of the wind, or occasional expansion by heat, brings the line into intermittent contact with the earth.

**Earth, Total** — —A term sometimes used for dead earth. (See *Earth, Dead or Total.*)

**Ebonite.**—A tough, hard, black substance, composed of india rubber and sulphur, which possesses high powers of insulation and of specific inductive capacity.

Ebonite is often called vulcanite.

Vulcanite rubbed with cat-skin acts as one of the best known substances for becoming electrified by friction. For this purpose both substances should be thoroughly dried.

**Economic Co-efficient of Dynamo-Electric Machine.**—(See *Co-efficient, Economic, of a Dynamo-Electric Machine.*)

**Eddy Currents.**—(See *Currents, Eddy.*)

**Eddy Currents, Deep-Seated** — —(See *Currents, Eddy, Deep-Seated.*)

**Eddy Currents, Superficial** — —(See *Currents, Eddy, Superficial.*)



**Eddy-Displacement Currents.**—(See *Currents, Eddy-Displacement*.)

**Eel, Electric** — —An eel possessing the power of giving powerful electric shocks. The *gymnotus electricus*.

The electricity is produced by an organ extending the entire length of the body.

According to Faraday, the shock given by a specimen of the animal examined by him was equal to that of 15 Leyden jars, having a total surface of 25 square feet. Fig. 225 shows the general appearance of the animal.

**Effect, Acheson** — — The increase in the electromotive force of the secondary of a transformer by the action of the changes in temperature of its core. (See *Electricity, Cal.*)

**Effect, Chemical** — — The effect occasioned by atomic combination, which results in a loss of those properties or peculiarities by which the substances entering into combination are ordinarily recognized.

Atomic combination, resulting in the formation of new molecules.

The formation of new molecules necessitates the possession by the new substance of properties distinct and separate from those of its constituents.

Black carbon, and yellow sulphur, for example, both solids, unite chemically to form a transparent colorless liquid.

Chemical changes differ from physical changes, which latter can occur in a substance without the formation of new molecules, and consequently without the loss by it of the properties it ordinarily possesses.

Thus a sheet of vulcanite, electrified by friction, still retains its characteristic density, shape, color, etc.

**Effect, Counter-Inductive** — — The opposition of current or charge by means of a counter-electromotive force produced by induction.

In the Thomson counter-electromotive force lightning arrester, a counter-electromotive force, produced by the inductive effects of the passage of the bolt to earth, protects the instrument by opposing the passage of the bolt. (See *Arrester, Lightning, Counter-Electromotive Force*.)

**Effect, Edison** — — An electric discharge which occurs between one of the terminals of the incandescent filament of an electric lamp, and a metallic plate placed near the filament but disconnected therefrom, as soon as a certain difference of potential is reached between the lamp terminals.

The effect of the discharge is to produce a current in a circuit connected to one pole of the lamp terminals and the metallic plate, as may be shown by means of a galvanometer.

**Effect, Electrotonic** — — An altered condition of excitability of a nerve produced when in the electrotonic state. (See *Electrotonus*.)

**Effect, Faraday** — — The rotation of the plane of polarization of a beam of plane polarized light by its passage through a magnetic field.

Lodge suggests the following explanation for the Faraday effect: As is well known, a strongly magnetized medium possesses a different magnetic susceptibility to additional magnetizing forces in the same direction than it does in the opposite direction. It therefore follows that the vibrations are resolved into two opposed circular components, which travel through the medium with different rates of velocity, since one tends to magnetize it and the other to demagnetize it. The plane of rotation will therefore be rotated.

He also suggests the following explanation for the Faraday effect, viz.: He assumes that the Ampèrian molecular currents in such substances as exhibit rotation in a magnetic field do not consist of two equal and opposite electrical currents, but that one of the currents is slightly stronger than the other. Suppose, for example, that in iron the positive Ampèrian current is weaker than the negative, and that the ether as a whole is rotating with the negative current. Any ethereal vibration entering such a medium will begin to screw itself in the direction opposed to that of the magnetizing current. In copper, or other similar substances, the rotation should take place in the opposite direction.



Fig. 225. Electric Eel.



**Effect, Ferranti** — — An increase in the electromotive force, or difference of potential, of mains or conductors towards the end of the same farthest from the terminals that are connected with a source of constant potential.

The Ferranti effect refers to the increase of the electromotive force on the mains employed in systems for the transmission of electrical energy by means of alternating currents. It was found, for example, in the currents used on the mains connected with one of Mr. Ferranti's alternating dynamos and leading to the town of Deptford, that instead of finding a drop of potential at the ends of the mains farthest from the dynamo, as was expected, a notable increase in the potential occurred. These effects were observed during the laying of the mains. Testing the potential by placing an incandescent lamp in the circuit across the mains, the increase of the potential with the increase of the length of the main was shown by the increased brilliancy of the light of the incandescent lamp.

Various explanations have been given as the cause of the Ferranti effect.

**Effect, Hall** — — A transverse electromotive force, produced by a magnetic field in substances undergoing electric displacement.

This transverse electromotive force is probably

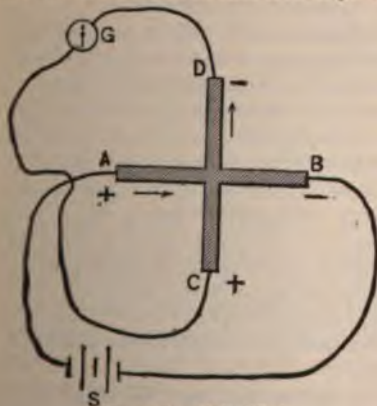


Fig. 226. Hall Effect.

due to magnetic whirls, in a manner similar to the Faraday effect.

The Hall effect is produced by placing a very thin metallic strip, conveying an electric current, in a strong magnetic field.

The cross A B C D, Fig. 226, is cut out of a

gold leaf or other very thin metallic sheet. The ends A and B, are connected with the terminals of a battery S, and the ends C and D, with the galvanometer G.

None of the battery current can therefore flow through the galvanometer.

If, now, the metallic cross be placed in a powerful magnetic field, the lines of force of which are perpendicular to the plane of the cross, the deflection of the galvanometer needle will show the existence of a current, which, if the battery current flows in the direction of the arrow, or from A, to B, and the lines of magnetic force pass through the paper from the *front to the back of the sheet*, when the cross is formed of gold, silver, platinum or tin-foil, will flow through C D, from C to D, but in the opposite direction if formed of iron. These effects cease if the conductor is increased in thickness beyond a certain extent.

As regards the production of the Hall effect by the influence of a magnetic field on conductors, Mr. Shelford Bidwell suggests that since magnetism affects the conductivity of metals in a complicated manner, it is possible that metallic substances conveying an electric current in a magnetic field are more or less strained by the mechanical forces, and that, therefore, heat may be unequally developed, and that the resistance thus being modified in places, there may be produced disturbances of the flow which may rapidly produce in part a transverse electromotive force.

**Effect, Hall, Real** — — A transverse electromotive force produced in conductors conveying electric currents, by magnetic whirls, in a manner similar to that in which the Faraday effect is produced. (See *Effect, Faraday*.)

**Effect, Hall, Spurious** — — An apparent transverse electromotive force produced in conductors conveying electric currents in magnetic fields, by changes, produced by magnetism, in the conductivity of the metals, and the consequent production of local disturbances in the electrical flow, thus resulting in an apparent transverse electromotive force.

**Effect, Impulsion** — — The restoration or loss of sensitiveness of a photo-voltaic cell to the action of light, produced by means of an impulse such as that of a tap or blow, or electro-magnetic impulse.



"We may express," says Maxwell, "both the Peltier and the Thomson effects by stating that when an electric current is flowing from places of smaller to places of greater thermo-electric power, heat is absorbed, and when it is flowing in the reverse direction heat is generated, and this whether the difference of thermo-electric power in the two places arises from a difference in the

nature of the metals, or from a difference of temperature in the same metal."

**Effect, Voltaic** — — A difference of potential observed at the point of contact of two dissimilar metals.

This difference of potential was formerly ascribed to the mere contact of dissimilar metals, and is even yet believed by some to be due to such contact. It is, however, perhaps more accurately ascribed to the greater affinity of oxygen of the air for the positive metal than for the negative metal; that is, to a chemical action on the positive element of a voltaic couple.

**Effective Electromotive Force.**—(See *Force, Electromotive, Effective*.)

**Effective Secondary Electromotive Force.**—(See *Force, Electromotive, Secondary, Effective*.)

**Effects of Capillarity on Voltaic Cells.**—(See *Capillarity, Effects of, on Voltaic Cell*.)

**Efficiency, Commercial** — — The useful or available energy produced divided by the total energy absorbed by any machine or apparatus.

The Commercial Efficiency =

$$\frac{W}{M} = \frac{W}{W + w + m},$$

when  $W$  = the useful or available energy;  $M$  = the total energy;  $w$ , the energy absorbed by the machine, and  $m$ , the stray power, or power lost in friction of bearings, etc., air friction, eddy currents, etc.

**Efficiency, Commercial, of Dynamo** — — The useful or available electrical energy in the external circuit, divided by the total mechanical energy required to drive the dynamo that produced it. (See *Co-efficient, Economic, of a Dynamo-Electric Machine*.)

**Efficiency, Electric** — — The useful or available electrical energy of any source, divided by the total electrical energy.

The electric efficiency =  $\frac{W}{W + w}$ , where  $W$ , equals the useful or available electrical energy, and  $w$ , the electrical energy absorbed by the machine.

**Efficiency of Conversion.**—The ratio between the energy present in any result and the energy expended in producing that result.

**Efficiency of Conversion of Dynamo.**—(See *Conversion, Efficiency of, of Dynamo*.)

**Efficiency of Transformer.**—(See *Transformer, Efficiency of*.)

**Efficiency, Quantity, of Storage Battery** — — The ratio of the number of ampère-hours taken out of a storage or secondary battery, to the number of ampère-hours put in the battery in charging it.

**Efficiency, Real, of Storage Battery** — — The ratio of the number of watt-hours taken out of a storage battery, to the number of watt-hours put into the battery in charging it.

**Efflorescence.**—The drying of crystals by losing their water of crystallization and becoming pulverulent or crumbling.

The term is sometimes loosely applied to the deposition of solid matter by the crystallization of a salt, above the line of the liquid, on the surface of a vessel containing a vaporizable saline solution.

The liquid, by capillarity in a porous vessel, or by adhesion to the walls of an impervious vessel, rises above the level of the main liquid line, and, evaporating, deposits crystals on the vessel.

This process is technically called *creeping*, and is often the cause of much annoyance in voltaic cells.

**Egg, Philosopher's** — — A name given to the ovoidal, or egg-shaped mass of light that appears when a convective discharge is taken between two electrodes in a partial vacuum.

The philosopher's egg is but one of the shapes assumed by the *convective discharge*. (See *Discharge, Convective*.)

**Elasticity, Electric** — — The quotient arising from dividing the electric stress by the electric strain.

It can be shown mathematically that the electric elasticity is equal to 4, or  $4 \times 3.1416$ , divided by the specific inductive capacity.

**Electropeter.**—An instrument for changing the direction of an electric current.

The old term for switch, key, or pole changer. (*Obsolete*.)

**Electric.**—Pertaining to electricity.



- Electric Absorption.**—(See *Absorption, Electric.*)
- Electric Acoutemeter.**—(See *Acoutemeter, Electric.*)
- Electric Actinometer.**—(See *Actinometer, Electric.*)
- Electric Adhesion.**—(See *Adhesion, Electric.*)
- Electric Aging of Alcohol.**—(See *Alcohol, Electric Aging of.*)
- Electric Alarm.**—(See *Alarm, Electric.*)
- Electric Alarm Speaking-Tube Mouth-Piece.**—(See *Speaking-Tube Mouth-Piece, Electric Alarm.*)
- Electric Amalgam.**—(See *Amalgam, Electric.*)
- Electric Ammunition Hoist.**—(See *Hoist, Ammunition, Electric.*)
- Electric Analysis.**—(See *Analysis, Electric.*)
- Electric Analyzer.**—(See *Analyzer, Electric.*)
- Electric Anemometer.**—(See *Anemometer, Electric.*)
- Electric Annealing.**—(See *Annealing, Electric.*)
- Electric Annunciator Clock.**—(See *Clock, Electric Annunciator.*)
- Electric Arc.**—(See *Arc, Electric.*)
- Electric Arc Blow-Pipe.**—(See *Blow-Pipe, Electric Arc.*)
- Electric Argand Burner, Hand-Lighter** — — (See *Burner, Argand Electric, Hand-Lighter.*)
- Electric Argand Burner, Plain-Pendant** — — (See *Burner, Argand Electric, Plain-Pendant.*)
- Electric Argand Burner, Ratchet-Pendant** — — (See *Burner, Argand Electric, Ratchet-Pendant.*)
- Electric Balance.**—(See *Balance, Electric.*)
- Electric Balloon.**—(See *Balloon, Electric.*)
- Electric Battery.**—(See *Battery, Electric.*)
- Electric Bell, Continuous-Sound** — — (See *Bell, Continuous-Sound.*)
- Electric Bell, Differential.**—(See *Differential Electric.*)
- Electric Bell, Mechanical.**—(See *Electro-Mechanical.*)
- Electric Bell Pull.**—(See *Pull, Electric.*)
- Electric Bioscopy.**—(See *Bioscopy, Electric.*)
- Electric Bi-Polar Bath.**—(See *Bath, Bi-Polar.*)
- Electric Blasting.**—(See *Blasting, Electric.*)
- Electric Bleaching.**—(See *Bleaching, Electric.*)
- Electric Blow-Pipe.**—(See *Blow-Pipe, Electric.*)
- Electric Boat.**—(See *Boat, Electric.*)
- Electric Bobbin.**—(See *Bobbin, Electric.*)
- Electric Body-Protector.**—(See *Protector, Electric.*)
- Electric Boiler-Feed.**—(See *Feed, Electric.*)
- Electric Branding.**—(See *Branding, Electric.*)
- Electric Breeze.**—(See *Breeze, Electric.*)
- Electric Bridge.**—(See *Bridge, Electric.*)
- Electric Buoy.**—(See *Buoy, Electric.*)
- Electric Burner.**—(See *Burner, Electric.*)
- Electric Buzzer.**—(See *Buzzer, Electric.*)
- Electric Cable.**—(See *Cable, Electric.*)
- Electric Calamine.**—(See *Calamine, Electric.*)
- Electric Call-Bell.**—(See *Bell, Call, Electric.*)
- Electric Calorimeter.**—(See *Calorimeter, Electric.*)
- Electric Candle.**—(See *Candle, Electric.*)
- Electric Case-Hardening.**—(See *Hardening, Electric.*)
- Electric Canterization.**—(See *Canterization, Electric.*)
- Electric Canterizer.**—(See *Canterizer, Electric.*)

**Electric Caутery.**—(See *Cautery, Electric.*)

**Electric Charge.**—(See *Charge, Electric.*)

**Electric Chimes.**—(See *Chimes, Electric.*)

**Electric Chronograph.**—(See *Chronograph, Electric.*)

**Electric Chronoscope.**—(See *Chronoscope, Electric.*)

**Electric Cigar-Lighter.**—(See *Lighter, Cigar, Electric.*)

**Electric Circuit.**—(See *Circuit, Electric.*)

**Electric Cleats.**—(See *Cleats, Electric.*)

**Electric Clepsydra.**—(See *Clepsydra, Electric.*)

**Electric Clock.**—(See *Clock, Electric.*)

**Electric Coil.**—(See *Coil, Electric.*)

**Electric Column.**—(See *Column, Electric.*)

**Electric Communicator.**—(See *Communicator, Electric.*)

**Electric Conducting.**—(See *Conducting, Electrical.*)

**Electric Conduction.**—(See *Conduction, Electric.*)

**Electric Convection of Heat.**—(See *Heat, Electric Convection of.*)

**Electric Cord.**—(See *Cord, Electric.*)

**Electric Counter.**—(See *Counter, Electric.*)

**Electric Creeping.**—(See *Creeping, Electric.*)

**Electric Cross.**—(See *Cross, Electric.*)

**Electric Crucible.**—(See *Crucible, Electric.*)

**Electric Current.**—(See *Current, Electric.*)

**Electric Cystoscopy.**—(See *Cystoscopy, Electric.*)

**Electric Damping.**—(See *Damping, Electric.*)

**Electric Death.**—(See *Death, Electric.*)

**Electric Decomposition.**—(See *Decomposition, Electric.*)

<sup>1</sup>—Vol. 1

**Electric Density.**—(See *Density, Electric.*)

**Electric Deposition.**—(See *Deposition, Electric.*)

**Electric Determination of Longitude.**—(See *Longitude, Electric Determination of.*)

**Electric Displacement.**—(See *Displacement, Electric.*)

**Electric Distillation.**—(See *Distillation, Electric.*)

**Electric Door-Bell Pull.**—(See *Pull, Electric Door-Bell.*)

**Electric Double-Refraction.**—(See *Double-Refraction, Electric.*)

**Electric Dyeing.**—(See *Dyeing, Electric.*)

**Electric Dynamometer, Siemens'.**—(See *Dynamometer, Electric.*)

**Electric Eel.**—(See *Eel, Electric.*)

**Electric Efficiency.**—(See *Efficiency, Electric.*)

**Electric Elasticity.**—(See *Elasticity, Electric.*)

**Electric Elevator.**—(See *Elevator, Electric.*)

**Electric Endosmose.**—(See *Endosmose, Electric.*)

**Electric Energy.**—(See *Energy, Electric.*)

**Electric Entropy.**—(See *Entropy, Electric.*)

**Electric Escape.**—(See *Escape, Electric.*)

**Electric Etching.**—(See *Etching, Electric.*)

**Electric Evaporation.**—(See *Evaporation, Electric.*)

**Electric Excitability of Nerve or Muscular Fibre.**—(See *Excitability, Electric, of Nerve or Muscular Fibre.*)

**Electric Exhaustion.**—(See *Exhaustion, Electric.*)

**Electric Expansion.**—(See *Expansion, Electric.*)

**Electric Exploder.**—(See *Exploder, Electric Mine.*)



**Electric Explorer.**—(See *Explorer, Electric*.)

**Electric Field.**—(See *Field, Electric*.)

**Electric Figures, Breath** — — (See *Figures, Electric, Breath*.)

**Electric Figures, Lichtenberg's** — — (See *Figures, Electric, Lichtenberg's*.)

**Electric Fishes.**—(See *Fishes, Electric*.)

**Electric Fly.**—(See *Fly, Electric*.)

**Electric Flyer.**—(See *Flyer, Electric*.)

**Electric Fog.**—(See *Fog, Electric*.)

**Electric Force.**—(See *Force, Electric*.)

**Electric Furnace.**—(See *Furnace, Electric*.)

**Electric Fuse.**—(See *Fuse, Electric*.)

**Electric Gas-Lighting.**—(See *Gas-Lighting, Electric*.)

**Electric Gas-Lighting, Multiple** — — (See *Gas-Lighting, Multiple Electric*.)

**Electric Gas-Lighting Torch.**—(See *Torch, Electric Gas-Lighting*.)

**Electric Gastroscope.**—(See *Gastroscope, Electric*.)

**Electric Gilding.**—(See *Gilding, Electric*.)

**Electric Governor.**—(See *Governor, Electric*.)

**Electric Hand-Lighter for Argand Burner.**—(See *Burner, Argand Electric Hand-Lighter*.)

**Electric Head-Bath.**—(See *Bath, Head, Electric*.)

**Electric Head-Light.**—(See *Head-Light, Locomotive, Electric*.)

**Electric Heat.**—(See *Heat, Electric*.)

**Electric Heater.**—(See *Heater, Electric*.)

**Electric Horse Power.**—(See *Power, Horse, Electric*.)

**Electric Hydrotasimeter.**—(See *Hydrotasimeter, Electric*.)

**Electric Ignition.**—(See *Ignition, Electric*.)

**Electric Images.**—(See *Images, Electric*.)

**Electric Incandescence.**—(See *Incandescence, Electric*.)

**Electric Indicator for Steamships.**—(See *Indicator, Electric, for Steamships*.)

**Electric Indicators.**—(See *Indicators, Electric*.)

**Electric Inertia.**—(See *Inertia, Electric*.)

**Electric Insolation.**—(See *Insolation, Electric*.)

**Electric Installation.**—(See *Installation, Electric*.)

**Electric Insulation.**—(See *Insulation, Electric*.)

**Electric Irritability.**—(See *Irritability, Electric*.)

**Electric Jar.**—(See *Jar, Electric*.)

**Electric Jewelry.**—(See *Jewelry, Electric*.)

**Electric Lamp, Arc** — — (See *Lamp, Electric, Arc*.)

**Electric Lamp-Bracket.**—(See *Bracket, Lamp, Electric*.)

**Electric Lamp, Incandescent** — — (See *Lamp, Electric, Incandescent*.)

**Electric Lamp, Semi-Incandescent** — — (See *Lamp, Electric, Semi-Incandescent*.)

**Electric Lamp, Socket for.**—(See *Socket, Electric Lamp*.)

**Electric Launch.**—(See *Launch, Electric*.)

**Electric Letter-Box.**—(See *Letter-Box, Electric*.)

**Electric Light.**—(See *Light, Electric*.)

**Electric Lighting, Central Station** — — (See *Station, Central*.)

**Electric Lighting, Isolated** — — (See *Lighting, Electric, Isolated*.)

**Electric Light or Power Cable.**—(See *Cable, Electric Light or Power*.)

**Electric Lock.**—(See *Lock, Electric*.)

**Electric Locomotive.**—(See *Locomotive, Electric*.)

**Electric Log.**—(See *Log, Electric*.)

**Electric Loom.**—(See *Loom, Electric*.)

**Electric Loop.**—(See *Loop, Electric*.)

**Electric Machine, Frictional** — — (See *Machine, Frictional Electric*.)

**Electric Main.**—(See *Main, Electric.*)  
**Electric Masses.**—(See *Masses, Electric.*)  
**Electric Measurements.**—(See *Measurements, Electric.*)

**Electric Megaloscope.**—(See *Megaloscope, Electric.*)

**Electric Meter.**—(See *Meter, Electric.*)

**Electric Mine-Exploder.**—(See *Mine-Exploder, Electro-Magnetic. Fuse, Electric.*)

**Electric Motor.**—(See *Motor, Electric.*)

**Electric Motor, High-Speed** — — (See *Motor, Electric, High-Speed.*)

**Electric Motor, Low-Speed** — — (See *Motor, Electric, Low-Speed.*)

**Electric Multipolar Bath** \* — — (See *Bath, Multipolar, Electric.*)

**Electric Musket.**—(See *Musket, Electric.*)

**Electric Organ.**—(See *Organ, Electric.*)

**Electric Oscillations.**—(See *Oscillations, Electric.*)

**Electric Osmose.**—(See *Osmose, Electric.*)

**Electric Osteotome.**—(See *Osteotome, Electric.*)

**Electric Overtones.**—(See *Overtones, Electric.*)

**Electric Pen.**—(See *Pen, Electric.*)

**Electric Pendant.**—(See *Pendant, Electric.*)

**Electric Pendant-Lamps.**—(See *Lamps, Electric Pendant.*)

**Electric Pendulum.**—(See *Pendulum, Electric.*)

**Electric Permeancy.**—(See *Permeancy, Electric.*)

**Electric Phosphorescence.**—(See *Phosphorescence, Electric.*)

**Electric Photometer.**—(See *Photometer.*)

**Electric Piano.**—(See *Piano, Electric.*)

**Electric Plow.**—(See *Plow, Electric.*)

**Electric Position-Finder.**—(See *Finder, Position, Electric.*)

**Electric Potential.**—(See *Potential, Electric.*)

**Electric Power.**—(See *Power, Electric.*)

**Electric Probe.**—(See *Probe, Electric.*)

**Electric Prostration.**—(See *Prostration, Electric.*)

**Electric Protection.**—(See *Protection, Electric, of Houses, Ships and Buildings.*)

**Electric Protection of Metals.**—(See *Metals, Electrical Protection of.*)

**Electric Pulse.**—(See *Pulse, Electrical.*)

**Electric Pyrometer, Siemens'.**—(See *Pyrometer, Siemens', Electric.*)

**Electric Radiometer, Crookes' — —**  
 (See *Radiometer, Electric, Crookes'.*)

**Electric Range-Finder.**—(See *Finder, Range, Electric.*)

**Electric Ratchet-Pendant for Argand Burner.**—(See *Burner, Argand Electric, Ratchet-Pendant.*)

**Electric Ray.**—(See *Ray, Electric.*)

**Electric Reaction Wheel.**—(See *Wheel, Reaction, Electric.*)

**Electric Rectification of Alcohol.**—(See *Alcohol, Electric Rectification of.*)

**Electric Refining of Metals.**—(See *Metals, Electric Refining of.*)

**Electric Register, Watchman's — —**  
 (See *Register, Watchman's Electric.*)

**Electric Registering Apparatus.**—(See *Apparatus, Registering, Electric.*)

**Electric Relay-Bell.**—(See *Bell, Relay, Electric.*)

**Electric Repulsion.**—(See *Repulsion, Electric.*)

**Electric Resistance.**—(See *Resistance, Electric.*)

**Electric Resonance.**—(See *Resonance, Electric.*)

**Electric Retardation.**—(See *Retardation, Electric.*)

**Electric Rings.**—(See *Rings, Electric.*)

**Electric Safety Lamps.**—(See *Lamp, Electric Safety.*)

**Electric Saw.**—(See *Saw, Electric.*)



**Electric Seismograph.**—(See *Seismograph, Electric.*)

**Electric Shadow.**—(See *Shadow, Electric.*)

**Electric Shock.**—(See *Shock, Electric.*)

**Electric Shower Bath.**—(See *Bath, Shower, Electric.*)

**Electric Shunt Bell.**—(See *Bell, Shunt, Electric.*)

**Electric Single-Stroke Bell.**—(See *Bell, Single-Stroke Electric.*)

**Electric Siphon.**—(See *Siphon, Electric.*)

**Electric Soldering.**—(See *Soldering, Electric.*)

**Electric Sphygmograph.**—(See *Sphygmograph, Electrical.*)

**Electric Sterilization.**—(See *Sterilization, Electric.*)

**Electric Storm.**—(See *Storm, Electric.*)

**Electric Striae.**—(See *Striae, Electric.*)

**Electric Submarine Boat.**—(See *Boat, Submarine, Electric.*)

**Electric Sunstroke.**—(See *Sunstroke, Electric.*)

**Electric Surgings.**—(See *Surgings, Electric.*)

**Electric Swaging.**—(See *Swaging, Electric.*)

**Electric Tanning.**—(See *Tanning, Electric.*)

**Electric Target.**—(See *Target, Electric.*)

**Electric Teazer.**—(See *Teazer, Electric Current.*)

**Electric Telehydrobarometer.**—(See *Telehydrobarometer, Electric.*)

**Electric Tell-Tale Signal.**—(See *Signal, Electric Tell-Tale.*)

**Electric Tempering.**—(See *Tempering, Electric.*)

**Electric Tension.**—(See *Tension, Electric.*)

**Electric Thermo-Call.**—(See *Thermo-Call, Electric.*)

**Electric Thermometer.**—(See *Thermometer, Electric.*)

**Electric Throwback-Indicator.**—(See *Indicator, Electrical Throwback.*)

**Electric Time-Ball.**—(See *Ball, Electric Time.*)

**Electric Time-Meter.**—(See *Meter, Electric Time.*)

**Electric Torpedo.**—(See *Torpedo, Electric.*)

**Electric Tower.**—(See *Tower, Electric.*)

**Electric Tramway.**—(See *Tramway, Electric.*)

**Electric Transmitters.**—(See *Transmitter, Electric.*)

**Electric Trumpet.**—(See *Trumpet, Electric.*)

**Electric Turn-Table.**—(See *Turn-Table, Electric.*)

**Electric Typewriter.**—(See *Typewriter, Electric.*)

**Electric Valve.**—(See *Valve, Electric.*)

**Electric Valve Burner, Argand** — (See *Valve Burner, Argand Electric.*)

**Electric Varnish.**—(See *Varnish, Electric.*)

**Electric Vibrating Burner.**—(See *Burner, Vibrating, Electric.*)

**Electric Volatilization.**—(See *Volatilization, Electric.*)

**Electric Water or Liquid Level Alarm.**—(See *Alarm, Water or Liquid Level.*)

**Electric Welding.**—(See *Welding, Electric.*)

**Electric Whirl.**—(See *Whirl, Electric.*)

**Electric Whistle, Automatic Steam** — (See *Whistle, Steam, Automatic Electric.*)

**Electric Wood Mouldings.**—(See *Mouldings, Electric Wood.*)

**Electric Work.**—(See *Work, Electric.*)

**Electrical Controlling Clock.**—(See *Clock, Electrical Controlling.*)

**Electrically.**—In an electrical manner.

**Electrically Controlled Clock.**—(See *Clock, Electrically Controlled.*)

**Electrically Discharge, To** — (See *To Electrically*.)

**Electrically Discharging** — (See *Discharging Electrically*.)

**Electrically Energizing** — (See *Energizing Electrically*.)

**Electrically Operated Alarm** — (See *Electrically Operated*.)

**Electrically Retarding** — (See *Retarding Electrically*.)

**Electrician** — One versed in the principles and applications of electrical science.

**Electrician, Electro-Therapeutical** — An electrician.

**Electrician, Medical** — One skilled in the application of electricity to the human system for diagnosis or curative purposes.

An electrician should possess a full knowledge not only of the principles and applications of electric science, but also of physics and some of the medical sciences.

**Electricity** — The name given to the unknown matter or force, or both, which produces all electric phenomena.

No matter how produced, is one and the same thing.

*Frictional-electricity, pyro-electricity, static-electricity, voltaic or galvanic electricity, contact-electricity, animal or vegetable electricity, etc., etc.*, though convenient terms, having their origin, have no longer the force formerly attributed to them as different kinds of the electric force. (*See Single-Fluid Hypothesis of Electricity*.)

**Electricity, Accumulated** — Electricity stored in or by means of accumulators.

**Electricity, Accumulating** — Obscurely increasing electrical force. (*See Electricity, Accumulation of*.)

**Electricity, Accumulation of** — Applied indifferently to—

1. The gradual collecting of electric charge in a Leyden jar or condenser.

2. The increase of an electric charge by various devices called accumulators.

(3.) The production of a charge by the use of machines called influence machines.

(4.) The collection of electric energy in the so-called storage batteries or accumulators.

**Electricity, Animal** — Electricity produced during life in the bodies of animals.

All animals produce electricity during life. In some, such as the electric eel or torpedo, the amount is comparatively large. In others, it is small.

Some of these animals, when of full size, are able to give very severe shocks, and use this curious power as a means of defense against their enemies.

If the spinal cord of a recently killed frog be brought into contact with the muscles of the thigh, a contraction will ensue. (*Matteucci*.)

The nerve and muscle of a frog, connected by a water contact with a sufficiently delicate galvanometer, show the presence of a current that may last several hours. Du Bois-Reymond showed that the *ends* of a section of muscular fibres are negative, and their *sides* positive, and has obtained a current by suitably connecting them.

In the opinion of some electro-therapeutists no electric current exists in passive, normal nerve or muscular tissue. In an injured tissue a current, called a *demarcation current*, is produced. (*See Current, Demarcation*.)

All muscular contractions, however, apparently produce electric currents.

In electro-therapeutics, it is probable that greater success would accrue in practice if the human body were regarded as an electric source as well as an electro-receptive device.

**Electricity, Atmospheric** — The free electricity almost always present in the atmosphere.

The following facts have been discovered concerning atmospheric electricity, viz.:

(1.) The free electricity of the atmosphere is generally positive, but often changes to negative on the approach of fogs and clouds.

(2.) It exists in greater quantity in the higher regions of the air than near the earth's surface.

(3.) It is stronger when the air is still than when the wind is blowing.

(4.) It is subject to yearly and daily changes in its intensity, being stronger in winter than in summer, and at the middle of the day than either at the beginning or the close.



**Electricity, Atmospheric, Origin of —**

—The exact cause of the free electricity of the atmosphere is unknown.

Peltier ascribes the cause of the free electricity of the atmosphere to a negatively excited earth, which charges the atmosphere by *induction*. (See *Induction, Electrostatic*.) Free atmospheric electricity has also been ascribed to the evaporation of water; to the condensation of vapor; to the friction of the wind; to the motion of terrestrial objects through the earth's magnetic field; to induction from the sun and other heavenly bodies; to differences of temperature; to combustion, and to gradual oxidation of plant and animal life. It is possible that all these causes may have some effect in producing the free electricity of the atmosphere.

Whatever is the cause of the free electricity of the atmosphere, there can be but little doubt that it is to the condensation of aqueous vapor that the high *difference of potential* of the lightning flash is due. (See *Potential, Difference of*.) As the clouds move through the air they collect the free electricity on the surfaces of the minute drops of water of which they are composed, and when many thousands of these subsequently collect in larger drops the difference of potential is enormously increased in consequence of the equally enormous decrease in the surface of any single drop over the sum of the surfaces of the drops that have coalesced to form it.

**Electricity, Atom of —** —A quantity of electricity equal in amount to that possessed by any chemical monad atom.

Professor Lodge points out the fact that the charge of a monad atom of any element is the smallest charge a body can possess, and is possibly as indivisible as the atom itself. He points out the fact that chemical affinity or atomic attraction may be due to the electrical attraction of atoms containing unlike charges; that although the difference of potential between the atoms is small, probably somewhere between 1 and 3 volts, the distances separating them are so very small that their mutual attractive force must be almost infinitely great.

As D'Auria has pointed out, if the centres of attraction of the atoms be the centres of the atoms themselves, then the atoms, if approached to actual contact, would be separated from one another by a distance equal to half the sum of their diameters. If, however, the centre of at-

traction be situated at any point on the surface of the atoms the distance of separation would come equal to zero, calling  $d$ , the distance between them,  $m$  and  $m'$ , their respective masses, and  $S$ , a co-efficient varying with the size of the atoms, the force of mutual attraction, the

$$f = S \left( \frac{m m'}{d^2} \right)$$

from which we see that the value of  $f$ , is infinite when the atoms are in contact.

**Electricity, Cal —** —Electricity produced by changes of temperature in the core of a transformer.

The changes of temperature in the transformer core can produce a difference of potential in the secondary circuit which increases the motive force induced in the secondary circuit, thus increasing the variations in the primary. This is called the Acheson effect. (See *Effect, Acheson*.)

**Electricity, Conservation of —** —A term proposed by Lippman to express the fact that when a body receives an electric charge in the open air, the earth and the other bodies receive an equal and opposite charge, thus preserving the sum of the total positive and negative electricities in the universe.

**Electricity, Contact —** —Electricity produced by the mere contact of dissimilar metals.

The mere contact of two dissimilar metals results in the production of opposite electric charges on their opposed surfaces, or in the difference of electric potential between these surfaces. The cause of this difference of potential is very generally ascribed to the voltaic couple, which is surrounded by the atmosphere, the oxygen of which acts more energetically on the positive element than it does on the negative element.

The mere contact of dissimilar metals produces a constant electric current. An electric current possesses kinetic energy. To produce a constant electric current, therefore, energy must be expended.

The voltaic pile through the contact of dissimilar metals produces a difference of potential, yet the cause of the current is to be found in the chemical action. (See *Cell, Voltaic*.)

**Electricity, Disguised —** —Disguised electricity. (See *Electricity, Disguised or Latent*.)

**Electricity, Dissimulated or Latent —**

—The condition of an electric charge when placed near an opposite charge, as in a Leyden jar or condenser.

In this case, merely touching one of the charged surfaces will not effect its complete discharge.

Electricity in the condition of a bound charge was formerly called *latent electricity*. This term is now in disuse. Such a charge is now called a *bound charge*. (See *Charge, Bound, Charge, Free*.)

**Electricity, Distribution of —**

—Various combinations of electric sources, circuits and electro-receptive devices whereby electricity generated by the sources is carried or distributed to more or less distant electro-receptive devices by means of the various circuits connected therewith.

A number of different systems for the distribution of electricity exist. Among the most important are the following, viz.:

- (1.) Direct or continuous-current distribution.
- (2.) Alternating-current distribution.
- (3.) Storage battery or secondary distribution.
- (4.) Distribution by means of condensers.
- (5.) Distribution by means of motor-generators.

**Electricity, Distribution of, by Alternating Currents —**

—A system of electric distribution by the use of alternating currents. A system of electric distribution in which lamps, motors, or other electro-receptive devices are operated by means of alternating currents that are sent over the line, but which, before passing through said devices, are modified by apparatus called transformers or converters.

Such a system embraces:

- (1.) An alternating-current dynamo-electric machine or battery of machines.
- (2.) A conductor or line wire arranged in a metallic circuit.
- (3.) A number of converters or transformers whose primary coils are placed in the circuit of the line wire.
- (4.) A number of electro-receptive devices placed in the circuit of the secondary coil of the converter. (See *Transformer*.)

**Electricity, Distribution of, by Alternating Currents by Means of Condensers —**

—A system of alternate current distribution in which condensers are employed to transform current of high potential received from an alternating current dynamo to currents of low potential which are fed to the lamps or other electro-receptive devices.

In the system of McElroy the conversion from high to low potential is obtained by making the primary plates of the condensers charged by the dynamo smaller than the secondary plates, the ratio of the area of the primary plates to that of the secondary plates being made in accordance with the ratio of conversion desired.

**Electricity, Distribution of, by Commutating Transformers —**

—A system of electrical distribution in which motor-generators are used, but neither the armature nor the field magnets are revolved, a special commutator being employed to change the polarity of the magnetic circuits.

**Electricity, Distribution of, by Constant Currents —**

—A system for the distribution of electricity by means of direct, *i. e.*, continuous, steady or non-alternating currents, as distinguished from alternating currents.

Distribution by means of direct currents may be effected in a number of ways; the most important are:

- (1.) Distribution with *constant current* or *series-distribution*.
- (2.) Distribution with *constant potential* or *multiple-distribution*.

Strictly speaking, these, as, indeed, all systems, are systems for the distribution of electric energy rather than the distribution of electricity.

In a system of *series-distribution*, the electro-receptive devices are placed in the main line in series, so that the electric current passes successively through each of them. In such a system each device added increases the total resistance of the circuit so that the total resistance is equal to the sum of the separate resistances on the line.

In order, therefore, to maintain the current strength constant, independent of the number of devices added to or removed from the circuit, the electromotive force of the source must increase with each electro-receptive device added, and decrease with each electro-receptive device taken



out. If the number of electro-receptive devices be great, such a circuit is necessarily characterized by a comparatively high electromotive force.

Since the current passes successively through all the electro-receptive devices, an automatic safety device is necessary in order to automatically provide a short circuit of comparatively low resistance past a faulty device, and thus prevent a single faulty device from invalidating the action of all other devices in the circuit.

Arc lamps are usually connected to the line circuit in series.

In a system of *multiple-distribution*, the electro-receptive devices are connected to the main line or leads in *multiple-arc*, or *parallel*, so that each device added *decreases the resistance of the circuit*. In order, therefore, to maintain a proper current through the electro-receptive devices, the mains must be kept at a nearly constant difference of potential. The electro-receptive devices employed in such a system of distribution are generally of high electric resistance, so that the introduction or removal of a few of the electro-receptive devices will not materially alter the resistance of the whole circuit, and will not, therefore, materially affect the remaining lights.

In this system automatic safety devices, operating by the fusion of a readily melted alloy or metal, are provided for the purpose of preventing too powerful currents from passing through any branch connected with the *main conductors* or *leads*. (See *Plug, Fusible*.)

Incandescent lamps are generally connected with the main conductors or leads in *parallel* or *multiple-arc*.

Distribution of incandescent lamps by series connections is sometimes employed. Such lamps are usually of comparatively low resistance, and are provided each with an automatic cut-out, which establishes a short circuit past the lamp on its failure to properly operate.

During the passage of an electric current through any series-distribution circuit, energy is expended in different portions of the circuit, in proportion to the resistance of these parts. In any system, economy of distribution necessitates that the energy expended in the electro-receptive devices must bear as large a proportion as practicable to the energy expended in the source and leads. In series-distribution, this can readily be accomplished even if the resistance of the leads is comparatively high, since the total resistance of the circuit increases with every electro-receptive

device added. Comparatively thin wires can therefore be employed for a very considerable extent of territory covered, without very great loss.

In systems of multiple-distribution, however, this is impossible; for, since every electro-receptive device added decreases the total resistance of the circuit, unless the resistance of the leads is correspondingly decreased the economy becomes smaller, unless the resistance of the leads was originally so low as to be inappreciable when compared with the change of resistance.

In systems of distribution by alternating currents this is avoided by passing a current of but small strength and considerable difference of potential over a line connecting distant points, and converting this current into a current of large strength and small difference of potential at the places where it is required for use.

#### Electricity, Distribution of, by Continuous Current, by Means of Condensers

—A system of distribution devised by Doubrava, in which a continuous current is conducted to certain points in the line where a device called a "disjuncter" is employed, to reverse it periodically, and the reversed currents so obtained directly used to charge condensers in the circuit of which induction coils are used.

This method of distribution is a variety of distribution by means of constant currents.

The condensers are used to feed incandescent lamps or other electro-receptive devices.

#### Electricity, Distribution of, by Continuous Current, by Means of Transformers

—A system for the transmission of electric energy by means of continuous or direct currents that are sent over the line to suitably located stations where motor-dynamos are used for transformers.

The dynamo armature is used with two separate circuits, one of a short and coarse wire, and one of a long fine wire. This construction will permit the conversion of a high to a low potential or *vice versa*; or two separate dynamos can be placed on the same shaft and one used as the motor.

It is evident that a motor generator can be constructed to convert continuous currents into alternate, or alternate currents into continuous cur-



In this last case the armature and fixed parts must be kept separate.

Another form of continuous current conversion effected by means of the motion of a commutator which effects a rotation of magnetic polarity in a double-wound armature of fine and coarse wire.

**Electricity, Distribution of, by Motor Generators** — A system of electric distribution in which a continuous current of potential, distributed over a main line, is employed at the points where its electric energy is to be utilized for driving a motor, which in turn drives a dynamo, the current of which is used to energize the electro-receptive devices.

This method of distribution is a variety of distribution by means of continuous or direct current.

Another system of distribution by means of motor generators, the motor and dynamo are combined in one with a double-wound armature, the fine wire coils in which receive the high potential driving current and the coarse wire coils which the low potential current used in the distribution circuits.

**Electricity, Double Fluid Hypothesis of** — A hypothesis which endeavors to explain the causes of electric phenomena by the assumption of the existence of two different electric fluids.

The double fluid hypothesis assumes:

(1) That the phenomena of electricity are due to tenuous and imponderable fluids, the positive and the negative.

(2) That the particles of the positive fluid repel one another, as do also the particles of the negative fluid; but that the particles of positive fluid attract the particles of the negative and *vice versa*.

(3) That the two fluids are strongly attracted together, and when present in it produce electrification.

(4) That the two fluids attract one another and thus mask the properties of each.

(5) That the act of friction separates these fluids, one going to the rubber and the other to the thing rubbed.

Professor Lodge is disposed to favor the double fluid hypothesis rather than the single fluid hypothesis. He states in support of this belief the following facts, viz.:

An electric wind or breeze is produced at the positive and negative terminals of an

electrical machine, and this whether the point be attached directly to these terminals, or whether it be held in the hand of a person near them.

(2.) The well known peculiarities connected with the spark discharge, seen in Wheatstone's experiments on the velocity of electricity.

(3.) An electrostatic strain scarcely affects the volume of the dielectric, thus suggesting or showing a distorting stress, which alters the shape of the substance of the dielectric, but not its size.

(4.) The effects of electrolysis in what he assumes the double procession of the atoms past each other in opposite directions.

(5.) The phenomena of self-induction, or the behavior of a thick wire on an alternating current.

(6.) The apparent absence of momentum in the electric current, or moment of inertia in an electro-magnet so far as tested.

**Electricity, Dynamic** — A term sometimes employed for current electricity in contradistinction to static electricity.

**Electricity, Franklinic** — A term sometimes employed in electro-therapeutics, for the electricity produced by a frictional or an electrostatic-induction machine. (See *Current, Franklinic*.)

**Electricity, Frictional** — Electricity produced by friction.

This term as formerly employed to indicate static charges as distinguished from currents, is gradually falling into disuse, and the frictional electric machines are being generally replaced by continuous-induction machines, like those of Holtz, Töpler-Holtz, or Wimshurst.

The character of the charge produced by friction depends on the nature of the rubber as well as on that of the thing rubbed.

In the following table the substances are so arranged that any one in the list becomes positively electrified when rubbed by any which follows it:

#### Positive.

Cat's fur.

Polished glass.

Wool.

Cork at ordinary temperatures.

Coarse brown paper.

Cork heated.

White silk.

Black silk.

Shellac.

Rough glass.—(*Forbes*.)



### Negative.

It will be seen that the character of the charge produced by friction depends on the character of the surfaces rubbed. This is seen from the foregoing table, where—

(1.) The roughness of the surface, as in the case of glass, produces a difference in the nature of the charge; thus, rough glass is at the bottom of the table, and smooth, polished glass near the top.

(2.) The state of the surface as shown by the color. Black silk rubbed with white silk is negative to it.

(3.) The state of the surface, as varied by the temperature. Hot cork receives a negative charge when rubbed against a piece of cold cork.

Forbes has pointed out that these differences are probably due to the change produced in the ability of the surface to radiate heat or light. A substance or body which radiates the most light or heat is negative. Thus, a hot body radiates more heat than a cold body, and is negative to it. A rough surface is negative to a smooth surface because it radiates more heat than a smooth surface. For the same reason a black surface is negative to a white surface. In this latter case, however, the black surface is the worse radiator of light.

The contact of dissimilar substances has long been considered by some as one of the requisites for the ready production of electricity by friction. In fact, the production of electricity by friction has been ascribed as an effect due to a true contact force at the points of junction of the rubber and the thing rubbed. Others, however, deny the existence of a true contact force of this nature. (See *Force, Contact*.)

**Electricity, Galvanic** — —A term used by some in place of voltaic electricity. (See *Electricity, Voltaic*.)

The use of the term galvanic electricity would appear to be less logical than the word voltaic, since Volta, and not Galvani, was the first to find out the true origin of the difference of potential produced in the voltaic pile.

**Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves** — —A theory, now generally accepted, which regards light as one of the effects of electro-magnetic pulsations or waves.

The recent brilliant researches of Dr. Hertz, of *Carlsruhe*, show that when an impulsive discharge

is passing through a conductor, ether waves are radiated or propagated in all directions in the space surrounding the conductor, and that these waves are in all respects similar to those of light, except that they are much longer.

The electro-magnetic waves are set up in the luminiferous ether, and move through it with the same velocity as that of light. Moreover, electro-magnetic waves possess the same powers of reflection, refraction, interference, resonance, etc., etc., as are possessed by waves of light. (See *Resonator, Electric*.)

When an alternating or simple faradic current or pulse of electricity is transmitted from one end to the other of a long metallic conductor, the pulses are believed to travel through the universal ether surrounding the conductor rather than through the conductor itself. The velocity of this propagation in free ether is the same as that of light, and, indeed, is identical with that of light itself. In the inter-atomic or inter-molecular ether, whether of conductors, or of dielectrics, the velocity of propagation varies with the nature of the medium.

The waves produced by electric pulses are of much greater length than those of light.

According to Lodge a condenser of the capacity of a micro-farad, if discharged through a coil having the self-induction of 1 ohm, will give rise to waves in the ether 1,200 miles in length, and will possess a rate of oscillation equal to about 157 complete wave-lengths per second.

A common pint Leyden jar discharged through an ordinary discharging rod, will produce a series of waves about 15 to 20 metres in length, and will possess a rate of oscillation equal to about ten million per second.

Lodge calculates that in order to obtain the short waves requisite to influence the retina of the eye, and thus produce light, the circuit in which the electrical oscillations take place must have at least atomic dimensions, and that the phenomena of light may therefore be due to local oscillations or surges in circuits of atomic dimensions. (See *Light, Maxwell's Electro-Magnetic Theory of*.)

**Electricity, Latent** — —A term formerly applied to bound electricity.

**Electricity, Magneto** — —Electricity produced by the motion of magnets past conductors, or of conductors past magnets.

Electricity produced by magneto-electric

tion. (See *Induction, Electro-Dyna-*

**Electricity, Multiple-Distribution of, by Constant Potential Circuit** — —Any system for the distribution of continuous current of electricity in which the electro-receptive devices are connected to the leads in multiple-arc or parallel. (See *Electricity, Distribution of, by Constant Currents.*)

**Electricity, Natural Unit of** — —A unit sometimes used in place of an atom of electricity.

The natural unit of electricity is an amount of charge possessed by any monad atom of chemical element.

The natural unit of electricity is equal to the one thousand millionth of the ordinary electrostatic unit, or less than a hundred trillionth of a coulomb. (See *Electricity, Atom of.*)

**Electricity, Negative** — —One of the two kinds of electrical excitement.

The kind of electric charge produced on amber when rubbed with cotton.

**Electricity, Photo** — —Electrical differences of potential produced by the action of light.

**Electricity, Plant** — —Electricity produced in plants during their growth.

**Electricity, Positive** — —One of the two kinds of electric excitement.

The kind of electric charge produced on glass when rubbed against resin.

**Electricity, Production of, by Light** — —The production of electric differences of potential by the action of light.

Wachs has noticed that a clean metallic surface becomes electrified when light falls upon it. Differences of potential are produced in a thermocell when its electrodes are unequally heated. A thermo cell is an illustration of a source of potential produced by non-luminous energy.

**Electricity, Pyro** — —Electricity developed in certain crystalline bodies by unequal heating or cooling them.

Tourmaline, in the crystalline state, possesses this property in a marked degree. When a piece of tourmaline is heated or cooled, it

acquires opposite electrifications at opposite ends or poles.

In the crystal of tourmaline shown in Fig. 227, the end A, called the *analogous pole*, acquires a positive electrification, and the end B, called the *antilogous pole*, a negative electrification, while the temperature of the crystal is rising. While cooling, the opposite electrifications are produced.

A heated crystal of tourmaline, suspended by a fibre, is attracted or repelled by an electrified body or by a second heated tourmaline, in the same manner as an electrified body.




Fig. 227. Pyro-Electric Crystal.

Many crystalline bodies possess similar properties. Among these are the ore of zinc known as electric calamine or the silicate of zinc, boracite, quartz, tartrate of potash, sulphate of quinine, etc.

**Electricity, Radiation of** — —The radiation of electric energy by means of electro-magnetic waves. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves.*)

**Electricity, Resinous** — —A term formerly employed in place of negative electricity.

It was at one time believed that all resinous substances are negatively electrified by friction. This we now know to be untrue, the nature of electrification depending as much on the character of the rubber as on the character of the thing rubbed. Thus resins rubbed with cotton, flannel or silk, become *negatively* excited, but when rubbed with sulphur or gun cotton, *positively* excited. The terms positive and negative are now exclusively employed.

**Electricity, Series Distribution of, by Constant Current Circuit** — —Any system for the distribution of constant currents of electricity in which the electro-receptive devices are connected to the line-wire or circuit in series. (See *Electricity, Distribution of, by Constant Currents.*)



**Electricity, Single-Fluid Hypothesis of**

—A hypothesis which endeavors to explain the cause of electrical phenomena by the assumption of the existence of a single electric fluid.

The single-fluid hypothesis assumes:

(1.) That the phenomena of electricity are due to the presence of a single, tenuous, imponderable fluid.

(2.) That the particles of this fluid mutually repel one another, but are attracted by all matter.

(3.) That every substance possesses a definite capacity for holding the assumed electric fluid, and, that when this capacity is just satisfied no effects of electrification are manifest.

(4.) That when the body has less than this quantity present, it becomes *negatively excited*, and when it has more, *positively excited*.

(5.) That the act of friction causes a redistribution of the fluid, part of it going to one of the bodies, giving it a surplus, thus positively electrifying it, and leaving the other with a deficit, thus negatively electrifying it.

The single-fluid hypothesis has been provisionally accepted by some with this modification, that a negatively excited body is thought to be the one which contains the *excess* of the assumed fluid, and a positively excited body the one which contains the *deficit*.

They make this change on account of the phenomena observed in Crookes' tube, where the molecules of the residual gas are observed to be thrown off from the *negative* and not from the positive terminal. (See *Tube, Crookes'*.)

Another view considers electricity to be due to differences of ether pressure, electricity being the ether itself, and electromotive force, the differences of ether pressures. Positive electrification is assumed to result from a surplusage of energy, and negative electrification from a deficit of energy.

At the present time the views of Hertz are generally accepted. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves*.)

**Electricity, Specific Heat of**

—A term proposed by Sir William Thomson to indicate the analogies existing between the absorption and emission of heat in purely thermal phenomena, and the absorption and emission of heat in thermo-electric phenomena. (See *Heat, Specific*.)

As we have already seen heat is either given

out or absorbed, when an electric current passes from one metal to another across a junction between them. (See *Effect, Peltier*.)

So, too, when electricity passes through an unequally heated wire, the current tends to increase or decrease the differences of temperature, according to the direction in which it flows, and according to the character of the metal. (See *Effect, Thomson*.)

"If electricity were a fluid," says Maxwell, "running through the conductor as water does through a tube, and always giving out or absorbing heat till its temperature is that of the conductor, then in passing from hot to cold it would give out heat, and in passing from cold to hot it would absorb heat, and the amount of this heat would depend on the specific heat of the fluid."

**Electricity, Static** —A term applied to electricity produced by friction.

The term static electricity is properly employed in the sense of a *static charge* but not as *static electricity*, since that would indicate a particular kind of electricity, and, as is now generally recognized, electricity, from no matter what source it is derived, is one and the same thing.

**Electricity, Storage of** —A term improperly employed to indicate such a storage of energy as will enable it to directly reproduce electric energy.

A so-called storage battery does not store electricity, any more than the spring of a clock can be said to store time or sound. The spring stores muscular energy, *i. e.*, renders the muscular kinetic energy potential, which, again becoming kinetic, causes the works of the clock to move or strike.

In the same way in a so-called storage battery, the energy of an electric current is caused to produce electrolytic decompositions of such a nature as independently to produce a current on the removal of the electrolyzing current. (See *Cell, Secondary. Cell, Storage*.)

**Electricity, Thermo** —Electricity produced by differences of temperature at the junctions of dissimilar metals.

If a bar of antimony is soldered to a bar of bismuth, and the free ends of the two metals are connected by means of a galvanometer, an application of heat to the junction, so as to raise its

temperature above the rest of the circuit, will produce a difference of potential, which, if neutralized, will cause a current to flow across the junction from the bismuth to the antimony (against the alphabet, or from B to A). If the junction be cooled below the rest of the circuit, a current is produced across the junction from the antimony to the bismuth (with the alphabet, or from A to B). These currents are called *thermo-electric currents*, and are proportional to the differences of temperature.

Even the same metal, in different physical states or conditions, such as a wire, part of which is straight and the remainder bent into a spiral as at H C, Fig. 228, if heated at F by the flame of



Fig. 228. Thermo-Electricity.

a lamp will have a difference of potential developed in it.

The same thing may also be shown by placing a cylinder of bismuth J, Fig. 229, in a gap in a



Fig. 229. Thermo-Electric Circuit.

hollow rectangle of copper A B, inside of which a magnetic needle, M, is supported.

The rectangle of copper being placed in the magnetic meridian, on heating the junction by the flame of a lamp F, the needle will be deflected by a current produced by the difference of temperature.

Thermo-electricity is generally obtained by means of the combination of a *thermo-electric couple*, in a *thermo-electric cell*. (See *Couple*, *Thermo-Electric*. *Cell*, *Thermo-Electric*.)

Since the difference of potential produced by a single thermo-electric couple is small, a number of such couples or cells are generally connected in

series to produce a *thermo-electric battery*. (See *Battery*, *Thermo-Electric*.)

### Electricity, Unit Quantity of — —

The quantity of electricity conveyed by unit current per second.

The practical unit quantity of electricity is the *coulomb*, which is the quantity conveyed by a current of one ampère in one second.

### Electricity, Unit Quantity of, Natural

—The quantity of electricity possessed as a charge by any elementary monad atom. (See *Electricity*, *Atom of*.)

**Electricity, Varieties of — —**A classification of electricity according to its state of rest or motion, or to the peculiarities of its motion.

Lodge classifies the different varieties of electricity as follows, viz.:

#### (1.) Electricity at Rest, or Static Electricity.

This branch of electric science treats of phenomena belonging to stresses and strains in insulated media, when brought into the neighborhood of electric charges, together with the modes of exciting such electric charges, and the laws of their interactions.

#### (2.) Electricity in Locomotion, or Current Electricity.

This branch of electric science treats of the phenomena produced in metallic conductors, chemical compounds and dielectric media, by the passage of electricity through them, and the modes of exciting electricity into motion, together with the laws of its flow.

#### (3.) Electricity in Rotation, or Magnetism.

This branch of electric science treats of the phenomena produced in electricity in whirling or vortex motion, the manner in which such whirls may be produced, the strains and stresses which they produce, and the laws of their interactions.

#### (4.) Electricity in Vibration, or Radiation.

This branch of electric science treats of the study of the propagation of periodic or undulatory disturbances through various kinds of media, the laws regulating wave velocity, wave length, reflection, interference, dispersion, polarization and other similar phenomena generally studied under light.

A misleading classification of electricity is sometimes made according to the sources which produce it. This is misleading, since electricity, no matter how produced, is one and the same.



The so-called varieties of electricity may be divided into different classes according to the nature of the source. The principles of these are as follows:

(1.) **Frictional-Electricity**, or that produced by the friction of one substance against another.

(2.) **Voltaic-Electricity**, or that produced by the contact of dissimilar substances under the influence of chemical action.

(3.) **Thermo-Electricity**, or that produced by differences of temperature in a thermo couple.

(4.) **Pyro-Electricity**, or that produced by differences of temperature in certain crystalline solids.

(5.) **Magneto-Electricity**, or that produced by the motion of a conductor through the field of permanent magnets. This is a variety of—

(6.) **Dynamo-Electricity**, or that produced by moving conductors so as to cut lines of magnetic force.

(7.) **Vital-Electricity**, or that produced under the influence of life or accompanying life.

**Electricity, Vitreous** — — A term formerly employed to indicate positive electricity.

It was formerly believed that the friction of glass with other bodies always produces the same kind of electricity. This, however, is now known not to be the case.

The term is now replaced by *positive electricity*. (See *Electricity, Resinous*.)

**Electricity, Voltaic** — — Differences of potential produced by the agency of a voltaic cell or battery.

Electricity is the same thing or phase of energy by whatever source it is produced.

**Electrics**.—Substances capable of becoming electrified by friction.

Substances like the metals, which, when held in the hand could not be electrified by friction were formerly called *non-electrics*.

These terms were used by Gilbert in the early history of the science.

This distinction is not now generally employed since conducting substances if insulated, may be electrified by friction.

**Electrifiable**.—Capable of being endowed with electric properties.

**Electrification**.—The act of becoming electrified.

The production of an electric charge.

**Electrified Body**.—(See *Body, Electrified*.)

**Electrify**.—To endow with electrical properties.

**Electrine**.—Relating to electrum, or amber.

**Electrization, Therapeutical** — — Subjecting different parts of the human body to the action of electric currents for the cure of diseased conditions.

**Electro-Biology**.—(See *Biology, Electro*.)

**Electro-Brassing**.—(See *Brassing, Electro*.)

**Electro-Bronzing**.—(See *Bronzing, Electro*.)

**Electro-Capillary Phenomena**.—(See *Phenomena, Electro-Capillary*.)

**Electroecesis**.—A word proposed for curing by electricity.

**Electro-Chemical Equivalent**. — (See *Equivalent, Electro-Chemical*.)

**Electro-Chemical Meter**.—(See *Meter, Electro-Chemical*.)

**Electro-Chemical Telephone**.—(See *Telephone, Electro-Chemical*.)

**Electro-Chemistry**. — (See *Chemistry, Electro*.)

**Electro-Chromic Rings**.—(See *Rings, Electro-Chromic*.)

**Electro-Contact Mine**.—(See *Mine, Electro-Contact*.)

**Electro-Coppering**. — (See *Coppering, Electro*.)

**Electro-Crystallization**.—(See *Crystallization, Electro*.)

**Electrocution**.—Capital punishment by means of electricity.

**Electrode**.—Either of the terminals of an electric source.

The term was applied by Faraday to either of the conductors placed in an electrolytic bath and conveying the current into it, and this is its strict meaning. The terms *pole* or *terminal* apply to the ends of a break in any electric circuit.

**Electrode, Aural** — — A therapeutic electrode, shaped for the treatment of the

ear. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Brush** — —A therapeutic electrode fashioned like a wire brush or other conducting brush. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Cautery-Knife** — —A knife-shaped electrode, that is rendered incandescent by the passage of the electric current.

**Electrode, Clay** — —A therapeutic electrode of clay shaped to fit the part of the body to be treated. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Disc** — —A disc-shaped electrode employed in electro-therapeutics. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Dry** — —A therapeutic electrode applied in a dry state. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Electro-Therapeutic** — —In electro-therapeutics the electrode mainly concerned in the treatment or diagnosis of the diseased parts.

Either the positive or the negative electrode may be the therapeutic electrode, and one or the other is employed according to the particular character of the effect it is desired to obtain. The other electrode is placed at any convenient and suitable part of the body, and is called the *indifferent electrode*.

The therapeutic electrode is generally placed nearer the organ or part to be treated than the indifferent electrode.

**Electrode-Handle, Pole-Changing and Interrupting** — —A handle provided for the ready insertion of electro-therapeutic electrodes, and provided with means for interrupting or changing the direction of the current.

**Electrode, Illumined** — —That electrode of a selenium cell which is exposed to the light. (See *Cell, Selenium.*)

**Electrode, Indifferent** — —In electro-therapeutics the electrode that is employed merely to complete the circuit through the organ or part subjected to the electric cur-

rent, and is not directly concerned in the treatment or diagnosis of the diseased parts.

Either the positive or the negative electrode may be the indifferent electrode. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Moist** — —A therapeutic electrode applied in a moist condition. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Needle** — —A therapeutic electrode in the shape of a needle, and employed for electrolytic treatment. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Negative** — —The electrode connected with the negative pole of an electric source.

**Electrode, Non-Illumined** — —That electrode of a selenium cell that is protected from the direct action of light. (See *Cell, Selenium.*)

**Electrode, Non-Wasting** — —A term sometimes applied to the negative electrode of an arc-lamp when made of iridium or other similar material.

**Electrode, Positive** — —The electrode connected with the positive pole of an electric source.

**Electrode, Rectal** — —A therapeutic electrode, suitably shaped for the treatment of the rectum. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Sponge** — —A moistened sponge connected to one of the terminals of an electric source and acting as the electro-therapeutic electrode.

**Electrode, Urethral** — —An electro-therapeutic electrode suitably shaped for the treatment of the urethra. (See *Electrode, Electro-Therapeutic.*)

**Electrode, Vaginal** — —An electro-therapeutic electrode suitably shaped for the treatment of the vagina. (See *Electrode, Electro-Therapeutic.*)

**Electro-Deposits** — (See *Deposits, Electro.*)

**Electrodes** — The terminals of an electric source.

The positive electrode is sometimes called the



*Anode*, and the negative electrode the *Kathode*. No matter for what purposes employed, they are generally in electro-therapeutics termed electrodes. In precise use these terms should be restricted to the electrodes when used for electrolytic decomposition.

The electrodes are made of different shapes and of different materials according to the character of the work the current is to perform.

#### Electrodes, Carbon, for Arc-Lamps —

Rods of artificial carbon employed in arc lamps.

These are more properly called simply arc-lamp carbons.

Arc-lamp carbons are moulded into the shape of rods, from plastic mixtures of carbonaceous materials and carbonizable liquids. On the subsequent carbonization of these rods the ingredients are caused to cohere in one solid mass by the deposit of carbon derived from the carbonizable materials. (See *Carbons, Artificial*.)

Carbons for arc-lamps are generally copper-coated, so as to somewhat decrease their resistance, and insure a more uniform consumption. Arc-lamp carbons are sometimes provided with a central *core* of softer carbon, which fixes the position of the arc and thus insures a steadier light. (See *Carbons, Cored*.)

**Electrodes, Cored** — Carbon electrodes of a cylindrical shape provided with a central cylinder of softer carbon.

The use of cored electrodes for arc lamps is for the purpose of steadying the light by maintaining the arc in a central position. This is effected by the greater vaporization of the softer carbon of the core.

#### Electrodes, Cylindrical Carbon —

Carbon cylinders used for electrodes of arc-lamps, or for battery plates.

#### Electrodes, Electro-Therapeutic —

Electrodes of various shapes employed in electro-therapeutics.

The electro-therapeutic electrode, as distinguished from the indifferent electrode, is especially shaped for the particular purpose for which it is designed.

When the electricity is intended to affect the skin or superficial portions of the body only, it is applied dry, and is then generally metallic. To reach the deeper structures, such as the muscle or nerve trunks, moistened sponge electrodes are

employed. Before their use the skin should be thoroughly moistened. Sponge-electrodes are generally made conducting by a solution of some saline substance, such as common salt.

#### Electrodes, Erb's Standard Size of —

—Standard sizes of electrodes generally adopted in electro-therapeutics.

The following standard sizes have been proposed by Erb, viz.:

- (1.) Fine electrode....  $\frac{1}{2}$  centimetre diameter.
- (2.) Small " .... 2 " "
- (3.) Medium " .... 7.5 " "
- (4.) Large " ... .6 x 2 " "
- (5.) Very large do.... 8 x 16 " "

#### Electrodes, Non-Polarizable —

Electrodes employed in electro-therapeutics, that are so constructed as to avoid the effects of polarization.

Non-polarizable electrodes are obtained by employing two amalgamated zinc wires, dipped into saturated solution of zinc chloride placed in glass tubes, and closing the lower ends of the tubes by a piece of potter's clay. The contact of an electrode so prepared with the tissues of the body does not produce a polarization.

**Electro-Diagnosis.**—(See *Diagnosis, Electro*.)

**Electro-Diagnostic.**—(See *Diagnostic, Electro*.)

**Electro-Dynamic Attraction.**—(See *Attraction, Electro-Dynamic*.)

**Electro-Dynamic Capacity.**—(See *Capacity, Electro-Dynamic*.)

**Electro-Dynamic Induction.**—(See *Induction, Electro-Dynamic*.)

**Electro-Dynamic Repulsion.**—(See *Repulsion, Electro-Dynamic*.)

**Electro-Dynamics.**—(See *Dynamics, Electro*.)

**Electro-Dynamometer.**—(See *Dynamometer, Electro*.)

**Electro-Etching.**—Electric etching. (See *Etching, Electro*.)

**Electrogenesis.**—Results following the application of electricity to the spinal cord or nerve after the withdrawal of the electrodes.

**Electro-Gilding.**—(See *Gilding, Electro*.)

**Kinetics.**—(See *Kinetics, Elec-*

**er.**—A chandelier for holding  
ps, as distinguished from a chan-  
delling gas-lights.

**gy.**—That branch of science  
s of electricity. (Obsolete.)

**sis.**—Chemical decomposition  
means of an electric current.

electric current is sent through an  
e., a liquid which permits the cur-  
rently by means of the decomposition  
, the decomposition that ensues is  
*lytic decomposition*.

olyte is decomposed or broken up  
groups of atoms or *radicals*, called

are of two distinct kinds, viz.: The  
e ions, or *kathions*, and the *electro-*  
or *anions*.

node of the source is connected with  
positive terminal, it is clear that the  
e *electro-negative ions*, must appear  
and the *kathions*, or *electro-positive*  
pear at the *kathode*.

and the metals generally, are  
xygen, chlorine, iodine, etc., are

containing the electrolyte, in which  
ositions take place, is sometimes  
*rolytic cell*.

ytic cell is called a *voltmeter* when  
for measuring the current passing  
the amount of decomposition it  
*Voltmeter*.)

**is by Means of Alternating**  
Electrolytic decomposition ef-  
fians of alternating currents.

ternating current is passed through  
ic acid, in a voltmeter provided  
tinum electrodes, no visible decom-  
rs. If, however, the size of the  
decreased below a certain point,  
composition occurs.

ved that when no other break ex-  
ircuit of the alternating current  
oltmeter, no indications of elec-  
obtained, unless the alternating  
powerful. If, however, a break is  
secondary circuit, so that the dis-

charge has to pass as a spark, then visible signs  
of electrolysis are produced by comparatively  
feeble alternating currents.

When electrolysis occurs by means of alternat-  
ing currents—

(1.) The gases collected at both electrodes  
have the same composition.

(2.) Where the quantities of electricity that al-  
ternately pass in opposite directions are unequal,  
the electrodes show manifest polarization, and,  
when connected by a conductor, yield a current  
like a secondary battery.

(3.) The electrodes manifest no sensible polari-  
zation where the quantities of electricity that al-  
ternately pass in opposite directions are equal.

#### Electrolysis, Faraday's Laws of — —

The principal facts of electrolysis are given  
in the following laws:

(1.) The amount of chemical action in any  
given time is equal in all parts of the circuit.

(2.) The number of *ions* liberated in a given  
time is proportional to the strength of the cur-  
rent passing. Twice as great a current will  
liberate twice as many *ions*. The current may  
be regarded as being carried through the elec-  
trolyte by the *ions*: since an *ion* is capable of  
carrying a fixed charge only of  $+$  or  $-$  electri-  
city, any increase in the current strength necessi-  
tates an increase in the number of *ions*.

(3.) When the same current passes successively  
through several cells containing different elec-  
trolytes, the weights of the *ions* liberated at the  
different electrodes will be equal to the strength  
of the current multiplied by the electro-chemical  
equivalent of the *ion*. (See *Equivalence, Elec-*  
*tro-Chemical, Law of*.)

The *chemical equivalent* is proportional to the  
*atomic weight* divided by the *valency*. (See  
*Equivalent, Chemical*.)

The electro-chemical equivalent of any element  
is equal to the weight in grammes of that element  
set free by one coulomb of electricity, and is found  
by multiplying the electro-chemical of hydrogen  
by the chemical equivalent of that element. (See  
*Equivalent, Electro-Chemical*.)

#### Electrolyte, Polarization of — —

The formation of molecular groups or chains, in  
which the poles of all the molecules of any  
chain are turned in the same direction, viz.:  
with their positive poles facing the negative  
plate, and their negative poles facing the



positive plate. (See *Cell, Voltaic. Hypothesis, Grotthus'.*)

**Electrolytic or Electrolytical.**—Pertaining to electrolysis.

**Electrolytic Analysis.**—(See *Analysis, Electrolytic.*)

**Electrolytic Cell.**—(See *Cell, Electrolytic, Tesla's.*)

**Electrolytic Clock.**—(See *Clock, Electrolytic.*)

**Electrolytic Conduction.**—(See *Conduction, Electrolytic.*)

**Electrolytic Convection.**—(See *Convection, Electrolytic.*)

**Electrolytic Decomposition.**—(See *Decomposition, Electrolytic.*)

**Electrolytic Hydrogen.**—(See *Hydrogen, Electrolytic.*)

**Electrolytic Writing.**—(See *Writing, Electrolytic.*)

**Electrolytically.**—In an electrolytic manner.

**Electrolyzable.**—Capable of being electrolyzed, or decomposed by means of electricity.

**Electrolyzed.**—Separated or decomposed by means of electricity.

**Electrolyzing.**—Causing or producing electrolysis.

**Electro-Magnet.**—(See *Magnet, Electro.*)

**Electro-Magnetic Ammeter.**—(See *Ammeter, Electro-Magnetic.*)

**Electro-Magnetic Annunciator.**—(See *Annunciator, Electro-Magnetic.*)

**Electro-Magnetic Attraction.**—(See *Attraction, Electro-Magnetic.*)

**Electro-Magnetic Bell-Call.**—(See *Call, Bell, Magneto-Electric.*)

**Electro-Magnetic Bell, Siemens' Armature** — — (See *Bell, Electro-Magnetic, Siemens' Armature Form.*)

**Electro-Magnetic Brake.**—(See *Brake, Electro-Magnetic.*)

**Electro-Magnetic Cam.**—(See *Cam, Electro-Magnetic.*)

**Electro-Magnetic Dental-Mallet.**—(See *Dental-Mallet, Electro-Magnetic.*)

**Electro-Magnetic Drill.**—(See *Drill, Electro-Magnetic.*)

**Electro-Magnetic Engine.**—(See *Engine, Electro-Magnetic.*)

**Electro-Magnetic Exploder.**—(See *Exploder, Electro-Magnetic.*)

**Electro-Magnetic Eye.**—(See *Eye, Electro-Magnetic.*)

**Electro-Magnetic Impulse.**—(See *Impulse, Electro-Magnetic.*)

**Electro-Magnetic Induction.**—(See *Induction, Electro-Magnetic.*)

**Electro-Magnetic Medium.**—(See *Medium, Electro-Magnetic.*)

**Electro-Magnetic Meter.**—(See *Meter, Electro-Magnetic.*)

**Electro-Magnetic Momentum of Secondary Circuit.**—(See *Momentum, Electro-Magnetic, of Secondary Circuit.*)

**Electro-Magnetic Pop-Gun.**—(See *Pop-Gun, Electro-Magnetic.*)

**Electro-Magnetic Radiation.**—(See *Radiation, Electro-Magnetic.*)

**Electro-Magnetic Repulsion.**—(See *Repulsion, Electro-Magnetic.*)

**Electro-Magnetic Resonator.**—(See *Resonator, Electro-Magnetic.*)

**Electro-Magnetic Shunt.**—(See *Shunt, Electro-Magnetic.*)

**Electro-Magnetic Solenoid.**—(See *Solenoid, Electro-Magnetic.*)

**Electro-Magnetic Strain.**—(See *Strain, Electro-Magnetic.*)

**Electro-Magnetic Stress.**—(See *Stress, Electro-Magnetic.*)

**Electro-Magnetic Theory of Light, Maxwell's** — — (See *Light, Maxwell's Electro-Magnetic Theory of.*)

**Electro-Magnetic Vibrator.**—(See *Vibrator, Electro-Magnetic.*)

**Electro-Magnetic Voltmeter.**—(See *Voltmeter, Electro-Magnetic.*)

**o-Magnetic Units.**—(See *Units, Magnetic*.)

**o-Magnetics.** — (See *Magnetics*.)

**o-Massage.**—(See *Massage, Elec-*

**o-Mechanical Alarm.**—(See *Alarm, Mechanical*.)

**o-Mechanical Gong.**—(See *Gong, Mechanical*.)

**o-Metallurgical Crystalline De-**  
See *Deposit, Crystalline, Electro-*  
*logical*.)

**o-Metallurgical Galvanization.**—  
*vanization, Electro-Metallurgical*.)

**o-Metallurgical Nodular Deposit.**  
*Deposit, Electro-Metallurgical*  
(.)

**o-Metallurgical Reguline De-**  
See *Deposit, Electro-Metallurgical*  
(.)

**o-Metallurgical Sandy Deposit.**—  
*osit, Electro-Metallurgical Sandy*.)

**o-Metallurgy.**—(See *Metallurgy*.)

**ometer.**—An apparatus for measur-  
ences of potential.

eters operate, in general, by means  
action or repulsion of charged conduc-  
suitably suspended needle or disc. As  
it is required to flow through the appa-  
ratus are especially adapted to many  
re voltmeters could not be so readily

**ometer, Absolute** — — An elec-  
the dimensions of which are such  
value of the electromotive force can  
tly determined from the amount of  
ction of the needle.

rm of attracted-disc electrometer.  
*ctrometer, Attracted-Disc*.)

**rometer, Attracted-Disc** — — A  
electrometer devised by Sir William

Thomson, in which the force is measured by  
the attraction between the two discs.

Thomson's Attracted-Disc Electrometer is  
shown in Fig. 230. It consists of a plate C, sus-  
pended from the longer end of a lever l, within the  
fixed guard plate, or guard ring B, immediately  
above a second plate A, supported on an insulated  
stand, and capable of a measurable approach

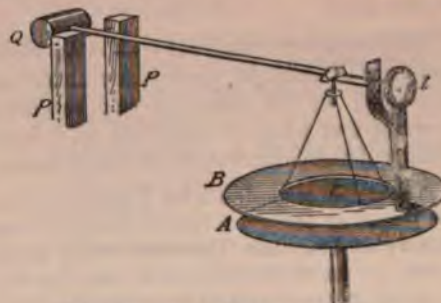


Fig. 230. Attracted-Disc Electrometer.

towards C, or a movement away from it. The  
plate, C, is placed in contact with B, by means of  
a thin wire. By means of this connection the  
distribution of the charge over the plate, C, is  
uniform. The electrostatic attraction is meas-  
ured by the attraction of the fixed disc, A, on the  
movable disc, C, connected respectively to the two  
bodies whose difference of potential is to be  
measured. One of these may be the earth. The  
fulcrum of the lever l, is formed of an aluminium  
wire, the torsion of which is used to measure the  
force of the attraction; or, it may be measured  
directly by the counterpoise weight Q.

This instrument is sometimes called an absolute  
electrometer, because, knowing the dimensions of  
the apparatus, the value of the difference of poten-  
tial can be directly determined from the amount  
of the motion observed.

**Electrometer, Capillary** — — An elec-  
trometer in which a difference of potential is



Fig. 231. Capillary Electrometer.

measured by the movement of a drop of  
sulphuric acid in a tube filled with mercury.



A form of capillary electrometer is shown in Fig. 231, in which a horizontal glass tube with a drop of acid at B, has its ends connected with two vessels M and N, filled with mercury. If a current be passed through the tube, a movement of the drop *towards the negative pole* will be observed. Where the electromotive force does not exceed one volt, the amount of the movement is proportional to the electromotive force.

**Electrometer, Quadrant** — An electrometer in which an electrostatic charge is measured by the attractive and repulsive force of four plates or quadrants, on a light needle of aluminium suspended within them.

The sectors or quadrants are of brass, and are so shaped as to form a hollow cylindrical box when placed together. The four sectors, or quadrants, are insulated from one another, but the opposite ones are connected by a conducting wire, as shown in Fig.

232. A light needle of aluminium, *u*, maintained at some constant potential, by connection with the inner coating of a Leyden jar, is suspended, generally by two parallel silk threads,




Fig. 232. Quadrant Electrometer.

so as to freely swing inside the hollow box. This needle, when at rest, is in the position shown by the dotted lines, with its axis of symmetry exactly under one of the slots or spaces between two opposite sectors. (See *Suspension, Bi-Filar*.)

The quadrant electrometer, shown in Fig. 233, has one of its quadrants removed so as to show the suspended aluminium needle.

A similar form of instrument is shown in Fig. 234, with all the quadrants in place, and the whole instrument covered by a glass shade.

To use the quadrant electrometer the pairs of sectors are connected with the two bodies whose difference of potential is to be measured, and the deflection of the needle observed, generally through a telescope, by means of a spot of light reflected from a mirror attached to the upper part of the needle.

Sometimes the segments are made in the shape of a cylinder, and the needle in the shape of a suspended rectangle.

**Electrometer, Registering** — An electrometer, the deviations of the needle which are automatically registered.

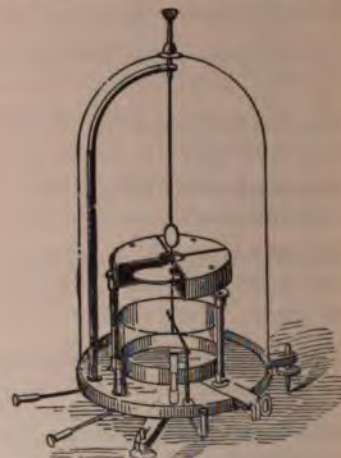


Fig. 233. Quadrant Electrometer, Showing Suspended Needle.

The registration of this class of electrometer obtained by means of photography. The spot

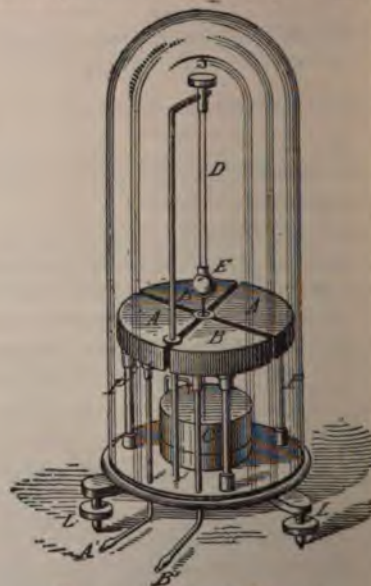


Fig. 234. Quadrant Electrometer.

light, reflected from the mirror of the electrometer, falls on a fillet of sensitized paper, moves clockwork.

**Electromotive Arrangement or Device.**—(See *Arrangement or Device, Electromotive.*)

**Electromotive Difference of Potential.**—(See *Potential, Difference of Electromotive.*)

**Electromotive Force.**—(See *Force, Electromotive.*)

**Electromotive Force, Average** — — (See *Force, Electromotive, Average or Mean.*)

**Electromotive Force, Back or Counter** — — (See *Force, Electromotive, Back.*)

**Electromotive Force, Direct** — — (See *Force, Electromotive, Direct.*)

**Electromotive Force, Inductive** — — (See *Force, Electromotive, Inductive.*)

**Electromotive Force, Secondary-Impressed** — — (See *Force, Electromotive, Secondary-Impressed.*)

**Electromotive Force, Simple-Periodic** — — (See *Force, Electromotive, Simple-Periodic.*)

**Electromotive Force, Transverse** — — (See *Force, Electromotive, Transverse.*)

**Electromotive Impulse.**—(See *Impulse, Electromotive.*)

**Electro-Motograph.**—(See *Motograph, Electro.*)

**Electro-Muscular.**—(See *Muscular, Electro.*)

**Electro-Muscular Excitation.**—(See *Excitation, Electro-Muscular.*)

**Electronecrosis.**—Pertaining to capital punishment by means of electricity.

**Electronecrosis.**—A word proposed for capital punishment by means of electricity.

**Electro-Negative Ions.**—(See *Ions, Electro-Negative.*)

**Electronegatives.**—The atoms or radicals that appear at the anode or positive terminal during electrolysis.

The anions. (See *Electrolysis, Anion.*)

**Electro-Nervous Excitability.**—(See *Excitability, Electro-Nervous.*)

**Electro-Nickeling.**—(See *Nickeling, Electro.*)

**Electro-Optics.**—(See *Optics, Electro.*)

**Electrophanic.**—Pertaining to capital punishment by means of electricity.

**Electrophanical.**—Pertaining to capital punishment by means of electricity.

**Electrophanize.**—To inflict capital punishment by means of electricity.

**Electrophany.**—Capital punishment by means of electricity.

The word *electrophany* would appear to be far preferable to the word *electrocution*, since it is in accordance with etymological usage, while *electrocution* is not.

**Electrophila.**—A devotee of electricity.

**Electrophobia.**—A word proposed for fear of electricity.

**Electrophoric.**—Pertaining to an electrophorus. (See *Electrophorus.*)

**Electrophorus.**—An apparatus for the production of electricity by electrostatic induction. (See *Induction, Electrostatic.*)

A disc of vulcanite, or hard rubber B, contained in a metallic form, is rubbed briskly by a piece of cat's skin and the insulated metallic disc, A, is placed on the centre of the vulcanite disc, as shown in Fig. 235.

The negative charge produced in B, by friction, produces by induction a positive charge on the part of A, nearest it, and a negative charge on the part furthest from it.

In this condition, if the disc be raised from the plate by means of its insulating handle, as shown in Fig. 236, no electrical effects will be noticed, since the two opposite and equal charges unite and neutralize each other. If, however, the disc A, be first touched by the finger, and then raised from the disc B, it will be found to be positively charged.



Fig. 235. Electrophorus, Charging.



Fig. 236. Electrophorus, Discharging.



**Electro-Physiology.**—(See *Physiology, Electro.*)

**Electropic Medium.**—(See *Medium, Electropic.*)

**Electro-Plating.**—(See *Plating, Electro.*)

**Electro-Plating Bath.**—(See *Bath, Electro-Plating.*)

**Electro-Pneumatic Signals.**—(See *Signals, Electro-Pneumatic.*)

**Electro-Pneumatic Thermostat.**—(See *Thermostat, Electro-Pneumatic.*)

**Electroponion Liquid.**—(See *Liquid, Electroponion.*)

**Electro-Positive Ions.**—(See *Ions, Electro-Positive.*)

**Electropositives.**—The atoms or radicals that appear at the kathode or negative terminal of any source during electrolysis.

The kathions. (See *Electrolysis, Kathion.*)

**Electro-Prognosis.**—(See *Prognosis, Electric.*)

**Electro-Puncture.**—(See *Puncture, Electro.*)

**Electro-Receptive Devices.**—(See *Device, Electro-Receptive.*)

**Electro-Receptive Devices, Multiple-Arc-Connected** — (See *Devices, Electro-Receptive, Multiple-Arc-Connected.*)

**Electro-Receptive Devices, Multiple-Series-Connected** — (See *Devices, Electro-Receptive, Multiple-Series-Connected.*)

**Electro-Receptive Devices, Series-Connected** — (See *Devices, Electro-Receptive, Series-Connected.*)

**Electro-Receptive Devices, Series-Multiple-Connected** — (See *Devices, Electro-Receptive, Series-Multiple-Connected.*)

**Electroscope.**—An apparatus for showing the presence of an electric charge, or for determining its sign, whether positive or negative, but not for measuring its amount or value.

In the gold-leaf electroscope, two gold leaves, *n, n*, Fig. 239, suspended near each other, show by their repulsion the presence of an electric charge. Two pith balls may be used for the same purpose.

The pith balls *B, B*, shown in Fig. 237, form a simple electroscope. If repelled by a charge, when approached by a similar charge in *S*, they will at once be still further repelled, as shown by the dotted lines.

To use an electroscope for determining the sign of




Fig. 237. Pith Ball Electroscopes.

an unknown charge, the gold leaves or pith balls are first slightly repelled by a charge of known name, as, for example, positive, applied to the knob *C*, Fig. 239. They are then charged by the electrified body whose charge is to be determined. If they are further repelled, its charge is positive. If they are first attracted and afterwards repelled, its charge is negative.

Two posts *B*, Fig. 239, connected with the earth, increase the amount of divergence by induction.

**Electroscope, Condensing, Volta's** —

An electroscope employed for the detection of feeble charges, the leaves of which are charged by means of a condenser.

The condensing electroscope, Fig. 238, is formed of two metallic plates, placed at the top of the instrument, and separated by a suitable dielectric. The upper plate, *P*, is removable by means of the insulated handle, *G*.

To employ the electroscope, as for example, to detect the free charge in an unequally heated crystal of tourmaline, the crystal is touched to the lower plate, while the upper plate is connected to the ground by the finger. On the subsequent removal of the upper plate an enormous decrease



Fig. 238. Condensing Electroscope.

in the capacity of the condenser, and the now raises the potential of the lower and causes a marked divergence of the L, L. (See *Electricity, Pyro.*)

**Electroscope, Gold-Leaf** — An electroscope in which two leaves of gold are used to detect the presence of an electric charge, determine its character whether positive or negative.

When a charge is imparted to the knob C, Fig. 239, the gold leaves n, n, diverge. This will occur whether the charge be positive or negative.

To determine the character of an unknown charge, the leaves are first made to diverge by means of a known positive or negative charge. The unknown charge is then given to the leaves. If they still further diverge, then the charge is of the same character as that originally possessed by the leaves. If, however, they first move together and are afterwards repelled, the charge is of the opposite character.



Fig. 239. Gold-Leaf Electroscope.

**Electroscope, Pith - Ball**

— An electroscope which shows the presence of an electric charge by the repulsion of similarly charged pith balls. (See *Electroscope.*)

Two pith balls, suspended by non-conducting threads, but insulated from the earth, will form an electroscope.

**Electroscope, Quadrant** — Sometimes employed to indicate large charges of electricity.

A pith ball placed on a light stand, of straw or other similar material, Fig. 240, is pivoted at the centre of a graduated arc B. The arm, C, is attached to the ball by means of the screw A. The arm C is the prime conductor of an electric machine. When a similar charge is imparted to A, by contact




Fig. 240. Henley's Electroscope.

with C, causes a repulsion which may be measured on the graduated arc.

This instrument approaches the electrometer in the character of its operation, since by its means, approximately correct measurements may be made of the value of the repulsion. It should not, however, be confounded with the *quadrant electrometer*. (See *Electrometer, Quadrant.*)

**Electroscopically.**—By means of the electroscope. (See *Electroscope.*)

**Electroscopy.**—The art of determining the kind of charge a body possesses, by means of an electroscope.

**Electro - Sensibility.**—(See *Sensibility, Electro.*)

**Electro-Silvering.**—(See *Silvering, Electro.*)

**Electro-Smelting.**—(See *Smelting, Electro.*)

**Electrostatic Attraction.**—(See *Attraction, Electrostatic.*)

**Electrostatic Capacity.**—(See *Capacity, Electrostatic.*)

**Electrostatic Circuit.**—(See *Circuit, Electrostatic.*)

**Electrostatic Field.**—(See *Field, Electrostatic.*)

**Electrostatic Induction.**—(See *Induction, Electrostatic.*)

**Electrostatic Induction Machine.**—(See *Machine, Electrostatic Induction.*)

**Electrostatic Leakage.**—(See *Leakage, Electrostatic.*)

**Electrostatic Lines of Force.**—(See *Force, Electrostatic, Lines of.*)

**Electrostatic Repulsion.**—(See *Repulsion, Electrostatic.*)

**Electrostatic Screening.**—(See *Screening, Electrostatic.*)

**Electrostatic Stress.**—(See *Stress, Electrostatic.*)

**Electrostatic Units.**—(See *Units, Electrostatic.*)

**Electrostatics.**—That branch of electric science which treats of the phenomena and measurement of electric charges.



The principles of electrostatics are embraced in the following laws, viz.:

(1.) Charges of like name, *i. e.*, either positive or negative, repel each other. Charges of unlike name attract each other.

(2.) The forces of attraction or repulsion between two charged bodies are directly proportional to the product of the quantities of electricity possessed by the bodies and inversely proportional to the square of the distance between them.

These laws can be demonstrated by the use of Coulomb's torsion balance. (See *Balance, Torsion.*)

Calling  $q$ , and  $q^1$ , the quantities of electricity possessed by the two bodies, and  $r$ , the distance between them, then, if  $f$ , is the force exerted by their mutual action,

$$f = \frac{qq^1}{r^2}$$

**Electro-Technics.**—(See *Technics, Electro.*)

**Electrothanasing.**—Producing death by electricity.

**Electrothanasis.**—A word proposed for death by electricity.

The death referred to here is death other than that caused by capital punishment.

**Electrothanasise.**—To produce death by electricity.

The death here referred to is other than that caused by capital punishment.

**Electrothanatose.**—To cause death by electricity.

**Electrothanatosic.**—Pertaining to capital punishment by means of electricity.

**Electrothanatosing.**—Causing death by electricity.

**Electrothanatosis.**—A word proposed for death by electricity.

The death here referred to is death other than that caused by capital punishment.

**Electro-Therapeutic Bath.**—(See *Bath, Electro-Therapeutic.*)

**Electro-Therapeutic Breeze.**—(See *Breeze, Electro-Therapeutic.*)

**Electro-Therapeutic Diffusion of Current.**—(See *Current, Diffusion of, Electro-Therapeutic.*)

**Electro-Therapeutic Dosage.**—(See *Dosage, Electro-Therapeutic.*)

**Electro-Therapeutic Electrode.**—(See *Electrode, Electro-Therapeutic.*)

**Electro-Therapeutic Electrodes.**—(See *Electrode, Electro-Therapeutic.*)

**Electro-Therapeutic Galvanization.**—(See *Galvanization, Electro-Therapeutic.*)

**Electro-Therapeutic Head-Breeze.**—(See *Breeze, Head, Electro-Therapeutic.*)

**Electro-Therapeutics.**—(See *Therapeutics, Electro.*)

**Electro-Therapeutist.**—(See *Therapeutist, Electro.*)

**Electro-Therapy.**—(See *Therapy, Electro.*)

**Electro-Thermal Meter.**—(See *Meter, Electro-Thermal.*)

**Electro-Tinning.**—(See *Tinning, Electro.*)

**Electrotisic.**—Pertaining to capital punishment by means of electricity.

**Electrotising.**—Producing capital punishment by means of electricity.

**Electrotisis.**—A word proposed for capital punishment by means of electricity.

**Electrotonic Current.**—(See *Current, Electrotonic.*)

**Electrotonic Effect.**—(See *Effect, Electrotonic.*)

**Electrotonic Excitability.**—(See *Excitability, Electrotonic.*)

**Electrotonic State.**—(See *State, Electrotonic.*)

**Electrotonus.**—A condition of altered functional activity which occurs in a nerve when subjected to the action of an electric current.

The electrotonic state is produced by the passage through a nerve of a constant current called the polarizing current.

Electrotonus is attended by the modification of the nerve in the following respects, viz.:

- (1.) In its electromotive force.
- (2.) In its excitability.

The passage of the constant current produces a change in the electromotive force of that part of the nerve traversed by the current.

This alteration in muscular excitability may consist in either an increased or a decreased functional activity. The *decreased* functional activity occurs in the neighborhood of the anode, or the positive terminal, and is called the *anelectrotonic state*. The *increased* functional activity occurs in the neighborhood of the kathode, or the negative terminal, and is called the *kathoelectrotonic state*. (See *Anelectrotonus*. *Kathoelectrotonus*.)

This altered functional activity affects not only the *intra polar* parts of the nerve, or that part between the electrodes, but also the *extra-polar portions*, or, in other words, the remainder of the nerve.

The electrotonic state is characterized by two varieties, viz.: those in which the electromotive force of the nerve is decreased, and those in which the electromotive force of the nerve is increased. These varieties of electrotonus are called respectively the negative and positive phase of electrotonus. (See *Electrotonus*, *Negative Phase of*. *Electrotonus*, *Positive Phase of*.)

#### **Electrotonus, Negative Phase of —**

A decrease in the electromotive force of a nerve effected by sending a current through the nerve in the opposite direction to the nerve current. (See *Current*, *Nerve*.)

#### **Electrotonus, Positive Phase of —**

An increase in the electromotive force of a nerve effected by sending a current through the nerve in the same direction as the nerve current.

The increase in the electromotive force not only affects the portions of the nerve in the *intra-polar* regions, but in the *extra-polar* regions as well.

**Electrotype.**—A type, cast, or impression of an object obtained by means of electro-metallurgy. (See *Metallurgy*, *Electro*. *Electrotyping*.)

#### **Electrotyping, or the Electrotype Pro-**

**cess** ——— Obtaining casts or copies of objects by depositing metals in molds by the agency of electric currents.

The molds are made of wax, or other plastic substance, rendered conducting by coating it with powdered plumbago.

The mold is connected with the negative battery terminal, and placed in a metallic solution, generally of copper sulphate, opposite a plate of metallic copper, connected with the positive battery terminal. As the current passes, the metal is deposited on the mold at the kathode, and dissolved from the metallic plate at the anode, thus producing an exact copy or cast and at the same time maintaining constant the strength of the bath.

**Electrozemia.**—A word proposed for capital punishment by means of electricity.

**Electrum.**—A name given by the ancients to various substances that could be readily electrified by friction.

The term electrum included a number of substances, but was applied mainly either to amber or to an alloy of gold and silver.

**Element.**—Any kind of matter which cannot be decomposed into simpler matter.

Matter that is formed or composed of but one kind of atoms.

Oxygen and hydrogen are *elements* or varieties of elementary matter. They cannot be decomposed into anything but oxygen or hydrogen. Water, on the contrary, is *compound matter*, since it can be decomposed into its constituent parts, oxygen and hydrogen.

There are about seventy well-known elements, some of which are very rare, occurring in extremely small quantities.

The evidence of the true elementary condition of many of the elements is based, to a great extent, on the fact that so far they have resisted all efforts made to decompose them into simpler substances. We should bear in mind, however, that until Davy's use of the voltaic battery, potash, soda, and many other similar compounds were regarded as true elements. It is not improbable that many of the now so-called elements, may hereafter be decomposed into simpler constituents.

The following table gives the names, chemical



symbols, approximate atomic weights and equivalents of the principal elements :

Names of Elements.	Symbol.	Approximate Atomic Weight.	Chemical Equivalent.*
Aluminium.....	Al.	27.	9 [compounds
Antimony.....	Sb.	120.	40 in <i>ous</i> , 24 in <i>ic</i>
Arsenic.....	As.	74.9	24.9 in <i>ous</i> , 15 in <i>ic</i>
Barium.....	Ba.	136.8	68.4
Beryllium.....	Be.	9.1	4.6
Bismuth.....	Bi.	207.5	69.2
Boron.....	B.	10.9	3.6
Bromine.....	Br.	79.8	79.8
Cadmium.....	Cd.	111.8	55.9
Caesium.....	Cs.	132.6	66.3
Calcium.....	Ca.	40.	20
Carbon.....	C.	12.	6
Cerium.....	Ce.	140.4	
Chlorine.....	Cl.	35.4	35.4
Chromium.....	Cr.	52.	26 in <i>ous</i> , 17.3 in <i>ic</i>
Cobalt.....	Co.	58.9	29.5
Copper.....	Cu.	63.2	31.6
Didymium.....	D.	144.6	
Erbium.....	E.	105.9	
Fluorine.....	F.	19.	19.
Gallium.....	Ga.	68.9	
Germanium.....	Ge.	72.3	
Glucinum.....	G.		
Gold.....	Au.	196.2	196.2 in <i>ous</i> , 65.4 in <i>ic</i>
Hydrogen.....	H.	1.	1
Indium.....	In.	113.4	37.8
Iodine.....	I.	126.6	126.6
Iridium.....	Ir.	192.7	96.4, 64.2, 48.2
Iron.....	Fe.	55.9	28 in <i>ous</i> , 18.6 in <i>ic</i>
Lanthanum.....	La.	138.5	
Lead.....	Pb.	206.5	103.3
Lithium.....	Li.	7.	7
Magnesium.....	Mg.	24.	12
Manganese.....	Mn.	53.9	27
Mercury.....	Hg.	199.7	199.7 in <i>ous</i> , 99.9 in <i>ic</i>
Molybdenum.....	Mo.	95.5	
Nickel.....	Ni.	57.9	28
Niobium.....	Nb.	93.8	
Nitrogen.....	N.	14.	14
Osmium.....	Os.	198.5	
Oxygen.....	O.	16.	8
Palladium.....	Pd.	105.7	52.9 in <i>ous</i> , 26.4 in <i>ic</i>
Phosphorus.....	P.	31.	6.2 in phosphates
Platinum.....	Pt.	194.4	97.2 in <i>ous</i> , 48.6 in <i>ic</i>
Potassium.....	K.	39.1	39.1
Rhodium.....	R.	104.1	52 in <i>ous</i> , 31.7 in <i>ic</i>
Rubidium.....	Rb.	85.3	85.3
Ruthenium.....	Ru.	104.2	52.1 in <i>ous</i> , 34.7 in <i>ic</i>
Samarium.....	Sm.	150.02	
Scandium.....	Sc.	44.	
Selenium.....	Se.	78.8	
Silicon.....	Si.	28.2	7.
Silver.....	Ag.	107.7	107.7
Sodium.....	Na.	23.	23
Strontium.....	Sr.	87.4	43.7
Sulphur.....	S.	32.	
Tantalum.....	Ta.	182.1	
Tellurium.....	Te.	128.	
Thallium.....	Tl.	203.7	203.7 in <i>ous</i> , 67.9 in <i>ic</i>
Thorium.....	Th.	233.4	
Tin.....	Sn.	117.7	58.9 in <i>ous</i> , 29.4 in <i>ic</i>
Titanium.....	Ti.	48.	24 in <i>ous</i> , 12 in <i>ic</i>
Tungsten.....	W.	183.6	91.8 in <i>ous</i>
Uranium.....	U.	238.5	119.2 in <i>ous</i>
Vanadium.....	Va.	51.3	17.1 in <i>ous</i>
Ytterbium.....	Yb.	172.8	
Yttrium.....	Y.	89.8	
Zinc.....	Zn.	64.9	32.5
Zirconium.....	Zr.	89.4	

\* Atomic weight divided by the valency.

**Element, Negative** — — One of the substances forming a voltaic couple. (See *Couple, Voltaic*.)

**Element, Negative, of a Voltaic Cell** — — That element or plate of a voltaic cell into which the current passes from the exciting fluid of the cell.

The plate that is not acted on by the electrolyte during the generation of current by the cell.

The copper or carbon plate, respectively, in a zinc-copper or zinc-carbon couple.

It must be carefully borne in mind that the conductor attached to the *negative element of a voltaic pile is the positive conductor or electrode of the pile*, since the current that flows into the plate from the liquid or electrolyte must flow out of the plate where it projects beyond the liquid.

**Element of Current.**—(See *Current, Element of*.)

**Element of Storage Battery.**—(See *Battery, Storage, Element of*.)

**Element, Positive** — — That element or plate of a voltaic cell from which the current passes into the exciting fluid of the cell.

The element of a voltaic couple which is acted on by the exciting fluid of the cell. (See *Couple, Voltaic*.)

**Element, Thermo-Electric** — — One of the two metals or substances which form a thermo-electric couple. (See *Couple, Thermo-Electric*.)

**Element, Voltaic** — — One of the two metals or substances which form a voltaic couple. (See *Couple, Voltaic*.)

**Elements, Electrical Classification of** — — A classification of the chemical elements into two groups or classes according to whether they appear at the anode or kathode when electrolyzed.

The chemical elements may be arranged into electro-positive and electro-negative according to whether, during electrolysis, they appear at the negative or positive terminal of the source respectively.

The electro-positive elements or radicals are called *kathions*, and appear at the kathode or electro-negative terminal. The electro-negative

elements are called *anions*, and appear at the anode, or the electro-positive terminal. (See *Ions*.)

The metals generally are electro-positive; oxygen, chlorine, iodine, fluorine, etc., are electro-negative.

**Elements, Magnetic, of a Place** —

The values of the magnetic intensity, the magnetic declination or variation, and the magnetic inclination or dip at any place.

**Elevator Annunciator.**—(See *Annunciator, Elevator*.)

**Elevator, Electric** — — An elevator operated by electric power.

**Elongated Ring Core.**—(See *Core, Ring, Elongated*.)

**Elongation, Magnetic** — — An increase in the length of a bar of iron on its magnetization.

This increase in length is thought to greatly strengthen Hughes' theory of magnetism. (See *Magnetism, Hughes' Theory of*.)

**Elongation of Needle.**—(See *Needle, Elongation of*.)

**Emboss, Telegraphic** — — An apparatus for recording a telegraphic message in raised or embossed characters.

**Emptied.**—A term sometimes applied to a completely discharged secondary or storage cell.

It is difficult to determine exactly when a storage cell is completely emptied or "discharged." The cell is generally regarded as discharged when its voltage falls below a certain point.

**Endosmose.**—The unequal mixing of two liquids or gases through an interposed medium.

The presence of an electric current affects the endosmose. (See *Currents, Diaphragm*.)

**Endosmose, Electric.**—Differences in the level of liquids capable of mixing through the pores of a diaphragm separating them, produced by the flow of an electric current through the liquid.

Wiedemann, who investigated these phenomena, employed a porous earthenware vessel closed at the bottom and terminated at its upper end by a glass bell provided with a glass tubulure, to

which was attached a horizontal arm for the escape of the liquid raised in the tubulure. The battery terminals were attached to platinum electrodes placed respectively inside the porous cell, and in a vessel of water outside of the porous cell, in which the porous cell was placed; on the passage of the current from the outside of the cell to the inside the liquid rose in the glass tubulure and ran over the horizontal tube into a vessel placed ready to receive it.

**Energizing, Electrically** — — Causing electricity to produce any effect in an electro-receptive device.

An electro-magnet is energized by the passage of a current through its coils.

**Energy.**—The power of doing work.

The amount of work done is measured by the product of the *force*, by the *space* through which the force moves. Thus one pound raised vertically through ten feet, ten pounds raised through one foot, or five pounds raised through two feet, all represent the same amount of work; viz., ten foot-pounds.

If a weight of ten pounds be raised through a vertical height of one foot, by means of a string passing over a pulley, there will have been expended an amount of energy represented by the work of ten foot-pounds. If the weight be prevented in any way from falling, as by securing the string to a fixed support, the weight will have stored in it an amount of energy equal to ten foot-pounds, and if permitted to fall, will be capable of doing an amount of work which, leaving out air resistance and friction, is exactly equal to that originally expended in raising it to the position from which it fell; viz., ten foot-pounds of work.

**Energy, Actual** — — Energy actually employed in doing work as distinguished from energy that only possesses the power of doing work, but not actually doing such work.

This term is also used in the sense of kinetic energy or energy due to motion, but kinetic energy is no more actual than potential energy.

**Energy, Atomic** — — Chemical-potential energy. (See *Energy, Chemical-Potential*.)

**Energy, Chemical-Potential** — — The potential energy possessed by the elementary chemical atoms. (See *Energy, Potential*.)

If a weight of one pound be raised vertically



against the earth's attraction, through a distance of say ten feet, and placed on a suitable support, an amount of energy, equal to the ten foot-pounds of work done on the weight, becomes potential.

In the same manner if the elementary atoms of carbon and oxygen, when combined so as to form carbonic acid, are raised or separated from one another sufficiently to decompose the carbonic acid and separate the carbon from the oxygen, the amount of potential energy the carbon and oxygen possess, as a result of having been separated, is equal precisely to that originally required to separate them. In this manner each chemical element possesses a store of chemical-potential energy peculiar to it, and any element with which it may subsequently enter into combination. When elements combine chemically this potential energy is expended in producing heat.

**Energy, Conservation of** — —The indestructibility of energy.

The total quantity of energy in the universe is unalterable.

The total energy of the universe is not, however, available for the production of work useful for man.

When energy disappears in one form it reappears in some other form. This is called the *conservation* or *indestructibility of energy*. The commonest form in which energy reappears is as *heat*, and in this case some of the heat is lost to the earth by radiation. This *degradation* or *dissipation of energy* causes some of the energy of the earth to become *non-available* to man.

Energy is therefore *available* and *non-available*. (See *Entropy*.)

**Energy, Correlation of** — — A term sometimes applied to the different phases under which energy may appear.

Since energy is indestructible, when it disappears in one form or phase, it must reappear in another form or phase. The correlation of the different phases of energy, therefore, necessarily follows from the fact that all energy is indestructible.

**Energy, Degradation of** — — Such a dissipation of energy as to render it non-available to man. (See *Energy, Conservation of*. *Entropy*.)

**Energy, Dissipation of** — — The expenditure or loss of available energy.

**Energy, Electric** — — The power which electricity possesses of doing work.

In the case of a liquid mass at different levels, the liquid at the higher level possesses a certain amount of *potential energy* measured by the *quantity* of the liquid at the higher level, and the *excess of its height over that of the lower level*; or, by the difference between the two levels. Any difference of level will produce a flow of the liquid *from the higher to the lower level*, and during the flow of this current of liquid, potential energy will be lost, and a certain amount of work will be done.

In the case of electricity, the *difference of electric level*, or *potential*, between any two points of a conductor, causes an electric current to flow between these points toward the lower electric level, during which *electric potential energy* is lost, and *work* is accomplished by the electric current. (See *Potential, Electric*.)

The amount of this electric work is measured by the *quantity of electricity* that flows, multiplied by the *difference of potential* under which it flows. (See *Joule*. *Volt-Coulomb*.)

Electric energy, however, is generally measured in *electric power*, or *rate of doing electric work*.

Since an *ampère* is one *coulomb-per-second*, if we measure the difference of potential in *volts*, the product of the ampères by the volts will give the electrical power in *volt-ampères*, or *watts*, or *units of electric power*.  $C E = \text{Watts}$ . (See *Ampère*. *Volt*. *Watt*.)

One *horse-power* equals 550 foot-pounds per second. One watt or volt-ampère =  $\frac{1}{746}$  of a horse-power, or one *horse-power* equals 746 *volt ampères* or *watts*, therefore:

*The current in ampères, multiplied by the difference of potential in volts, divided by 746, equals the rate of doing work in horse-powers.*

Thus, if .7 ampère is required to operate a 16 candle, 110 volt, incandescent lamp, it requires 4.8 *watts* per candle.

One Watt = 44.2394 foot-pounds per minute.

One Watt = .737324 foot-pound per second.

The *Heat Activity*, or the heat-per-second produced by an electric current, is also proportional to the product  $C E$ , or the watts, for the heat is proportional to the *square* of the current in *ampères* multiplied by the *resistance* in ohms, or  $C^2 R = \text{the watts}$ . (See *Calorimeter, Electric*.)

*Ohm's Law* (See *Ohm's Law*)

$$= \frac{E}{R} \quad (1), \text{ or } C R = E \quad (2),$$

electric power, or the watts,  $= C E \quad (3).$

we substitute the value of  $E$ , taken from equation (2) in equation (3) we have

$$C E = C \times C R = C^2 R;$$

$C^2 R = \text{Watts}.$

To determine the heating power of a current in calories, calling  $H$ , the amount of heat to raise 1 gramme of water through  $1^\circ$  C, the current in amperes—

$$H = C^2 R \times .24.$$

$C$  = number of seconds,  $t$ ,

$$H = C^2 R t \times .24.$$

(*See*)

*Ohm's Law*,

$$C = \frac{E}{R} \quad (1),$$

formula for electric power or the watts

(2) By substituting in equation (2) the value of  $C$ , in equation (1),

$$C E = E \times \frac{E}{R} = \frac{E^2}{R} = \text{Watts}.$$

say, the electric power in any part of varies directly as the square of the electromotive force.

Therefore, have three expressions for the watt, or the unit of electric power,

$$C E = \text{Watts.} \quad (1)$$

$$C^2 R = \text{Watts.} \quad (2)$$

$$\frac{E^2}{R} = \text{Watts.} \quad (3)$$

$C E = \text{Watts}$ ; or the electric power is proportional to the product of the quantity of electricity, in ampères, and the electromotive force or level, which it passes, in volts.

$C^2 R = \text{Watts}$ ; or the electric power is proportional to the resistance  $R$ , when the current is constant, or as the square of the current, when the resistance is constant. That is to say, if the resistance be doubled, the power is four times as great, or is as the square of the current.

$\frac{E^2}{R} = \text{Watts}$ , or the electric power is in-

versely as the resistance  $R$ , when the electromotive force is constant, and is directly proportional to the square of the electromotive force if the resistance is constant.

A circuit of one ohm resistance will have a power of one watt, when under an electromotive force of one volt, since it would then have a current of one ampère flowing through it, and  $C E = 1$ . If, however, the resistance be halved or becomes .5 ohm, then two amperes pass, or the power equals 2 watts.

The power varies as the square of the electromotive force in any part of a circuit, when the resistance is constant in that part. Thus 2 amperes, and 2 volts, in a circuit of one ohm resistance, give a power,  $C E = 2 \times 2 = 4$  watts. If now,  $R$ , remaining the same, the electromotive force be raised to 4 volts, then since  $E$ , is doubled,  $C$ , or the amperes, is doubled, and  $C$

$$\times E = 4 \times 4 = 16 \text{ watts, or } \frac{E^2}{R} = \frac{16}{1} = 16.$$

### Energy, Electric, Transmission of —

—The transmission of mechanical energy between two distant points connected by an electric conductor, by converting the mechanical energy into electrical energy at one point, sending the current so produced through the conductor, and reconverting the electrical into mechanical energy at the other point.

A system for the electric transmission of energy embraces:

(1.) A conducting circuit between the two stations.

(2.) An electric source or battery of electric sources or machines at one of the stations, generally in the form of a dynamo-electric machine or machines, for converting mechanical energy into electric energy.

(3.) Electro-receptive devices, generally electric motors, at the other station for reconverting the electric into mechanical energy. (*See Motor, Electric.*)

**Energy, Flow of —** —The flow or transmission of energy from the medium or dielectric surrounding a conductor which is directing a current of electricity on to the conductor. (*See Law, Poynting's.*)

### Energy, Hysteresial, Dissipation of —

—The dissipation of energy by means of



hysteresis. (See *Energy, Dissipation of. Hysteresis.*)

**Energy, Kinetic** — —Energy which is due to motion as distinguished from potential energy. (See *Energy, Potential.*)

**Energy-Meter.**—(See *Meter, Energy.*)

**Energy of Position.**—(See *Position, Energy of.*)

**Energy of Stress.**—(See *Stress, Energy of.*)

**Energy, Potential** — —Stored energy. Potency, or capability of doing work.

Energy possessing the power or potency of doing work, but not actually performing such work.

The capacity for doing work possessed by a body at rest, arising from its position as regards the earth, or from the position of its atoms as regards other atoms, with which it is capable of combining.

A pound of coal, if raised vertically one foot, possesses, as a mere weight, an amount of energy capable of doing an amount of work equal to one foot-pound. The atoms of carbon, however, of which it is composed, have been *raised or separated from those of oxygen*, or some other elementary substance, and when the coal is burned, or the carbon atoms fall towards the oxygen atoms (*i. e.*, unite with them), the coal gives up the potential energy of its atoms in the form of heat.

All elementary substances possess in the same way *atomic or chemical-potential energy*, or the energy with which they tend to fall together, or enter into combination. This energy varies in amount in different elements and becomes kinetic, as heat, on combination with other elements. (See *Energy, Chemical-Potential.*)

**Energy, Radiant** — —Energy transferred to or charged on the universal ether.

Radiant energy is of three forms, *viz.*:

- (1.) Obscure radiation, or heat.
- (2.) Luminous radiation, or light.
- (3.) Electro-magnetic radiation.

**Energy, Static** — —A term used to express the energy possessed by a body at rest, resulting from its position as regards other bodies, in contradistinction to kinetic energy or the energy possessed by a body whose

atoms, molecules or masses are in actual motion.

Potential energy.

The general term for static energy is *potential energy*. (See *Energy, Potential.*)

**Energy, Storage of** — —The change from any form of kinetic energy, to any form of potential energy. (See *Energy, Kinetic. Energy, Potential.*)

**Engine, Electro-Magnetic** — —A motor whose driving power is electricity. (See *Motor, Electric.*)

**Engraving, Acoustic** — —Engraving by the human voice.

In the *Phonograph, Graphophone* and *Gramophone*, a diaphragm, set in vibration by the speaker's voice, cuts or engraves a record of its to-and-fro movements on a sheet of tin foil, a cylinder of hardened wax, or a specially coated plate of metal or glass. This record is employed in order to *reproduce the speech*. (See *Phonograph.*)

**Engraving, Electric** — —A method for electrically etching or engraving a metallic plate by covering it with wax, tracing the design on the wax so as to expose the metal, connecting the metal with the positive terminal of a battery, and placing it in a bath opposite another plate of metal.

By the action of electrolysis the metal is *dissolved* from the exposed portions and *deposited* on the plate connected with the other terminal of the battery. (See *Electrolysis.*)

In this manner the design is obtained in the form of an etching or cutting of the plate.

By connecting the waxed plate to the negative terminal of the electric source, the metal will be *deposited* on the exposed portions of the plate, thus producing the design in relief. Unless great care is taken, this latter method is not, however, apt to produce a sufficiently uniform deposit to enable the plate so formed to be used for printing from.

Electric engraving is sometimes called *electro-etching*.

**Entropy.**—In thermo-dynamics the non-available energy in any system.—(*Clausius and Mayer.*)

In thermo-dynamics, the available energy in any system.—(*Tait, Thomson and Maxwell.*)

will be noticed, this term is used in entirely different and opposite senses by different scientific writers. The latter sense is, perhaps, the one most commonly taken.

Heat energy is available for doing useful external work only when the source of heat utilized is hotter than surrounding bodies, that is, when the heat is transferred from a hotter to a colder body. If all bodies have acquired the same temperature, they can do no more external work. In various transformations of energy some of the heat is converted into heat, and this heat is gradually diffused through the universe and thus becomes non-available to man. Therefore, the temperature of our earth is decreasing.

"Entropy, in thermodynamics," says Maxwell, "is a quantity relating to a body such that an increase or diminution implies that heat has been added to or left the body. The amount of heat entering or leaving the body is measured by the amount of the increase or diminution of entropy at the temperature at which it takes place."

**Entropy, Electric** — —A term proposed by Maxwell for use in thermo-electric phenomena to include the doctrine of entropy in electric science.

"When an electric current," says Maxwell, "passes from one metal to another, heat is either evolved or absorbed at the junction of the metals. We could, therefore, suppose that the electric current has diminished or increased when the heat passes from one metal to the other, the entropy being different according to the nature of the medium in which the electricity is, and being affected by its temperature, stress, etc."

**Equalizer, Feeder** — —An adjustable device placed in the circuit of a feeder for the purpose of regulating the difference of potential at the junction box.

**Equalizer, Magnetic** — —A device for equalizing the otherwise unequal force exerted between a magnet pole and its armature by varying distances.

"The force of magnetic attraction increases with the decrease of the distance, it follows that any force sufficiently great to cause the motion of an armature towards a pole, against the force of gravity, will result in the movement of the armature to the pole, and that, therefore, no difference as to the final result will be produced

by a powerful current, and a current just strong enough to start the action. If, however, the armature move against the action of a spring, the latter can be so arranged that the force with which it opposes the motion of the armature increases, the nearer the armature is to the pole, and in this way the movement of the armature can be made proportional to the strength of the current energizing the electro-magnet.

A similar method consists in mechanical devices that cause the armature to work with lessened mechanical advantage as it approaches the pole.

Or, the polar surfaces may be so shaped by cutting, or by the addition of suitable projections, as to cause the approach of the armature to be attended by a nearly constant force.

**Equator, Geographical** — —An imaginary great circle passing around the earth midway between its poles.

**Equator, Magnetic** — —The magnetic parallel or circle on the earth's surface where a magnetic needle, suspended so as to be free to move in a vertical as well as in a horizontal plane, remains horizontal.

An irregular line passing around the earth approximately midway between the earth's magnetic poles. (See *Dip or Inclination, Angle of*.)

**Equator of Magnet**. — (See *Magnet, Equator of*.)

**Equatorial**. — Pertaining to the equator.

**Equatorially**. — In the direction of the equator.

**Equipotential Surface of a Conductor through which a Current is Flowing**. — (See *Surface, Equipotential, of a Conductor through which a Current is Flowing*.)

**Equipotential Surface, or Level Surface of Escaping Fluid**. — (See *Surface, Equipotential, or Level Surface of Escaping Fluid*.)

**Equipotential Surfaces, Electrostatic** — — (See *Surfaces, Equipotential, Electrostatic*.)

**Equipotential Surfaces, Magnetic** — — (See *Surfaces, Equipotential, Magnetic*.)

**Equivalence, Electro-Chemical, Law of** — — The amount of chemical action produced by an electric current, passed through various chemical substances, is proportional to the chemical equivalent of each substance,



that is, to its atomic weight, divided by its valency. (See *Valency*.)

Thus, the atomic weight of oxygen is sixteen times greater than the atomic weight of hydrogen. Oxygen is a diad; that is, has twice the combining power of hydrogen. The passage of a given quantity of electricity will liberate eight times, by weight, as much oxygen as hydrogen; or, to put it in another way, the passage of a given quantity of electricity will liberate two atoms of hydrogen for every atom of oxygen.

The atomic weight of chlorine is 35.4. The passage of a given amount of electricity will liberate a weight of chlorine 35.4 greater than the weight of hydrogen; or, for every atom of chlorine it will liberate one atom of hydrogen. Here the passage of a given amount of electricity liberates one atom of the monad element hydrogen for every atom of the monad element chlorine.

The atomic weight of gold is 196.2, and its atomicity or valency is 3. The passage of a given amount of electricity will liberate  $\frac{196.2}{3} = 65.4$  in *ic* compounds as great a weight of the triad element gold as of hydrogen; or, will liberate them in the proportion of one atom of gold for every three atoms of hydrogen.

Generalizing, it appears, therefore, that the passage of the same quantity of electricity through an electrolyte liberates the same number of atoms of a monad element, no matter what their nature may be. It liberates one-half as many of the diad atoms as it does of the monads, and one-third as many of the triad atoms as of the monads.

Professor Lodge points out, that assuming the truth of the theory that a current of electricity flows in an electrolyte by means of a true electric convection, each atom carrying an electric charge, then it would seem that every monad atom carries an equal charge of electricity, whether it be an atom of hydrogen, chlorine, potassium, silver, or mercury. That each diad element carries twice as much, and that each triad element carries three times as much.

In general, the number of atoms liberated by a given current of electricity is equal to the number of atoms of hydrogen, divided by the valency of the atom. "The electric charge," says Lodge, "belonging to each atom of matter, is a simple multiple of a definite quantity of electricity, which quantity is an absolute constant, quite independent of the nature of the particular substance to which the atom belongs."

The specific charge thus hypothetically given to each atom of matter is believed never to be lost.

Atoms capable of entering into combination are supposed to be oppositely charged, and chemical affinity is, according to this supposition, believed to be the result of the mutual attractions of opposite electric charges naturally and originally possessed by the atoms of matter.

Lodge points out the following results which naturally flow from the hypothesis that the atoms of matter possess definite positive and negative charges of electricity, viz.:

(1.) That the amount of electricity possessed by each monad atom is exceedingly small, being about the hundred thousand millionth part of the ordinary electrostatic unit, or less than the hundred trillionth of a coulomb.

(2.) The charge being small, the potential is necessarily low.

Probably something between one and three volts is a high difference of potential between two oppositely charged atoms.

(3.) The nearness of the attracting atoms, however, can cause a very strong electrostatic attraction between them.

(4.) That chemical affinity, or atomic attraction, is caused by the presence of these electric charges.

(5.) That the electrical force between two atoms at any distance is ten thousand million billion billion times greater than their gravitation attraction at the same distance, or, the force has an intensity per unit of mass capable of producing an acceleration, nearly one trillion times greater than that of gravity at the earth's surface.

**Equivalent, Chemical** — —The quotient obtained by dividing the atomic weight of any elementary substance by its atomicity. (See *Weight, Atomic. Atomicity*.)

The ratio between the quantity of an element and the quantity of hydrogen it is capable of replacing.

That quantity of an elementary substance that is capable of combining with or replacing one atom of hydrogen.

The chemical equivalent has a different value from the atomic weight whenever the valency is greater than unity. Thus the atomic weight of gold is 196.2, but since in *ic* compounds one atom of gold is capable of combining with three atoms of hydrogen, the weight of the gold equivalent to that of one atom of hydrogen is one-third of 196.2, or 65.4.

**nt Conductivity.**—(See *Conductivalent*.)

**nt, Electro-Chemical** — — A representing the weight in grammes elementary substance liberated during by the passage of one coulomb of (See *Electrolysis. Coulomb*.)

mical equivalent of a substance by the electro-chemical equivalent n.

o-chemical equivalent is, therefore, multiplying the electro-chemical equivalent by the chemical equivalent of determined experimentally that one electricity, expended electrolytically, .0000105 gramme of hydrogen.

current of one ampère, or one coulomb, will liberate .0000105 gramme of hydrogen. The number .0000105 is the chemical equivalent of hydrogen.

In manner the electro-chemical equivalent of other elements are obtained by multiplying the electro-chemical equivalent of hydrogen by the chemical equivalent of the substance.

chemical equivalent of potassium is .0000105. By multiplying .0000105 of the current that passes by the chemical equivalent of any substance we get the weight of that substance liberated by (See *Equivalence, Electro-Chemical*.)

ine the electro-chemical equivalent of elements see table of chemical equivalents 212.

**nt, Joule's** — — The mechanical equivalent of heat. (See *Heat, Mechanical Equivalent of*.)

**nt of Heat, Mechanical** — — Mechanical Equivalent of.)

**nt Resistance.**—(See *Resistance*.)

—A term proposed by J. T. the unit of electrical energy, applied to chemical decomposition.

defines an equivalent as follows: "The energy of one volt electromotive force per unit conditions through one equivalent action in grains."

This term has not been generally accepted. (See *Volt-Coulomb. Joule*.)

**Erb's Standard Size of Electrodes.**—(See *Electrodes, Erb's Standard Size of*.)

**Erg.**—The unit of work, or the work done when unit force is overcome through unit distance.

The work accomplished when a body is moved through a distance of one centimetre with the force of one dyne. (See *Dyne*.)

A dyne centimetre.  
The work done when a weight of one gramme is raised against gravity through a vertical height of one centimetre is equal to 981 ergs, because the weight of one gramme is  $1 \times 981$  dynes, or 981 ergs.

The following values for the erg, the unit of work, and the dyne, the unit of force, are taken from Hering:

- 1 erg = 1 dyne centimetre.
- 1 erg = 0.0000001 joule.
- 981 ergs = 1 gramme centimetre.
- 1,937.5 ergs = 1 foot grain.
- 13,562,600 ergs = 1 foot-pound.
- 1 dyne = 1.0194 milligrammes.
- 1 dyne = 0.015731 grain.
- 1 dyne = 0.0010194 grammes.
- 1 dyne = 0.00003596 ounce avoirdupois.
- 63,568 dynes = 1 grain.
- 981 dynes = 1 gramme.

**Ergmeter.**—An apparatus for measuring the work of an electric current in ergs.

**Erg-ten.**—A term proposed for ten million ergs or  $1 \times 10^{10} = 10,000,000,000$ .

In representing large numbers containing many ciphers the following plan is generally adopted for representing the number of ciphers that are to be added to a given number. Thus, suppose it is desired to represent the number 3,800,000,000. When written  $38 \times 10^8$  it indicates that 38 is to be multiplied by  $10^8$  or 100,000,000, or, in other words, that 38 is to be followed by 8 ciphers, thus 3,800,000,000.

A negative exponent, as  $3 \times 10^{-8}$  represents the corresponding decimal thus, .00000003.

1 erg  $\times 10^{10}$ , or 10,000,000,000 is called an erg-ten.  $1 \times 10^6 =$  an erg-six. These terms are not in general use. Ten meg-ergs is a preferable phrase to an erg-ten. (See *Meg-erg*.)

**Escape, Electric** — — A term some-



times employed to indicate the loss of charge on an insulated conductor. (See *Leakage, Electric.*)

**Escaping Fluid, Flow-Lines of** — — (See *Flow-Lines of Escaping Fluid.*)

**Escaping Fluid, Stream-Lines of** — — (See *Stream-Lines of Escaping Fluid.*)

**Essential Resistance.**—(See *Resistance, Essential.*)

**Etching, Electro** — — A term sometimes employed instead of electro-engraving. (See *Engraving, Electric.*)

**Etching, Galvanic** — — Electro-Engraving. (See *Engraving, Electric.*)

**Ether.**—The tenuous, highly elastic fluid that is assumed to fill all space, and by vibrations or waves in which light and heat are transmitted.

Although the existence of the ether is assumed in order to explain certain phenomena, its actual existence is very generally credited by scientific men, and, in reality, proofs are not wanting to fairly establish such existence.

Light and heat are believed to be due to transverse vibrations in the ether. Magnetism appears to be due to whirls or whirlpools, and an electric current is believed by some to be due to pulses of waves of ether set in motion by differences in the ether pressures.

It is not correct to regard the luminiferous ether as possessing no weight, or as being imponderable. Maxwell estimates its density as

$\frac{936}{1,000,000,000,000,000,000,000,000}$  that of water. It is very readily moved or set into vibration, its rigidity being estimated at about  $\frac{1}{1,000,000,000}$  that of steel.

According to the speculations of some physicists the ether is not discontinuous or granular, but it is similar to what might be regarded as an almost impalpable jelly.

**Ethereal.**—Pertaining to the universal ether.

**Eudiometer.**—A voltmeter in which separate graduated vessels are provided for the reception and measurement of the gaseous

during electrolysis. (See

In all cases electrodes for eudiometer used which do not enter into combination evolved gaseous products. In the case of oxygen and hydrogen, platinum is generally used.

A form of eudiometer is shown in Fig. 241. Two separate glass vessels, provided at the top with stop cocks, and open at their lower ends, rest in a vessel of water A, over platinum electrodes, connected electrically with binding posts K, K. Both vessels are filled with water slightly acidulated with sulphuric acid, and, when connected with a battery of sufficient electromotive force (not less than 1.45 volts), electrolysis takes place, and oxygen and hydrogen gas collects in the vessels. The platinum electrode connected with the active battery terminal, and oxygen is evolved over the electrode connected with the negative battery terminal. The volume of the oxygen is approximately twice as great as the volume of the hydrogen. (See *Water, Electrolysis of.*)



Fig. 241. E.

The proportion is not exactly 2 to 1, (1.) Some of the hydrogen is occluded or absorbed by the platinum electrode.

(2.) Some of the oxygen is given off as atomic oxygen, or ozone, which is denser and occupies less space than free atomic oxygen.

**Eudiometric.**—Pertaining to the eudiometer. (See *Eudiometer.*)

**Eudiometrically.**—By means of the eudiometer.

**Evaporation.**—The change from the liquid to the vaporous state.

Wet clothes exposed to the air are dried by the evaporation of the water.

Evaporation is greater:

- (1.) The more extended the surfaces.
- (2.) The higher the temperature of the liquid.
- (3.) The dryer the air, or the smaller the quantity of vapor it contains already.
- (4.) The stronger the wind.
- (5.) The smaller the barometric pressure.

**Evaporation, Electric** — — The

vapors at the surfaces of substances influence of negative electrification.

From electric evaporation was proposed by Crookes for the formation of metallic vapors of substances as metallic platinum, exposed in a vacuum to the effects of negative electrification. It shows that under these circumstances the molecules of the platinum lose their cohesion and fly off into the space, i. e., suffer true evaporation. This takes place under atmospheric pressures, but ordinary evaporation is greatly facilitated by the presence of a high vacuum.

Electric evaporation takes place with liquids as well as with solids. In an experiment by Crookes, the influence of the kind of the electric current was clearly shown. A vessel of water




Fig. 242. Electrical Evaporation.

to the air was first positively electrified, and after an exposure of  $1\frac{3}{4}$  hours only a trifling evaporation was noticeable. The water was then negatively electrified, and at the end of  $1\frac{1}{2}$  hours it had lost  $\frac{1}{1000}$  part of its weight more than positively charged water.

Crookes experimented with cadmium, in order to show that electric evaporation is not from evaporation produced by the agency of heat, tried the following, viz.: A high vacuum tube shaped as shown in Fig. 242, was pro-




Fig. 243. Electrical Evaporation.

vided with two platinum poles sealed in the glass at the ends. Two pieces of cadmium, C and D, were placed in the tube in the position shown, and uniformly heated by means of a gas-air bath, and maintained at a constant temperature. The current was then passed for one hour, B, being made the negative pole.

No metal was deposited in the neighborhood of the positive pole, the portions of the tube surrounding the positive pole being quite clean, while the corresponding portions of the other limb of the tube were thickly coated, as shown by the shading in the drawing.

In another experiment, in which the temperature was kept lower than in the preceding, viz., just below the melting point of the cadmium, after the current had passed for an hour, the limb of the tube through which the current had passed had received a thick coating, while the other was nearly free from coating, as shown in Fig. 243. Here the increase in the amplitude of the molecular oscillation under the influence of the electricity is manifest.

#### Evaporation, Electrification by — —

An increase in the difference of potential existing in a mass of vapor attending its sudden condensation.

The free electricity of the atmosphere is believed by some to be due to the condensation of the vapor of the air that results in rain, hail, clouds, etc. It is probable, however, that the true effect of condensation is mainly limited to the increase of a feeble electrification already possessed by the air or its contained vapor. The small difference of potential of the exceedingly small drops of water in clouds is enormously increased by the union or coalescing of many thousands of such drops into a single rain drop. (See *Electricity, Atmospheric.*)

#### Exchange, Telephonic, System of — —

—A combination of circuits, switches and other devices, by means of which any one of a number of subscribers, connected with a telephonic circuit, or a neighboring telephonic circuit or circuits, may be placed in electrical communication with any other subscriber connected with such circuit or circuits.

A telephone exchange consists essentially of a multiple switchboard, or a number of multiple switchboards, furnished with *spring-jacks*, *annunciator drops*, and suitable *connecting cords*. A *call bell*, or bells, is also provided. The annunciator drops are often omitted. (See *Board, Multiple Switch.*)

**Excitability, Electric, of Nerve or Muscular Fibre** — — The effect produced by an electric current in stimulating the nerve of a



living animal, or in producing an involuntary contraction of a muscle.

Du Bois-Reymond has shown that these effects depend :

(1.) On the strength of the current employed. The excitability occurs only when the current begins to flow, and when it ceases flowing; or, when the electrodes first touch the nerves, and when they are separated from it. Subsequent investigations have shown that this is true only for the frog's nerves, and is true for the human nerves only in the case of moderate currents, strong currents producing tetanus.

(2.) On the rapidity with which the current used reaches its maximum value, that is, on the rapidity of change of *current density*. (See *Current Density*.)

**Excitability, Electro-Nervous** — — In electro-therapeutics the electric excitation of a nerve.

**Excitability, Electrotonic** — — The actual excitability of a nerve when in the electrotonic condition. (See *Electrotonus*, *Anelectrotonus*, *Kathoelectrotonus*.)

**Excitability, Faradic** — — Muscular or nervous excitability following the employment of the rapidly intermittent currents produced by induction coils. (See *Coil*, *Induction*.)

Faradic excitability is different from *galvanic excitability*, or that produced by means of a continuous voltaic current. (See *Excitability*, *Galvanic*.)

**Excitability, Galvanic** — — A term sometimes employed for electric excitability of nerve or muscular fibre. (See *Excitability*, *Electric*, *of Nerve or Muscular Fibre*.)

**Excitation, Compensated, of Alternator.** — (See *Alternator*, *Compensated Excitation of*.)

**Excitation, Direct** — — The excitement of a muscle by placing an electrode on the muscle itself.

**Excitation, Electro-Muscular** — — In electro-therapeutics the galvanic or faradic excitation of the muscle, or its excitation by the continuous currents of a voltaic battery, or the alternating currents of an induction coil.

**Excitation, Faradic** — — Excitation of muscle or nerve fibre by means of rapidly

alternating currents of electricity. (See *Excitability*, *Faradic*.)

**Excitation, Indirect** — — The excitement of a muscle from its nerve.

**Exciter of Field.** — (See *Field*, *Exciter of*.)

**Exciting Liquid of Voltaic Cell.** — (See *Cell*, *Voltaic*, *Primary*, *Exciting Liquid of*.)

**Execution, Electric** — — Causing the death of a criminal, in cases of capital punishment, by means of the electric current.

Electric execution has been adopted by the State of New York, in accordance with the following law :

"The Court shall sentence the prisoner to death within a certain week, naming no day or hour, and not more than eight nor less than five weeks from the day of sentence. The execution must take place in the State prison to which convicted felons are sent by the Court, and the executioner must be the agent and warden of the prison.

"No newspaper may print any details of the execution, which is to be inflicted by electricity. A current of electricity is to be caused to pass through the body of the condemned of sufficient intensity to kill him, and the application is to be continued until he is dead."

**Exhaustion, Electric** — — Physiological effects resembling those produced by sun-stroke, resulting from prolonged exposure to the radiation of unusually large voltaic arcs. (See *Sun-Stroke*, *Electric*.)

**Exhaustion of Primary Voltaic Cell.** — (See *Cell*, *Voltaic*, *Primary*, *Exhaustion of*.)

**Exhaustion of Secondary Voltaic Cell.** — (See *Cell*, *Voltaic*, *Secondary*, *Exhaustion of*.)

**Exhaustion of Voltaic Cell.** — (See *Cell*, *Voltaic*, *Exhaustion of*.)

**Exhaustion, Reaction of** — — A condition of nervous and muscular irritability to electric excitation when a certain reaction, produced by a given current strength, cannot be reproduced without an increase of current strength.

The reaction of exhaustion may be regarded as a special variety of the reaction of degeneration. (See *Degeneration*, *Reaction of*.)

The reaction of degeneration embraces the following modifications of irritability, viz.:



(1.) Disappearance or diminution of nervous irritability to both galvanic and faradic currents.

(2.) Disappearance of faradic and increase of galvanic irritability of muscles, generally associated with an increase of mechanical irritability.

(3.) Disappearance of faradic and increase of galvanic muscular irritability associated generally with increased mechanical irritability.

(4.) Tardy, delayed contraction of muscles instead of quick reaction of normal muscle.

(5.) Marked modifications of normal sequence of contraction.—*Liebig & Rohé.*

**Expanding Magnetic Whirl.**—(See *Whirl, Expanding Magnetic.*)

**Expansion, Co-efficient of** — The fractional increase in the dimensions of a bar or rod when heated from 32 degrees to 33 degrees F. or from 0 degree to 1 degree C.

The fractional increase in the length of the bar is called the *Co-efficient of Linear Expansion*.

The fractional increase in the surface is called the *Co-efficient of Surface Expansion*.

The fractional increase in the volume is called the *Co-efficient of Cubic Expansion*.

**Expansion, Electric** — The increase in volume produced in a body on giving such body an electric charge.

A Leyden jar increases in volume when a charge is imparted to it. This result is due to an expansion of the glass due to the electric charge. According to Quincke, some substances, such as resinous or oily bodies, manifest a *contraction of volume* on the reception of an electric charge.

**Expansion Joint.**—(See *Joint, Expansion.*)

**Expansion, Linear, Co-efficient of** — A number expressing the fractional increase in length of a bar for a given increment of heat.

The co-efficients of expansion of a few substances are given in the following table:

	Temp.	
Aluminium.....	16 to 100 degrees C.	.0.0000235
Brass .....	0 " 100 " "	.0.0000188
Copper .....	0 " 100 " "	.0.0000167
German silver..	0 " 100 " "	.0.0000184
Glass .....	0 " 100 " "	.0.0000071
Iron .....	13 " 100 " "	.0.0000123
Lead .....	0 " 100 " "	.0.0000280
Platinum .....	0 " 100 " "	.0.0000089
Silver .....	0 " 100 " "	.0.0000194
Zinc.....	0 " 100 " "	.0.0000230

—(Anthony & Brackett.)

**Exploder, Electric Mine** — A small magneto-electric machine used to produce the currents of high electromotive force employed in the direct firing of blasts.

**Exploder, Electro-Magnetic** — A small magneto-electric machine used to produce the currents of high electromotive force employed in the direct firing of blasts.

**Explorer, Electric** — An apparatus operated by means of induced currents, and employed for the purpose of locating bullets or other foreign metallic substances in the human body. (See *Balance, Induction, Hughes'.*)

**Explorer, Magnetic** — A small, flat coil of insulated wire, used, in connection with the circuit of a telephone, to determine the position and extent of the magnetic leakage of a dynamo-electric machine or other similar apparatus. (See *Magnetophone.*)

**Explosive Distance.**—(See *Distance, Explosive.*)

**Extension Call-Bell.**—(See *Bell, Extension Call.*)

**External Circuit.**—(See *Circuit, External.*)

**External Secondary Resistance.**—(See *Resistance, External Secondary.*)

**Extra Currents.**—(See *Currents, Extra.*)

**Extraordinary Resistance.**—(See *Resistance, Extraordinary.*)

**Extra-Polar Region.**—(See *Region, Extra-Polar.*)

**Eye, Electro-Magnetic** — A term proposed for a certain form of spark-micrometer employed by Hertz in his experiment on electro-magnetic radiation.

This apparatus has received the above name because it enables the observer to see or localize an electromagnetic disturbance.

The particular spark-micrometer that has received the name of the electro-magnetic eye had the form of a circle 35 centimetres in radius, and was formed of a copper wire 2 millimetres in diameter. Like all spark-micrometer circuits, it had its terminals separated by a small air-space.

**Eye, Selenium** — An artificial eye in



which a selenium resistance takes the place of the retina and two slides the place of the eyelids.

The selenium resistance is placed in the circuit of a battery and a galvanometer. When the slides L, L, Fig. 244, are shut, the galvanometer deflection is less than when they are open.

The opening of the aperture between the slides L, L, may be automatically accomplished by the action of the light itself, by moving them by an electro-magnet placed in the circuit of a local battery, and a selenium resistance may be so arranged that when light falls on it the slides L, L, are moved together, and when the amount of such light is small they are moved apart, by the action

of a spring. In this way there is obtained a device roughly resembling the dilatation or contraction of the pupil of the eye from the action of light on the iris. (See *Photometer, Selenium.*)



Fig. 244. Selenium Eye.

traction of the pupil of the eye from the action of light on the iris. (See *Photometer, Selenium.*)

## F

**Fac-Simile Telegraphy, or Pantelegraphy.**—(See *Telegraphy, Fac-Simile.*)

**Fahrenheit's Thermometer Scale.**—(See *Scale, Thermometer, Fahrenheit's.*)

**Fall of Potential.**—(See *Potential, Fall of.*)

**False Magnetic Pole** — — (See *Pole, Magnetic, False.*)

**False Resistance.**—(See *Resistance, False.*)

**False Zero.**—(See *Zero, False.*)

**Fan Guard.**—(See *Guard, Fan.*)

**Farad.**—The practical unit of electric capacity.

Such a capacity of a conductor or condenser that one coulomb of electricity is required to produce in the conductor or condenser a difference of potential of one volt.

As in gases, a quart vessel will hold a quart of gas under unit pressure of one atmosphere, so, in electricity, a conductor or condenser, whose capacity is one farad, will hold a quantity of electricity equal to one coulomb when under an electromotive force of one volt.

It may cause some perplexity to the student to understand why there should be in electricity one unit of capacity to represent the size of the vessel or conductor, and another to represent the amount or quantity of electricity required to fill

such vessel. But, like a gas, electricity acts, in effect, as if it were very compressible, so that the quantity required to fill any condenser will de-



Fig. 245. Elevation of Standardized Condenser.

pend on the electromotive force under which it is put into the conductor or condenser.

For purposes of measurement, capacities of conductors are compared with those of condensers



Fig. 246. Plan of Standardized Condenser.

whose capacities are known in microfarads, or fractions thereof. The microfarad, or the

$\frac{1}{1,000,000}$  of a farad, is used because of the very great size of a farad.

Fig. 245 shows an elevation, and Fig. 246 a plan of the form often given to a standardized condenser or microfarad. The condenser is charged by connecting the terminals of the electric source to the binding posts N and N'. It is discharged by means of the plug key P\*, that connects the brass pieces A and B, when pushed firmly into the conical space between them.

The condenser is made by placing sheets of tin foil between sheets of oiled silk or mica in the box and connecting the alternate sheets to one of the brass pieces B, and the other set to the brass piece A, as will be better understood from an inspection of Fig. 247.




Fig. 247 Method of Construction of a Condenser.

Condensers are generally made of the capacity of the  $\frac{1}{2}$  of a microfarad. Sometimes, however, they are made so that either all or part of the condenser may be employed, by the insertion of the different plug keys.

The form of condenser shown in Fig. 248 is

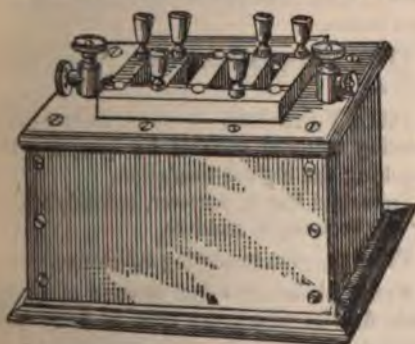


Fig. 248. Standard Condenser

Capable of ready division into five separate values, viz.: .05, .05, .2, .2 and .5 microfarad.

**Farad, Micro** — The millionth part of a farad. (See *Farad*.)

**Faraday Effect.**—(See *Effect, Faraday*.)

**Faraday's Cube.**—(See *Cube, Faraday's*.)

**Faraday's Dark Space.**—(See *Space, Dark, Faraday's*.)

**Faraday's Net.**—(See *Net, Faraday's*.)

**Faradic Apparatus, Magneto-Electric** — (See *Apparatus, Faradic Magneto-Electric*.)

**Faradic Brush.**—(See *Brush, Faradic*.)

**Faradic Current.**—(See *Current Faradic*.)

**Faradic Excitation.**—(See *Excitation, Faradic*.)

**Faradic Induction Apparatus.**—(See *Apparatus, Faradic Induction*.)

**Faradic Irritability.**—(See *Irritability, Faradic*.)

**Faradic Machine.**—(See *Machine, Faradic*.)

**Faradization.**—In electro-therapeutics, the effects produced on the nerves or muscles by the use of a faradic current, in order to distinguish such effects from galvanization or those produced by a voltaic current. (See *Galvanization*.)

**Faradization, General** — A method of applying the faradic current similar to that employed in general galvanization. (See *Galvanization, General*.)

**Faradization, Local** — A method of applying the faradic current in general similar to that employed in local galvanization. (See *Galvanization, Local*.)

**Fault.**—Any failure in the proper working of a circuit due to ground contacts, cross-contacts or disconnections. (See *Contacts, Cross*.)

Faults are of three kinds, viz.:

- (1.) Disconnections. (See *Disconnection*.)
- (2.) Earths. (See *Earth*.)
- (3.) Contacts. (See *Contacts*.)

Various methods are employed for detecting and localizing faults, for the explanation of which reference should be had to standard electrical works on testing or measurements.

**Fault, Ironwork, of Dynamo** — A ground or connection between the current of a dynamo and any part of its ironwork.



If the dynamo is in good connection with the ground, as is frequently the case in marine plants, this fault is the same as a ground.

**Faults, Localization of** — —Determining the position of a fault on a telegraph line or cable by calculations based on the fall in the potential of the line measured at different points, or by loss of charge, etc.

For details, see standard works on electrical measurements.

**Feed, Clockwork, for Arc Lamps** — —An arrangement of clockwork for obtaining a uniform feed motion of one or both electrodes of an arc lamp.

The clockwork is automatically thrown into or out of action by an electro-magnet, usually placed in a shunt circuit around the carbons.

**Feed, To** — —To supply with an electric current, as by a dynamo or other source.

**Feeder.**—One of the conducting wires or channels through which the current is distributed to the main conductors.

**Feeder, Standard or Main** — —The main feeder to which the standard pressure indicator is connected, and whose pressure controls the pressure at the ends of all the other feeders.

The term pressure in the above definition is used in the sense of electromotive force or difference of potential.

**Feeder-Wires.**—(See *Wires, Feeder.*)

**Feeders.**—In a system of distribution by constant potential, as in incandescent electric lighting, the conducting wires extending between the bus-wires or bars, and the junction boxes.

A feeder differs from a main in that a main consists of a conductor that may be tapped at any point to supply a customer, while a feeder leads direct from the dynamo or other source to a main and is not tapped at any point.

**Feeders, Negative** — —The feeders that are connected with the negative terminal of the dynamo. (See *Feeders.*)

**Feeders, Positive** — —The feeders that are connected with the positive terminal of the dynamo. (See *Feeders.*)

**Feeding Device of Electric Arc Lamp.**—(See *Device, Feeding, of an Arc Lamp, Feed, Clockwork, for Arc-Lamps.*)

**Feeding-Wire.**—(See *Wire, Feeding.*)

**Feet, Ampère** — —The product of the current in ampères by the distance in feet through which that current passes.

It has been suggested that the term ampère-feet should be employed in expressing the strength of electro-magnetism in the field magnets of dynamo-electro machines or other similar apparatus.

**Ferranti Effect.**—(See *Effect, Ferranti.*)

**Ferro-Magnetic Substance.**—(See *Substance, Ferro-Magnetic.*)

**Fibre, Quartz** — —A fibre suitable for suspending galvanometer needles, etc., made of quartz.

The quartz fibre is obtained by fusing quartz and drawing out the fused material as a fine thread, in a manner similar to the production of glass fibres. Quartz fibres possess marked advantage over silk fibres, in that they are 5.4 times stronger for equal diameters, and especially, in that they return to the zero point, after very considerable deflections.

Quartz fibres are readily obtained by fusing quartz pebbles together in the voltaic arc, and drawing them apart with a rapid, but steady, uniform motion.

**Fibre Suspension.**—(See *Suspension, Fibre.*)

**Fibre, Vulcanized** — —A variety of insulating material suitable for purposes not requiring the highest insulation.

Vulcanized fibre is, however, seriously affected by long exposure to moisture.

**Fibron.**—An insulating substance.

**Field, Air** — —That portion of a magnetic field in which the lines of force pass through air only.

**Field, Alternating** — —An electrostatic or magnetic field the positive direction of the lines of force in which is alternately reversed or changed in direction.

**Field, Alternating Electrostatic** — —An electrostatic field, the potential of which is rapidly alternating.

alternating electrostatic field is, according to Faraday's experiments, produced in the neighborhood of the terminals of the secondary of an induction coil, through whose primary, alternations of frequency are passing.

**Field, Alternating Magnetic.**—A magnetic field the direction of whose lines of force is alternately reversed.

**Field, Density of** —The number of lines of force that pass through any field, per unit area of cross-section.

**Field, Electric** —A term sometimes used in place of an electrostatic field. (See *Electrostatic*.)

**Field, Electro-Magnetic** —The space traversed by the lines of magnetic force produced by an electro-magnet. (See *Field, Magnetic*.)

**Field, Electrostatic** —The region of electrostatic influence surrounding a charged body.

Electrostatic attractions or repulsions take place along certain lines called lines of electrostatic force. These lines of force produce a field called an *electrostatic field*. *Electric level* or *equipotential* is measured along these lines, just as potential levels are measured with a plumb line along the lines of gravitation force. (See *Potential, Electric*.)

Work is done when a body is moved along the lines of electrostatic force in a direction *from* an electrified body, or *towards* a similarly electrified body, just as work is done against gravity when a body is moved along the lines of gravitation force, away from the earth's centre, or vertically upwards.

**Field, Exciter of** —In a separately excited dynamo-electric machine, the dynamo-electric machine, voltaic battery, or other electric source employed to produce the field of field magnets. (See *Machine, Dynamo-electric*.)

**Field, Intensity of** —The strength of the field as measured by the number of lines of force that pass through it per unit of area of cross-section. (See *Field, Electrostatic*, *Field, Magnetic*.)

**Field, Magnetic** —The region of

magnetic influence surrounding the poles of a magnet.

A space or region traversed by lines of magnetic force.

A place where a magnetic needle, if free to move, will take up a definite position, under the influence of the lines of magnetic force.

Unit strength of magnetic field is the field which would be produced by a magnetic pole of unit strength at unit distance.

Magnetic attractions and repulsions are assumed to take place along certain lines called *lines of magnetic force*. The directions of these lines in any plane of a magnetic field may be shown by sprinkling iron filings over a sheet of paper held in a horizontal position to a magnet pole inclined



Fig. 249. Magnetic Field.

to the paper in the desired plane and then gently tapping the paper.

The groupings of iron filings so obtained are sometimes called *magnetic figures*.

The directions of the lines of force thus shown will appear from an inspection of Fig. 249, taken in a plane joining the two poles of a straight bar magnet, and Fig. 250, taken in a plane at right angles to the north pole of a straight bar magnet.

In Fig. 249, the repulsion of the lines of force at either pole is shown by the radiation of the chains of magnetized iron particles. The mutual attraction of unlike polarities is shown by the curved lines.

In Fig. 250, the repulsion of the similarly magnetized chains is clearly shown.

Lines of magnetic force are assumed to pass out from the north pole and back again into the magnet at its south pole. This assumed direction



is called the *direction of the lines of magnetic force*.

Faraday expressed his conception of lines of magnetic force as follows:

"Every line of force must therefore be considered as a closed circuit, passing, in some part of its course, through a magnet and having an equal amount of force in every part of its course. There



Fig. 250. Magnetic Field.

exist lines of force within the magnet of the same nature as those without. What is more, they are exactly equal in *amount* to those without. They have a relation in *direction* to those without and are, in fact, continuations of them."

When a conductor, such as a wire through which a powerful current of electricity is flowing, is dipped in a mass of iron filings, a chain of iron filings is formed, the north end of which is urged around the conductor in one direction and the south end in the opposite direction, so that the movable chain of filings surrounds or grips the conductor in concentric rings or circles.

The *density of a magnetic field* is directly proportional to the number of lines of force per unit of area of cross-section.

A *single line of force*, or a *unit line of force*, is such an intensity of field as exists in each square centimetre of cross-section of a unit magnetic field.

A magnetic field is *uniform*, or possesses *uniform intensity*, when it possesses the same number of lines of force per square centimetre of area of cross-section.

**Field, Magnetic, Alternating** — —The magnetic field produced by means of an alternating current.

**Field, Magnetic, Dissymmetrical** — —A field whose lines of force are not symmetrically distributed in adjacent halves.

**Field, Magnetic, Expanding of** — —An increase in the length of the lines of magnetic force in any field, or an increase in the length of their magnetic circuit.

**Field, Magnetic, of an Electric Current** — —The magnetic field surrounding a cir-



Fig. 251. Field of Current.

cuit through which an electric current is flowing.

An electric current produces a magnetic field. This was discovered by Oersted in 1819, and may be shown by sprinkling iron filings on a sheet of paper, placed on the wire conductor conveying the current, at right angles to the direction in which the current is passing. Here the lines of force appear as concentric circles, extending around the conductor, as shown in Fig. 251. Their direction, as regards the length of the conductor, is shown in Fig. 252. The electric current sets up these *magnetic whirls* around the conductor on its passage through it.



The *direction of the lines of magnetic force* produced by an electric current, and hence its *magnetic polarity*, depends on the direction in which the electric current flows. This direction

Fig. 252. Direction of Lines of Force.

may be remembered as follows: If the current flows towards the observer, the directions of the lines of magnetic force is opposite to that of the hands of a watch, as shown in Fig. 253.

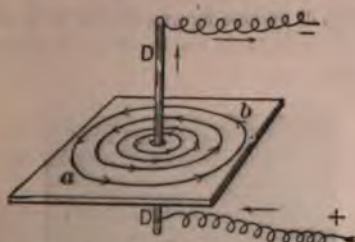


Fig. 253. Direction of Lines of Force.

It is from the direction of the lines of magnetic force that the polarity of a helix carrying a current is deduced. (See *Solenoid, Magnetic. Magnet, Electro.*)

A magnetic field possesses the following properties, viz.:

(1.) All magnetizable bodies are magnetized when brought into a magnetic field. (See *Induction, Magnetic.*)

(2.) Conductors moved through a magnetic field so as to cut its lines of force have differences of potential generated in them at different points, and if these points be connected by a conductor, an electric current is produced. (See *Induction, Electro-Magnetic.*)

**Field, Magnetic, Pulsatory** — — A field, the strength of which pulsates in such manner as to produce oscillatory currents by induction.

**Field, Magnetic, Reversing** — — That portion of the field of a dynamo-electric machine, produced by the field-magnet coils, in which the currents flowing in the armature coils are stopped or reversed after the coil has passed its theoretical position of neutrality.

Sparkless commutation is obtained by placing the brushes on the commutator so as to correspond with the reversing field.

**Field, Magnetic, Shifting** — — A term proposed by Professor Elihu Thomson to express a field of magnetic lines of changing position with respect to the axis of the pole from which they emanate.

A shifting magnetic field is especially a phenomenon of a rapidly alternating magnetic field

occurring in a substance like hardened steel in which the coercive force is fairly high. It, for example, a single magnet pole of an electro-magnet, whose coils are traversed by a rapidly alternating current of electricity, is placed near one end of a steel file, the changing polarity developed thereby moves or shifts from the point directly over the pole towards the distant end. The presence of this shifting field can be shown by the rotation of discs of copper suitably inclined to the end of the file. In a similar manner a prismatic mass of steel, placed with one of its flat sides on the pole of a rapidly alternating magnetic field, will have a magnetic field developed in it, which will move or shift from the flat base towards the upper edge. Movable masses of good conducting metal, such as copper, will be set in rotation in a direction such as would be caused by an escape of gas therefrom.

The shifting magnetic field travels from the upper portions of the prism just as a stream of escaping gaseous substance would.

**Field, Magnetic, Spreading-Out** — — A term sometimes used to represent an expanding magnetic field. (See *Field, Magnetic, Expanding of.*)

**Field, Magnetic, Stray** — — That portion of the field of a dynamo-electric machine which is not utilized for the development of differences of potential in the armature, because its lines of force do not pass through the armature.

**Field, Magnetic, Strength of** — — The dynamic force acting on a free magnetic pole, placed in a magnetic field.

If a free magnetic pole could be placed in a magnetic field, it would begin to move towards the opposite pole of the field, under its magnetic attraction, just as an unsupported body, free to move, would begin to fall towards the earth. The strength of a magnetic field corresponds to the acceleration of the force of gravity in the case of a falling body. The strength of the magnetic pole corresponds to the mass of the falling body. The force impressed in the case of the magnetic field is equal to the strength of the pole multiplied by the strength of the field.

**Field, Magnetic, Symmetrical** — — A field whose lines of force are symmetrically distributed in adjacent halves.



**Field, Magnetic, Uniform** — —A field traversed by the same number of lines of magnetic force in all unit portions of area of cross-section. (See *Field, Magnetic*.)

**Field, Magnetic, Waste** — —A term sometimes employed for stray field. (See *Field, Magnetic, Stray*.)

**Field, Rotating-Current** — —A magnetic field produced by means of a rotating current. (See *Current, Rotating*.)

**Field, Uniform Density of** — —A uniform density in all equal areas of cross-section of field.

**Field, Vortex-Ring** — —The field of influence possessed by a vortex-ring.

Professor Dolbear points out the fact that the direction of the rotation of a fluid constituting a vortex-ring resembles the magnet flux in a magnetic field, and shows, from the action of such rings on one another, that they possess a true field, or atmosphere of influence outside their actual bodies. He infers that such rings possess true polarity, since the motions producing them have different directions on opposite sides or ends.

**Figure of Merit of Galvanometer.**—(See *Galvanometer, Figure of Merit of*.)

**Figures, Breath** — —Faint figures of condensed vapor produced by electrifying a coin, placing it momentarily on the surface of a sheet of clean, dry glass, and then breathing gently on the spot where the coin was placed.

The moisture collects on the electrified portions of the plate and forms a fairly distinct image of the coin.

**Figures, Electric** — —Figures of various shapes produced on electrified surfaces by the arrangement of dust particles or vapor vesicles under the influence of electric charges.

Electric figures are of two varieties, viz.:

- (1.) Dust figures.
- (2.) Breath figures.

**Figures, Lichtenberg's Dust** — — Figures produced by writing on a sheet of shellac with the knob of a charged Leyden jar, and then sprinkling over the sheet dried and powdered sulphur and red lead, which have

been previously mixed together, and are so rendered, respectively negative and positive.

The red lead collects on the negative parts of the shellac surface, and the sulphur on the positive parts, in curious figures, known as *Lichtenberg's Dust Figures*, one of which is shown in Fig. 254.



Fig. 254. *Lichtenberg's Dust Figures.*

These figures show very clearly that an electric charge tends to creep irregularly over the surface of an insulating substance.

**Figures, Magnetic** — —A name sometimes applied to the groupings of iron filings on a sheet of paper so held in a magnetic field as to be grouped or arranged under the influence of the lines of force of the same. (See *Field, Magnetic*.)

**Filament.**—A slender thread or fibre.

The term is applied generally to threads or fibres varying considerably in diameter.

**Filament, Current** — —A term sometimes employed in place of current streamlet. (See *Streamlets, Current*.)

**Filament, Magnetic** — —A polarized line or chain of ultimate magnetic particles.

This is sometimes called a *uniform magnetic filament*.

A bar-magnet possesses but two free poles. When broken at its neutral point or equator, the bar will develop free poles at the broken ends. This is explained by considering the magnet to be composed of a number of separate particles, separately magnetized. A single chain or filament of such particles is called a magnetic filament. (See *Magnet, Neutral Point of*. *Magnetism, Hughes' Theory of*. *Magnetism, Ewing's Theory of*.)

**Filament of Incandescent Electric Lamp.**

—(See *Lamp, Incandescent Electric, Filament of.*)

**Filament, Uniform Magnetic** — —A term sometimes applied to a magnetic filament. (See *Filament, Magnetic.*)

**Filaments, Flashed** — —Filaments for an incandescent lamp, that have been subjected to the flashing process. (See *Carbons, Flashing Process for.*)

**Filamentous Armature Core.**—(See *Core, Armature, Filamentous.*)

**Film Cut-Out.**—(See *Cut-Out, Film.*)

**Finder, Induction** — —A term sometimes employed for a magnetic explorer.

**Finder, Position, Electric** — —A device by means of which the exact position of an object can be obtained.

By means of a position-finder a gunner can be telephoned or otherwise ordered to fire at objects he cannot see, and yet obtain a fair degree of accuracy.

**Finder, Range, Electric** — —A device by means of which the exact distance of an enemy's ship or other target can be readily determined.

The operation of an electric range-finder is based on a method somewhat similar to the solving of a triangle for the purpose of determining distances. If the base line of a triangle and the two angles at the base are known, the other two sides and the included angle can be determined.

In the range-finder, the resistance of a German silver wire corresponds to the graduated arc of the theodolite used to measure the angles, and a rheostat, as a receiving instrument, measures the values of the angles. The base line is a constant, so that the receiving instrument is marked in yards instead of angles. To use the range-finder, two observers watch the target object continuously through a telescope. They do this and nothing else, while a third observer watches a galvanometer and so alters a resistance, by moving a contact or slide key along a resistance wire, as to keep the needle of the galvanometer constantly at zero. The exact distance being thus ascertained, the gunner can make the proper allowance in firing.

**Finder, Wire** — —Any form of galvanometer used to locate or find the corre-

sponding ends of different wires in a bunched cable.

The different wires in a cable are usually tagged and numbered at the end of the cable and at the joints. The telephone has been successfully employed as a wire finder.

**Fire Alarm Annunciator.**—(See *Annunciator, Fire Alarm.*)

**Fire Alarm, Automatic** — —(See *Alarm, Fire, Automatic.*)

**Fire Alarm Contact.**—(See *Contact, Fire Alarm.*)

**Fire Alarm Signal Box.**—(See *Box, Fire Alarm Signal.*)

**Fire Alarm Telegraph Box.**—(See *Box, Fire Alarm Telegraph.*)

**Fire Ball.**—(See *Ball, Fire.*)

**Fire Cleansing.**—(See *Cleansing, Fire.*)

**Fire Extinguisher, Electric** — —A thermostat or mercury contact, which automatically completes a circuit and turns on a water supply for extinguishing a fire, on a certain predetermined increase of temperature.

**Fire, Hot, St. Elmo's** — —A term proposed by Tesla for a form of powerful brush discharge between the secondary terminals of a high frequency induction coil. (See *Discharge, Brush-and-Spray.*)

This form of St. Elmo's fire differs from the ordinary form in being hot. Its general appearance is shown in Fig. 255, taken from Tesla.

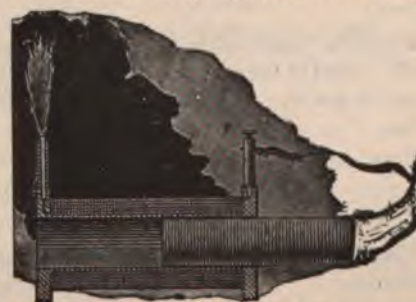


Fig. 255. St. Elmo's Hot Fire.

Describing its production he says: "In many of these experiments, when powerful effects are wanted for a short time, it is advantageous to use



iron cores with the primaries. In such case a very large primary coil may be wound and placed side by side with the secondary, and, the nearest terminal of the latter being connected to the primary, a laminated iron core is introduced through the primary into the secondary as far as the streams will permit. Under these conditions an excessively powerful brush, several inches long, which may be appropriately called 'St. Elmo's hot fire,' may be caused to appear at the other terminal of the secondary, producing striking effects. It is a most powerful ozonizer; so powerful indeed, that only a few minutes are sufficient to fill the whole room with the smell of ozone, and it undoubtedly possesses the quality of exciting chemical affinities."

**Fire, St. Elmo's** — — Tongues of faintly luminous fire which sometimes appear on the pointed ends of bodies in connection with the earth, such as the tops of church steeples or the masts of ships.

The appearance of the St. Elmo's fire is due to brush discharges of electricity.

**Fishes, Electric** — — A term applied to various fishes, such as the eel and the ray, which possess the ability of protecting themselves by giving electric shocks to objects touching them. (See *Eel, Electric*.)

**Fishing Box.** — (See *Box, Fishing*.)

**Fittings or Fixtures, Electric Light** — — The sockets, holders, arms, etc., required for holding or supporting incandescent electric lamps.

**Fixed Secondary.** — (See *Secondary, Fixed*.)

**Fixtures, Telegraphic** — — A term generally limited to the variously shaped supports provided for the attachment of telegraphic wires.

**Fixtures, Telegraphic House-Top** — — Telegraphic fixtures placed on the roofs of buildings for the support of the lines.

**Flaming Discharge.** — (See *Discharge, Flaming*.)

**Flash, Side** — — A sparking or lateral discharge taking place from the sides of a conductor, when an impulsive rush of electricity passes through it.

The phenomenon of side flashing is due to a lateral discharge which takes the alternative path, instead of a path of much smaller ohmic resistance. The tendency to side flash results from the fact that the metallic circuit possesses inductance. (See *Path, Alternative. Discharge, Lateral. Inductance*.)

**Flashed Carbons.** — (See *Carbons, Flashed*.)

**Flashed Filaments.** — (See *Filaments, Flashed*.)

**Flashes, Auroral** — — Sudden variations in the intensity of the auroral light.

Intermittent flashes of auroral light that occur during the prevalence of an aurora. (See *Aurora Borealis*.)

**Flashing of Carbons, Process for the** — — (See *Carbons, Flashing Process for*.)

**Flashing of Dynamo-Electric Machine.** — (See *Machine, Dynamo-Electric, Flashing of*.)

**Flat Cable.** — (See *Cable, Flat*.)

**Flat Duplex Cable.** — (See *Cable, Flat Duplex*.)

**Flat Ring Armature.** — (See *Armature, Flat Ring*.)

**Flats.** — A name sometimes applied to those parts of commutator segments the surface of which, through wear, has become lower than the other portions. (See *Commutator*.)

**Fleming's Gauss.** — (See *Gauss, Fleming's*.)

**Fleming's Standard Voltaic Cell.** — (See *Cell, Voltaic, Standard, Fleming's*.)

**Flexible Electric Light Pendant.** — (See *Pendant, Flexible Electric Light*.)

**Flexible Lead.** — (See *Lead, Flexible*.)

**Floating Battery, De la Rive's.** — (See *Battery, Floating, De la Rive's*.)

**Flow.** — In hydraulics, the quantity of water or other fluid which escapes from an orifice in a containing vessel, or through a pipe, in a given time.

**Flow-Lines of Escaping Fluid.** — Lines within the mass of a fluid in motion, drawn at

of points, so that the flow at any point is tangential at such points to the path.

**Magnetic** — —The magnetic force. (See *Flux, Magnetic*.)

**of Current, Assumed Direction of** — —(See *Current, Assumed Direction of*.)

**of Energy** — —(See *Energy, Flow of*.)

**of Lines of Electrostatic Force** — —(See *Electrostatic, Lines of, Assumed*.)

**of Magnetic Induction** — —(See *Induction, Magnetic, Flux or Flow of*.)

**Depolarizing** — —An electrode in a voltaic cell that prevents polarization. (See *Cell, Voltaic, Polarization of*.)

**Insulator** — —(See *Insulator, Fluid*.)

**Fluoresce** — —To become self-luminous when exposed to light.

**Fluorescent** — —A body is said to fluoresce when it shines, by the light it produces. In this respect it is like an illuminated body, which shines by light.

**Fluorescence** — —A property possessed by solid or liquid substances of becoming luminous while exposed to light.

**Fluorescence** — —In the presence of the refrangibility of rays of light is changed. The invisible rays beyond the ultra-violet, become visible, so that the light is transformed, the particles absorbing the light and emitting another. (See *Incan-*

**Fluorescent** — —A glass, or glass colored yellow by oxide of iron, or a solution of sulphate of quinine, has fluorescent properties. The path of a light brought to a focus in either of these cases, or a beam or cone of light passed through them, is rendered visible by the particles of the medium along this path becoming self-luminous. The beam of light entering the dusty air of a closed chamber is visible from the light being scattered in all directions by the float-particles.

**Fluorescent substance** — —The path of the light is rendered visible by the particles which lie along it, throwing out light in all directions. However, this difference, that in the

case of the dust particles the light which comes directly from the beam is reflected; while in the case of the fluorescent body the light comes from the particles themselves, which are set into vibration by the light that is passing through, and has been absorbed by their mass.

Fluorescence is, therefore, a variety of phosphorescence. (See *Phosphorescence*.)

**Fluorescent** — —Possessing the capability of fluorescing.

**Fluorescing** — —Exhibiting the property of fluorescence.

**Flush Box** — —(See *Box, Flush*.)

**Fluviograph** — —An apparatus for electrically registering the varying height of water in a tidal stream or in the ocean; or, in general, differences of water levels.

**Flux, Magnetic** — —The number of lines of magnetic force that pass or flow through a magnetic circuit.

The total number of lines of magnetic force in any magnetic field.

The magnetic flux is also called the magnetic flow.

A Committee of the American Institute of Electrical Engineers on "Units and Standards" proposed the following as the definition of magnetic flux.

"The magnetic flux through a surface bounded by a closed curve is the surface integral of magnetic induction taken over the bounded surface, and when produced by a current is also equal to the line integral of the vector potential of the current taken round the boundary."

"The uniform and unit time rate of change in flux through a closed electric circuit establishes unit electromotive force in the circuit."

Fluxes range in present practical work from 100 to 100,000,000 C. G. S. lines, and the working units would perhaps prefix milli- and micro-

**Flux of Magnetic Induction** — —(See *Induction, Magnetic, Flux or Flow of*.)

**Flux or Flow of Magnetism** — —(See *Magnetism, Flux or Flow of*.)

**Fly, Electric** — —A wheel or other device driven by the reaction of a convective discharge. (See *Flyer, Electric, Convection, Electric*.)



**Flyer, Electric** — — A wheel arranged so as to be set into rotation by the escape of convection streams from its points when connected with a charged conductor.

A wheel formed of light radial arms P, P, P, etc., shaped as shown in Fig. 256, and capable of rotation on the vertical axis A, is set into rapid rotation when connected with the prime conductor of a frictional or influence machine, through the convection streams of air particles, which are shot off from the points or extremities of the radial arms. The wheel is driven by the reaction of these streams in a direction opposite to that of their escape. (See *Discharge, Convective*.)




Fig. 256. Electric Flyer.

**Focus**.—A point in front of a lens or mirror, where all the rays of light meet or seem to meet. (See *Lens, Achromatic*.)

**Fog, Electric** — — A dense fog which occurs on rare occasions when there is an unusual quantity of free electricity in the atmosphere.

During these electric fogs the free electricity of the atmosphere changes its polarity at frequent intervals.

**Following Horn of Pole Pieces of Dynamo-Electric Machine**.—(See *Horns, Following, of Pole Pieces of a Dynamo-Electric Machine*.)

**Foot-Candle**.—(See *Candle, Foot*.)

**Foot-Pound**.—A unit of work. (See *Work*.)

The amount of work required to raise 1 pound vertically through a distance of 1 foot.

The same amount of work, viz., 3 foot-pounds, is done by raising 1 pound through a vertical distance of 3 feet, or 3 pounds through a vertical distance of 1 foot.

Apart from air friction, the amount of work done in raising 1 pound through 1 foot, viz., 1 foot-pound, is the same whether this work be done in one second or in one day. The *power*, or the *rate of doing work*, is, however, very different in the two cases. (See *Power*.)

**Force**.—Any cause which changes or tends

to change the condition of rest or motion of a body.

**Force, Centrifugal** — — The force that is supposed to urge a rotating body directly away from the centre of rotation.

If a stone be tied to a string and whirled around, and the string break, the stone will not fly off directly away from the centre, but will move along the tangent to the point where it was when the string broke.

The centrifugal force in reality is the force which is represented by the tension to which the string is subjected during this rotation.

**Force, Coercive** — — A name sometimes applied to coercive force. (See *Force, Coercive*.)

**Force, Coercive** — — The power of resisting magnetization or demagnetization.

Coercive force, in the sense of resisting demagnetization, is sometimes called *magnetic retentivity*.

Hardened steel possesses great coercive force; that is, it is magnetized or demagnetized with difficulty.

Soft iron possesses very feeble coercive force.

It is on account of the feeble coercive force of the soft iron core of an electro-magnet that its main value depends, since it is thereby enabled to rapidly acquire its magnetization, on the completion of a circuit through its coils, and to rapidly lose its magnetization on the opening of such circuit.

**Force, Contact** — — A difference of electrostatic potential, produced by the contact of dissimilar metals.

That a difference of potential is produced by the mere contact of dissimilar metals is now generally recognized. Such a force is generally called the true contact force. (See *Force, True Contact*.)

According to Lodge, a true contact force has no existence. There is no evidence, he thinks, of a peculiar electromotive force at the point of contact, but that the phenomena are due simply to the fact that the metals are immersed in air or oxygen, which is capable of combining with one of them, and that, therefore, the cause of the phenomena is the greater action, for instance, of the oxygen of the air on the zinc than on the copper.

g to this view, the voltaic effect is due to the difference of potential between the copper, but to the difference of the air or moisture.

**Force de Cheval or Cheval Vapeur.**—This term for horse-power.

Force de cheval is equal to 75 kilogramme-second, or 32,549 foot-pounds per

English horse-power is equal to 33,000 foot-pounds per minute. 1 force de cheval equals 1.01385 horse-power; 1 horse-power equals 1.01385 force de cheval.—(*Hering*.)

**Electric** — — The force developed by electricity.

Electricity is generally limited to the force of attraction or repulsion produced by an electrostatic charge.

**Electromotive** — — The force which causes electricity in motion, or tending to produce electricity in motion.

Force which moves or tends to move

Electricity is an unfortunate one. Strictly speaking, electromotive force is not a force at all: it is not a force in the Newtonian sense, and it is only that which acts on matter. The term electromotive force is generally written E. M. F.

The unit of electromotive force is the volt.

When electric induction takes place, there is a change in the distribution of the thing called electricity, whereby a movement occurs that separates positive and a negative charge. The force which produces this movement is called the electromotive force.

It is an unfortunate want of uniformity at the use of the term "electromotive force" by some, the electromotive force is something which causes the difference of potential; by others the electromotive force is something being produced by the difference of potential, and, by still others, electromotive force is the same as the entire electric moving cause by any source; while anything less than that produced by them potential difference.

Those who regard the electromotive force as the force which produces the potential difference call the electromotive force as acting within

the source and maintaining a potential difference at its terminals.

Silvanus P. Thompson uses the term electromotive force in his "Elementary Lessons in Electricity and Magnetism" as follows: "The term 'electromotive force' is employed to denote that which moves or tends to move electricity from one place to another. For brevity we sometimes write it E. M. F. In this particular case it is obviously the result of difference of potential and proportional to it; just as in water pipes, a difference in level produces a pressure, and the pressure produces a flow as soon as the tap is turned on, so difference of potential produces electromotive force, and electromotive force sets up a current as soon as a circuit is completed for the electricity to flow through."

Mascart and Joubert, in their work on "Electricity and Magnetism," Vol. I., say: "In all cases the difference of potential  $V_1 - V_2$ , may be considered as producing the motion of electrical masses; it is often called the electromotive force."

Maxwell, in his "Elementary Treatise on Electricity," speaking of the potential differences which may be shown to exist at the terminals of a Daniell voltaic cell when on open circuit, says: "This difference of potential is called the electromotive force of a Daniell cell."

Balfour Stewart, in his "Electricity and Magnetism," says: "This difference of electric level we shall call E, and, indeed, it is merely a manner of expressing the cause of electromotive force."

Prof. Fleming, in his "Short Lectures to Electrical Artisans," says: "The difference of electrical level or potential must be caused by some electromotive force acting in the conductor."

Prof. Anthony, in "A Review of Modern Electrical Theories," regards the potential difference as due to electromotive force. He says: "Difference of potential results from a changed electrical distribution, an electrical strain, and represents the tendency to return to the state of equilibrium. Electromotive force is the something from without that produced the electric strain."

Hering, in his "Principles of Dynamo-Electric Machines," says: "Difference of potential is, as the name implies, the difference of electrical potential between any two points of a circuit, and may, therefore, be applied to that at the poles of a machine, battery or lamp, or at the ends of leads, or, in general, to any two points in a circuit. The term 'electromotive force,' however,



applies only to the maximum difference of potential which exists in the circuit, or, in other words, the total generated difference of potential."

This last paragraph expresses the distinction between the two terms as ordinarily used in connection with dynamos and batteries.

**Force, Electromotive, Absolute Unit of** — — A unit of electromotive force expressed in absolute or C. G. S. units.

The one-hundred millionth part of a volt, since 1 volt equals  $10^8$  C. G. S. units of electromotive force. (See *Units, Practical*.)

**Force, Electromotive, Average or Mean** — — The sum of the values of a number of separate electromotive forces divided by their number.

The square root of the mean square of the electromotive force of an alternating or variable current.

When a wire in the armature of a dynamo-electric machine cuts the lines of magnetic force in the field of the machine, the electromotive force produced depends on the number of lines of force cut per second. This will vary for different positions of the coil. The mean value of the varying electromotive forces between the brushes is the average electromotive force.

**Force, Electromotive, Back** — — A term sometimes used for counter electromotive force.

Counter electromotive force is the preferable term. (See *Force, Electromotive, Counter*.)

**Force, Electromotive, Counter** — — An opposed or reverse electromotive force, which tends to cause a current in the opposite direction to that actually produced by the source.

In an electric motor, an electromotive force contrary to that produced by the current which drives the motor, and which is proportional to the velocity attained by the motor.

Counter electromotive force acts to diminish the current in the same manner as a resistance would, and is therefore sometimes called *spurious resistance* in order to distinguish it from an *ohmic* or *true resistance*.

Counter electromotive force is sometimes expressed in ohms, though it is not a *true ohmic resistance*. (See *Resistance, Spurious*.)

The counter electromotive force of a battery is due to the *polarization* of the electrodes. Since this force is due to the current it can never exceed such current or reverse it. It may, however, equal it and stop the flow. (See *Cell, Voltaic, Polarization*.)

In a *storage cell*, the charging current sets up an electromotive force counter to itself in a motor, is a true measure of the energy in the cell. Economy requires that the electromotive force of the charging current be as little as possible greater than that of the electromotive force of the cell it is charging.

In a voltaic arc a counter electromotive force is believed to be set up by polarization.

**Force, Electromotive, Counter Electromotive Discharge** — — Resistance to the passage of an electric discharge through a high vacuum, somewhat of the nature of the counter electromotive force.

The resistance to the passage of conduction charges, therefore, is due to the following:

- (1.) True ohmic resistance.
- (2.) Counter electromotive force.

**Force, Electromotive, Counter, Induction** — — The counter electromotive force produced by the mutual induction between the primary and secondary circuit and other.

**Force, Electromotive, Counter, Induction** — — That part of the electromotive force which is produced which tends to produce, at any change in the current strength.

**Force, Electromotive, Counter, Induction of the Primary** — — The counter electromotive force produced in the circuit of an induction coil by the variation of the electromotive force thereon of a simple periodic electromotive force.

The counter electromotive force produced in the primary circuit of an induction coil by the application of a simple periodic electromotive force to the primary circuit.

**Force, Electromotive, Counter, Induction of the Secondary** — — The counter electromotive force produced in the secondary circuit by the periodic variation of the electromotive force in the primary circuit.

**e, Electromotive, Direct** — — An electromotive force acting in the same direction as another electromotive force already existing.

**term direct electromotive force is employed in contradistinction to counter electromotive.** (See *Force, Electromotive, Counter.*)

**e, Electromotive, Effective** — — The difference between the direct and the counter electromotive force.

**e, Electromotive, Effective, of Secondary** — — The difference between the direct and the counter electromotive force in the secondary of an induction coil.

**e, Electromotive, Generated by Dynamo-Electric Machine, Method of Increasing** — — The electromotive force of a dynamo-electric machine may be increased in the following ways, viz:

By increasing its speed of rotation.

By increasing the strength of the magnetic field which the armature rotates.

By increasing the size of the field through which the armature passes in unit time, the inductance remaining the same.

By increasing the number of armature turns, i. e., by making successive parts of the armature pass simultaneously through the field.

**e, Electromotive, Impressed** — — An electromotive force acting on any circuit to produce a current therein.

**Impressed electromotive force** may be regarded as producing two parts, viz.: The effective electromotive force and the counter electromotive force.

**e, Electromotive, Inductive** — — Sometimes used in place of counter electromotive force of self-induction.

**e, Electromotive, Inverse** — — An electromotive force which acts in the opposite direction to another electromotive force already existing. (See *Force, Electromotive, Direct.*)

**e, Electromotive, Motor** — — A term proposed by F. J. Sprague for the counter electromotive force of an electric motor. (See *Force, Electromotive, Counter.*)

**term** was proposed by Sprague as expressing

the necessity for the existence of a counter electromotive force in an electric motor, in order to permit it to utilize the energy of the electric current which drives it.

**Force, Electromotive, of Induction** — — The electromotive force developed by any inductive action.

In a coil of wire undergoing induction, the value of the induced electromotive force does not depend in any manner on the nature of the material of which the coil is composed.

It has been shown:

(1.) That the electromotive force of induction is independent of the width, thickness or material of the wire windings. — (*Faraday.*)

(2.) That it is dependent on the form of the conductor, and the character of the change it experiences as regards the magnetic induction which takes place through it.

Since any increase in the strength of a current flowing through a coiled circuit, produces a counter electromotive force, which opposes the electromotive force producing the current, it is clear that the impressed electromotive force must do work against this counter electromotive force all the time the current strength is increasing.

The movement of a circuit of a given length through a given field with a given velocity produces the same electromotive force whether the circuit be formed of conducting material or non-conducting material, or consists of an electrolyte.

**Force, Electromotive, of Secondary or Storage Cell, Time-Fall of** — — A gradual decrease in the potential difference of a storage battery observed during the discharge of the same.

When a secondary or storage battery is first discharged, a slight decrease of its potential difference takes place and a potential difference of a slightly decreased value is maintained nearly constant during a protracted period of discharge.

**Force, Electromotive, of Secondary or Storage Cell, Time-Rise of** — — A gradual increase in the potential difference of a secondary or storage cell observed on beginning the discharge after a prolonged rest.

When a secondary or storage cell is discharged and then given a prolonged rest by opening its circuit, a gradual but decided rise in its potential difference is observed on again beginning its discharge.



applies only to the maximum difference of potential which exists in the circuit, or, in other words, the total generated difference of potential."

This last paragraph expresses the distinction between the two terms as ordinarily used in connection with dynamos and batteries.

#### **Force, Electromotive, Absolute Unit of**

—A unit of electromotive force expressed in absolute or C. G. S. units.

The one-hundred millionth part of a volt, since 1 volt equals  $10^8$  C. G. S. units of electromotive force. (See *Units, Practical*.)

#### **Force, Electromotive, Average or Mean**

—The sum of the values of a number of separate electromotive forces divided by their number.

The square root of the mean square of the electromotive force of an alternating or variable current.

When a wire in the armature of a dynamo-electric machine cuts the lines of magnetic force in the field of the machine, the electromotive force produced depends on the number of lines of force cut per second. This will vary for different positions of the coil. The mean value of the varying electromotive forces between the brushes is the average electromotive force.

#### **Force, Electromotive, Back**

—A term sometimes used for counter electromotive force.

Counter electromotive force is the preferable term. (See *Force, Electromotive, Counter*.)

#### **Force, Electromotive, Counter**

—An opposed or reverse electromotive force, which tends to cause a current in the opposite direction to that actually produced by the source.

In an electric motor, an electromotive force contrary to that produced by the current which drives the motor, and which is proportional to the velocity attained by the motor.

Counter electromotive force acts to diminish the current in the same manner as a resistance would, and is therefore sometimes called *spurious resistance* in order to distinguish it from an *ohmic* or *true resistance*.

Counter electromotive force is sometimes expressed in ohms, though it is not a *true ohmic resistance*. (See *Resistance, Spurious*.)

The counter electromotive force of a voltaic battery is due to the *polarization* of the cells. Since this force is due to the current in the cell, it can never exceed such current or reverse its direction. It may, however, equal it and thus stop its flow. (See *Cell, Voltaic, Polarization of*.)

In a *storage cell*, the charging current produces an electromotive force counter to itself, which, as in a motor, is a true measure of the energy stored in the cell. Economy requires that the electromotive force of the charging current should be as little as possible greater than that of the counter electromotive force of the cell it is charging.

In a voltaic arc a counter electromotive force is believed to be set up by polarization.

#### **Force, Electromotive, Counter, of Convective Discharge**

—Resistance to the passage of an electric discharge through a high vacuum, somewhat of the nature of a counter electromotive force.

The resistance to the passage of convective discharges, therefore, is due to the following causes:

- (1.) True ohmic resistance.
- (2.) Counter electromotive force.

#### **Force, Electromotive, Counter, of Mutual Induction**

—The counter electromotive force produced by the mutual induction of the primary and secondary circuits on each other.

#### **Force, Electromotive, Counter, of Self-Induction**

—That part of the impressed electromotive force which is producing, or which tends to produce, at any instant a change in the current strength.

#### **Force, Electromotive, Counter, of Self-Induction of the Primary**

—A counter electromotive force produced in the primary circuit of an induction coil by the action thereon of a simple periodic electromotive force.

The counter electromotive force produced in the primary circuit of an induction coil by the application of a simple periodic impressed electromotive force to the primary circuit.

#### **Force, Electromotive, Counter, of Self-Induction of the Secondary**

—A counter electromotive force produced in the secondary by the periodic variations in the effective electromotive force in the secondary.

**Electromotive, Direct** — An electromotive force acting in the same direction as another electromotive force already

term direct electromotive force is employed as a contradistinction to counter electromotive. (See *Force, Electromotive, Counter*.)

**Electromotive, Effective** — The difference between the direct and the counter electromotive force.

**Electromotive, Effective, of Secondary** — The difference between the direct and the counter electromotive force in the secondary of an induction coil.

**Electromotive, Generated by Dynamic Electric Machine, Method of Increasing** — The electromotive force of a dynamic electric machine may be increased in the following ways, viz:

1. By increasing its speed of rotation.

2. By increasing the strength of the magnetic field in which the armature rotates.

3. By increasing the size of the field through which the armature passes in unit time, the intensity remaining the same.

4. By increasing the number of armature turns, i. e., by making successive parts of the armature pass simultaneously through the field.

**Electromotive, Impressed** — An electromotive force acting on any circuit to produce a current therein.

An impressed electromotive force may be represented by two parts, viz.: The effective electromotive force and the counter electromotive

**Electromotive, Inductive** — Sometimes used in place of counter electromotive force of self-induction.

**Electromotive, Inverse** — An electromotive force which acts in the opposition to another electromotive force already existing. (See *Force, Electromotive, Counter*.)

**Electromotive, Motor** — A term proposed by F. J. Sprague for the counter electromotive force of an electric motor. (See *Force, Electromotive, Counter*.)

ing the necessity for the existence of a counter electromotive force in an electric motor, in order to permit it to utilize the energy of the electric current which drives it.

**Force, Electromotive, of Induction** — The electromotive force developed by any inductive action.

In a coil of wire undergoing induction, the value of the induced electromotive force does not depend in any manner on the nature of the material of which the coil is composed.

It has been shown:

(1.) That the electromotive force of induction is independent of the width, thickness or material of the wire windings. — (*Faraday*.)

(2.) That it is dependent on the form of the conductor, and the character of the change it experiences as regards the magnetic induction which takes place through it.

Since any increase in the strength of a current flowing through a coiled circuit, produces a counter electromotive force, which opposes the electromotive force producing the current, it is clear that the impressed electromotive force must do work against this counter electromotive force all the time the current strength is increasing.

The movement of a circuit of a given length through a given field with a given velocity produces the same electromotive force whether the circuit be formed of conducting material or non-conducting material, or consists of an electrolyte.

**Force, Electromotive, of Secondary or Storage Cell, Time-Fall of** — A gradual decrease in the potential difference of a storage battery observed during the discharge of the same.

When a secondary or storage battery is first discharged, a slight decrease of its potential difference takes place and a potential difference of a slightly decreased value is maintained nearly constant during a protracted period of discharge.

**Force, Electromotive, of Secondary or Storage Cell, Time-Rise of** — A gradual increase in the potential difference of a secondary or storage cell observed on beginning the discharge after a prolonged rest.

When a secondary or storage cell is discharged and then given a prolonged rest by opening its circuit, a gradual but decided rise in its potential difference is observed on again beginning its discharge.



**Force, Electromotive, Photo** — — An electromotive force produced by the action of light on selenium. (See *Cell, Selenium*.)

**Force, Electromotive, Reacting Inductive, of the Primary Circuit** — — The back or counter electromotive force produced in the primary circuit by the current set up by induction in the secondary.

**Force, Electromotive, Secondary Impressed** — — An electromotive force produced in the secondary coil or circuit by a periodic electromotive force impressed on the primary.

**Force, Electromotive, Simple-Periodic** — — An electromotive force which varies in such manner as to produce a simple periodic current, or an electromotive force the variations of which can be correctly represented by a simple-periodic curve.

**Force, Electromotive, Thermo** — — An electromotive force, or difference of potential, produced by differences of temperature acting at thermo-electric junctions.

**Force, Electromotive, Transverse** — — An electromotive force excited by a magnetic field in a substance in which electric displacement is occurring.

It is to a transverse electromotive force that the Hall effect is due. (See *Effect, Hall*.)

**Force, Electromotive, Zigzag** — — An electromotive force, the curve of which would have the general form of a zigzag.

**Force, Electrostatic** — — The force producing the attractions or repulsions of charged bodies.

**Force, Electrostatic, Lines of** — — Lines of force produced in the neighborhood of a charged body by the presence of the charge.

Lines extending in the direction in which the force of electrostatic attraction or repulsion acts.

An insulated charged conductor produces around it an electrostatic field, in a manner somewhat similar to the magnetic field produced by a magnet or an electric current. (See *Field, Electrostatic*.)

Lines of electrostatic force pass through dielectrics. Whether the force acts to produce electrostatic induction, by means of a polarization of the dielectric, or by means of a tension set up in the substance of the dielectric, is not known.

**Force, Electrostatic, Lines of, Assumed Flow of** — — A mathematical conception in which the phenomena of electricity are compared with the similar phenomena of heat.

In heat no flow of heat occurs over isothermal surfaces, or surfaces at the same temperature. Between different isothermal surfaces, the flow will vary with the power of heat conduction. In electricity, no flow occurs over equipotential surfaces. Specific inductive capacity corresponds to heat conductivity, and the lines of force to the lines of heat conduction. (See *Capacity, Specific Inductive*.)

**Force, Lines of, Contraction of** — — A decrease that occurs in the length of the circular lines of force that surround a circuit through which an electric current is passing, while the current is decreasing in intensity or strength.

The contraction or decrease in the average diameter of the circular lines of force of an electric circuit is similar to the expansion or growth of lines of force, excepting that the movement is one of decrease in diameter, and takes place in the opposite direction, *i. e.*, towards the circuit, instead of away from it. (See *Force, Lines of, Growth or Expansion of*.)

**Force, Lines of, Cutting** — — Passing a conductor through lines of magnetic force, so as to cut or intersect them.

The cutting of lines of magnetic force produces differences of potential. This is true whether the conductor moves through a stationary field or whether the field itself moves through the stationary conductor, so that the lines of force and the conductor cut one another. This cutting is mutual. Each line of force cuts and is cut by the circuit. Since all lines of force form closed-circuits or paths, the cutting of the circuit by the lines of force, or the reverse, forms a link or chain, and the cutting takes place at the moment of linking or unlinking, *i. e.*, of cutting.

**Force, Lines of, Diffusion of** — — The deflection of the lines of magnetic force from

ordinary position, between the poles produce them.

**Force, Lines of, Direction of** — The direction in which it is assumed that the lines of magnetic force pass.

It is generally agreed to consider the lines of magnetic force as coming out of the north pole of a magnet and passing into its south pole, as in Fig. 257.



Fig. 257. Direction of Lines of Force.

It is sometimes called the positive direction of lines of force and agrees in general with the direction in which the electric current is assumed to flow, which is from the positive to the negative. That is to say, the lines of magnetic force are assumed to flow or pass out of the north pole and into the south pole of a magnet. Of course there is no direct evidence of any flow, or of any particular direction characterizing the lines of force. (See *Field, Magnetic*.)

The lines of electrostatic force are assumed to pass out of a positively charged surface and into a negatively charged surface.

**Force, Lines of, Growth or Expansion of** — The increase in the length of path in which lines of force pass, consequent upon an increase in the strength of the magnetization of a magnet, or on an increase in the length of the magnetizing current.

The circular lines of force which surround a conductor through which a current is flowing, may be regarded as starting from the surface of the conductor and growing in size as they spread out, at the same time new lines of force being formed in their places. This action continues while the length of the current is increasing, somewhat like the series of concentric waves which are formed on the surface of water, when a stone is dropped into it.

Their growth or expansion outwards from a conductor, if the lines of force cut or pass near neighboring conductors, they produce

therein differences of electric potential, capable, when being connected by a conductor, of producing electric currents.

**Force, Lines of, Radiation of** — The passing of lines of force out of the north pole of a magnet or solenoid.

In gross matter all lines of magnetic induction either pass through magnetized iron, or other paramagnetic substance which surrounds an electric circuit. Since lines of force pass through a vacuum, the ether which occupies such a space must also be regarded as permitting the passage of lines of force.

**Force, Loops of** — A term sometimes employed in the sense of lines of force. (See *Force, Magnetic, Lines of*.)

The term "Lines of Force" is generally adopted in place of Faraday's term "Loops of Force."

**Force, Magnetic** — The force which causes the attractions or repulsions of magnetic poles.

**Force, Magnetic, Line of** — Arbitrarily a single line of magnetic force.

Practically the lines of magnetic force which pass through a unit area of cross-section of a magnetic field of unit strength.

**Force, Magnetic, Lines of** — Lines extending in the direction in which the magnetic force acts.

Lines extending in the direction in which the force of magnetic attraction or repulsion acts. (See *Field, Magnetic*.)

Faraday regarded the lines of magnetic force as possessing tension along one direction. Lines of force act as if they were stretched elastic threads, possessed of the property of lengthening or shortening, and of repelling one another.

**Force, Magnetic, Lines of, Conducting Power for** — A term employed by Faraday for magnetic permeability. (See *Permeability, Magnetic*.)

**Force, Magnetic, Lines of, Positive Direction of** — The direction in which a free north-seeking pole would move along the lines of force when placed in a magnetic field.



**Force, Magnetic, Telluric** — —The earth's magnetic force.

**Force, Magneto-Motive** — —The force that moves or drives the lines of magnetic force through a magnetic circuit against the magnetic resistance.

A Committee of the American Institute of Electrical Engineers on "Units and Standards" proposed the following definition.

The magneto-motive force in a magnetic circuit is  $4\pi$  multiplied by the flow of the current linked with that circuit. The magneto-motive force between two points connected by a line is the line integral of the magnetic force along that line. Difference of magnetic potential constitutes magneto-motive force."

The same committee gave the electro-magnetic dimensional formula  $L^{\frac{1}{2}} M^{\frac{1}{2}} T^{-1}$ .

The flow or flux of lines of magnetic force in any magnetic circuit is proportional to the magneto-motive force divided by the magnetic resistance; or, expressing the law in the form of Ohm's law for current:

$$\text{Magnetic Flux} = \frac{\text{Magneto-Motive Force}}{\text{Reluctance.}}$$

In this formula the word reluctance is used in place of magnetic resistance. In the case of an electro-magnet, the magneto-motive force is proportional to the strength of the current which flows and the number of times it circulates; or, more simply, is proportional to the number of ampere turns. (See *Turns, Ampère.*)

**Force, Magneto-Motive, Absolute Unit of** — — $4\pi$  multiplied by unit current of one turn.

**Force, Magneto-Motive, Practical Unit of** — —A value of the magneto-motive force equal to  $4\pi$  multiplied by the ampères of one turn, or to  $\frac{1}{10}$  of the absolute unit.

**Force, Motor Electromotive** — —A term proposed by F. J. Sprague for the counter electromotive force of a motor.


During the rotation of the armature of an electric motor in its field, a counter electromotive force is produced in its coils, which acts as a spurious resistance and opposes the flow or passage of the driving current through its coils. As the speed of the motor increases, this counter electromotive force increases and the strength of the driving current decreases until a certain

maximum speed is reached, when, theoretically, no current passes.

When a load is placed on the electric motor, the speed, and consequently the counter electromotive force, is decreased and more driving current is permitted to pass. It was this consideration, viz.: that the load automatically regulates the current required to drive the motor, that led to the name motor-electromotive force. (See *Force, Electromotive, Counter.*)

**Force, Resolution of** — —The separation of a single force, acting with a given intensity in a given direction, into a number of separate forces acting in some other direction.

Thus the force D B, Fig. 258, acting with the intensity and in the direction shown, may be resolved into two component forces, D E and D C, acting in the directions and having the intensities shown. The single force D B, has been resolved into two separate forces D E and C D.



**Force, True Contact** — —A force or effect entirely distinct from the voltaic effect, which exists at the points of contact between two dissimilar metals.

The truth of the existence of a true contact force at the junction of dissimilar metals is seen by the reversible heat effects observed, when a current of electricity is passed across a junction of two dissimilar metals. When the current is passed in one direction, an increase of temperature is produced, but when passed in the opposite direction, a decrease of temperature. (See *Effect, Peltier.*)

Hence there would appear to be a force existing at the junction, helping the electricity along in one direction, but opposing it in the opposite direction. In one direction the electricity does work and consumes its own energy in so doing. In the other direction it opposes the passage of the current, and there results a generation of heat.

**Force, Tubes of** — —Tubes bounded by lines of electrostatic or magnetic force.

Lines of force never intersect one another. Hence a tube of force may be regarded as con-

the same number of lines of force at any cross-section.

of electrostatic force always terminate equal quantities of positive and negative charge respectively. They terminate when met a conducting surface.

term tubes of force is somewhat misleading such so-called tubes are in general other than tubes.

**e, Twisting** — — A term sometimes for torque. (See *Torque*.)

**e, Unit of** — — A force which, acting on one second on a mass of one gram, will give it a velocity of one centimeter per second.

a unit of force is called a dyne. (See *Dyne*.)

**es, Composition of** — — Finding the direction and intensity of a single force which represents the total effect of two or more forces acting simultaneously on a body. (*Component*.)

**es, Parallelogram of** — — A parallelogram constructed about the two lines that represent the direction and intensity with which two forces are simultaneously acting together, in order to determine the direction and intensity of the resultant force with which they move.

two forces A C and A B, Fig. 259, simultaneously act in the directions of the arrows on a point A, the direction and intensity of the resultant A D, is determined by drawing C D




Fig. 259. Parallelogram of Forces.

parallel respectively to A B and A C. The diagonal A D, of the parallelogram A C D B, thus produced, gives this resultant. (See *Composition*.)

**, Trolley** — — The mechanism mechanically connects the trolley wheel with the trolley pole. (See *Trolley*.)

**ed Circuits**.—(See *Circuits, Forked*.)

**ed Lightning**.—(See *Lightning*.)

**al Inductance of Circuit**.—(See *Inductance, Formal, of Circuit*.)

**Forming Plates of Secondary or Storage Cells**.—(See *Plates of Secondary or Storage Cells, Forming of*.)

**Formulae**.—Mathematical expressions for some general rule, law, or principle.

Formulae are of great assistance in science in expressing the relations which exist between certain forces or values, and the effects that result from their operations, since they enable us to express these relations in clear and concise forms.

Thus in the formulation of Ohm's law:

$$C = \frac{E}{R}$$

we see that the continuous current C, in any circuit, is equal to the electromotive force E, divided by the resistance R. Again, we see that the current is directly proportional to the electromotive force, and inversely proportional to the resistance.

Formulae are usually written in the form of an equation and therefore contain the sign of equality or =.

**Formulae, Photometric** — — (See *Photometric Formulae*.)

**Foucault Currents**.—(See *Currents, Foucault*.)

**Four-Way Splice Box**.—(See *Box, Splice, Four-Way*.)

**Frames, Sectional Plating** — — Frames employed for so holding the objects to be plated that they shall receive a greater depth of deposit on certain portions of their surface than elsewhere.

Sectional printing frames depend for their action on the fact that the portions receiving the greater depth of deposit are nearer one of the electrodes than the rest of the surface.

**Franklinic Electricity**.—(See *Electricity, Franklinic*.)

**Franklinization**.—Electrization by means of a frictional or influence machine as distinguished from faradization or electrization by means of an induction coil.

This term is used only in medical electricity.

**Free Charge**.—(See *Charge, Free*.)

**Free Magnetic Pole**.—(See *Pole, Magnetic, Free*.)

**Frequency of Alternations**.—(See *Alternations, Frequency of*.)



**Friction Brake.**—(See *Brake, Friction.*)

**Frictional Electrical Machine.**—(See *Machine Frictional Electric.*)

**Frictional Electricity.**—(See *Electricity, Frictional.*)

**Frog, Galvanoscopic** — — The hind legs of a recently killed frog employed as an electroscope or galvanoscope, by sending an electric current from the nerves to the muscles. (See *Electroscope.*)

In 1786, Luigi Galvani made the observation that when the legs of a recently killed frog were touched by a metallic conductor connecting the nerves with the muscles, the legs were convulsed as though alive. He repeated this experiment and found the movements were more pronounced when two dissimilar metals, such as iron and copper, were employed in the manner shown in Fig. 260.

The classic experiment created intense excitement in the scientific world, and Galvani at first believed that he had discovered the true vital fluid of the animal, but afterwards recognized it as electricity, which he believed to be obtained from the body of the animal. Volta claimed that the movements were due to electricity caused by the contact of dissimilar metals, and thus produced his famous voltaic pile. (See *Pile, Voltaic.*)

**Frog, Trolley** — — The name given to the device employed in fastening or holding together the trolley wires at any point where the trolley wire branches, and properly guiding the trolley wheel along the trolley wire on the movement of the car over the track.

**Frog, Trolley, Right-Hand** — — A trolley frog used at the point where the branch trolley wire leaves the main line on the right of the direction in which the car is moving.

**Frog Trolley, Standard** — — The trolley frog used at the point where two branch lines make equally converging angles to the main line.

**Frog, Trolley, Three-Way** — — A trol-

ley frog used where the line branches in three directions.

**Frying of Arc.**—(See *Arc, Frying of.*)

**Fulgurite.**—A tube of vitrified sand, believed to be formed by a bolt of lightning.

The fulgurite consists of an irregular shaped tube of glass formed of sand which has been melted by the electric discharge.

**Full Contact.**—(See *Contact, Metallic.*)

**Fuller's Mercury Bichromate Voltaic Cell.**—(See *Cell, Voltaic, Fuller's Mercury Bichromate.*)

**Fulminate.**—The name of a class of highly explosive compounds.

Fulminating gold, silver and mercury are highly explosive substances. Fulminates are employed in percussion caps.

**Function, Trigonometrical** — — Certain quantities, the values of which are dependent on the length of the arcs subtended by angles, which are taken for the measures of the arcs or angles instead of the arcs themselves.

The trigonometrical functions are the sine, the co-sine, the tangent, the co-tangent, the secant and the co-secant.

These are generally abbreviated thus, viz.: sin., cos., tan., cot., sec. and co-sec.

The sine of an angle or arc is the perpendicular distance from one extremity of the arc to the diameter passing through the other extremity.

Thus in Fig. 261 B D, is the sine of the angle B O A, or of the arc B A.

The co-sine of an angle or arc is that part of the diameter which lies between the foot of the sine and the centre. Thus, D O, is the co-sine of the angle B O A, or of the arc B A.

The co-sine of an arc is equal to the sine of its complement. Thus E O B, or B E, the complement of B A, has for its sine I B, which is equal to O D. (See *Angle, Complement of.*)

If the arc is greater than a right angle, or 90



Fig. 260. Galvanoscopic Frog.




Fig. 261. Trigonometrical Functions.

es, such, for instance, as the angle  $TOG$ , arc  $BEFG$ ,  $BD$ , is its sine. This is also sine of  $BOA$ , or  $BA$ , which is the supplement of  $TOG$ , or  $BEFG$ . Hence the sine of  $c$  is equal to the sine of its supplement.

The same is true of the co-sine.

The tangent of an angle or arc is a straight line touching the arc at one extremity, drawn perpendicular to the diameter at that end of the arc and limited by a straight line connecting the centre of the circle and the other end of the arc.  $CA$ , is the tangent of the angle  $BOA$ , or arc  $BA$ .

The co-tangent of an angle or arc is equal to the tangent of its complement. Thus  $ET$ , is the co-tangent of the angle  $BOA$ , or the arc  $BA$ .

The tangent of an angle or arc is equal to the tangent of its supplement. Thus  $AC$ , is the tangent of the angle  $BOA$ , or the arc  $BA$ . It is equal to the tangent of the angle  $BOG$ , or arc  $BEFG$ , the corresponding supplement of angle  $BOA$ , or the arc  $BA$ .

The secant of an angle or arc is the straight line drawn from the centre of the circle through the extremity of the arc and limited by the tangent passing through the other extremity. Thus  $OA$  is the secant of the angle  $BOA$ , or of the arc  $BA$ .

The co-secant of an angle or arc is equal to the secant of its supplement.

The co-secant of an angle or arc is equal to the secant of its complement.

Thus  $OT$ , is the co-secant of the angle  $BOA$ , or the arc  $BA$ .

It will be observed that the co-sine, the co-cosine and the co-secant are respectively the tangent and secant of the complement of the angle, or in other words, the complement-sine, complement-tangent and the complement-secant.

**Fundamental Units.**—(See *Units, Fundamental*.)

**Furnace, Electric** — —A furnace in which heat generated electrically is employed for the purpose of effecting difficult fusions or the extraction of metals from their ores, or other metallurgical operations.

In electric furnaces, the heat is derived either from electric incandescence or from the voltaic arc. The latter form is frequently adopted.

The substance to be treated is exposed directly

to the voltaic arc. In some forms of furnace the crushed ore is permitted to fall through the arc, and the melted matter received in a suitable vessel in which the separation of the substances so formed is afterwards completed. In other forms of furnace, the ore is placed between two electrodes of carbon or other refractory substance, between which a powerful current is passed. In the Cowles furnace, when aluminium is reduced, molten copper forms an alloy with the aluminium as soon as separated.

Very numerous applications of electricity to furnace operations have been made.

**Fuse Block.**—(See *Block, Fuse*.)

**Fuse Board.**—(See *Board, Fuse*.)

**Fuse Box.**—(See *Box, Fuse*.)

**Fuse, Branch** — —A safety fuse or strip placed in a branch circuit. (See *Fuse, Safety*.)

**Fuse, Converter** — —A safety fuse connected with the circuit of a converter or transformer.

**Fuse, Electric** — —A device for electrically igniting a charge of powder.

Electric fuses are employed both in blasting operations and for firing cannon.

Electric fuses are operated either by means of the direct spark, or by the incandescence of a thin wire placed in the circuit. They are therefore either *high tension*, or *low tension fuses*.

The advantages of an electric fuse consist in the fact that its use permits the simultaneous firing of a number of charges in a mining operation, thus obtaining a greater effect from the explosion. A fulminate of mercury is frequently employed in connection with some forms of electric fuses.

**Fuse, Electric, High-Tension** — —A fuse that is ignited by the heating power of an electric spark.

High-tension fuses, therefore, require a high electromotive force. This is obtained either by means of induction coils or by some form of electrostatic induction machine.

**Fuse, Electric, Low-Tension** — —A fuse that is ignited by heating a wire to incandescence by the passage through it of an electric current.

**Fuse, Electric, Stratham's** — —A form



of fuse, in which the ignition is effected by the electric spark, is shown in Fig. 262.

The spark passes through a break A B, in the insulated leads D. Since gunpowder is not readily ignited by an electric spark, a peculiar priming material is employed at A B, in the place of ordinary powder.

**Fuse Links.** — (See *Links, Fuse*.)

**Fuse, Magazine** — —A safety fuse so arranged as to readily permit the replacement of the fuse when burned out.

A spool contains a coil of fuse wire. In order to release the burned-out fuse, a wedge-shaped device is provided to open the clamps that hold the fuse strip to release the portions of burned-out fuse left, and connection with the fuse strip is severed while the attachment of the new strip is being made.

**Fuse, Main** — —A safety fuse or strip placed in a main circuit. (See *Fuse, Safety*.)

**Fuse, Platinum** — —A thin platinum wire rendered incandescent by the passage of an electric current and employed for the ignition of a charge of powder. (See *Fuse, Electric*.)

**Fuse, Safety** — —A strip, plate or bar of lead, or some readily fusible alloy, that automatically breaks the circuit in which it is placed on the passage of a current of suf-



Fig. 262.  
*Stratham's Fuse.*

ficient power to fuse such strip, plate or bar, when such current would endanger the safety of other parts of the circuit.

Safety fuses are often called safety strips or safety plugs.

Safety fuses are made of alloys of lead, and are placed in boxes lined with non-combustible material in order to prevent fires from the molten metal.

Fig. 263 shows a fusible strip F, connected with leads L, L. Safety fuses are placed on all branch circuits, and are made of sizes proportionate to the number of lamps they guard.



Fig. 263. *Safety Fuse.*

Since incandescent lamps are generally placed in the circuit in multiple-arc, or in multiple-series, one or more of the circuits can be opened by the fusion of the plug without interfering with the continuity of the rest of the circuits. In series circuits, however, such as arc-light circuits, when a lamp is cut out, a short circuit or path around it must be provided in order to avoid the extinguishing of the rest of the lights.

**Fuse Wire.**—(See *Wire, Fuse*.)

**Fusible Plug.**—A term commonly applied to a safety plug. (See *Fuse, Safety*.)

## G

**Gains.**—The spaces cut in the faces of telegraph poles for the support or placing of the cross arms.

**Galvanic Battery.**—(See *Battery, Galvanic*.)

**Galvanic Cell.**—(See *Cell, Voltaic*.)

**Galvanic Circle.**—(See *Circle, Galvanic*.)

**Galvanic Circuit.**—(See *Circuit, Galvanic*.)

**Galvanic Dosage.**—(See *Dosage, Galvanic*.)

**Galvanic Electricity.**—(See *Electricity, Galvanic*.)

**Galvanic Excitability of Nerve or Muscular Fibre.**—(See *Excitability, Electric, of Nerve or Muscular Fibre*.)

**Galvanic Irritability.**—(See *Irritability, Galvanic*.)

**Galvanic Multiplier.**—(See *Multiplier, Galvanic*.)

**Galvanic Polarization.**—(See *Polarization, Galvanic*.)

**Galvanic Taste.**—(See *Taste, Galvanic*.)

**Galvanism.**—A term sometimes employed to express the effects produced by voltaic electricity.

**Galvanization, Central** — —A variety of central galvanization in which the cathode is placed on the epigastrium and the anode is placed over the body.

**Galvanization, Electro-Metallurgical** — —The process of covering any conducting surface with a metallic coating by electrolytic deposition, such, for example, as the copper coating deposited on the carbon electrodes used in systems of arc lighting.

This term is borrowed from the French, in which it has the above signification. It is preferred by the term electro-plating. (See *Electroplating, Electro*.)

This term galvanization is never correctly applied to the process for covering iron with zinc or other metal by dipping the same in a bath of solution.

**Galvanization, Electro-Therapeutical** — —In electro-therapeutics, the effects produced on nervous or muscular tissue by the passage of a voltaic current.

**Galvanization, General** — —A method of applying a current therapeutically by the use of electrodes of sufficient size to direct the current through practically the entire body.

**Galvanization, Labile** — —A term employed in electro-therapeutics, in contradistinction to stabile galvanization, to designate a method of applying the current by keeping one electrode at rest in firm contact with a part of the body, and connecting the other electrode to a sponge which is moved over various parts of the body that are to be treated.

**Galvanization, Local** — —The application of galvanization to parts or organs of the body in contradistinction to general galvanization.

**Galvanization, Stabile** — —A term employed in electro-therapeutics in which the current is caused to pass continuously and steadily through the portions of the body undergoing galvanization.

In stabile galvanization, the current is applied to and removed from the body gradually, in order to avoid shocks at the beginning and end of the application.

**Galvanized Iron.**—(See *Iron, Galvanized*.)

**Galvano.**—A word sometimes used in France in place of the word *electro*, to signify an article reproduced in copper by electro-metallurgy, especially an electrotpe or woodcut.

**Galvano-Caustic.**—(See *Caustic, Galvano*.)

**Galvano-Cautery.**—(See *Cautery, Galvano*.)

**Galvano-Cautery, Chemical** — —A term sometimes applied to electro puncture or the application of electrolysis to the treatment of diseased growths. (See *Cautery, Galvano, Electric, Puncture, Electro*.)

The term chemical galvano-cautery would appear to be poorly chosen, as it would imply the existence of a cautery action, which in point of fact does not exist.

**Galvano-Faradization.**—In electro-therapeutics, the simultaneous excitation of a nerve or muscle by both a voltaic and a faradic current.

**Galvano-Magnet.**—A term sometimes used for electro-magnetic.

Electro-magnetic is by far the preferable term, and is almost universally employed in the United States.

**Galvanometer.**—An apparatus for measuring the strength of an electric current by the deflection of a magnetic needle.

The galvanometer depends for its operation on the fact that a conductor, through which an electric current is flowing, will deflect a magnetic needle placed near it. This deflection is due to the magnetic field caused by the current. (See *Field, Magnetic, of an Electric Current*.)

This action of the current was first discovered by Oersted. A wire conveying a current in the



direction shown by the straight arrow, Fig. 264, or from + to —, will deflect a magnetic needle in the direction shown by the curved arrows.

The following rules show the direction of the



Fig. 264. Oersted's Experiment.

deflection of a magnetic pole by an electrical current:

(1.) Place the right hand on the conductor through which the current is flowing, with the palm facing the north pole, and with the fingers pointing in the direction of the current. The thumb will indicate the direction in which the north pole tends to move.

(2.) Suppose an ordinary corkscrew so placed along the conductor, through which a current of electricity is passing, that when twisted, it will move in the direction of the current. The handle will then turn in the direction in which the north pole of the magnet tends to move.

(3.) Imagine one swimming along the conductor in the direction of the current and facing the magnet. The north pole will tend to move towards the left hand of the swimmer.

Prof. Forbes has shown that the direction of the deflection of a magnet by a current is such

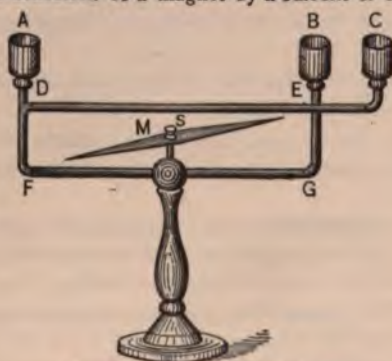


Fig. 265. Ampère's Apparatus.

that if the magnet were flexible, it would wrap itself round the current.

If the wire be bent in the form of a hollow rectangle, Fig. 265, and the needle, M,

be placed inside the circuit, the upper branches of the current will deflect the needle in the same direction, and the effect of the deflection will thus be multiplied. Mercury cups are provided at A, B and C, for a ready change of direction of the current. (See *Needle*.)

This principle of the multiplication of the deflecting power of a current was first applied by Schweigger, who used a large number of turns of insulated wire for the purpose of obtaining a greater deflection of the needle, such a device a multiplier. In extensive galvanometers, very many turns of wire are employed, in some cases amounting to thousands. Such galvanometers are of high resistance. Others, of low resistance, consist of a single turn of wire and are used for the direct measurement of large currents.

A Schweigger's multiplier or coil, consisting of many turns of insulated wire, is shown in Fig. 266. The action of such a coil on the needle is comparatively great, even when the current




Fig. 266. Schweigger's Multiplier.

In the case of any galvanometer, when a current is passing, the needle, when at rest, generally occupies a position parallel to the plane of the coil. On the passage of the current, the needle tends to place itself in a position perpendicular to the direction of the current. The length of the conducting wire in the coil, and the strength of the current passing is determined by observing the amount of this deflection, measured in degrees on a graduated circle, in which the needle moves.

The needle is deflected by the current, either in the earth's magnetic field or in a field obtained from a permanent electro magnet. In the first case, when used to measure a current, the plane of the coil must coincide with the plane of the magnetic meridian. In the other case,

ment may be used in any position in which the needle is free to move.

Galvanometers assume a variety of forms according either to the purposes for which they are employed, or to the manner in which their deflections are valued.

**Galvanometer, Absolute** — — A galvanometer whose constant can be calculated with an absolute calibration. (See *Calibration, Absolute*.)

Such a galvanometer is called absolute because if the dimensions of its coil and needle are known, the current can be determined directly from the observed deflection of the needle.

**Galvanometer, Aperiodic** — — A galvanometer the needle of which comes to its position without any oscillation.

A dead-beat galvanometer. (See *Galvanometer, Dead-Beat*.)

**Galvanometer, Astatic** — — A galvanometer, the needle of which is astatic. (See *Needle, Astatic*.)

Nobili's astatic galvanometer is shown in Fig. 267. The astatic needle, suspended by a fibre *b*, has its lower needle placed inside a coil, *a*, consisting of many turns of insulated wire, its upper needle moving over the graduated dial. The current to be measured is led into and from the coil at the binding posts, *x* and *y*.



Fig. 267. Astatic Galvanometer.

In this instrument, if small deflections only are employed, the deflections are sensibly proportional to the strength of the deflecting currents.

**Galvanometer, Ballistic** — — A galvanometer designed to measure the strength of currents that last but for a moment, such, for example, as the current caused by the discharge of a condenser.

The quantity of electricity passing in any circuit is equal to the current multiplied by the time. Since the current caused by the discharge of a condenser lasts but for a small time, during which it passes from zero to a maximum and back again to zero, the magnetic needle in a ballistic galvanometer takes the form of a ballistic pendulum, *i. e.*, it is given such a mass, and acquires such a slow motion, that its change of position does not

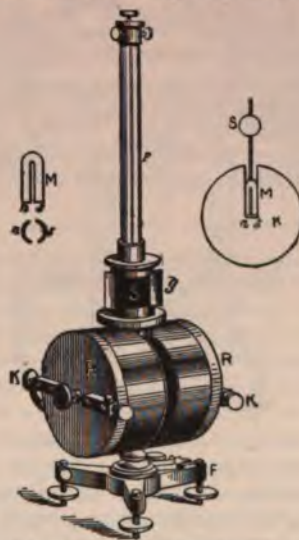


Fig. 268. Ballistic Galvanometer.

practically begin until the impulses have ceased to act.

In the ballistic galvanometer of Siemens and Halske, the coils *R, R*, Fig. 268, have a bell-shaped magnet, *M*, suspended inside them by means of an aluminium wire. The magnet is provided with a mirror *S*, for measuring the deflections. The bell-shaped magnet is shown in elevation at *M*, and in plane at *n, s*.

In using the ballistic galvanometer, it is necessary to see that the needle is absolutely at rest before the charge is sent through the coils.

A form of ballistic galvanometer by Nalder is shown in Fig. 269.

The ordinary form of compensating magnet is, in this galvanometer, replaced by the small magnet *A*, capable of rotation in a horizontal plane, but incapable of being raised or lowered, as is usual in such magnets. This form of compensating magnet possesses the advantage of being able to alter the direction of the field on the needle system,



without considerably altering its intensity. When the galvanometer is for ready use the magnet A, is turned until the needle is brought to zero. The



Fig. 269. Nalder's Galvanometer.

combined field of earth and magnet A, are then brought to the degree of sensitiveness required




Fig. 270. Nalder's Galvanometer.

by rotating magnet B, on its shaft, or altering its distance from the needle. In order to insure ease in replacing the fibre, the front coil is hinged as shown. The fibre D, is supported on E, one end of which it is free to turn, so as to permit of the removal of torsion; D, being twisted can be raised or lowered at E. The needle system with heavy bell-shaped magnet is shown in Fig. 270.

**Galvanometer, Combined Tangent and Sine** — — A galvanometer furnished with two magnetic needles of different lengths. The small needle is used for tangent measurements, and the long needle for sine measurements.

**Galvanometer Constant.**—(See *Constant, Galvanometer*.)

**Galvanometer, Dead-Beat** — — A galvanometer, the needle of which comes quickly to rest, instead of swinging repeatedly to-and-fro. (See *Damping*.)

**Galvanometer, Deprez-D'Arsonval** — — A form of dead-beat galvanometer.

The movable part of the Deprez-D'Arsonval galvanometer consists of a light rectangular coil

C, Fig. 271, of many turns of wire, supported by two silver wires H J and D E, between the poles of a strong permanent horseshoe magnet A A. The position of the coil may be altered as to height by screws at H and E. The supporting wires, prevent by their torsion the swinging of the coil, as does also the cylinder of soft iron B, placed inside the coil, and supported independently of it. The movements of the coil are observed by means of a spot of light reflected from a mirror J, attached to the wire H J.



Fig. 271. Deprez-D'Arsonval Galvanometer.

**Galvanometer, Detector** — — A form of galvanometer employed for rough testing work.

A form of detector galvanometer is shown in Fig. 272.

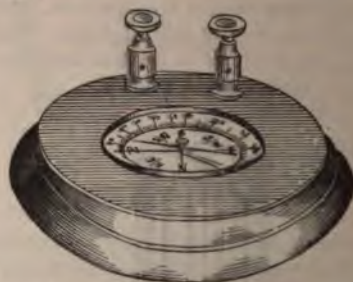


Fig. 272. Detector Galvanometer.

**Galvanometer, Differential** — — A galvanometer containing two coils so wound as to tend to deflect the needle in opposite directions.

The needle of a differential galvanometer shows no deflection when two equal currents are sent through the coils in opposite directions, since, under these conditions, each coil neutralizes the other's effects. Such instruments may be used in comparing resistances. The Wheatstone Bridge, however, in most cases, affords a preferable method for such purposes. (See *Bridge Electric*.)

A form of differential galvanometer is shown in Fig. 273.

Sometimes the current is so sent through the two coils, that each coil deflects the needle in the same direction. In this case the instrument is no longer differential in action.

If the magnetic needle, in such cases, is suspended at the exact centre of the line which joins the centres of the coils, the advantage is gained by obtaining a field of more nearly uniform intensity around the needle.



Fig. 273. Differential Galvanometer.

#### Galvanometer, Figure of Merit of —

The reciprocal of the current required to produce a deflection of the galvanometer needle through one degree of the scale.

The smaller the current required to produce a deflection of one degree, the greater the figure of merit, or the greater the sensitiveness of the galvanometer.

**Galvanometer, Marine** — — A galvanometer devised by Sir William Thomson for use on steamships where the motion of magnetized masses of iron would seriously disturb the needles of ordinary instruments.

An unscreened needle would be so much affected by the motion of the engines, the shaft and the screw, as to be useless for galvanometric measurement.

The needle of the marine galvanometer is shielded or cut off from the extraneous fields so produced, by the use of a magnetic screen or shield, consisting of an iron box with thick sides, inside of which the instrument is placed.

The needle is suspended by means of a silk fibre attached both above and below, in line with the centre of gravity of the needle. In this manner, the oscillations of the ship do not affect the needle.

**Galvanometer, Mirror** — — A galvanometer in which, instead of reading the deflections of the needle directly by its move-

ments over a graduated circle, they are read by the movements of a spot of light reflected from a mirror attached to the needle.

This spot of light moves over a graduated scale, or its movements are observed by means of a telescope.



Fig. 274. Mirror Galvanometer.

A form of mirror galvanometer designed by Sir William Thomson is shown in Fig. 274. The needle is attached directly to the back of a light, silvered glass mirror, and consists of several small magnets made of pieces of a watch spring. The needle and mirror are suspended by a single silk fibre and are placed inside the coil. A compensating magnet N S, movable on a vertical axis, is used to vary the sensitiveness of the instrument. The lamp L, placed back of a slot in a wide screen, throws a pencil of light on the mirror Q, from which it is reflected to the scale K.

A form of lamp and scale with slot for light is shown in Fig. 275.




Fig. 275. Galvanometer Lamp and Scale.

**Galvanometer, Potential** — — A term sometimes applied to a voltmeter. (See *Voltmeter*.)

**Galvanometer, Reflecting** — — A term sometimes applied to a mirror galvanometer. (See *Galvanometer, Mirror*.)



**Galvanometer, Sensibility of** — The readiness and extent to which the needle of a galvanometer responds to the passage of an electric current through its coils. (See *Galvanometer*.)

**Galvanometer-Shunt.**—(See *Shunt*, *Galvanometer*.)

**Galvanometer, Sine** — A galvanometer in which a vertical coil is movable around a vertical axis, so that it can be made to follow the magnetic needle in its deflections.

In the sine galvanometer, the coil is moved so as to follow the needle until it is parallel with the coil. Under these circumstances, the strength of the deflecting currents in any two different cases is proportional to the sines of the angles of deflection.

A form of sine galvanometer is shown in Fig. 276. The vertical wire coil is seen at M. A needle of any length less than the diameter of the coil M, moves over the graduated circle N. The coil M, is movable over the graduated horizontal circle H, by which the amount of the movement

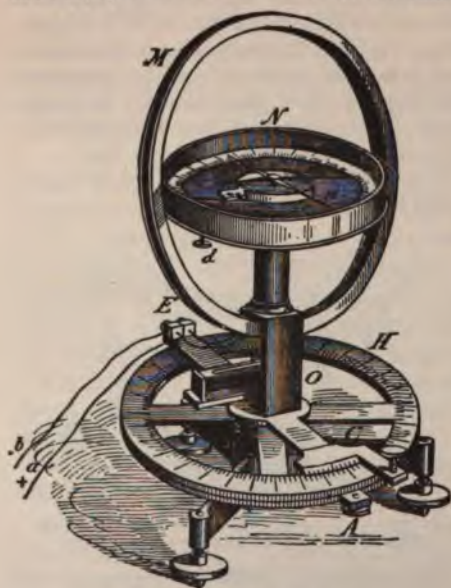


Fig. 276. Sine Galvanometer.

necessary to bring the needle to zero is measured. The current strength is proportional to the sine of the angle measured on this circle, through which it is necessary to move the coil M, from its

position when the needle is at rest in the plane of the earth's magnetic meridian, until the needle is not further deflected by the current, although parallel to the coil M.

**Galvanometer, Tangent** — An instrument in which the deflecting coil consists of a coil of wire within which is placed a needle very short in proportion to the diameter of the coil, and supported at the centre of the coil.



Fig. 277. Tangent Galvanometer.

A galvanometer acts as a tangent galvanometer only when the needle is very small as compared with the diameter of the coil. The length of the needle should be less than one-twelfth the diameter of the coil.

A form of tangent galvanometer is shown in Fig. 277. The needle is supported at the exact centre of the coil C.

Under these circumstances, the strengths of two different deflecting currents are proportional to the tangents of the angles of deflection. Tangent galvanometers are sometimes made with coils of wire containing many separate turns.

**Galvanometer, Tangent, Obach's** —

A form of galvanometer in which the deflecting coil, instead of being in a fixed vertical position, is movable about a horizontal axis, so as to decrease the delicacy of the instrument, and thus increase its range of work.

**Galvanometer, Torsion** — A galvanometer in which the strength of the deflecting current is measured by the torsion exerted on the suspension system.

A ball-shaped magnet, shown at the right of Fig. 278, is suspended by a thread and spiral

between two coils of high resistance, parallel to each other in the positions

On the deflection of the magnet, by the to be measured, the strength of the current is determined by the amount of the torsion required to bring the magnet back to its zero point.

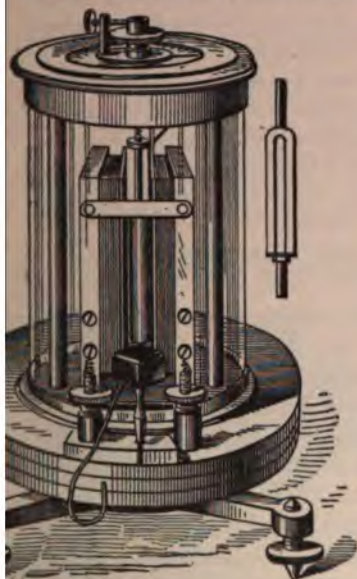


Fig. 278. Torsion Galvanometer.

le of torsion is measured on the horizontal the top of the instrument.

torsion galvanometer, unlike the electro-meter, the action between the coils and the magnet is as the current strength causing deflection. In the electro-dynamometer, increase of current in the deflecting coils places in the deflected coil, the mutual of the two is as the square of the current causing the deflection.

**Galvanometer, Upright** — — A galvanometer, the needle of which moves in a vertical plane. (See *Galvanometer, Vertical*.)

**Galvanometer, Vertical** — — A galvanometer the needle of which is capable of moving in a vertical plane only.

In the vertical galvanometer, the north pole of the needle is weighted so that the needle assumes a vertical position when no current is passing. In the form shown in Fig. 279, two needles

are sometimes employed, one of which is placed inside the coils C, C.

The vertical galvanometer is not as sensitive as the ordinary forms. It is employed, however, in various forms for an electric current indicator, or even for a rough current measurer.

**Galvanometer Voltmeter.**—An instrument devised by Sir William Thomson, for the measurement of differences of electric potential.



Fig. 279. Vertical Galvanometer.

This instrument is so arranged that by a single correction for the varying strength of the earth's field in any place, the results are read at once in volts.

A coil of insulated wire shown at A, Fig. 280, has a resistance of over 5,000 ohms. A magnetic needle, formed of short parallel needles placed above one another, and called a magnetometer needle, is attached to a long but light aluminium index, moving over a graduated scale. A movable, semi-circular magnet B, called the restoring magnet, is placed over the needle, and is used for varying the effect of the earth's field at any point. The sensitiveness of the instrument may be varied either by the restoring magnet or by sliding the magnetometer box nearer to or further away from the coil.

The voltmeter galvanometer depends for its operation on the fact that when a galvanometer of sufficiently high resistance is introduced be-



Fig. 280. Galvanometer Voltmeter.

tween any two points in a circuit, the current that passes through it, and hence the deflection of its needle, is directly proportional to the difference of potential between such two points.



**Galvanometers** for the commercial measurements of currents assume a variety of forms. They are generally so constructed as to read off the ampères, volts, ohms, watts, etc., directly. They are called ampèremeters or ammeters, voltmeters, ohmmeters, wattmeters, etc. For their fuller description reference should be had to standard works on electrical measurement.

**Galvanometric.**—Of or pertaining to the galvanometer. (See *Galvanometer*.)

**Galvanometrical.**—Of or pertaining to the galvanometer. (See *Galvanometer*.)

**Galvanometrically.**—In a galvanometric manner.

**Galvano-Plastics.**—(See *Plastics, Galvano*.)

**Galvanoplasty.**—The art of galvanoplastics. (See *Plastics, Galvano*.)

**Galvano-Puncture.**—(See *Puncture, Galvano*.)

**Galvanoscope.**—A term sometimes improperly employed in place of galvanometer.

A galvanoscope, strictly speaking, is an instrument intended rather to show the existence of an electric current than to measure it in degrees. It may, however, be roughly calibrated, and then it differs from a galvanometer only in delicacy and accuracy.

**Galvano-Therapeutics.**—A term sometimes used for electro-therapeutics.

Electro-therapeutics is by far the preferable term and is almost universally employed in the United States.

**Gap, Air** — —A gap, or opening in a magnetic circuit containing air only. (See *Gap, Air, Magnetic*.)

The air gap between two magnetic poles may be regarded as the space in which an armature acting as a magneto-receptive device is placed, which by the action upon it of the lines of magnetic force passing through the gap has differences of potential generated in its coils of insulated wire.

**Gap, Air, Magnetic** — —A gap filled with air which exists in the opening at any part of a core of iron or other medium of high permeability.

The space between the pole pieces and arma-

ture core is called the air gap in dynamos or motors even though partly filled with copper conductors. It is also called the interference space.

The gap or air space of an electro-magnet decreases the strength of its magnetization because—

The increased reluctance of the air gap causes a decrease in the number of lines of magnetic force which pass through the magnetic circuit.

**Gap, Spark** — —A gap forming part of a circuit between two opposing conductors, separated by air, or other similar dielectric which is closed by the formation of a spark only when a certain difference of potential is attained.

**Gap, Wire-Gauge** — —(See *Gauge, Wire, Gap*.)

**Gas-Battery.**—(See *Battery, Gas*.)

**Gas Burner, Argand, Plain-Pendant, Electric** — —(See *Burner, Argand Electric, Plain-Pendant*.)

**Gas Burner, Argand, Ratchet-Pendant, Electric** — —(See *Burner, Argand Electric, Ratchet-Pendant*.)

**Gas Burner, Automatic Electric** — —(See *Burner, Automatic Electric*.)

**Gas Burner, Plain-Pendant, Electric** — —(See *Burner, Plain-Pendant Electric*.)

**Gas Burner, Ratchet-Pendant, Electric** — —(See *Burner, Ratchet-Pendant Electric*.)

**Gas, Carbonic Acid** — —A gaseous substance formed by the union of one atom of carbon with two atoms of oxygen.

Carbonic acid gas is formed during the combustion of carbon by a sufficient supply of air.

**Gas, Dielectric Density of** — —A term sometimes employed instead of dielectric strength of gas. (See *Gas, Dielectric Strength of*.)

**Gas, Dielectric Strength of** — —The strain a gas is capable of bearing without suffering disruption, or without permitting a disruptive discharge to pass through it.

The dielectric strength of a gas depends—

- (1.) On the nature of the gas.
- (2.) On its pressure.

has been calculated roughly that it requires 100 volts per centimetre to pass a disruptive spark through dry air at ordinary pressures.

**Jet, Carcel Standard** — — (See *Standard Gas-Jet*.)

**Jet Photometer.**—(See *Photometer*.)

**Lighting, Electric** — — The electric lighting of a gas-jet from a distance.

**Lighting, Multiple Electric** — — A system of electric gas-lighting in which a series of gas-jets are lighted by means of a single charge of high electromotive force, derived from a Ruhmkorff coil or a static electric machine.

These devices are operated by means of minute sparks which are made to pass through the burning gas-jets. A spark for this purpose is obtained either by means of the extra current of a spark coil, by means of an induction coil or by means of discharges. (See *Spark Coil, Extra. Coil, Induction.*)



Fig. 281. Multiple Gas Jet.

A tip for use in multiple gas-lighting apparatus is shown in Fig. 281. The spark is immediately over the slot in the burner, and therefore ignites the escaping gas.

**Occlusion of** — — The absorption or retention of a gas in the pores, or on the surface, of various substances.

Carbon possesses in a marked degree the property of occluding or absorbing gases in its pores. Occluded gases must be driven out from the pores of a conductor employed in an incandescent lamp, or otherwise their expulsion, on the incandescence of the carbon, consequent on the light of the lamp, will destroy the high vacuum of the lamp chamber and thus lead to the ultimate destruction of the filament. (See *Lamp, Electric, Incandescent*.)

**Evolution.**—The evolution of gas from the pores of a storage or secondary cell.

**Gastroscopy.**—An electric apparatus for the examination and inspection of the human stomach.

The light is obtained by means of a platinum spiral in a glass tube surrounded by a layer of water to prevent undue heating. The platinum spiral is placed at the extremities of a tube, provided with prisms, and passed into the stomach of the patient. A separate tube for the supply of air for the extension of the stomach is also provided.

**Gastroscopy.**—The examination of the stomach by the gastroscope. (See *Gastroscope*.)

**Gauge, Battery.**—A form of portable galvanometer, suitable for ordinary testing work.

A form of battery gauge is shown in Fig. 282.



Fig. 282. Battery Gauge.

**Gauge, Electrometer** — — A device employed in connection with some of Sir William Thomson's electrometers to ascertain whether the needle, connected with the layer of acid that acts as the inner coating of the Leyden jar used in connection therewith, is at its normal potential.

**Gauge, Wire, American** — — A name sometimes applied to the Brown & Sharpe Wire Gauge. (See *Gauges, Wire, Varieties of*.)

**Gauge, Wire, Birmingham** — — A term sometimes applied to one of the English wire gauges.

**Gauge, Wire, Gap** — — A wire gauge in which gaps are left for the introduction of the wire to be measured.



**Gauge, Wire, Micrometer** — A gauge employed for accurately measuring the diameter of a wire in thousandths of an inch, based on the principle of the vernier or micrometer. (See Fig. 283.)

The wire to be measured is placed between a fixed support B, and the end C, of a long movable screw, which accurately fits a threaded tube A. A thimble D, provided with a milled head, fits over the screw C, and is attached to the upper part. The lower circumference of D, is divided into a scale of twenty equal parts. The tube A, is graduated into divisions equal to the pitch of the screw. Every fifth of these divisions is marked as a larger division.

The principle of the operation of the gauge is as follows: Suppose the screw has fifty threads to the inch, the pitch of the screw, or the distance between two contiguous threads, is therefore  $\frac{1}{50}$  or .02 of an inch.

One complete turn of the screw will, therefore, advance the sleeve D, over the scale A, the .02 of an inch. If the screw is only moved through one of the twenty parts marked on the end of the thimble or sleeve parts, or the  $\frac{1}{50}$  of a com-

plete turn, the end C, advances towards B, the  $\frac{1}{50}$  of  $\frac{1}{50}$ , i. e.,  $\frac{1}{1000}$  or .001 inch.

Suppose now a wire is placed between B and C, and the screw advanced until it fairly fills the

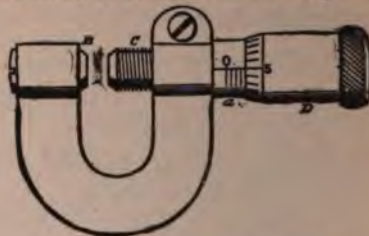


Fig. 283. Vernier Wire Gauge.

space between them, and the reading shows two of the larger divisions on the scale A, three of the smaller ones and three on the end of the sleeve D, then

Two large divisions of scale A..... = .2 inch  
Three smaller divisions of scale A..... = .06  
Three divisions on circular scale on D..... = .003  
Diameter of wire..... = .263

Serious inconvenience has arisen in practice

#### NEW LEGAL STANDARD WIRE GAUGE (ENGLISH).

Tables of Sizes, Weights, Lengths and Breaking Strains of Iron Wire.

Size on Wire Gauge.	Diameter.		Sectional area in sq. inches.	Weight of		Length of Cwt.	Breaking Strains.		Size on Wire Gauge.
	Inch.	Millimetres.		100 yards.	Mile.		Annealed.	Bright.	
				Lbs.	Lbs.	Yards.	Lbs.	Lbs.	
7/0.....	.500	12.7	.1963	193.4	3404	58	10470	15700	7/0
6/0.....	.464	11.8	.1691	166.5	2930	67	9017	13525	6/0
5/0.....	.432	11.	.1466	144.4	2541	78	7814	11725	5/0
4/0.....	.400	10.2	.1257	123.8	2179	91	6702	10052	4/0
3/0.....	.372	9.4	.1087	107.1	1885	105	5796	8694	3/0
2/0.....	.348	8.8	.0951	93.7	1649	120	5072	7608	2/0
1/0.....	.324	8.2	.0824	81.2	1429	138	4397	6595	1/0
1.....	.300	7.6	.0707	69.9	1225	161	3770	5655	1
2.....	.276	7.	.0593	58.9	1037	190	3190	4785	2
3.....	.252	6.4	.0499	49.1	864	228	2660	3990	3
4.....	.232	5.9	.0423	41.6	732	269	2254	3381	4
5.....	.212	5.4	.0353	34.8	612	322	1883	2824	5
6.....	.192	4.9	.0290	28.0	502	393	1544	2316	6
7.....	.176	4.5	.0243	24.	422	467	1298	1946	7
8.....	.160	4.1	.0201	19.8	348	566	1072	1608	8
9.....	.144	3.7	.0163	16.	282	700	869	1303	9
10.....	.128	3.3	.0129	12.7	223	882	687	1030	10
11.....	.116	3.	.0106	10.4	183	1077	564	845	11
12.....	.104	2.6	.0085	8.4	148	1333	454	680	12
13.....	.092	2.3	.0066	6.5	114	1721	355	532	13
14.....	.080	2.	.0050	5.	88	2240	268	402	14
15.....	.072	1.8	.0041	4.	70	2800	218	326	15
16.....	.064	1.6	.0032	3.2	56	3500	172	257	16
17.....	.056	1.4	.0025	2.4	42	4567	131	197	17
18.....	.048	1.2	.0018	1.8	32	6222	97	145	18
19.....	.040	1.	.0013	1.2	21	9333	67	100	19
20.....	.036	.9	.0010	1.	18	11200	55	82	20

(Issued by the Iron and Steel Wire Manufacturers' Association.)

from the numerous arbitrary numbers of sizes of wires employed by different manufacturers. These differences are gradually leading to the abandonment of arbitrary sizes for wires and employing in place thereof the diameters directly in inches or thousandths of an inch.

**Gauge, Wire, Round** — A device for accurately measuring the diameter of a wire.

The round wire gauge shown in Fig. 284 is very generally used for telegraph lines. Notches



Fig. 284. Round Wire Gauge.

for varying widths, cut in the edges of a circular plate of tempered steel, serve to approximately measure the diameter of a wire, the sides of the wire being passed through the slots. Numbers, indicating the different sizes of the wire, are affixed to each of the openings.

**Gauge, Wire, Self-Registering** — A wire gauge arranged to give the exact diameter of the wire to be measured directly without calculation.

A form of self-registering wire gauge is shown in Fig. 285. The wire or plate is inserted in the gap between a fixed and a movable plate. The numbers corresponding to the diameter of the wire or plate are shown on one side of the gauge and the gauge numbers on the other side.



Fig. 285. Wire and Plate Gauge.

**Gauge, Wire, Standard** — A wire gauge adopted by the National Telephone Exchange Association at Providence, R. I., and by the National Electric Light Association, at Baltimore, Md., in February, 1886.

The value of the standard as compared with the other gauges will be seen from an inspection of the table in this column:

**Gauges, Wire, Varieties of** — The following table gives a comparison of the principal wire gauges in use.

COMPARISON OF THE DIFFERENT WIRE GAUGES.

Number of Wire Gauge.	American or Brown & Sharpe.	Birmingham, or Stubbs.	Washburn & Moen Mfg. Co., Worcester, Mass.	Trenton Iron Co., Trenton, N. J.	Standard Wire Gauge.	Old English from Brass Mfrs. List.
000000	.....	.....	.46			
00000	.....	.....	.43	.45		
0000	.46	.454	.393	.4	.400	
000	.40064	.425	.362	.36	.372	
00	.3648	.38	.331	.33	.348	
0	.32495	.34	.307	.305	.324	
1	.2893	.3	.283	.285	.300	
2	.25763	.284	.263	.265	.276	
3	.22942	.259	.244	.245	.252	
4	.20431	.238	.225	.225	.232	
5	.18194	.22	.207	.205	.212	
6	.16202	.203	.192	.19	.192	
7	.14428	.18	.177	.175	.176	
8	.12849	.165	.162	.16	.160	
9	.11443	.148	.148	.145	.144	
10	.10189	.134	.135	.13	.128	
11	.090742	.12	.12	.1175	.116	
12	.080808	.109	.105	.105	.104	
13	.071961	.095	.092	.0925	.092	
14	.064084	.083	.08	.08	.080	.083
15	.057068	.072	.072	.07	.072	.072
16	.05082	.065	.063	.061	.064	.065
17	.045257	.058	.052	.0525	.056	.058
18	.040303	.049	.047	.045	.048	.049
19	.035399	.042	.041	.039	.040	.04
20	.031061	.035	.035	.034	.036	.035
21	.028462	.032	.032	.03	.032	.0315
22	.025147	.028	.028	.27	.028	.0295
23	.022571	.025	.025	.024	.024	.027
24	.0201	.022	.023	.0215	.022	.025
25	.0179	.02	.02	.019	.020	.023
26	.01594	.018	.018	.018	.018	.0205
27	.014195	.016	.017	.017	.0164	.01875
28	.012641	.014	.016	.016	.0148	.0165
29	.011257	.013	.015	.015	.0136	.0155
30	.010025	.012	.014	.014	.0124	.01375
31	.008928	.01	.0135	.013	.0116	.01225
32	.007995	.009	.013	.012	.0108	.01125
33	.00708	.008	.011	.011	.0100	.01025
34	.006304	.007	.01	.01	.0092	.0095
35	.005614	.005	.0095	.009	.0084	.009
36	.005	.004	.009	.008	.0076	.0075
37	.004453	....	.0085	.00725	.0068	.0065
38	.003965	....	.008	.0065	.006	.00575
39	.003531	....	.0075	.00575	.0052	.005
40	.003144	....	.007	.005	.0048	.0045



NUMBER, DIAMETER, WEIGHT, LENGTH AND RESISTANCE OF PURE COPPER WIRE.

American Gauge.

No.	Diameter, Inches.	Weight, sp. gr. = 8.89.		Length.		Resistance of Pure Copper at 70° Fahrenheit.		
		Grs. per ft.	Lbs. per 1,000 feet.	Ft. per lb.		Ohms per 1,000 ft.	Feet per ohm.	Ohms per lb.
2000...	.46000	4475.33	640.40	1.56		.051	19605.69	.0000995
1900...	.40964	3549.07	507.01	1.97		.064	15547.87	.000117
1800...	.36480	2814.62	402.09	2.49		.081	12330.36	.000160
1700...	.32486	2231.28	319.04	3.13		.102	9753.63	.000200
1600...	.28930	1770.13	252.88	3.95		.129	7754.66	.000251
1500...	.25763	1403.79	200.54	4.99		.163	6149.78	.000311
1400...	.22942	1113.30	159.03	6.29		.205	4876.73	.000389
1300...	.20431	882.85	126.12	7.93		.259	3867.62	.000490
1200...	.18194	700.10	100.01	10.00		.320	3067.06	.000618
1100...	.16202	555.10	79.39	12.61		.411	2432.22	.000780
1000...	.14429	440.27	62.00	15.90		.519	1928.75	.000984
900...	.12849	349.18	49.88	20.05		.654	1529.69	.01311
800...	.11443	276.94	39.56	25.28		.824	1213.22	.02085
700...	.10190	219.57	31.37	31.88		1.040	961.91	.03314
600...	.09074	174.15	24.88	40.20		1.311	762.91	.05266
500...	.08081	138.11	19.73	50.69		1.653	605.03	.08377
400...	.07196	109.52	15.65	63.91		2.084	479.80	.13328
300...	.06408	86.86	12.41	80.59		2.628	380.51	.2118
250...	.05707	68.88	9.84	101.63		3.314	301.75	.3368
200...	.05082	54.63	7.81	128.14		4.179	239.32	.5335
175...	.04525	43.32	6.19	161.59		5.269	189.78	.8515
150...	.04030	34.35	4.91	203.76		6.615	150.50	1.3539
125...	.03589	26.49	3.78	264.26		8.617	116.05	2.2772
100...	.03196	21.61	3.09	324.00		10.566	94.65	3.423
75...	.02846	17.13	2.45	408.56		13.323	75.06	5.443
50...	.025347	13.59	1.94	515.15		16.799	59.53	8.654
37.5...	.022372	10.77	1.54	649.66		21.185	47.20	13.763
25...	.0201	8.54	1.22	819.21		26.713	37.43	21.885
20...	.0179	6.78	.97	1032.96		33.684	29.69	34.795
16...	.01594	5.37	.77	1302.61		42.477	23.54	55.331
12.5...	.014105	4.26	.61	1642.55		53.593	18.68	87.979
10...	.012641	3.38	.48	2071.22		67.542	14.81	130.893
7.5...	.011358	2.68	.38	2611.82		85.170	11.74	222.449
5...	.010025	2.13	.30	3293.97		107.391	9.31	353.742
3.75...	.008928	1.69	.24	4152.22		135.402	7.39	562.221
3...	.00795	1.34	.19	5236.66		170.765	5.86	894.242
2.5...	.00708	1.06	.15	660.271		215.312	4.64	1421.646
2...	.0063	.84	.12	8328.30		271.583	3.68	2261.82
1.75...	.00561	.67	.10	10501.35		342.413	2.92	3596.104
1.5...	.005	.53	.08	13238.83		431.712	2.32	5715.36
1.25...	.00445	.42	.06	16691.06		544.287	1.84	9084.71
1...	.003965	.34	.05	20854.65		686.511	1.46	14320.26
.75...	.003531	.27	.04	26302.23		865.046	1.16	22752.6
.5...	.003144	.21	.03	33175.94		1091.865	.92	36223.59

**Gauss.**—The unit of intensity of magnetic field.

The term gauss for unit of intensity of magnetic field was proposed by S. P. Thompson as being that of a field whose intensity is equal to  $10^8$  C. G. S. units, that is,  $10^8$  lines of force per square centimetre.

J. A. Fleming proposes, for the value of the gauss, such strength of field as would develop an electromotive force of one volt in a wire one million centimetres in length, moving through such a field with unit velocity.

Fleming's value for the gauss was assumed on account of the small value of the gauss proposed

by S. P. Thompson. It is one hundred times greater in value than Thompson's gauss.

Sir William Thomson proposes, for the value of the gauss, such an intensity of magnetic field as is produced by a current of one weber (ampère) at the distance of one centimetre.

**Gauss, Fleming's** — — Such a strength of magnetic field as is able to develop an electromotive force of one volt in a wire one million centimetres in length moved through the field with unit velocity. (See *Gauss*.)

**Gauss, S. P. Thompson's** — — Such a strength of magnetic field that its intensity is equal to  $10^8$  C. G. S. units. (See *Gauss*.)

**Gauss, Sir William Thomson's** — — — Such an intensity of magnetic field as would be produced by a current of one ampère at the distance of one centimetre. (See *Gauss*.)

**Geissler Mercurial Pump.**—(See *Pump, Air, Geissler, Mercurial*.)

**Geissler Tubes.**—(See *Tubes, Geissler*.)

**General Faradization.**—(See *Faradization, General*.)

**General Galvanization.**—(See *Galvanization, General*.)

**Generation of Current by Dynamo-Electric Machine.**—(See *Current, Generation of, by Dynamo-Electric Machine*.)

**Generator, Dynamo-Electric** — — — An apparatus in which electricity is produced by the mechanical movement of conductors through a magnetic field so as to cut the lines of force.

A dynamo-electric machine. (See *Machine, Dynamo-Electric*.)

A dynamo-electric machine operates on the general principles of electro-dynamic induction. Strictly speaking, however, in a dynamo-electric generator the conductors are actually moved through the lines of force. In this respect, therefore, a dynamo-electric generator differs from a transformer, in which the lines of force are moved through the conductor. (See *Induction, Electro-Dynamic. Transformer. Induction, Mutual*.)

**Generator, Motor** — — — A dynamo-electric generator in which the power required to drive the dynamo is obtained from an electric current.

Motor generators are used in systems of electrical distribution for the purpose of changing the potential of the current. They consist of dynamos, the armatures of which are furnished with two separate windings, of fine and coarse wire respectively. One of these, generally the fine wire, receives the driving or motor current, usually of high potential, and the other, the coarse wire, furnishes the current used, usually of low potential.

The advantage of having the windings, which receive the driving current, of fine wire, is to enable a current of high potential to be distributed over the line from distant stations to

places where it is desired to use the energy of the current at a much lower potential.

Motor generators often consist simply of two distinct machines mechanically connected, one acting as a motor and the other as a dynamo.

Motor generators are sometimes called dynamo-motors or dynamotors.

Aldrich draws the following distinction between a dynamo-motor and a dynamotor :

(1.) A dynamo-motor is an energy transformer with the dynamo and motor in the same electric circuit.

(2.) A dynamotor is an energy transformer with the dynamo and motor in the same magnetic circuit.

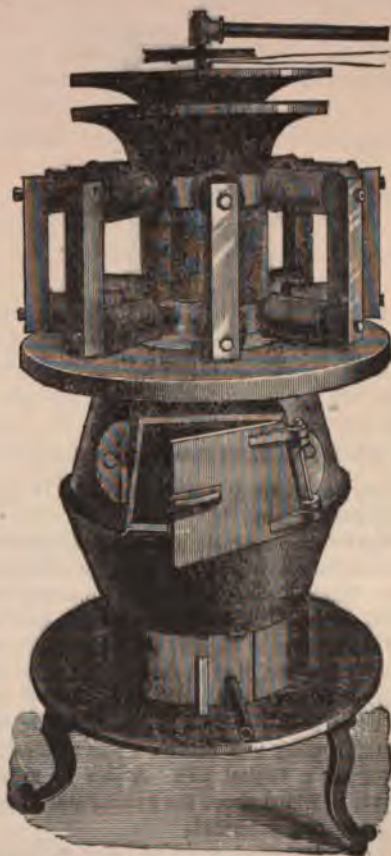


Fig. 286. Edison's Pyro-Magnetic Generator.

**Generator, Pyro-Magnetic** — — — An apparatus for producing electricity directly from heat derived from the burning of fuel.



The operation of the pyro-magnetic generator is dependent upon the fact that any variation in the number of lines of magnetic force that pass through a conductor will develop differences of electric potential therein. Such variations may be effected either by varying the position of the conductor as regards the magnetic field, or by varying the magnetic field itself. The latter method of generating differences of potential is utilized in the pyro-magnetic generator, and is effected in it by varying the magnetization of rolls of thin iron or nickel by the action of heat.

A form of pyro-magnetic generator devised by Edison is shown in Figs. 286 and 287.



Fig. 287. Edison's Pyro-Magnetic Generator.

This apparatus is sometimes called a pyro-magnetic dynamo.

Eight electro-magnets are provided, each with an armature consisting of a roll of corrugated iron. Each of these armatures is provided with a coil of insulated wire wound on it and protected by asbestos paper. The armatures pass through two iron discs as shown. The armature coils are connected in series in a closed-circuit, the wires from the coils being connected with metallic brushes that rest on a commutator supported on a vertical axis. A pair of metallic rings is provided above the commutator to carry off the current generated.

The vertical axis is provided below with a semi-circular screen called a guard plate which rotates with the axis and cuts off or screens one-half the iron armatures from the heated air.

When the axis is rotated, the difference in the

magnetization of the armatures, when hot and cold, develops electromotive forces which result in the production of an electric current.

**Generator, Secondary** — — A term frequently employed for a converter or transformer.

The word transformer is now almost universally employed. (See *Transformer*.)

**Generator, Watt** — — A term sometimes employed for stating the power in watts that any electric source is capable of producing.

Estimating the power of a dynamo-electric machine by the number of watts it is capable of producing is very convenient in practice, and is now very generally adopted. A dynamo capable of furnishing a difference of potential of 1,000 volts, and a current of 10 amperes, would be said to be a 10,000 watt-generator.

The term watt-generator, though applicable to the case of any electric source, is in practice generally limited to the case of dynamo-electric machines or secondary batteries.

**Generators, Motor, Distribution of Electricity by** — — (See *Electricity, Distribution of, by Motor Generators*.)

**Geographical Distribution of Thunder Storms.** — (See *Storms, Thunder, Geographical Distribution of*.)

**Geographical Equator.** — (See *Equator, Geographical*.)

**Geographical Meridian.** — (See *Meridian, Geographical*.)

**German Silver Alloy.** — (See *Alloy, German Silver*.)

**Gilding, Electric** — — The electrolytic deposition of gold on any object.

Electro-plating with gold. (See *Plating, Electro*.)

The surfaces of the object to be gilded are made electrically conducting, if not already so, and are then connected to the negative terminal of a voltaic cell or other source, and immersed in a plating bath containing a solution of a salt of gold, directly opposite a plate of gold, connected with the positive terminal of the source. The objects to be plated thus become the cathode, and the plate of gold the anode of the plating bath. On the passage of a suitable current, the gold is dissolved from the plate at the anode and deposited

on the object at the kathode. (See *Bath, Gold. Kathode. Anode.*)

**Gilt Plumbago.**—(See *Plumbago, Gilt.*)

**Gimbals.**—Concentric rings of brass, suspended on pivots in a compass box, and on which the compass card is supported so as to enable it to remain horizontal notwithstanding the movements of the ship. (See *Compass, Azimuth.*)

Each ring is suspended on two pivots placed directly opposite each other, that is, at the ends of a diameter, which in one ring is at right angles to that in the other.

**Girder Armature.**—(See *Armature, Girder.*)

**Globe, Vapor, of Incandescent Lamp**

—A glass globe surrounding the chamber of an incandescent electric lamp, for the purpose of enabling the lamp to be safely used in an explosive atmosphere, or to permit the lamp to be exposed in places where water is liable to fall on it.

Such a vapor globe is shown in Fig. 288. In the event of accidental breakage of the outside globe, the lamp chamber proper prevents the ignition of the explosive gases. In such cases, however, the outer protecting chamber should be promptly replaced.

In some forms of vapor globes, a valve is provided, opening outwards, in order to permit the expanded air to escape when a given pressure is reached, and yet, at the same time, to prevent the entrance of gas or vapor from without.



Fig. 288. Vapor Globe.

**Glow Discharge.**—(See *Discharge, Glow.*)

**Glow Lamp.**—(See *Lamp, Electric Glow.*)

**Gold Bath.**—(See *Bath, Gold.*)

**Gold-Leaf Electroscope.**—(See *Electroscope, Gold-Leaf.*)

**Gold-Plating.**—(See *Plating, Gold.*)

**Gong, Electro-Mechanical** —A gong

struck or operated by mechanical force at times which are dependent on the passage of an electric current.

The motive power is the mechanical force developed by a bent spring, the fall of a weight, etc., and, by suitable mechanism, is permitted to act only on the passage of an electric current.

**Governor, Centrifugal** —A device for maintaining constant the speed of a steam engine or other prime mover, despite sudden changes in the load or work.

In a ball governor, any increase in speed causes the balls to fly out from the centre of rotation by centrifugal force. This motion is utilized to control a valve or other regulating device. If the speed of the engine falls, the balls move towards the centre, shifting the valve or regulating device in the opposite direction.

**Governor, Current** —A current regulator.

A device for maintaining constant the current strength in any circuit.

Current governors are either automatic or non-automatic. (See *Regulation, Automatic.*)

**Governor, Electric** —A device for electrically controlling the speed of a steam engine, the direction of current in a plating bath, the speed of an electric motor, the resistance of an electric circuit, the flow of water or gas into or from a containing vessel, or for other similar purposes.

The particular form assumed by the apparatus varies with the character of the work it is intended to accomplish. In some cases an ordinary ball or centrifugal governor is employed to open or close a circuit; or, a mass of mercury in a rotating vessel is caused, at a certain speed, to open or close a circuit; or, the resistance of a bundle of carbon discs is caused to vary, either by pressure produced by centrifugal force, or by the movement of an armature.

**Governor, Periodic** —A name applied by Ayrton & Perry to a form of governor for an electric motor, in which the current is automatically cut out for a certain portion of each revolution.

**Governor, Spasmodic** —A name given by Ayrton & Perry to a form of governor for an electric motor, in which the cur-



rent is automatically cut off in proportion as the work is cut off.

The spasmodic governor consists essentially of a cone dipping into the surface of mercury in a rotating vessel. As the speed of the governor increases on a lightening of the load, the surface of the mercury is curved by the increased centrifugal force, until finally the mercury leaves the contact point and thus cuts off the current.

**Governor, Steam, Electric** — — A device used in connection with a valve to so electrically regulate the supply of steam to an engine, that the engine shall be driven at such a speed as will maintain either a constant current or a constant potential.

In the electric governor, the steam valve is operated by an electro-magnet, whose coils, in the case of a constant current machine, are of thick wire placed in the main circuit, and, in that of a constant potential machine, are of thin wire placed in a shunt around the mains.

**Graduators.**—Devices, generally electro-magnetic, employed in systems of simultaneous telegraphic and telephonic transmission over the same wire, so inserted in the line circuit as to obtain the makes and breaks required in a system of telegraphic communication so gradually that they fail to sensibly influence the diaphragm of a telephone placed in the same circuit.

**Gramme.**—A unit of weight equal to 15.43235 grains.

The gramme is equal to the weight of one cubic centimetre of pure water at the temperature of its maximum density. It has various multiples and decimal divisions—of the former, the kilogramme or one thousand grammes is the most frequently used; of the latter, the centigramme or the one-hundredth of a gramme, and the milligramme or the one-thousandth of a gramme. (See *Weights and Measures, Metric System of*.)

**Gramme Atom.**—(See *Atom, Gramme*.)

**Gramme Molecule.**—(See *Molecule, Gramme*.)

**Gramophone.**—An apparatus for recording and reproducing articulate speech. (See *Phonograph*.)

**Gramophone Record.**—(See *Record, Gramophone*.)

**Graphite.**—A soft variety of carbon suitable for writing on paper or similar surfaces.

Graphite is the material that is employed for the so-called black lead of lead pencils. It is sometimes called plumbago. Strictly speaking, the term graphite is only applicable to the variety of plumbago suitable for use in lead pencils.

Graphite is used for rendering surfaces to be electro-plated, electrically conducting, and also for the brushes of dynamos and motors. For the latter purpose it possesses the additional advantage of decreasing the friction by means of its marked lubricating properties.

**Graphophone, Micro** — — A modification of the phonograph in which, instead of a single diaphragm, a number of separate non-metallic diaphragms are caused to act on a single diaphragm to record the speech, so that the separate diaphragms can be thrown into strong vibration when reproducing the speech.

**Graphophone, Phonograph** — — A term sometimes applied to the graphophone. (See *Graphophone, Micro. Phonograph*.)

**Graphophone Record.**—(See *Record, Graphophone*.)

**Gray's Harmonic Telegraphic Analyzer.**—(See *Analyzer, Gray's Harmonic Telegraphic*.)

**Gray's Harmonic Telegraphy.**—(See *Telegraphy, Gray's Harmonic Multiple*.)

**Gravitation.**—A name applied to the force which causes masses of matter to tend to move towards one another.

This motion is assumed to be that of attraction, that is, the bodies are assumed to be drawn together. It is not impossible, however, that they may be pushed together.

Gravitation, like electricity, is well known, so far as its effects are concerned; but, as to the true cause of either, particularly the former, we are in comparative ignorance.

The general facts of gravitation may be succinctly stated by the following law, generally known as Newton's law.

Every particle of matter in the universe is attracted by every other particle of matter, and itself attracts every other particle of matter, with a force which is directly proportional to the product of the masses of the two quantities of matter

and inversely proportional to the square of the distance between them.

**Gravity Ammeter.**—(See *Ammeter, Gravity*.)

**Gravity, Centre of** — —The centre of weight of a body.

Bodies supported at their centres of gravity are in equilibrium, since their weight is then evenly distributed around the point of support.

**Gravity-Drop Annunciator.**—(See *Annunciator, Gravity-Drop*.)

**Gravity, Voltaic Cell** — —(See *Cell, Voltaic, Gravity*.)

**Gravity Voltmeter.**—(See *Voltmeter, Gravity*.)

**Great Calorie.**—(See *Calorie, Great*.)

**Grenet Voltaic Cell.**—(See *Cell, Voltaic, Grenet*.)

**Grid.**—A lead plate, provided with perforations, or other irregularities of surface, and employed in storage cells for the support of the active material.

The support provided for the active material on the plate of a secondary or storage cell.

The grid receives its name from its resemblance to a gridiron. The active material is generally maintained on the grid by means of variously shaped apertures or holes. These are generally larger near the centre, so as to prevent the falling out of the material after it has been hardened by compression. (See *Cell, Secondary, Cell, Storage*.)

Various forms have been given to the grid. The object of these forms, in general, is to insure the retention of the active material by the grid.

The grids are preferably suspended from suitable supports fastened to the top of the battery jars, instead of resting on the bottom of the battery jars.

**Grip, Cable** — —A grip provided for seizing the end of a cable when it is to be drawn into a duct or conduit.

**Grove's Voltaic Cell.**—(See *Cell, Voltaic, Grove*.)

**Grothüss' Hypothesis.**—(See *Hypothesis, Grothüss*.)

**Ground Circuit.**—(See *Circuit, Ground*.)

**Ground Detector.**—(See *Detector, Ground*.)

**Ground or Earth.**—A general term for the earth when employed as a conductor, or as a large reservoir of electricity.

The term ground is also applied to a fault caused by an accidental and undesired connection between an electric circuit, line or apparatus and the ground. (See *Fault*.)

**Ground Plate of Lightning Protector.**—(See *Plate, Ground, of Lightning Protector*.)

**Ground-Return.**—A general term used to indicate the use of the ground or earth for a part of an electric circuit.

The earth or ground which forms part of the return path of an electric circuit.

The ground-return is generally used in the Morse system of telegraphy as practiced in the United States.

**Ground-Wire.**—The wire or conductor leading to or connecting with the ground or earth in a grounded circuit.

This is sometimes called an earth-grounded wire.

A circuit is grounded when it is completed in part by the ground or earth.

**Grounded Circuit.**—(See *Circuit, Grounded*.)

**Growth or Expansion of Lines of Force.**—(See *Force, Lines of, Growth or Expansion of*.)

**Guard, Fan** — —A wire netting placed around the fan of an electric motor for the purpose of preventing its revolving arms from striking external objects.

**Guard, Lightning** — —A term sometimes used for lightning rod. (See *Rod, Lightning*.)

**Guard, Transformer, Lightning** — —A transformer lightning arrester. (See *Arrester, Lightning, Transformer*.)



**Guard, Wire Shade** — — A guard of wire netting provided for the protection of a shade.

A form of wire shade is shown in Fig. 289.



Fig. 289. Wire Shade Guard.

**Gutta-Percha.**—A resinous gum obtained from a tropical tree, and valuable electrically for its high insulating powers.

Gutta-percha readily softens by heat, but on

cooling becomes hard and tough. Unlike India-rubber, it possesses but little elasticity. Its specific inductive capacity is 4.2, that of air being 1, and of vulcanized rubber, 2.94. (See *Capacity, Specific Inductive.*)

Gutta-percha is obtained largely from the East Indies, from a tree which yields a brownish gum. It is a fibrous and tenacious substance with but little flexibility, and is unaffected by acids. Oils produce less effect upon it than on India-rubber.

Gutta-percha is one of the best insulating materials known for sub-aqueous cables.

**Gymnotus Electricus.**—The electric eel. (See *Eel, Electric.*)

**Gyrometer.**—A speed indicator. (See *Indicator, Speed.*)

## H

**H.**—A contraction for the horizontal intensity of the earth's magnetism.

**H.**—A contraction proposed for one unit of self-induction.

**H.**—A contraction used in mathematical writings for the magnetizing force that exists at any point, or, generally, for the intensity of the magnetic force.

The letter **H**, when used in mathematical writings or formulæ for the intensity of the magnetic force, is always represented in bold or heavy faced type, thus: **H**.

**H-Armature Core.**—(See *Core, Armature, H.*)

**Hail, Assumed Electric Origin of** — — A hypothesis, now generally rejected, framed to explain the origin of the alternate coatings of ice and snow in a hail stone, by the alternate electric attractions and repulsions of the stones between neighboring, oppositely charged, snow and rain clouds.

It is now generally recognized that the electric manifestations attending hail storms are the effects and not the causes of the hail. (See *Paragrêles.*)

**Hair, Electrolytic Removal of** — — The permanent removal of hair from any part

of the body, by the electrolytic destruction of the hair follicles.

A platinum negative electrode is inserted in the hair follicle and the positive electrode, covered with moist sponge or cotton, is held in the hand of the patient. A current of from two to four *milli-amperes* from a battery of from eight to ten Leclanché elements is then passed for from ten to thirty seconds. A few bubbles of gas appear, and the hairs are then removed from the follicles by a pair of forceps. (See *Milli-Ampère.*)

When the work is properly done there is no destruction of the skin and therefore no marks or scars.

In the removal of hair from the face, it is preferable that the current should slowly reach its maximum strength.

**Half-Shades for Incandescent Lamps.** — **Shades** for incandescent electric lamps, in which one-half of the lamp chamber proper is covered with a coating of silver, or other reflecting surface for reflecting the light, or is ground for the purpose of diffusing the light.

The half-shade is applicable to cases where it is desired to throw out the light, not in all directions, but on one side only of any plane. Sometimes the dividing plane is taken parallel to the length of the incandescing filament and sometimes at right angles to it. When the lamp is placed

within a surrounding globe the reflecting surface may be placed on this globe instead of on the lamp chamber.

**Hall Effect.**—(See *Effect, Hall*.)

**Halleyan Lines.**—(See *Lines, Halleyan*.)

**Halpine-Savage Torpedo.**—(See *Torpedo, Halpine-Savage*.)

**Handhole of Conduit.**—A box or opening communicating with an underground cable, provided for readily tapping the cable, and of sufficient size to permit of the introduction of the hand.

**Hand-Lighting Argand Electric Burner.**—(See *Burner, Argand Electric, Hand-Lighter*.)

**Hand-Lighting Electric Burner.**—(See *Burner, Hand-Lighting Electric*.)

**Hand-Regulation.**—(See *Regulation, Hand*.)

**Hand-Regulator.**—(See *Regulator, Hand*.)

**Hanger-Board.**—(See *Board, Hanger*.)

**Hanger, Cable** — — A hanger or hook suitably secured to the cable and designed to sustain the weight of the cable by intermediately supporting it on iron or steel wires strung above the cable.

A cable hanger or cable clip is shown in Fig. 290. The mode of supporting the cable C, by the hanger hook H, will be readily understood from an inspection of the figure.

The weight per foot of an aerial cable is generally so great that the poles or supports would require to be very near together, unless the device of intermediate supports, by means of cable clips or hangers, were adopted.

**Hanger, Double-Curve Trolley** — — A trolley hanger generally employed at the ends of single and double curves, and on intermediate points on double track curves, supported by lateral strain in opposite directions.




Fig. 290. Cable Hanger.

**Hanger, Single-Curve Trolley** — — A trolley hanger supported on a single track curve, except at the ends and on the inside curve of a double track line, by lateral strain in one direction.

**Hanger, Straight-Line Trolley** — — A trolley hanger on a straight trolley line suitably supported by a span wire so as to have a vertical strain only.

**Hanger, Trolley** — — A device for supporting and properly insulating trolley wires.

**Hard-Drawn Copper Wire.**—(See *Wire, Copper, Hard-Drawn*.)

**Harmonic Receiver.**—(See *Receiver, Harmonic*.)

**Harmonic Telegraphy.**—(See *Telegraphy, Gray's Harmonic Multiple*.)

**Head Bath, Electric** — — (See *Bath, Head, Electric*.)

**Head Breeze, Electro-Therapeutic** — — (See *Breeze, Head, Electro-Therapeutic*.)

**Head Light, Locomotive, Electric** — — An electric light placed in the focus of a parabolic reflector in front of a locomotive engine.

The lamp is so placed that its voltaic arc is a little out of the focus of the reflector, so that, by giving a slight divergence to the reflected light, the illumination extends a short distance on either side of the tracks.

**Heat.**—A form of energy.

The phenomena of heat are due to a vibratory motion impressed on the molecules of matter by the action of some form of energy.

Heat in a body is due to the vibrations or oscillations of its molecules. Heat is transmitted through space by means of a wave motion in the universal ether. This wave motion is the same as that causing light.

A hot body loses its heat by producing a wave motion in the surrounding ether. This process is called *radiation*. (See *Radiation*.)

The energy given off by a heated body cooling is called radiant energy.

Radiant energy is transmitted by means of ether waves; it is of two kinds, viz.:

(1.) *Obscure Heat*, or heat which does not affect the eye, although it can impress a photographic image on a sufficiently sensitive photographic plate.



(2.) *Luminous Heat*, or heat which accompanies light. (See *Energy, Radiant*.)

Heat is conducted, or transmitted through bodies, with different degrees of readiness.

Some bodies are good conductors of heat, others are poor conductors.

Heat is transmitted through liquids by means of currents occasioned by differences in density caused by differences of temperature. These currents are called *convection currents*.

Heat is measured as to its *relative degree of intensity* by the *thermometer*. It is measured as to its *amount or quantity* by the *calorimeter*. (See *Thermometer, Electric. Calorimeter*.)

The heat unit most commonly employed is, perhaps, the *calorie*, or the amount of heat required to raise one gramme of water one degree centigrade.

Another *heat unit*, very generally employed in the United States and England, is the quantity of heat required to raise one pound of water one degree Fahrenheit. This is called the English heat unit. (See *Calorie. Units, Heat. Joule. Volt-Coulomb*.)

**Heat, Absorption and Generation of, in Voltaic Cell** — The heat effects which attend the action of a voltaic cell.

The chemical action of the exciting liquid or electrolyte on the positive plate or element of a voltaic cell, like all cases of chemical combination, is attended by a development of heat.

When, however, the circuit of the cell is closed, the energy liberated during the chemical combination appears as electricity, which develops heat in all parts of the circuit. (See *Heat, Electric. Cell, Voltaic*.)

**Heat, Atomic** — A constant product obtained by multiplying the specific heat of an elementary substance by its *atomic weight*. (See *Weight, Atomic*.)

Dulong and Petit have discovered the remarkable fact that the product of the specific heat of all elementary substances by their atomic weights is nearly the same. The product is called the *atomic heat*, and is about equal to 6.4.

Dulong and Petit's law may be stated as follows, viz.: *All elementary atoms require the same quantity of heat to heat them to the same number of degrees.*

The atomic heat of any body divided by its specific heat gives its atomic weight.

The heat imparted to any body performs three kinds of work, viz.:

(1.) That expended in external work, such, for example, as in overcoming the atmospheric pressure.

(2.) That expended in internal work, or in overcoming the attractions of the atoms and driving them apart.

(3.) That expended in overcoming the temperature, or the true specific heat, or heat expended in increasing the molecular vis-viva.

The expenditure of energy is greatest in the third head. The exact value of the three factors is as yet unknown, and in the opinion of Weber and others the correctness of Dulong and Petit's law cannot be regarded as being satisfactorily established.

Regnault has proved that Dulong and Petit's law is true for compound bodies, *i. e.*, in all compounds of similar composition the product of the specific heat by the total chemical equivalent is constant.

The following table from Anthony and Brackett illustrates the law of Dulong and Petit:

Elements,	Specific Heat of Equal Weight.	Atomic Weight.	Product of Specific Heat into Atomic Weight.
Iron .....	0.114	55.9	6.371
Copper .....	0.095	63.17	6.001
Mercury .....	0.0314 (Solid)	199.71	6.288
Silver .....	0.057	107.67	6.137
Gold .....	0.0329	196.15	6.453
Tin .....	0.056	117.7	6.594
Lead .....	0.0314	206.47	6.483
Zinc .....	0.0955	64.9	6.198

"This product—the atomic heat of elements, the molecular heat of compounds—has the following physical meaning: Of any substance whose atomic or molecular weight we know, we may take a number of grammes numerically equal to the atomic or molecular weight; for example, 35.5 grammes of chlorine, 16 grammes of marsh gas; we may call such quantity the gramme atom or the gramme molecule of the substance. The atomic heat or the molecular heat of a substance is the number of calories of heat necessary to raise the temperature of a gramme atom or a gramme molecule of the substance through 1 degree C."—(Daniell.)

**Heat, Electric** — The heat developed by the passage of an electric current through a conductor.

Heat is developed by the passage of a current through any conductor, no matter what its resistance may be.

If the conductor is of considerable length, and of good conducting power, the heat developed is not very sensible, since it is spread over a considerable area, and is rapidly lost by *radiation*.

H, the heat generated in any conductor of a resistance R, by the passage through it of an electric current C, is equal to

$$H = C^2 R, \text{ in watts.}$$

But one watt = .24 small calorie per second.

Therefore, the heat which is generated,

$$H = C^2 R \times .24 \text{ calories per second.}$$

For the case of a uniform wire of circular cross-section the resistance R, in ohms is directly proportional to the length l, and inversely proportional to the area of cross-section  $\pi r^2$ , or

$$R = \frac{l}{\pi r^2}; \text{ that is, } H = C^2 \left( \frac{l}{\pi r^2} \right).$$

The temperature to which a wire of a given resistance is raised, will of course vary with the mass of the wire, its radiating surface, and its specific heat capacity. If the same number of heat calories are generated in a small weight of a conductor, whose radiating surface is small, the resulting temperature will of course be far higher than if generated in a larger mass provided with a much greater radiating surface. In general, however, its temperature increases as the square of the current strength when the resistance is constant, and increases as the resistance of the wire per unit of length is greater.

The temperature a wire acquires by the passage of a current through it varies inversely as the third power of the radius. If two wires of the same material have the same lengths, but different radii, the temperature, acquired by the passage of an electric current, will depend on the heat developed per second, less that radiated per second. Since the former varies as  $\frac{1}{r^2}$ , and the latter as  $r$ , that is, as  $1 \times 2\pi r$ , the temperatures attained vary as  $\frac{1}{r^3}$ , and not as  $\frac{1}{r^2}$ , as frequently stated.—(Larden.)

The current required to raise the temperature of a bare copper wire a given number of degrees above the temperature of the air is given in the following table.

#### BARE COPPER WIRES.

Current required to increase the temperature of a copper wire 1° Centigrade above the surrounding air, the copper wire being bright polished or blackened.

Diameter in Centimetres and Mils (thousandths of an inch).		CURRENT IN AMPERES.					
		t = 1° C.		t = 9° C.		t = 25° C.	
		Bright	Black	Bright	Black	Bright	Black
.1	40	1.0	1.4	3.0	4.1	4.8	6.6
.2	80	2.8	3.9	8.3	11.5	13.5	18.7
.3	120	5.2	7.2	15.3	21.2	24.9	34.4
.4	160	8.0	11.0	23.6	32.7	38.3	53.0
.5	200	11.1	15.4	33.0	45.7	53.5	74.1
.6	240	14.6	20.3	43.4	60.0	70.3	97.4
.7	280	18.5	25.6	54.6	75.6	88.7	123
.8	310	22.6	31.3	66.7	92.4	108	150
.9	350	26.9	37.3	79.6	110	129	179
1.0	390	31.5	43.6	93.3	129	151	210
2.0	790	89.2	123	264	365	428	593
3.0	1180	164	227	485	671	787	1090
4.0	1570	252	349	740	1035	1211	1675
5.0	1970	353	488	1043	1444	1699	2343
6.0	2360	463	642	1371	1898	2235	3080
7.0	2760	584	808	1728	2392	2803	3882
8.0	3150	714	988	2110	2922	3432	4741
9.0	3540	851	1178	2519	3486	4088	5659
10.0	3940	997	1380	2950	4084	4788	6626
34.4	.....	.....	.....	.....	.....	.....	.....

Diameter in Centimetres and Mils (thousandths of an inch).		CURRENT IN AMPERES.			
		t = 49° C.		t = 81° C.	
		Bright.	Black.	Bright.	Black.
.1	40	6.5	8.9	7.9	11.0
.2	80	18.3	25.3	22.4	31.0
.3	120	33.5	46.4	41.2	57.0
.4	160	51.7	71.5	63.4	87.8
.5	200	72.2	99.9	88.6	123
.6	240	94.9	131	116	161
.7	280	119	165	147	203
.8	310	146	202	179	248
.9	350	174	241	214	296
1.0	390	204	283	251	347
2.0	790	577	799	709	981
3.0	1180	1061	1468	1303	1805
4.0	1570	1633	2260	2006	2776
5.0	1970	2283	3160	2802	3880
6.0	2360	3000	4154	3685	5100
7.0	2760	3781	5233	4642	6426
8.0	3150	4620	6396	5671	7850
9.0	3540	5511	7630	6769	9370
10.0	3940	6425	8935	7926	10973
34.4	.....	.....	.....	.....	70000

—(Forbes.)

Heat, Electric Convection of — — A term employed to express the dissymmetrical distribution of temperature that occurs when a



current of electricity is sent through a metallic wire, the middle of which is maintained at a constant temperature, and the ends at the temperature of melting ice.

The distribution of heat during the passage of a current through an unequally heated conductor.

If the central portions of a metallic bar are heated the curve of heat distribution is symmetrical. On sending an electric current through the wire it is heated according to Joule's law, and the curve of heat distribution is still symmetrical. But the current in passing from the colder to the hotter parts of the wire produces an additional heating effect at this point, and in passing from the warmer to the colder parts of the wire produces a cooling effect. (See *Effect, Peltier, Effect, Thomson*.) The curve of heat distribution is then no longer symmetrical. The term *Electrical Convection of Heat*, has been given to the dissymmetrical distribution of heat so effected.

Sir William Thomson, who studied these effects, found that the electrical convection of heat in copper takes place in the opposite direction to that in iron; that is to say, the electrical convection of heat is negative in iron, (*i. e.*, the direction is opposite to that of the current), and positive in copper.

**Heat, Irreversible** — —Heat produced in a homogeneous conductor by the passage of electricity through it.

This heat, according to Joule's law, is proportional to the square of the current, and is produced no matter in what direction the current is passing. In this respect it is unlike the heat produced by the passage of electricity through a heterogeneous conductor, in which case heat is developed or liberated only by the passage of the current in a given direction: on the passage of the current in the opposite direction, heat being absorbed and the temperature lowered. (See *Heat, Reversible*.)

**Heat Lightning.**—(See *Lightning, Heat*.)

**Heat, Luminous** — —A variety of radiant energy which affects the eye, as light.

Radiant heat and light are, in reality, different effects produced by one and the same cause, viz., by vibrations or waves in the universal ether. In general the waves producing heat are of

greater length and smaller frequency than are those producing light.

**Heat, Mechanical Equivalent of** — —

The amount of mechanical energy, converted into heat, that would be required to raise the temperature of 1 pound of water 1 degree Fahr.

The mechanical equivalence between the amount of energy expended and the amount of heat produced, as measured in heat units.

Joule's experiments, the results of which are generally accepted, gave 772 foot-pounds as the energy equivalent to that expended in raising the temperature of 1 pound of water 1 degree Fahr.

**Heat, Molecular** — —The number of calories of heat required to raise the temperature of one gramme-molecule of any substance 1 degree C. (See *Molecule, Gramme, Heat, Atomic*.)

**Heat, Obscure** — —A variety of radiant energy which does not effect the eye.

Radiant heat is sometimes divided into luminous heat and obscure heat. (See *Heat, Luminous*.)

**Heat, Red** — —The temperature at which a body, whose temperature is gradually increasing, begins to glow or to emit red rays of light.

When a refractory solid body is gradually heated to incandescence, the red waves of light are first emitted, then the orange, and successively afterwards the yellow, green, blue, indigo and violet, when the body emits white light or is white hot.

**Heat, Reversible** — —The heat produced in a heterogeneous conductor by the passage through it of an electric current in a certain direction.

Reversible heat is produced at the junction of two metals, where a difference of potential exists between them, or where their heterogeneity is greatest. It is called reversible because it depends upon the direction in which the current is passing. If the current be passed in a certain direction across the junction, heat is liberated; while, if it be passed in the opposite direction, heat is absorbed, or cold results.

Reversible heat effects are seen in the Peltier effect. (See *Effect, Peltier*.)

**t, Specific** — The capacity of a substance for heat as compared with the capacity of an equal quantity of some other substance taken as unity.

Water is generally taken as the standard for comparison, because its capacity for heat is greater than that of any other common substance.

Different quantities of heat are required to raise the temperature of a given weight of different substances through 1 degree. The specific heats of substances are generally compared with water or with hydrogen, the capacity of substances for heat being very great.

According to Dulong and Petit, the specific heat of all elementary atoms is the same. For example, the heat energy of an atom of hydrogen is equal to that of an atom of oxygen, but since the mass of hydrogen, under similar conditions of temperature and pressure, contains sixteen times as many atoms as an equal mass of oxygen, hydrogen, when compared weight for weight, has a specific heat sixteen times greater than that of oxygen.

In general, comparing equal weights, the specific heat of an elementary substance is inversely proportional to its atomic weight. (See *Atomic*.)

**t, Specific, of Electricity** — (See *Electricity, Specific Heat of*.)

**t Unit.**—The quantity of heat required to raise a given weight of water through 1 degree.

There are a number of different heat units. The most important are:

The British Heat Unit, or Thermal Unit, or Unit of heat required to raise 1 pound of water 1 degree Fahr. This unit represents an amount of work equal to 772 foot-pounds.

The Greater Calorie, or the amount of heat required to raise the temperature of 1,000 grams of water 1 degree C. (See *Calorie*.)

The Smaller Calorie, or the amount of heat required to raise the temperature of one gramme of water 1 degree C.

The Joule, or the quantity of heat developed by the passage of a current of one ampere through a resistance of one ohm.

1 Joule equals .002407 large calories.

1 Joule equals .2407 small calories.

1 Joule-pound equals 1.356 joules.

1 pound-Centigrade equals 1884.66 joules.

1 " " " " 1389.6 foot pounds.

1 " Fahrenheit " 1047.03 joules.

**Heat Unit, English** — (See *Units, Heat*.)

**Heat Unit or Calorie.**—(See *Calorie*.)

**Heat Unit or Joule.**—(See *Joule*.)

**Heat, White** — The temperature at which light of all wave lengths from the red to the violet is emitted from a heated body, and the body, therefore, glows with a white light.

A solid substance heated to white incandescence emits a continuous spectrum, *i. e.*, a spectrum in which all the wave lengths of light from the red to the violet are present.

**Heater, Electric** — A device for the conversion of electricity into heat for purposes of artificial heating.

Electric heaters consist essentially of coils or circuits of some refractory metal through which the current is passed. These coils or circuits are surrounded by air or finely divided solids, and are placed inside metallic boxes or radiators, which throw off or radiate the heat produced.

When employed for the heating of liquids the coils are placed directly in the liquid to be heated, or are surrounded by radiating boxes placed in the liquid.

**Heating Effects of Currents.**—(See *Currents, Heating Effects of*.)

**Hedgehog Transformer.**—(See *Transformer, Hedgehog*.)

**Hecto-Ampère** — One hundred amperes.

**Heliograph.**—An instrument for telegraphic communication that operates by employing flashes of light to represent the dots and dashes of the Morse alphabet, or the movements of the needles of a needle telegraph to the right or the left. (See *Alphabet, Telegraphic*.)

The flashes of light are thrown from the surface of a plane mirror. Motions to the right or left may be employed in order to distinguish between the dots and dashes, or the same may be effected by the relative durations of the flashes of



light, or by the intervals between successive flashes.

Telegraphic communication has been carried on between steamers during foggy weather by means of their fog horns; or between locomotives by their steam whistles.

**Helix, Dextrorsal** — —A name sometimes applied to a dextrorsal solenoid. (See *Solenoid, Dextrorsal*.)

The magnetic polarity of a helix or solenoid depends not only on the direction in which the current is passed, but also on the direction in which the wire is coiled or wound. (See *Magnet, Electro*.)

**Helix, Sinistrorsal** — —A name sometimes applied to a sinistrorsal solenoid. (See *Solenoid, Sinistrorsal*.)

**Hemihedral Crystal**.—(See *Crystal, Hemihedral*.)

**Henry, A** — —The practical unit of self-induction.

It has been generally agreed in the United States to call the practical unit of self-induction a henry, in place of a secohm or quadrant. The name henry should be adopted, not only by American electricians, but also by those of other countries, since the terms secohm or quadrant are contrary to the generally adopted usage of employing for such the names of distinguished electricians, who have passed from their labors.

The fact that of all discoverers in the field of self-induction, none possesses so great a claim as that of Prof. Henry, must be generally acknowledged. As early as 1832 he published in *Silliman's Journal* a paper in which he described experiments, showing clearly that the spark obtained by breaking the current of a battery, in which a long wire was interposed, was greater than when a short wire was employed, and that this increased length of spark was further increased by coiling the wire, and that the phenomena were ascribed to the action of the current on itself.

A committee of the American Institute of Electrical Engineers, after careful consideration, recommended to the Institute that the value of the practical unit of inductance should be equal to 10<sup>9</sup> C. G. S. units of inductance, usually expressed by a length equal to one earth quadrant or 1,000,000,000 centimetres.

The value of the practical unit of inductance, or the "henry," may in some cases be too high for

convenience; in such cases it may be expressed by some fractional dimension, such, for example, as milli-henry.

**Hercules Stone**.—(See *Stone, Hercules*.)

**Hermetical Seal**.—(See *Seal, Hermetical*.)

**Hertz's Theory of Electricity**.—(See *Electricity, Hertz's Theory of*.)

**Heterostatic**.—A term applied by Sir William Thomson to distinguish a form of electrometer in which the electrification is measured by determining the mutual influence of the attraction exerted by the charge to be measured and the attraction of an opposite charge imparted to the instrument by a source independent of the charge to be measured.

The term heterostatic distinguishes this form of electrometer from an idiostatic instrument, or one in which the measurement is effected by determining the repulsion between the charge to be measured and the repulsion of a charge of the same name, *i. e.*, positive or negative, imparted to the instrument from an independent source. (See *Electrometer*.)

**Hick's Automatic Button Repeater**.—(See *Repeaters, Telegraphic*.)

**High-Bars**.—A term applied to those commutator segments, or parts of commutator segments, which, through less wear, faulty construction or looseness, are higher than adjoining portions. (See *Commutator*.)

**High-Frequency Currents, Electric Lighting by** — —(See *Lighting, Electric, by High-Frequency Currents*.)

**High Resistance Magnet**.—(See *Magnet, High Resistance*.)

**High Speed Electric Motor**.—(See *Motor, Electric, High Speed*.)

**High Tension Electric Fuse**.—(See *Fuse, Electric High Tension*.)

**Hissing of Arc**.—(See *Arc, Hissing of*.)

**Holder for Safety Fuse**.—A box or other receptacle of refractory material for holding a safety fuse, and catching the molten metal when fused.

The holder or fuse box is provided to prevent the

molten metal of the fuse from setting fire to any combustible material on which it might otherwise fall.

**Holders, Carbon, for Arc Lamps** — — A clutch or clamp attached to the end of the lamp rod or other support, and provided to hold the carbon pencils used on arc lamps. (See *Lamp, Arc, Electric*.)

**Holders for Brushes of Dynamo-Electric Machine.**—A device for holding the collecting brushes of a dynamo-electric machine.— (See *Machine, Dynamo-Electric*.)

**Hole, Armature** — — A term sometimes applied for armature bore or chamber. (See *Bore, Armature*.)

**Hole, Armature Bore, Elliptical** — — An armature bore or chamber ellipsoidal in shape.

**Holohedral Crystal.**—(See *Crystal, Holohedral*.)

**Holtz Machine.**—(See *Machine, Holtz*.)

**Home Station.**—(See *Station, Home*.)

**Homogeneous Current Distribution.**— (See *Current, Homogeneous Distribution of*.)

**Hood for Electric Lamp.**—A hood provided for the double purpose of protecting the



Fig. 291. Arc Lamp Hood.

body of an electric lamp from rain or sun, and for throwing its light in a general downward direction.

Hoods for arc lamps are generally conical in shape.

A form of hood for an exposed arc lamp is shown in Fig. 291.

**Horizontal Component of Earth's Magnetism.**— (See *Component, Horizontal, of Earth's Magnetism*.)

**Horns, Following, of Pole Pieces of a Dynamo-Electric Machine** — — The edges or terminals of the pole pieces of a dynamo-electric machine towards which the armature is carried during its rotation.

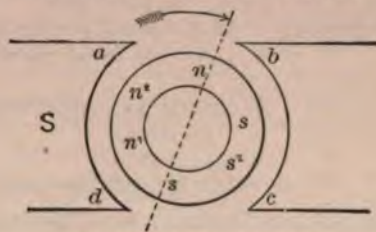


Fig. 292. Horns of Dynamo.

According to S. P. Thompson, the following horns, b, d, Fig. 292, are those towards which the armature is carried; the leading horns, a, c, those from which it is carried.

As the change in the magnetic intensity is more sudden when the armature is moved from the pole pieces, and least when moved towards them, it is clear that the leading horns in a dynamo-electric machine, and the following horns in an electric motor, become heated during rotation by the production of Foucault currents. (See *Currents, Foucault, Machine, Dynamo Electric*.)

**Horns, Leading, of Pole Pieces of a Dynamo-Electric Machine** — — The edges or terminals of the pole pieces of a dynamo-electrical machine from which the armature is carried during its rotation.

Thus, in Fig. 292, a and c, are the leading horns of the pole pieces.

**Horns of Pole Pieces of Dynamo-Electric Machine.**—The edges of the pole pieces of a dynamo-electric machine towards or from which the armature is carried during its rotation.

These are called the following and the leading horns.

**Horse-Power.**—A commercial unit for power or rate of doing work.



A rate of doing work equal to 33,000 pounds raised 1 foot per minute, or 550 pounds raised 1 foot per second.

A rate of doing work equal to 4,562.33 kilogrammes raised 1 metre per minute.

A careful distinction must be drawn between work and power. The same amount of work is done in raising 1 pound through 10 feet whether it be done in one minute or in one hour. The power expended or the rate of doing work is, however, quite different, being in the former case sixty times greater than in the latter.

1 horse-power = 550 foot-pounds per second.

" = 33,000 foot-pounds per minute.

" = 4,562.33 kilogramme-metres per minute.

" = 745.941 watts.

" = 1.01385 metric horse-power.

**Horse-Power, Electric** — (See *Power, Horse, Electric*.)

**Horse-Power Hour** — (See *Hour, Horse-Power*.)

**Horse-Power, Metric** — —A unit of power in which rate of doing work is equal to 75 kilogramme-metres. (See *Horse-Power*.)

**Horseshoe Electro-Magnet** — (See *Magnet, Electro, Horseshoe*.)

**Horseshoe Magnet** — (See *Magnet, Horseshoe*.)

**Hot, Red** — —Sufficiently heated to emit red light only. (See *Heat, Red*.)

**Hot St. Elmo's Fire** — (See *Fire, Hot, St. Elmo's*.)

**Hot, White** — —Sufficiently heated to emit all the colored lights of the spectrum. (See *Heat, White*.)

**Hotel Annunciator** — (See *Annunciator, Hotel*.)

**Hour, Ampère** — —A unit of electrical quantity equal to one ampère flowing for one hour.

The ampère-hour is in reality a unit of quantity like the coulomb. It is used in the service of electric currents, and is equal to the product of the current delivered by the time in hours. The ampère-hour is not a measure of energy, but when

combined with the volt, and expressed in watt hours, it is a measure of energy.

The capacity of any service for maintaining a flow of current is measured in ampère-hours. Thus, if any service, such as a primary or secondary battery, has a capacity of 80 ampère-hours, it will supply 8 ampères for ten hours, or it may give 10 ampères for eight hours.

The storing capacity of accumulators is generally given in ampère-hours. The same is true of primary batteries.

One coulomb equals .0002778 ampère-hours.

One ampère-hour equals 3,600 coulombs.

**Hour, Horse-Power** — —A unit of work. An amount of work equal to one horse-power for an hour.

One horse-power is equal to 1,980,000 foot-pounds, or 745.941 watt hours.

**Hour, Kilo-Watt** — —A unit of electrical power equal to a kilo-watt maintained for one hour.

**Hour, Lamp** — —Such a service of electric current as will maintain one electric lamp during one hour.

The number of lamp-hours is obtained by multiplying the number of lamps by the average number of hours during which the lamps are burning.

The use of lamp-hours is for the purpose of estimating the current supplied to a consumer by counting the number of hours each lamp is in service.

To convert lamp-hours to watt-hours, multiply the number of lamp-hours by the number of watts per lamp. The watt hours, divided by 746, will then give the electrical horse-power hours. (See *Hour, Watt*.)

**Hour, Watt** — —A unit of electrical work.

An expenditure of an electrical work of one watt for one hour.

Lamp-hours are converted to watt-hours by multiplying the number of lamp-hours by the number of watts per lamp. (See *Hour, Lamp*.)

**House Annunciator** — (See *Annunciator, House*.)

**House Main** — (See *Main, House*.)

**House-Service Conductor** — (See *Conductor, House-Service*.)

**House-Top Fixtures, Telegraphic** — —  
(See *Fixtures, Telegraphic House-Top*.)

**House Wire.**—(See *Wire, House*.)

**Hughes' Electro-Magnet.**—(See *Magnet, Electro, Hughes'*.)

**Human Body, Electric Resistance of** —  
—(See *Body, Human, Resistance of*.)

**Hydro-Electric Bath.**—(See *Bath, Hydro-Electric*.)

**Hydro-Electric Machine, Armstrong's**  
— —(See *Machine, Armstrong's Hydro-Electric*.)

**Hydrogen, Electrolytic** — —Hydrogen produced by electrolytic decomposition.

It is the electrolytic hydrogen liberated in a voltaic cell at the surface of the negative plate, which causes polarization and consequent decrease in the resulting current strength, by reason both of the counter-electromotive force it produces and the increased resistance it produces in the cell.

Electrolytic hydrogen is atomic hydrogen; *i. e.*, hydrogen with its bonds open or free. It therefore possesses much stronger chemical affinities than does molecular hydrogen. Electrolytic oxygen which is evolved at the same time as the electrolytic hydrogen has been successfully employed in electric bleaching. Hydrogen peroxide is also formed and acts as a bleaching agent.

**Hydrometer or Areometer.**—An apparatus for determining the specific gravity of liquids. (See *Areometer or Hydrometer*.)

**Hydro-Plastics.**—(See *Plastics, Hydro*.)

**Hydro-Plasty.**—The art of hydro-plastics. (See *Plastics, Hydro*.)

**Hydrotasimeter, Electric** — —An electrically operated apparatus designed to show at a distance the exact position of any water level.

In most forms of the electric hydrotasimeter a float placed in the liquid and connected with an electric circuit breaks this circuit, and, at intervals, sends positive impulses into the line when rising and negative impulses when falling. These are registered by means of an index moved by a step-by-step motion, positive currents moving it in one direction and negative currents moving it in the opposite direction.

**Hygrometer.**—An apparatus for determining the amount of moisture in the air.

**Hygrometrical.**—Of or pertaining to the hygrometer.

**Hygrometrically.**—In the manner of the hygrometer.

**Hypothesis.**—A provisional assumption of facts or causes the real nature of which is unknown, made for the purpose of studying the effects of such causes.

When the facts assumed by a hypothesis can be shown to be presumably true the hypothesis becomes a theory. A theory, therefore, gives a more correct expression of the relations between the causes and effects of natural phenomena than does a hypothesis.

**Hypothesis, Double-Fluid Electric** —  
—(See *Electricity, Double-Fluid Hypothesis of*.)

**Hypothesis, Grothüss'** — —A hypothesis proposed by Grothüss to account for the electrolytic phenomena that occur on closing the circuit of a voltaic cell.

Grothüss' hypothesis assumes:

(1.) That before the electric circuit is closed the molecules of the electrolyte are arranged in an irregular or unpolarized condition, as repre-

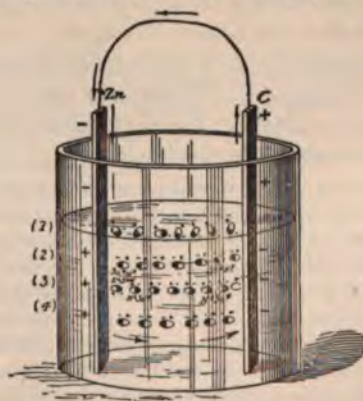


Fig. 293. Grothüss' Hypothesis of Electrolytic Polarization.

sented at (1), Fig. 293. These molecules are shaded as shown in Fig. 294, to indicate their composition and polarity.

(2.) When the circuit is closed and a current



begins to pass, a polarization of the electrolyte, as shown at (2), ensues, whereby all the negative ends of the molecules of hydrogen sulphate, or sulphuric acid, are turned towards the positive or zinc plate, and all the positive ends towards the negative or copper plate. This, as will be seen, will turn the  $\text{SO}_4$  ends towards the zinc, and the  $\text{H}_2$  ends towards the copper.

(3.) A decomposition of the polarized chain, whereby the  $\text{SO}_4$  unites with the zinc and the  $\text{H}_2$  liberated reunites with the  $\text{SO}_4$  of the molecule next to it in the chain, and its liberated  $\text{H}_2$  with the one next to it, and so on until the last liberated  $\text{H}_2$  in the chain is given off at the surface of the copper or negative plate. This leaves the chain of molecules as shown at (3).




Fig. 294. Conventionalized Molecule.

(4.) A semi-rotation of the molecules of the chain, as at (3), until they assume the position shown at (4). This rotation is required, since all the molecules in (3) are turned with their similar poles towards similarly charged battery plates.

**Hypothesis, Single-Fluid Electric** — (See *Electricity, Single-Fluid Hypothesis of*.)

**Hypothetical.**—Of or pertaining to a hypothesis.

**Hypsometer.**—An apparatus for determining the height of a mountain or other elevation by ascertaining the exact temperature at which water boils at such elevation.

The use of a thermometer to measure the height of a mountain or other elevation is based on the fact that a given decrease in the temperature of the boiling point of water invariably attends a given decrease in the atmospheric pressure. Therefore, as the observer goes further above the level of the sea, the boiling point of water becomes lower, and from this decrease the height of the mountain or other elevation may be calculated.

**Hypsometrical.**—Of or pertaining to the hypsometer.

**Hypsometrically.**—In the manner of the hypsometer.

**Hysteresial Dissipation of Energy** (*Energy, Hysteresial Dissipation of*.)

**Hysteresis.**—Molecular friction t  
netic change of stress.

A retardation of the magnetizing magnetizing effects as regards the which produce them.

The quality of a paramagnetic substance by virtue of which energy is dissipated reversal of its magnetization.

The ratio of magnetic induction to the magnetizing force producing it, or, in other words, the magnetic permeability, is greater when the magnetizing force is decreasing, than when it is increasing. This phenomenon is seen in the known retention of magnetism in iron after the withdrawal of the force causing the magnetization and was called by Ewing *hysteresis* 'ὕστερεσις, to lag behind.

If a curve is constructed in which the horizontal abscissas represent the magnetizing force or the magnetizing current to which the magnetization is proportional, and the vertical ordinates represent the number of lines of induction passing through the body that is being magnetized, both in the case of gradually increasing and gradually decreasing currents, the curve will be found to have different values for the decreasing than for the increasing current. Constructing a curve in this manner, the case of a ring of iron, which has been first suddenly magnetized and then demagnetized, taking the magnetizing force along the line F H, Fig. 295, and the resulting magnetization along the line M N, a loop is formed in the curve, as shown in the figure. The arrows show the direction of the magnetizing force; the shaded area represents the work done due to hysteresis.




Fig. 295. Curves of Hysteresis (Ewing).

The area of this loop represents the amount of energy per unit of volume expended in carrying a magnetic cycle, i. e., in carrying the material through a magnetization and subsequent demagnetization.

The physical meaning of the loop is that

of magnetization has occurred. This lag of the magnetization is due to hysteresis. It gives the value for the energy in ergs dissipated per cubic centimetre, for a complete cyclic cycle for a number of substances, as follows:

Sample of Iron operated upon.	Energy dissipated in ergs per cubic centimetre, during a complete cycle of doubly reversed strong magnetization.
Soft annealed iron.....	9,300 ergs.
Soft annealed iron.....	16,300 "
Drawn steel wire.....	60,000 "
Drawn steel wire.....	70,500 "
Steel, glass hard.....	76,000 "
Soft steel wire, normal	
per.....	116,000 "
annealed.....	94,000 "
glass hard.....	117,000 "

approximately 28 foot-pounds of energy are required to make a double reversal of strong magnetization in a cubic foot of iron. Energy dissipated in this way takes the form of heat. Heat, however, is to be distinguished from induced by Foucault currents.

According to Ewing, hysteresis is greatly delayed by keeping the iron in a state of magnetic vibration. In this way, the energy dissipated in a complete magnetic cycle is correspondingly decreased. This observation of Ewing agrees with the prior observation of Hughes, who found that tapping or twisting a bar of iron accelerates the removal of its residual magnetism.

The phenomena of hysteresis, according to Ewing, accounts for part of the energy which is dissipated in a dynamo-electric machine:

In the field magnets.

In an ordinarily constructed continuous-current dynamo, work is done in magnetizing the field magnets, not only to give the iron its initial magnetism, but also to constantly reproduce the magnetism which the machine loses by reason of the

continual vibrations to which it is subjected during its run. If sufficient residual magnetism were retained, on the withdrawal of the magnetizing force there would be no necessity for the current in the field magnets; but, since this is removed by even a small vibration, the energy of the exciting current must needs be expended.

(2.) In the armature of the dynamo.

The soft iron of the core is subjected to successive magnetizations and demagnetizations. According to Fleming, in the case of a core having a volume of 9,000 cubic centimetres, with fifteen reversals per second, the loss is equal to about  $\frac{1}{4}$  horse-power.

**Hysteresis, Static** — — That quality in iron, or other paramagnetic substance, by virtue of which energy is dissipated during every reversal of its magnetization.

Static hysteresis is so named in order to distinguish it from viscous hysteresis. (See *Hysteresis, Viscous*.)

**Hysteresis, Viscous** — — The time-lag observed in magnetizing a bar of iron, which is referable neither to induction in the iron, nor to self-induction in the magnetizing current, but to the magnetic viscosity of the substance.

A sluggishness exhibited by iron for magnetization or demagnetization due to magnetic viscosity.

The difference between static and viscous hysteresis is thus stated by Fleming in considering the analogous mechanical case of lifting a weight in a viscous fluid. "Apart from fluid resistance, the work done in lifting the weight against gravity, say one hundred times, is a hundred times the work required to be spent to lift it once; but if fluid resistance comes into play, and if this varies as the square of the velocity of the moving body, then the total work done in lifting the weight through the fluid will be dependent also upon the rate at which the cycle is performed."



## I

**I. H. P.**—A contraction for indicated horse-power, or the horse-power of an engine as obtained by the means of an indicator card.

**I. W. G.**—A contraction for Indian wire gauge.

**Idio-Electrics.**—A name formerly applied to such bodies as amber, resin or glass, which are readily electrified by friction, and which were then supposed to be electric in themselves.

This distinction was based on an erroneous conception, and the word is now obsolete.

**Idiostatic.**—A term employed by Sir William Thomson to designate an electrometer in which the measurement is effected by determining the repulsion between the charge to be measured and that of a charge of the same sign imparted to the instrument from an independent source. (See *Heterostatic*.)

**Idle Poles.**—(See *Poles, Idle*.)

**Igniter, Jablochkoff** — A small strip of carbon, or some carbonaceous material that is readily rendered incandescent by the current, placed between the free ends of the parallel carbons of a Jablochkoff candle, for the establishment of the arc on the passage of the current.

The igniter is necessary in the Jablochkoff electric candle, since the parallel carbons are rigidly kept at a constant distance apart by the insulating material placed between them, and cannot therefore be moved together as in the case of the ordinary lamp. (See *Candle, Jablochkoff*.)

**Ignition, Electric** — The ignition of a combustible material by heat of electric origin.

The electric ignition of wires is generally accomplished by electric incandescence. Ignition may be accomplished by the heat of the voltaic arc. (See *Heat, Electric. Furnace, Electric*.)

The ignition of combustible gases is accomplished by the heat of the electric spark. (See *Burner, Automatic, Electric*.)

**Illumination, Artificial** — The employment of artificial sources of light.

A good artificial illuminant should possess the following properties, viz.:

(1.) It should give a general or uniform illumination as distinguished from sharply marked regions of light and shadow.

To this end a number of small lights well distributed are preferable to a few large lights.

(2.) It should give a steady light, uniform in brilliancy, as distinguished from a flickering, unsteady light. Sudden changes in the intensity of a light injure the eyes and prevent distinct vision.

(3.) It should be economical, or not cost too much to produce.

(4.) It should be safe, or not likely to cause loss of life or property. To this intent it should, if possible, be inclosed in or surrounded by a lantern or chamber of some incombustible material, and should preferably be lighted at a distance.

(5.) It should not give off noxious fumes or vapors when in use, nor should it unduly heat the air of the space it illumines.

(6.) It should be reliable, or not apt to be unexpectedly extinguished when once lighted.

The electric incandescent lamp is an excellent artificial illuminant.

(1.) It is capable of great subdivision, and can, therefore, produce a uniform illumination.

(2.) It is steady and free from sudden changes in its intensity.

(3.) It compares favorably in point of economy with coal oil or gas, provided its extent of use is sufficiently great.

(4.) It is safer than any known illuminant, since it can be entirely inclosed and can be lighted from a distance or at the burner without the dangerous friction match.

The leads, however, must be carefully insulated and protected by safety fuses. (See *Fuse, Safety*.)

(5.) It gives off no gases, and produces far less heat than a gas-burner of the same candle power.

It perplexes many people to understand why the incandescent electric light should not heat the air of a room as much as a gas light, since it is quite as hot as the gas light. It must be remembered, however, that a gas-burner, when lighted, not only permits the same quantity of

gas to enter the room which would enter it if the gas were simply turned on and not lighted, but that this bulk of gas is still given off, and is, indeed, considerably increased by the combination of the illuminating gas with the oxygen of the atmosphere; and, moreover, this great bulk of gas escapes as highly heated gases. Such gases are entirely absent in the incandescent electric light, and consequently its power of heating the surrounding air is much less than that of gas lights.

(6.) It is quite reliable, and will continue to burn as long as the current is supplied to it.

#### **Illumination, Lighthouse, Electric** —

—The application of the electric arc light to lighthouses.

A powerful arc light is placed in the focus of the dioptric lens now commonly employed in lighthouses. Since the consumption of the carbon electrodes would alter the position of the focus of the light, electric lamps for such purposes are constructed to feed both of their carbons, instead of the upper carbon only, as in the case of the ordinary arc lamp. Such lamps are called focusing lamps.

**Illumination, Unit of** — —A standard of illumination proposed by Preece, equal to the illumination given by a standard candle at the distance of 12.7 inches.

According to Preece, the illumination of the average streets of London, where gas is employed, is equal to about one-tenth of this standard in the neighborhood of a gas lamp, and about one-fiftieth in the middle space between two lamps.

The term unit of illumination, in place of intensity of light, was proposed by Preece in order to avoid the very great difficulty in determining the intensity of a light in a street or space where there were a number of luminous sources, and where the directions of incidence of the different lights vary so greatly.

A carcel standard at the distance of a metre will illumine a surface to the same intensity of illumination as a standard candle at the distance of 12.7 inches. (See *Candle, Foot*.)

**Illumined Electrode.**—(See *Electrode, Illumined*.)

**Imbibition Currents.**—(See *Currents, Imbibition*.)

**Images, Electric** — —A term some-

times applied to the charge produced on a neighboring surface by induction from a known charge.

A positive charge produces, by induction, on a flat metallic surface near it, a negative charge which is distributed with varying density over the surface, but acts electrically as would an equal quantity of negative electricity placed back of the plate at the same distance the positive charge is in front of it. The correspondence of this charge with the image of an object seen in a plane mirror, has led to the term electric image.

Maxwell defines electric image as follows: "An electric image is an electrified point, or system of points, on one side of a surface, which would produce, on the other side of that surface, the same electrical action which the actual electrification of the surface really does produce."

**Impedance.**—Generally any opposition to current flow.

The sum of the ohmic resistance and the spurious resistance of a circuit measured in ohms.

A quantity which is related to the strength of the impressed electromotive force of a simple periodic or alternating current, in the same manner that resistance is related to the steady electromotive force of a continuous current.

In the case of steady currents, the current strength is equal to the electromotive force divided by the resistance; or,

$$\text{Current strength} = \frac{\text{Electromotive force}}{\text{Resistance.}}$$

In the case of a simple periodic or alternating current, the average current strength is equal to the average impressed electromotive force divided by the impedance; or,

$$\text{Average current strength} = \frac{\text{Average impressed electromotive force}}{\text{Impedance.}}$$

Since impedance, like true resistance of the circuit, can be measured in ohms, it is sometimes called the virtual resistance.

Impedance is a quantity equal to the square root of the sum of the squares of the inductive resistance of the circuit and the ohmic resistance.

In the case of simple periodic or alternating currents, the average current strength is equal to the average impressed electromotive force, divided by the impedance; the maximum current strength



is equal to the maximum impressed electromotive force, divided by the impedance.

The impedance of a circuit can be represented geometrically as follows: Draw a right angled triangle (Fig. 296), the base of which represents the ohmic resistance of the circuit, and the perpendicular, the inductive resistance; then the hypotenuse will represent the impedance.



Fig. 296. Geometrical Representation of Impedance.

Since the ohmic resistance equals  $R$ , and the inductive resistance equals the inductance  $L$ , multiplied by  $2\pi n$ , in which  $n$ , is the frequency, the value of the impedance is equal to

$$\sqrt{R^2 + 4\pi^2 n^2 L^2}.$$

**Impedance Coil.**—(See *Coil, Impedance*.)

**Impedance, Impulsive or Oscillatory**

—The impedance which a conductor offers to an impulsive or oscillatory discharge.

The impulsive impedance varies in simple proportion to the frequency of the periodic current. It depends on the form and size of the circuit, but it is independent of its resistance or permeability.

**Imponderable.**—That which possesses no weight.

A term formerly applied to the luminiferous or universal ether, but now generally abandoned.

It is very questionable whether it is possible for any form of matter to be actually imponderable or to possess no attraction for other matter.

An imponderable fluid, as, for example, the universal ether, as the term is now generally employed, is a fluid whose weight is comparatively small and insignificant, and not a fluid an infinite quantity of which would be entirely devoid of weight.

**Impressed Electromotive Force.**—(See *Force, Electromotive, Impressed*.)

**Impulse, Electro-Magnetic** — An impulse produced in the ether surrounding a conductor by the action of an impulsive discharge, or by a pulsating field.

**Impulse, Electromotive** — An impulse producing an impulsive rush of electricity.

The term is employed to distinguish between the ordinary electromotive force which produces a steady current of electricity and an electromotive impulse which produces an impulsive rush of electricity or impulsive discharge.

**Impulsion Cell.**—(See *Cell, Impulsion*.)

**Impulsion Effect.**—(See *Effect, Impulsion*.)

**Impulsive Impedance.**—(See *Impedance, Impulsive or Oscillatory*.)

**Incandescence.**—To shine or glow by means of heat.

**Incandescence.**—The shining or glowing of a substance, generally a solid, by reason of a sufficiently high temperature.

**Incandescence, Electric** — The shining or glowing of a substance, generally a solid, by means of heat of electric origin.

Electric incandescence of solid substances differs from ordinary incandescence, in the fact that unless the substance is electrically homogeneous throughout, the temperature is not uniform in all parts, but is highest in those portions where the resistance is highest and the radiation smallest.

The deposition of carbon in and on a carbon conductor by the *flashing process* is quite different as performed by electrical incandescence, than it would be if the carbons were heated by ordinary furnace or other heat. (See *Carbons, Flashing Process* for.)

**Incandescence, Thermal** — The shining or glowing of a substance, generally a solid, by means of heat other than that of electric origin.

**Incandescent.**—Shining or glowing with heat.

**Incandescent Ball Electric Lamp.**—(See *Lamp, Electric, Incandescent Ball*.)

**Incandescent Electric Lamp, Life Curve of** — (See *Curve, Life, of Incandescent Lamp*.)

**Incandescent Electric Lamp, Life of** — (See *Lamp, Electric, Incandescent, Life of*.)

**Incandescent Straight Filament Lamp** — (See *Lamp, Incandescent, Straight Filament*.)

**Incandescing.**—Glowing or shining by heat.

**Inclination, Angle of** —The angle a magnetic needle, free to move in a vertical and horizontal plane, makes with a vertical line passing through its point of suspension.

**Angle of magnetic dip.** —The angle a magnetic needle, supported at its centre of suspension and capable of moving freely in a vertical as well as in a horizontal plane, does not make with a horizontal position at all parts of the surface.

**Angle which marks its deviation from the vertical position** is called the angle of dip or inclination. (See *Dip, Magnetic*.)

**Incandescent Electric Lamp.** — (See *Electric, Incandescent*.)

**Inclination Chart.** — (See *Chart, Inclination*.)

**Inclination Compass.** — (See *Compass, Inclination*.)

**Inclination, Magnetic** —The angle of deviation from a horizontal position of a suspended magnetic needle. (See *Magnetic, Chart, Inclination*.)

**Inclination Map.** — (See *Map or Chart, Inclination*.)

**Inclination of Magnetic Needle.** — (See *Magnetic, Inclination of*.)

**Inclinometer.** —A name sometimes given to an inclination compass. (See *Compass, Inclination*.)

**Incomplete Circuit.** — (See *Circuit, Incomplete*.)

**Increased Electric Irritability.** — (See *Irritability, Electric, Increased*.)

**Increment Key.** — (See *Key, Increment*.)

**Increment Key of a Quadruplex Telegraphic System.** — (See *Key, Increment, of Quadruplex Telegraphic System*.)

**India Rubber.** —A resinous substance obtained from the milky juices of several tropical trees.

India rubber or caoutchouc is obtained from *Hevea elastica* of South America.

India rubber is quite elastic and possesses high powers of electric insulation. When vulcanized or combined with sulphur, it still retains its powers of electric insulation in a high degree. In this state it is highly electrified by friction. (See *Caoutchouc*.)

**Indicating Bell.** — (See *Bell, Indicating*.)

**Indicator, Automatic** —Any automatic device for electrically indicating the number of times a circuit has been opened or closed, and thus the number of times a given operation has occurred which has caused the opening or closing of such circuit.

An annunciator with an automatic drop is sometimes called an automatic indicator. (See *Annunciator, Electro-Magnetic, Annunciator Drop, Automatic*.)

**Indicator, Electric** —A name applied to various devices, generally operated by the deflection of a magnetic needle, or the ringing of a bell, or both, for indicating, at some distant point, the condition of an electric circuit, the strength of current that is passing through it, the height of water or other liquid, the pressure on a boiler, the temperature, the speed of an engine or line of shafting, the working of a machine or other similar events or occurrences.

A term sometimes used in place of annunciator. (See *Annunciator, Electro-Magnetic*.)

Indicators are of various forms. They are generally electro-magnetic in character. They are automatic in action.

**Indicator, Electric Circuit** —A device, generally in the form of a vertical galvanometer, employed to indicate the presence and direction of a current in a circuit, and often to roughly measure its strength. (See *Galvanometer, Vertical*.)

**Indicator, Electric, for Steamships** —An electric indicator operated by circuits connected with the throttle valve and reversing gear of the steam engine.

The signal "stop," for example, sent by the navigating officer to the engineer, causes him to close the throttle. This act places the indicator needle at "stop," and thus informs the officer that his signal has been obeyed. In the same



manner, the opening of the throttle sets the indicator needle to "ahead," etc.

**Indicator, Electric Throwback** — — An annunciator with a drop that is electrically replaced. (See *Annunciator, Electro-Magnetic.*)

**Indicator, Lamp** — — An apparatus used in the central station of a system of incandescent lamp distribution to indicate the presence of the proper voltage or potential difference on the mains.




Fig. 297. Edison-Howell Lamp Indicator.

The lamp indicator of Edison and Howell is shown in Fig. 297. It consists essentially of a Wheatstone bridge with the resistances arranged as shown. A galvanometer at G, serves, by the movements of its magnetic needle, to act as an indicator. This needle remains at zero, when the potential difference is the exact voltage required on the circuit with which the indicator is connected. The incandescent lamp at L, being one of the resistances, and being constantly traversed by the current, will have a fixed resistance for the temperature at which it is designed to run. The other resistances are so proportioned as to insure the needle at G, remaining at zero. If, however, the potential varies, the temperature of the lamp L, varies, and, being carbon, its resistance also varies, a rise of temperature corresponding to a fall of lamp resistance, which destroys the balance of the bridge and deflects the galvanometer needle. The attendant then regulates the potential to bring the needle back to zero.

**Indicator, Mechanical Throwback** — — An annunciator with a mechanical drop. (See *Annunciator, Electro-Magnetic. Annunciator, Drop. Annunciator, Gravity.*)

**Indicator, Pendulum** — — An annunciator, the indicating arm of which is operated

by means of a pendulum. (See *Annunciator, Pendulum.*)

**Indicator, Potential** — — An apparatus for indicating the potential difference between any points of a circuit.

A voltmeter is a potential indicator. It is, however, more than an indicator, since it gives the value of the potential difference in volts. (See *Voltmeter.*) A lamp indicator is a potential indicator. (See *Indicator, Lamp.*)

**Indicator, Semaphore** — — An annunciator in which a gravity drop or shutter is caused to fall by the action of the electric current, thus exposing a number of other signals back of the drop or shutter.

**Indicator, Speed** — — A name sometimes applied to a tachometer. (See *Tachometer.*)

A form of speed indicator is shown in Fig. 298. The endless screw drives the wheel when the triangular point is held firmly against the centre of the revolving shaft or pulley.



Fig. 298. Speed Indicator.

**Indicator, Voltaic Battery** — — A device for indicating the condition of a voltaic battery.

**Indifferent Point.**—(See *Point, Indifferent.*)

**Indirect Excitation.**—(See *Excitation, Indirect.*)

**Induced Atomic Currents.**—(See *Currents, Induced, Atomic or Molecular.*)

**Induced Current.**—(See *Current, Induced.*)

**Induced Direct Current.**—(See *Current, Direct, Induced.*)

**Induced Electrostatic Charge.**—(See *Charge, Induced Electrostatic.*)

**Induced Molecular Currents.**—(See *Currents, Induced Molecular.*)

**ed Reverse Currents.**—(See *Currents, Induced*.)

**tance** — —The induction of a current in itself, or on other circuits.

**Induction.**

is now generally employed instead of **induction**.

property in virtue of which a finite electromotive force, acting on a circuit, does not immediately generate the full current due to the electromotive force, and when the electromotive force is withdrawn, time is required for the current strength to fall to zero.—(*Fleming*.)  
**Inductance** by virtue of which the passage of an electric current is necessarily accompanied by the absorption of electric energy in the form of a magnetic field.

**Inductance of a circuit depends:**

1. On the form or shape of the circuit,

2. On the magnetic permeability of the space through the circuit.

3. On the magnetic permeability of the circuit.

For variations of current strength in electric circuits, inductance is not unlike mass, or inertia, as regards variations of velocity. Time is required to produce velocity in a body by the action of any force; so also time is required to produce a current by the action of an electromotive force.

The electro-magnetic energy present in any circuit is equal to the square of the current multiplied by the inductance. Since one of these (the current strength) represents the velocity, the inductance, must have the dimensions of a distance or length. Inductance, therefore, is measurable in units of length. If circuits are formed of magnetizable materials, the inductance of a circuit is the ratio between the electromotive force taking place through the circuit and the current producing it.

If a circuit is formed entirely of non-magnetic materials, and is surrounded entirely by materials of uniform magnetic permeability (such as air, and diamagnetic materials generally), the inductance is a constant quantity and depends on the form or shape of the circuit. In this case the total inductance through the circuit is proportional to the magnetizing force, and the magnetic inductance, or the magnetic conductance of the circuit, is equal to the total inductance.

tion through the circuit, divided by the magnetizing force.

In cases where the magnetic circuit is partly or wholly of paramagnetic substances, where the induction bears no constant ratio to the magnetizing force, and where the induction takes place partly or wholly in media of variable permeability, the co-efficient of self-induction, or the inductance, must be defined in three ways:

(1.) As the ratio between the counter electromotive force in any circuit and the time rate of variation of the current producing it.

(2.) As the ratio between the total induction through the circuit and the current producing it.

(3.) As the energy associated with the circuit in the form of magnetic field, due to unit current in that circuit, or as the co-efficient by which half the square of the current must be multiplied to obtain the electro-kinetic energy of the circuit at that instant.—(*Fleming*.)

A flat sheet or strip of metal possesses less inductance than a round conductor of equal cross-section.

This may be explained by conceiving that a flat conductor presents a greater absorption surface to the dielectric.

Therefore, the perfect form for a conductor transmitting rapidly alternating currents is that of a flat sheet or strip of copper, or preferably a copper tube.

The experiments of Hughes show that the inductance of a conductor may be regarded as an effect due to the time required for the rapidly periodic current to penetrate the conductor, and that the decrease in the inductance, produced by forming the conductor of a strip or bar, is due to the decreased distance the current has to pass to the inner parts.

**Inductance, Absolute Unit of** — —A unit of length equal to one centimetre.

A length equal to an earth quadrant or 10<sup>9</sup> centimetres is called the practical unit of inductance. The practical unit of inductance was formerly called a secohm or quadrant. It is now generally called a henry. (See *Henry, A.*)

**Inductance Bridge.**—(See *Bridge, Inductance*.)

**Inductance, Co-efficient of** — —A constant quantity, such that when multiplied by the current strength passing in any coil or circuit, will represent numerically the induction through the coil or circuit due to that current.



A term sometimes used for co-efficient of self-induction. (See *Induction, Co-efficient of*.)

**Inductance, Constant** — —The inductance which occurs in circuits formed wholly of non-magnetic materials, immersed in or surrounded by media of constant magnetic permeability or magnetic conductance for lines of magnetic force. (See *Permeability, Magnetic*.)

When the lines of magnetic force pass through such materials as ordinary insulators, or diamagnetic materials, such as copper, the inductance is constant, provided the geometric form of the circuit remains the same.

**Inductance, Formal, of Circuit** — —That part of the counter electromotive force of a circuit which depends on the form of the circuit.

**Inductance, or Self-Induction, Practical Unit of** — —A length equal to the earth quadrant or  $10^9$  centimetres.

The absolute unit of inductance is equal to 1 centimetre.

**Inductance, Oscillatory, Electric** — —Inductance produced by electric oscillations.

**Inductance, Unit of** — —A term now generally used for unit of self-induction.

The value of the inductance may be given either in absolute or in practical units of inductance. The absolute unit of inductance is equal to a length of one centimetre. The practical unit of inductance is equal to 1,000,000,000 centimetres or  $10^9$  centimetres.

The practical unit of inductance was formerly called a secohm. The term henry is generally used for this unit. (See *Henry, A.*)

**Inductance, Variable** — —The inductance which occurs in circuits formed partly or wholly of substances like iron or other paramagnetic substances, the magnetic permeability of which varies with the intensity of the magnetic induction, and where the lines of force have their circuit partly or wholly in such material of variable magnetic permeability.

**Induction.**—An influence exerted by a

charged body or by a magnetic field on neighboring bodies without apparent communication.

A medium is necessary to connect the body producing the induction and that in which the induction is produced. (See *Induction, Electrostatic, Induction, Magnetic, Induction, Electro-Dynamic*.)

**Induction, Apparent Co-efficient of** — —A term sometimes used for co-efficient of apparent magnetic induction. (See *Induction, Magnetic, Apparent Co-efficient of*.)

It is called the apparent co-efficient of induction because its value is different from what it would be if the eddy currents were entirely suppressed. The eddy currents increase the resistance of the primary and decrease its inductance.

**Induction-Balance, Hughes'** — —(See *Balance, Induction, Hughes'*.)

**Induction, Balance of, in Cable** — —The removal of induction in a cable by neutralization by the presence of equal and opposite effects.

A balance is obtained of the inductive effects of the neighboring conductors, whether in the bunched cable or outside of it.

**Induction-Bridge.**—(See *Bridge, Inductance*.)

**Induction, Co-efficient of** — —A term sometimes used for co-efficient of magnetic induction. (See *Induction, Magnetic, Co-efficient of*.)

**Induction Coil.**—(See *Coil, Induction*.)

**Induction Coil, Inverted** — —(See *Coil, Induction, Inverted, Transformer*.)

**Induction, Current** — —A term sometimes used for voltaic induction. (See *Induction, Voltaic, Induction, Electro-Dynamic*.)

**Induction, Dissymmetrical, of Armature** — —An induction produced by the passage of a different number of lines of magnetic force through adjoining halves of the armature.

**Induction, Electro-Dynamic** — —Electromotive forces set up by induction in conductors which are either actually or practically moved so as to cut the lines of magnetic force.

electromotive forces, when permitted to close a circuit, produce an electric current. Dynamic induction may be produced in two ways:

1. By causing expanding or contracting lines of magnetic force to pass through that circuit.

2. By causing the circuit or conductor to pass through the lines of magnetic force.

As the lines of force are made to pass through the conductor or wire.

There are four cases of electro-magnetic induction:

1. That in which expanding or contracting lines of magnetic force, produced by rapidly varying current in any circuit, are caused to pass through or cut that circuit and consequently to produce differences of potential therein.

2. That in which expanding or contracting lines of magnetic force produced by any circuit by rapidly varying strength of the electric current passing through that circuit, are caused to pass through another neighboring circuit and produce differences of potential therein.

3. That produced by moving a conductor through a magnetic field so as to cut its lines of force. In this way the strength of the field may remain practically constant, the strength as regards the field of the fixed magnet is varying, as the magnet producing the field is moved toward or from such circuit. In this way differences of potential are produced in the circuit.

4. That produced by moving an inducing field through a fixed conductor. This may be accomplished by moving an electro-magnet, an electric current, or a permanent magnet past the conductor. The difference of potential is to be induced.

There are therefore four distinct varieties of dynamic induction:

1. Self-induction or inductance. (See Induction.)

2. Mutual induction, or, as it is sometimes called, voltaic current induction. (See Induction.)

3. Electro-magnetic induction, or, as it is sometimes called, dynamo-electric induction.

4. Magneto-electric induction.

When the terminals of a voltaic cell be connected by the ends of a comparatively long coil of wire, no appreciable spark will be observed at the cell, because the current induced by the induction is in the opposite direction to the

current of the cell and weakens it. On breaking contact, however, a spark is readily observed. This is due to the induced current on breaking, which, flowing in the same direction as the current of the cell, strengthens it.



Fig. 299. Mutual Induction.

The coil B, Fig. 299, consists of two parallel coils of insulated wire, the terminals of one of which, called the *primary coil*, are connected with the battery cell P N, and those of the other, called the *secondary coil*, with the galvanometer G.

Under these circumstances it is found:

(1.) That at the moment of closing the circuit through the primary coil, a momentary current is produced in the secondary coil in a *direction opposite to that of the current through the primary*, as is shown by the direction of the deflection of the needle of the galvanometer.

(2.) At the moment of breaking the circuit through the primary coil, an induced current is produced in the secondary coil in the *same direction as that flowing through the primary coil*.

(3.) These induced currents are momentary, and continue in the secondary only while the intensity of the current in the primary is varying, *i. e.*, while variations are occurring in the strength of the magnetic field in which the secondary coil is placed, therefore while the expanding or contracting lines of force are passing through the secondary coil.

If, for instance, when the current is established in the primary coil, and no current exists in the



Fig. 300. Mutual Induction.

secondary, the intensity of the current in the primary be varied by establishing a *shunt circuit* across the battery terminals, as by placing a short wire d, Fig. 300, in the mercury cups g, g, thus



decreasing the intensity of the current in the primary, an induced current will be set up in the secondary circuit in the same direction as the primary current.

From all these phenomena, we see that any increase of current in a conductor produces in a neighbouring conductor an induced current, or one in the opposite direction to the inducing current, while a decrease of the current produces a direct induced current, or one in the same direction as the inducing current.

If the induction coil be made, as in Fig. 302, with the primary coil movable into and out of the secondary coil, then the following phenomena will occur:

(1.) When the primary coil is moved toward the secondary coil an *inverse* current is induced in the secondary; and,

(2.) When the primary coil is moved away from the secondary coil a *direct* current is induced in the secondary.

The movements of permanent magnets towards or from a coil will also produce an induced current.

If, for example, the apparatus be arranged as in Fig. 301, then:



Fig. 301. Electro-Dynamic Induction.

(1.) A motion of the magnet towards the coil produces an induced current in the coil in one direction; and

(2.) Its motion away from the magnet produces an induced current in the coil in the opposite direction.

The directions of these induced currents are respectively *inverse* and *direct* as compared with the direction of the amperian currents which are assumed to produce the magnetic poles of permanent magnets, or of the currents that actually produce electro-magnets. (See *Magnetism, Ampère's Theory* of.)

These facts may be expressed by the following laws:

(1.) Any increase in the intensity of the



Fig. 302. Magneto-Dynamic Induction.

which pass through a circuit produces a current in that circuit, while any decrease of such lines of force which pass through any circuit produces a direct current in that circuit.



Fig. 303. Fleming's Rule.

(2.) The intensity of the induced current, more correctly, the *difference of potential* produced, is proportional to the rate of *increase* or *decrease* of the lines of force passing through the circuit.

A conductor, therefore, when moved thro

netic field so as to cut the lines of magnetic force. If the circuit is closed so that the difference of potential can neutralize itself, it will have a current induced in it by induction.

A simple but effective manner of remembering the direction of such currents is that proposed by Fleming.

The hand be held with the fingers extended, the thumb pointing in the direction of the forefinger, and the positive direction of the lines of force, *i. e.*, those coming out of the N. pole of a magnet. Then, if a wire or other conductor be moved in the direction in which the thumb points, it will cut these lines of force at right angles, and if the conductor have its length moved across these lines, it will have an induced current developed in it in the direction in which the middle finger points. (See *Force, Lines of Force*.)

The same thing can, perhaps, be even more

remembered by a piece of paper in the shape shown in Fig. 304, marking it as in Fig. 304, and then bending it at P, upward at the line, so as to form a right angle at P, another.

It has been already shown that a difference of potential, and not a current, is produced by moving a conductor through a magnetic field so as to cut the lines of force.

It can be shown that in order to generate a difference of potential of one volt, 100,000,000 C. G. of force must be cut per second.

In electro-dynamic induction, the induced current is produced by the energy absorbed in moving a conductor through the magnetic field. It is shown that in all cases of electro-dynamic induction, produced by the movement either of a circuit or of the magnet, the current induced in the circuit is in such a direction as to produce a pole which would tend to oppose the

**Induction, Electro-Magnetic** — — A form of electro-dynamic induction in which currents are produced by the motion of a

of electro-magnets or electro-magnetic solenoids. (See *Induction, Electro-Dynamic*.)

**Induction, Electrostatic** — — The production of an electric charge in a conductor brought into an electrostatic field.

If the insulated conductor A B, Fig. 305, be brought into the positive electrostatic field of the insulated conductor C, then,

(1.) A charge will be produced on A and B, as will be indicated by the divergence of the pith balls.

(2.) This charge is negative at the end A, nearest C, and positive at the end B, furthest from C, as can be shown by an *electroscope*. (See *Electroscope*.)



Fig. 305. Electrostatic Induction.

(3.) The charges at A and B, are equal to each other; for, if the conductor A B, be removed from the field of C, without touching it, the opposite charges completely neutralize each other.

(4.) If, however, the conductor A B, be touched at any place by a conductor connected with the earth, it will lose its positive charge, and will remain negatively charged when removed from the field of C. It is in this manner that an *electrophorus* is charged. (See *Electrophorus*.)

(5.) The amount of the charges produced in the conductor, A B, can never be greater than that in the inducing body C. That is to say, the



Fig. 306. Induction Precedes Attraction.

negative electricity at A, may be sufficient in amount to neutralize the positive charge on C, if allowed to do so. In point of fact the charge in-



duced is less in amount than the inducing charge, according to the distance between C and A, and the nature and condition of the medium which separates them.

The attractions of light bodies by charged surfaces are due to the opposite charge produced on those parts of the light bodies that are nearest the charged body.

The pith ball B, Fig. 306, suspended by a silk thread between an insulated positively charged conductor A, and the uninsulated conductor C, will receive by induction a negative charge on the side nearest A, and a positive charge on the side nearest C. It is therefore attracted to A, where, receiving a positive charge, it is repelled to C, where it is discharged and again assumes a vertical position. Induction again occurs, and consequent attraction and repulsion. These movements follow one another so long as a sufficient charge remains in A.

**Induction, Faradic, Apparatus** — —  
(See *Apparatus, Faradic Induction*.)

**Induction-Finder.**—(See *Finder, Induction*.)

**Induction, Lateral** — —An induction observed between closely approached portions of a circuit through which an impulsive discharge, such as the disruptive discharge of a Leyden jar, is passed as a long spark, thereby making the resistance of the circuit high.

A long copper wire, bent in the form of a rectangle, has its free ends near their extremities bent so as to approach within half an inch of each other. One of the ends of the wire is provided with a metallic ball and the other end connected with the earth. If, now, a Leyden jar charge is passed through the wire by connecting the outer coating with the end of the earth-connected wire and holding the inside coating near the knob, a spark will pass through the half inch of space between the approached portions of the circuit.

This discharge is due to what was formerly called lateral induction. The discharge of a Leyden jar is an oscillatory discharge, and it passes through the intervening air space instead of through the conductor because the resistance of the latter to the rapid alternations produces a counter electromotive force which acts as a resistance whose value is greater than that of the air space itself. (See *Path, Alternative*.)

**Induction, Magnetic** — —The production of magnetism in a magnetizable substance by bringing it into a magnetic field.

Suppose a small portion of a magnetizable body is placed in a magnetic field produced in a gap separating two closely approximated poles. To simplify matters, suppose this small portion to be a free unit pole. It will be acted on by two forces:

(1.) The force due to the magnetic field.

(2.) The force due to the free magnetism, which appears at the surface of the gap or cut.

The force on the unit pole is compounded of these two separate forces, and is called the *magnetic induction* of the space. Magnetic induction is, therefore, strictly speaking, a quantity.

The direction of magnetic force and the magnetic induction are the same in an air space outside a magnet. Within a bar of iron or other paramagnetic material, under induction in a magnetic field, the magnetic force at any point is due not only to the external or original field, but also to the field produced by the polarity induced, which acts opposed to the magnetic force at points. Magnetic force and magnetic induction are identical only where there is no magnetism.—  
(*Fleming*.)

When a magnetizable body is brought into a magnetic field the following phenomena occur, viz.:

(1.) The lines of magnetic force pass through the body and are condensed upon it. (See *Field, Magnetic. Paramagnetic*.)

(2.) If the body is free to move around an axis, but is not free to move bodily towards the magnet pole, it will come to rest with its greatest extent or length in the direction of the lines of force; i. e., in the direction in which it will offer the least resistance to the lines of force that thread through it.

(3.) The body will therefore become a magnet, its south pole being situated where the lines of force enter it and its north pole where they pass out from it. Since the lines of magnetic force are assumed to come out of the north pole of a magnet and to enter its south pole, if a magnetizable substance is brought near a north pole, the lines of force from that north pole will enter it at those parts nearest such north pole, thereby rendering such points south, and will pass out of its further end, which will thereby become north.

(4.) The intensity of the induced magnetism

pend on the number of lines of force that thread through it.

The direction of the *axis of magnetization* depend on the directions in which the lines are thread through the body. (See *Axis, etc.*)



Fig. 397. Magnetic Induction.

bar of iron,  $N'S'$ , Fig. 397, be brought near magnetized bar,  $NS$ , poles will be produced by induction, as may be shown by throwing rings on it.

The nearer the body to be magnetized is brought to the magnetizing pole the greater will be the number of lines of force that thread through it. Consequently, the intensity of the induced magnetism will be greater; this will be greatest when the poles actually touch each other.

*The production of magnetism, therefore, by contact or touch is only a special case of the process of magnetization by induction.*

The attraction of a magnetizable body by a magnet pole is caused by the mutual attraction which exists between the pole produced by induction and the pole producing the induction. This, as has been seen, is similar to the attraction caused by electric charge.

The following terms are given by Fleming as applied in the same sense as magnetic induction to an area:

The number of unit tubes of induction passing through the area.

The number of lines of force (induction) passing through the area.—(*Faraday.*)

The total magnetic induction through the area.—(*Maxwell.*)

The flux or flow of magnetic induction through an area.—(*Mascart & Foubert.*)

The surface-integral of magnetic induction over an area.—(*Fleming.*)

**Induction, Magnetic, Apparent Co-efficient of** — — The co-efficient of induction influenced by the presence of eddy currents.

It is called the co-efficient of apparent induction, because its value is not the same as it would be if the eddy currents were entirely suppressed.

The value of the co-efficient of apparent induction depends on the amount of the retardation of the magnetism; or, what is the same thing, on the strength of the eddy currents.

**Induction, Magnetic, Co-efficient of** — — A term sometimes used instead of magnetic permeability. (See *Permeability, Magnetic.*)

The ratio existing between the number of lines of magnetic induction that pass through any area of cross-section of a magnetic circuit and the magnetizing force producing such induction.

If  $B$ , equals the magnetic induction, or the number of lines of force that pass through any area of cross-section, and  $H$ , equals the magnetizing force, and  $\mu$ , equals the permeability, or the co-efficient of magnetic induction; then,

$$\mu = \frac{B}{H}$$

**Induction, Magnetic, Dynamic** — — The induction which takes place in the field of a magnet whose field is moving as regards the body in which induction is occurring.

This movement of the field may be attained,

- (1.) By the movement of the magnet.
- (2.) By the movement of the body in which induction is taking place.
- (3.) By the expansion or contraction of the lines of magnetic force produced by variations of the strength of the magnetic field; or, in other words, by the movement of the field. (See *Induction, Electro-Dynamic.*)

**Induction, Magnetic, Flux or Flow of** — — A term employed in the same sense as the magnetic induction which takes place through any given area.

The flux or flow of magnetic induction is equal to the magnitude of the area multiplied by the normal induction which takes place in one unit of that area.

**Induction, Magnetic, Lines of** — — Lines which show not only the direction in which magnetic induction takes place, but also the magnitude of the induction.

A line of induction may be regarded as a line along which induction takes place, or as the axis of a tube of induction.

This term is often loosely used for lines of force.

**Induction, Magnetic, Static** — — The



induction which takes place in the field of a magnet whose field is stationary as regards the body in which induction is occurring.

The term static magnetic induction is used in contradistinction to dynamic magnetic induction which occurs in a moving field. (See *Induction, Electro-Dynamic*.)

**Induction, Magnetic, Surface-Integral of** — — A term employed in the same sense as the magnetic induction which takes place over a given area.

**Induction, Magneto-Electric** — — A variety of electro-dynamic induction in which electric currents are produced by the motion of permanent magnets, or of conductors past permanent magnets. (See *Induction, Electro-Dynamic*.)

**Induction, Mutual** — — Induction produced by two neighboring circuits on each other by the mutual interaction of their magnetic fields. (See *Induction, Electro-Dynamic, Currents, Extra*.)

Induction produced in neighboring charged conductors by the mutual interaction of their electrostatic fields. (See *Field, Electrostatic*.)

The mutual induction of two conductors or circuits, is equal to the ratio of the induction which takes place through one of the circuits, to the strength of current in the other circuit, which is producing the induction

**Induction, Mutual, Co-efficient of** — — The quantity which represents the number of lines of force which are common to or linked in with two circuits, which are producing mutual induction on each other.

The maximum value the co-efficient of mutual induction can have, is equal to the square root of the product of the inductance of the two circuits, or  $\sqrt{L \times N}$ , in which L and N, are the constant co-efficients of self-induction of the two circuits.

**Induction, Mutual, Loops of** — — Loops or lines of induction produced in any circuit by variations in the intensity of the current flowing in a neighboring circuit.

The lines of induction produced by a circuit, in which a current of electricity is flowing, are closed loops or circles surrounding the circuit once or more. The wire or circuit is formed by

coiling a conductor a number of times in a circular coil, and this circular coil is placed near another coil in which a varying current is flowing.

As the lines of induction grow or increase, they cut the circular coil, forming lines of induction in the shape of loops, a number of which pass around it. They are called loops of mutual induction.

**Induction, Open-Circuit** — — The induction produced in an open circuit by means of electric pulses in neighboring circuits.

The researches of Hertz have shown that when an impulsive discharge, or an oscillatory discharge, occurs, an induction occurs even in open circuited conductors. He shows that these inductive effects are due to electro-magnetic waves or oscillations set up in the surrounding ether, which are propagated through free ether with the velocity of light. When these electro-magnetic waves or radiations impinge on any circuit, if its dimensions be such that sympathetic vibrations can be excited therein, such vibrations are set up and cause similar phenomena to those of the exciting cause, viz., oscillatory discharges or electro-magnetic vibrations. Hertz calls these sympathetic circuits, resonators, from their resemblance to acoustic resonators. (See *Resonators, Electric*.)

**Induction, Oscillatory** — — A name sometimes applied to open-circuit induction. (See *Induction, Open-Circuit*.)

**Induction, Reflection of** — — A term proposed by Fleming to express an action which resembles a reflection of inductive power.

The coils A and B, Fig. 308, are arranged as

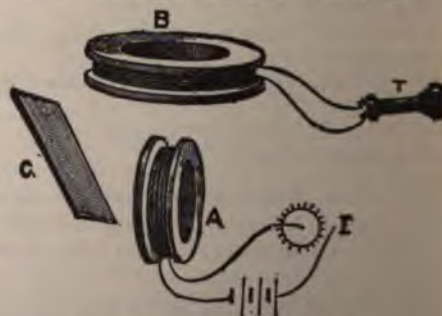


Fig. 308. Reflection of Induction.

shown, so as to act as the primary and secondary respectively of an induction coil, and are placed



conjugate or perpendicular to each other. (See *Coils, Conjugate*.) Therefore, no sounds are heard in the telephone T, when the current is rapidly reversed. If, however, a plate of copper, C, is placed in the position shown, then sounds are heard in the telephone. The action here resembles a reflection of the inductive action from A to B, by means of the plate C. The explanation is, of course, simple. Though A, can exert no action on B, because the two coils are conjugate to each other, yet A, can produce secondary currents in C; and these reacting on B, produce tertiary currents in C, and, therefore, sounds in the telephone.

**Induction, Self** — Induction produced in a circuit at the moment of starting or stopping the currents therein by the induction of the current on itself. (See *Currents, Extra*.)

A coil having unit self-induction, is sometimes said to have one tube of induction, or line of force added to its field for each increase of one unit of current.

**Induction, Self, Absolute Unit of** — A term sometimes employed for absolute unit of inductance. (See *Inductance, Absolute Unit of*.)

**Induction, Self, Ayrton & Perry's Standard of** — A standard for the comparison of values of self-induction.

The standard of self-induction of Ayrton & Perry consists of three bobbins of wire, two fixed and one movable. The movable bobbin is so arranged as to be capable of motion through 180 degrees within the fixed bobbins. The coils are wound on the surface of the zone of a sphere.

This apparatus permits of the ready comparison of the self-induction in different circuits, or in the same circuit under different conditions.

**Induction, Self, Co-efficient of** — The number of lines of force the current would induce or enclose in itself when the current flowing through it is equal to one absolute unit.

A term sometimes employed in the sense of inductance of a circuit.

The co-efficient of self-induction is defined by Fleming as follows: "In the case of circuits conveying electric currents, which are wholly made of non-magnetic material, and wholly immersed

in a medium of constant magnetic permeability, the total induction through the circuit per unit of current flowing in that circuit, when removed from the neighborhood of all other magnets and circuits, is called the co-efficient of self-induction; otherwise the ratio of the numerical values of the electro-magnetic momentum of such circuit, and the current flowing in it, when totally removed from all other currents and magnets, is the numerical value of the inductance of the circuit."

Since the magnetic lines due to a current in a circuit thread through the convolutions of the circuit itself, any variation in the current induces a difference of potential in the circuit itself, since the lines of force produced by the current in the circuit pass through or cut the circuit.

The ratio between this self-induced electromotive force, and the rate of change in the current which causes it, is called the co-efficient of self-induction. — (S. P. Thompson.)

For a given coil the co-efficient of self-induction is, according to S. P. Thompson:

(1.) Proportional to the square of the number of convolutions.

(2.) Is increased by the use of an iron core.

(3.) If the magnetic permeability is assumed as constant, the co-efficient of self-induction is numerically equal to the product of the number of lines of magnetic force due to the current, and the number of times they are enclosed by the circuit.

**Induction, Self, Magnetic** — A retardation in the appearance of magnetization, after the application of the magnetizing force, due to the influence of the magnetic lag.

Magnetic retardation.

This retardation in the magnetization has received the name of magnetic self-induction or retardation because it corresponds to the retardation in the starting or stopping of a current, in a conducting circuit, due to the self-induction of the current.

**Induction, Self, Unit of** — The unit of inductance. (See *Inductance, Unit of*.)

The unit of self-induction is now generally called the unit of inductance.

**Induction, Symmetrical, of Armature** — An induction produced by the simultaneous passage of the same number of lines of magnetic force through adjoining halves of the armature.



**Induction Telegraphy, Current Induction System of** — (See *Telegraphy, Induction, Current Induction System of*.)

**Induction Telegraphy, Static Induction System of** — (See *Telegraphy, Induction, Static Induction System of*.)

**Induction Top.** — (See *Top, Induction*.)

**Induction, Total Magnetic** — The total magnetic induction of any space is the number of lines of magnetic induction which pass through that space, where the magnetizable material is placed, together with the lines added by the magnetization of the magnetic material.

**Induction, Tubes of** — A portion of a magnetic field containing a number of closely contiguous lines of induction terminated by equipotential surfaces, or surfaces perpendicular to the lines of induction.

Tubes of induction possess the following characteristics:

(1.) The product of a normal cross-section of a tube and the mean magnetic induction which takes place over that section is the same for all cross-sections of the tube. In other words, the flux or flow of induction is constant throughout the entire length of the tube.

(2.) The normal cross-section of any equipotential surface at any point of a tube of induction is inversely proportional to the magnetic induction at that point.

(3.) All tubes of induction form endless tubes. This is necessary, since all lines of induction form closed circuits.

(4.) All tubes of induction may be expressed by a single line of induction, which, in the case of a uniform field, occupies the centre of the tube. (See *Force, Tubes of*.)

**Induction, Voltaic** — A variety of electro-dynamic induction produced by circuits on themselves or on neighboring circuits.

**Mutual induction.** (See *Induction, Electro-Dynamic*.)

This kind of induction is usually called current induction.

**Induction, Unipolar** — A term sometimes applied to the induction that occurs when a conductor is so moved through a

magnetic field as to continuously cut its lines of force.

If the conducting wire, A B C, Fig. 309, be ro-

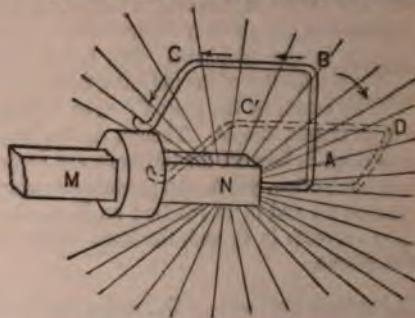


Fig. 309. Unipolar Induction.

tated (in a direction toward the observer) around the pole N, of a magnet, it will continuously cut its lines of magnetic force in practically the same direction, and will therefore produce a difference of potential that will result in a continuous current in the direction of the arrows. The end A, is supported in a recess in N, while the end near C, slides on a projection on the middle of the magnet.

Unipolar induction occurs in the case of Sturgeon's wheel, in which a metallic disc mounted on an axis is rotated between the poles of a magnet so as to cut the lines of magnetic force. In this case a difference of potential is generated which will produce a current that flows from the axis to the periphery, provided contact points are placed on the axis of rotation and the periphery of the disc connecting these parts of the disc in a closed circuit.

Unipolar dynamos operate by the continuous cutting of lines of magnetic force.

Strictly speaking, there is no such thing as a unipolar dynamo or unipolar induction, since a single magnetic pole cannot exist by itself. Continuous cutting of lines of magnetic force, however, can exist, and produces, unlike the ordinary bipolar induction, a continuous current without the use of a commutator.

**Inductionless Resistance.** — (See *Resistance, Inductionless*.)

**Inductive Capacity, Specific** — (See *Capacity, Specific Inductive*.)

**Inductive Circuit.** — (See *Circuit, Inductive*.)

**Electromotive Force.**—(See *Electromotive, Inductive*.)

**Retardation.**—(See *Retardative*.)

**Resistance.**—(See *Resistance*.)

**Specific Magnetic** — — Sometimes employed for specific magnetivity. (See *Conductivity, Specific*.)

**meter, Differential** — — An instrument for measuring, by means of a galvanometer, the momentary currents produced in a cable.

produced by the discharge of a cable at a duration that they do not produce more than a momentary effect on a needle.

positive charge in a cable, or the quantity produced in it by induction, is directly as the electromotive force of the battery;

inversely as the square root of the thickness of the gutta-percha or other insulating material between the conducting wires and the sheathing;

directly as the square root of the diameter of the wire of the conductor; and

inversely as the specific inductive capacity of the insulating material employed in the

cause the cable discharge to more effect the galvanometer needle, Mr. Wheatstone employed a differential instrument with a battery and three reversing keys, by which he gave a rapid succession of discharges of the cable. He called the instrument a *Inductometer*.

**Induction** — — A device, suggested by Wheatstone, for obtaining electric induction between moving trains and magnets, by means of the currents developed in a spiral of wire fixed on a rotating engine, by its motion past spirals of wire into which intermittent currents

from the engine is placed in the circuit. (See *Telegraph, Inductive*.)

**Inductor Dynamo.**—(See *Dynamo, Inductor*.)

**Inductorium.**—A name sometimes applied to a Ruhmkorff induction coil. (See *Coil, Induction*.)

**Inequality, Annual, of Earth's Magnetic Variation or Inclination** — — Annual variations in the value of the magnetic variation or inclination at any place. (See *Variation, Magnetic, Inclination, Magnetic*.)

**Inequality, Annual, of Earth's Magnetism** — — Variations in the value of the earth's magnetism during the earth's revolution depending on the position of the sun.

Annual variations in the earth's magnetism. (See *Variations, Magnetic, Annual*.)

**Inequality, Diurnal, of Earth's Magnetic Variation or Inclination** — — Diurnal variations in the value of the earth's magnetic variation or inclination. (See *Variation, Magnetic, Inclination, Magnetic*.)

**Inequality, Diurnal, of Earth's Magnetism** — — Inequalities or variations in the value of the earth's magnetism, dependent on the position of the sun during the earth's rotation.

**Inequality, Lunar, of Earth's Magnetic Variation or Inclination** — — Small variations in the value of the magnetic variation or inclination, dependent on the position of the moon as regards the magnetic meridian.

**Inequality, Lunar, of Earth's Magnetism** — — Small variations in the value of the earth's magnetism dependent on the position of the moon as regards the magnetic meridian.

**Inertia.**—The inability of a body to change its condition of rest or motion, unless some force acts on it.

The inertia of matter is expressed in Newton's first law of motion, as follows:

"Every body tends to preserve its state of rest or of uniform motion in a straight line, except in so far as it is acted on by an impressed force."

All matter possesses inertia.

**Inertia, Electric** — — A term sometimes employed instead of electro-magnetic inertia. (See *Inertia, Electro-Magnetic*.)



A term employed to indicate the tendency of a current to resist its stopping or starting.

By self-induction an electromotive force is produced in a wire or other conductor at the moment of starting the current in it that tends to oppose the starting of such current, and also an electromotive force at the moment of stopping the current, in such a direction as to prolong or continue the current. In other words, self-induction tends to retard the rise or fall of the current.

Fleming traces the following comparison between the moment of inertia of a rotating wheel and the energy of its rotation on the one side, and the inductance of a circuit and the electro-magnetic energy of the circuit on the other.

(1.) The angular momentum of a fly-wheel is equal to the numerical product of its moment of inertia and the angular velocity of the wheel. Similarly the electro-magnetic momentum is equal to the product of the inductance of the circuit by the current flowing through it at any instant.

(2.) The rate of change of the angular momentum of the wheel, at any instant, is a measure of the rotational force of the couple acting at that instant.

Similarly the rate of change of the electro-magnetic momentum of the circuit is the measure of the electromotive force acting on it so far as mere change of current is concerned, and irrespective of that part of the electromotive force required to overcome the ohmic resistance.

An electric current does not start or stop instantaneously. It requires time to do either, just as a stream of water or other fluid does, and it is this property which is referred to by the term electric inertia. Inertia does not appear to be possessed by electricity apart from matter. "It is doubtful," says Lodge, "whether electricity of itself, and disconnected from matter, has any inertia."

**Inertia, Electro-Magnetic** — — A term sometimes employed instead of inductance, or the self-induction of a current. (See *Inductance, Inertia, Electric*.)

**Inertia, Electro-Magnetic, Co-efficient of** — — A term sometimes employed in place of the co-efficient of inductance or self-inductance of a circuit.

**Inertia, Magnetic** — — The inability of a magnetic core to instantly lose or acquire magnetism.

A magnet core tends to continue in the magnetic state in which it was placed.

The magnetic inertia is sometimes called the magnetic lag.

To decrease the magnetic inertia, the strength of the magnetizing current is increased and the length of the iron core decreased. The iron should also be quite soft. (See *Lag, Magnetic Force, Coercive*.)

**Inferred Zero**.—(See *Zero, Inferred*.)

**Infinity Plug**.—(See *Plug, Infinity*.)

**Influence**.—A term sometimes used instead of electrostatic induction. (See *Induction, Electrostatic*.)

The word influence is used by some to apply to the case of electrostatic induction, as distinguished from electro-magnetic or magnetic induction.

**Influence Charge**.—(See *Charge, Influence*.)

**Influence Machine**.—(See *Machine, Influence*.)

**Inker, Morse** — — A form of telegraphic ink-writer. (See *Ink-Writer, Telegraphic*.)

**Ink-Writer, Telegraphic** — — A device employed for recording the dots and dashes of a telegraphic message in ink on a fillet or strip of paper.

A telegraphic ink-writer is a form of telegraphic recorder. (See *Recorder, Morse*.)

**Inside Wiring**.—(See *Wiring, Inside*.)

**Insolation, Electric** — — A term sometimes employed for electric sunstroke, or electric prostration. (See *Sunstroke, Electric, Prostration, Electric*.)

**Installation**.—A term embracing the entire plant and its accessories required to perform any specified work.

The act of placing, arranging or erecting a plant or apparatus.

**Installation, Electric** — — The establishment of any electric plant.

An electric light installation, for example, includes the steam engine and boilers, or other prime movers, the dynamo-electric machines, the line wires or leads, and the lamps.

**Insulated Body**.—(See *Body, Insulated*.)



**Insulating Cements.**—(See *Cements, Insulating*.)

**Insulating Sleeve.**—(See *Sleeve, Insulating*.)

**Insulating Stool.**—(See *Stool, Insulating*.)

**Insulating Tape.**—(See *Tape, Insulating*.)

**Insulating Tube.**—(See *Tube, Insulating*.)

**Insulating Varnish.**—(See *Varnish, Electric*.)

**Insulation, Electric** — —Non-conducting material so placed with respect to a conductor as to prevent the loss of a charge, or the leakage of a current.

In the case of coils the character of the insulation of the coil of wires through which the current is to pass must be considered from the standpoint of the cooling of the coil by radiation.

In considering the safest and most economical current density to employ in any dynamo or motor, the depth of the coil, *i. e.*, the thickness of its coils, must be considered, as well as the character of the materials employed for the insulation. Such substances as silk or wool, which are characterized by low heat conduction, retain the heat longer than cotton. Hence the depth of a silk covered coil should necessarily be less than that of one covered with cotton.

**Insulation Joint.**—(See *Joint, Insulation*.)

**Insulation, Porous** — —An insulating material containing air or gas placed between the conductor and the insulating covering.

A strip of perforated paper is used for covering the bare conductor, and the insulating material is placed on the outside of this; or, a cord is wrapped separately around the conductor, and the insulating material is placed on the outside of this. By these means, as will be seen, a layer of air exists between the conductor and its insulating covering.

**Insulation Resistance.**—(See *Resistance, Insulation*.)

**Insulation, Static** — —A term employed in electro-therapeutics for a method of treatment by convection streams or dis-

charges, in which the patient is seated on an insulated stool connected to one pole or electrode of an influence machine, while the other pole or electrode is connected to the ground.

**Insulator Cap.**—(See *Cap, Insulator*.)

**Insulator, Dice-Box** — —A name sometimes applied to a double-cone insulator. (See *Insulator, Double-Cone*.)

**Insulator, Double-Cone** — —An insulator in which the line wire passes through and is supported by means of a tube consisting of two inverted cones joined at their smaller bases.

**Insulator, Double-Cup** — —An insulator consisting of two funnel-shaped cups, placed in an inverted position on the supporting pin and insulated from one another by a free air space, except near the ends, which are cemented.

The wire is wrapped in a groove on the outside of the outer cup. This possesses the advantage of exposing it to the rain, which thus cleanses the insulator and improves its power of insulation. The inner cup is supported on a pin and the outer cup cemented to it. Any leakage must, therefore, pass over the entire surface of both cups.

**Insulator, Double-Shackle** — —A form of insulator used in shackling a wire, consisting of two single-shackle insulators.

**Insulator, Double-Shed** — —A double-cup insulator. (See *Insulator, Double-Cup*.)

**Insulator, Fluid** — —An insulator provided with a small, internally placed, annular, cup-shaped space, filled with an insulating oil, thus increasing the insulating power of the support.

The line wire is wrapped in a groove on the outside of the insulator. Any surface leakage between the wire and ground in wet weather must occur between the outer surface of the insulator, which is kept cleansed by the rain, and the inner surface, where it is supported by the pin. But to do this, the current must cross the oil in the cup, which, from its high power of insulation, effectually prevents leakage.

**Insulator, Invert** — —An insulator



placed on the top of the wire instead of underneath it, as was formerly done.

**Insulator, Oil** — —A fluid insulator filled with oil. (See *Insulator, Fluid*.)

**Insulator Pins.**—(See *Pins, Insulator*.)

**Insulator, Single-Shackle** — —A form of insulator used for shackling a wire. (See *Shackling a Wire*.)

**Insulator, Single-Shed** — —An insulator with a single inverted cup.

The wire is wrapped around a groove on the outside of the cup, where it is exposed to the cleansing action of the rain. The cup is inverted and supported on a pin, to which it is screwed and cemented.

**Insulator, Telegraphic or Telephonic** — —A non-conducting support of telegraphic, telephonic, electric light or other wires.

Insulators are generally made of glass, earthen-




Fig. 310. Glass Insulator.



Fig. 311. Porcelain Insulator.

ware, porcelain or hard rubber, and assume a variety of forms, some of which are shown in Figs. 310, 311 and 312. Of whatever material they are made, it is necessary that the surface on which the wire rests, or around which it is wrapped, should be smooth, so as to avoid abrasion, either of its insulating covering or of the wire itself.

Two things are to be considered in the selection of an insulator, viz.:

(1.) The insulating power of the material of which the insulator is composed, so as to reduce the leakage as much as possible. (See *Leakage, Electric*.)

(2.) The tensile strength of the material. so



Fig. 312. Hard Rubber Insulator.

that in case of heavy wires no breaks may result from the fracture of the insulator.

Some forms of insulators are shown in Figs. 310, 311 and 312. They are screwed to the pins by the threads shown. The insulating materials of which they are formed are of glass, porcelain and hard rubber respectively.

**Insulator, Window-Tube** — —A tube of vulcanite or other insulating material provided for the insulation of a wire entering a room.

The wire conductor passes through the middle of the tube, which is firmly fixed in an opening passing through the window frame.

**Insulator, Z** — —A form of double-cup insulator in which the insulating material, earthenware or porcelain, is made in a single piece, instead of in two separate pieces.

The body of the insulator is conical in form, and the interior air space presents a shape approximately that of the letter Z.

The double form is used in order to diminish the leakage.

**Intensity Armature.**—(See *Armature, Intensity*.)

**Intensity, Connection of Voltaic Cells for** — —A term formerly employed for series-connected voltaic battery cells. (Obsolete.)

**Intensity, Magnetic** — —Density of magnetic induction.

Magnetic flux per square centimetre.

A committee of the American Institute of Electrical Engineers on "Units and Standards," proposes the following definition for magnetic intensity:

The induction density at a point within an element of surface is the surface differential at that point.

The practical unit of magnetic intensity is  $10^8$  or 100,000,000 C. G. S. lines per square centimetre.

In practice, excluding the earth's field, intensities range from 100 to 20,000 C. G. S. lines per square centimetre, and the working unit should, perhaps, have the prefix milli or micro.

**Intensity, Magnetic, Pole of** — —The earth's magnetic poles as determined by means of the oscillations of a magnetic needle.

The points of the earth's greatest magnetic intensity.

**Intensity of Current.**—(See *Current, Intensity of.*)

**Intensity of Field.**—(See *Field, Intensity of.*)

**Intensity of Light.**—(See *Light, Intensity of.*)

**Intensity of Magnetization.**—(See *Magnetization, Intensity of.*)

**Intensity, Photometric, Unit of** — — The amount of light produced by a candle that consumes two grains of spermaceti wax per minute. (See *Candle.*)

**Inter Air Space.**—(See *Space, Inter Air.*)

**Intercrossing.**—In a system of telephonic communication, a device for avoiding the disturbing effects of induction by alternately crossing equal sections of the line. (See *Connection, Telephonic Cross.*)

**Interference of Electro-Magnetic Waves.**—(See *Waves, Electro-Magnetic, Interference of.*)

**Interlocking Apparatus.**—(See *Apparatus Interlocking.*)

**Intermittent Contact.**—(See *Contact, Intermittent.*)

**Intermittent Cross.**—A form of electric cross. (See *Cross, Electric.*)

**Intermittent Current.**—(See *Current, Intermittent.*)

**Intermittent Disconnection.**—(See *Disconnection, Intermittent.*)

**Intermittent Earth.**—(See *Earth, Intermittent.*)

**Internal Circuit.**—(See *Circuit, Internal.*)

**Internal Polarization of Moist Bodies.**—(See *Polarization, Internal, of Moist Bodies.*)

**Interrupter.**—Any device for interrupting or breaking a circuit.

**Interrupter, Automatic** — — An automatic contact breaker. (See *Make-and-Break, Automatic.*)

**Interrupter, Reed** — — A term sometimes applied to a tuning-fork interrupter. (See *Interrupter, Tuning-Fork.*)

**Interrupter, Tuning-Fork** — — An interrupter in which the successive makes and breaks are produced by the vibrations of a tuning-fork or reed.

The tuning-fork or reed is maintained in vibration by any suitable means. Such interrupters are applied to various uses. Synchronous multiplex telegraphy affords an example of such uses.

**Invariable Calibration of Galvanometer.**—(See *Calibration, Invariable, of Galvanometer.*)

**Inverse Electromotive Force.**—(See *Force, Electromotive, Inverse.*)

**Inverse or Make-Induced Current.**—(See *Current, Make-Induced.*)

**Inverse Secondary Current.**—(See *Current, Inverse Secondary.*)

**Inversion, Thermo-Electric** — — An inversion of the thermo-electric electromotive force of a couple at certain temperatures. (See *Diagram, Thermo-Electric.*)

**Invert Insulator.**—(See *Insulator, Invert.*)

**Inverted Induction Coil.**—(See *Coil, Induction, Inverted.*)

**Inverted Type of Dynamo.**—(See *Dynamo, Inverted.*)

**Invisible Electric Floor Matting.**—(See *Matting, Invisible Electric Floor.*)

**Ions.**—Groups of atoms or radicals which result from the electrolytic decomposition of a molecule.

The ions are respectively electro-positive and electro-negative. The electro-positive ion appears at the plate connected with the *electro-negative terminal*, or at the *kathode*, and is called the *kathion*.

The electro-negative ion appears at the plate connected with the *electro-positive terminal*, or at the *anode*, and is called the *anion*. (See *Electrolysis, Kathion, Anion.*)

**Ions, Electro-Negative** — — The negative atoms, or groups of atoms, called radicals, into which the molecules of an electro-



lyte are decomposed by electrolysis. (See *Electrolysis*.)

The electro-negative ions are called the anions, because they appear at the anode of a decomposition cell. (See *Anions*. *Anode*.)

**Ions, Electro-Positive** — —The positive atoms, or groups of atoms, called radicals, into which the molecules of an electrolyte are decomposed by electrolysis. (See *Electrolysis*.)

The electro-positive ions are called the kathions, because they appear at the kathode of a decomposition cell. (See *Kathion*. *Kathode*.)

**Iron-Clad Electro-Magnet.**—(See *Magnet*, *Electro*, *Iron-Clad*.)

**Iron-Clad Magnet.**—(See *Magnet*, *Iron-Clad*.)

**Iron Core, Effect of, on the Magnetic Strength of a Hollow Coil of Wire** — —An increase in the number of lines of magnetic force, beyond those produced by the current itself, due to the opening out of the closed magnetic circuits in the atoms or molecules of the iron.

The atoms or molecules of the iron possess naturally closed magnetic circuits, or closed lines of magnetic force, lying entirely within the mass of the iron. When the iron is placed in a magnetic field, these minute closed circuits open out and are added to the lines of force produced by the circuit itself. The opening out of these closed atomic or molecular lines of magnetic force is attended by the formation of lines of polarized molecules or atoms.

Roughly speaking, according to Lodge, for each single line of magnetic force produced by the electric current, there are some 3,000 lines of magnetic force added to it from the iron, the exact number varying with the kind of iron, the physical condition of the iron and the degree of magnetization.

**Iron, Galvanized** — —Iron covered by a layer of zinc by dipping it in a bath of molten zinc.

The process of galvanizing iron is designed to prevent the corrosion or rusting of the iron on exposure to the air. (See *Metals*, *Electrical Protection of*.)

The word galvanized probably had its origin in

an assumed galvanic or voltaic action, in causing the zinc to adhere to the iron. The true galvanic or voltaic action, viz., the galvanic protection, comes after the galvanizing process is completed.

**Iron-Work Fault of Dynamo.**—(See *Fault*, *Iron-Work, of Dynamo*.)

**Irreversible Heat.**—(See *Heat*, *Irreversible*.)

**Irritability, Electric** — —Irritability of nervous or muscular tissue by an electric discharge.

**Irritability, Electric, Diminished** — —A decreased irritability of nervous or muscular tissue, produced by an electric current of given strength.

Diminished electric irritability is often present in certain diseases of the motor apparatus.

**Irritability, Electric, Increased** — —An irritability of nervous or muscular tissue produced by a much weaker electric current than that required to produce it in normal tissue.

**Irritability, Faradic** — —Muscular contractions produced by the action of a faradic current on a nerve.

The action of the faradic current is to cause a prolonged tonic contraction, which continues while the current continues. Though the natural action is to produce a contraction, followed by a relaxation on each make and break, yet the makes and breaks follow one another so rapidly that the relaxation has not time to occur before the next contraction follows.

**Irritability, Galvanic** — —Muscular contractions produced by the action of a galvanic current.

The action of a galvanic current is to cause a single, quick, momentary contraction of a muscle on each starting or completion of the circuit.

The contractions are stronger in the case of galvanic currents when the direction of the current is reversed with a commutator instead of by an actual break at the poles. Such a break is called a voltaic alternative, and the currents so produced *voltaic alternatives*. (See *Alternatives*, *Voltaic*.)

**Isobaric Lines.**—(See *Lines*, *Isobaric*.)

**Isobars.**—Lines connecting places on the

earth's surface which have the same barometric pressure.

The isobaric lines are generally corrected for differences of elevation of the surface.

Isobars are often called isobaric lines.

A study of the isobaric lines, or isobars, is of great assistance in making forecasts or predictions of coming changes in the weather.

**Isochasmic Curves.**—(See *Curves, Isochasmic*.)

**Isochronism.**—Equality of time of vibration or motion.

**Isochronize.**—To produce equality of time of vibration or motion.—(See *Isochronism*.)

**Isochronizing.**—Producing equality of time of vibration or motion. (See *Isochronism*.)

**Isochronous Vibrations or Oscillations.**—(See *Vibrations or Oscillations, Isochronous*.)

**Isoclinic Chart.**—(See *Chart, Inclination*.)

**Isoclinic Lines.**—(See *Lines, Isoclinic*.)

**Isodynamic Chart.**—(See *Chart, Isodynamic*.)

**Isodynamic Lines.**—(See *Lines, Isodynamic*.)

**Isodynamic Map.**—(See *Chart, Isodynamic*.)

**Iso-Electric Points.**—(See *Points, Iso-Electric*.)

**Isogonal.**—Pertaining to the isogonic lines.

**Isogonal Lines.**—(See *Lines, Isogonal*.)

**Isogonal Map or Chart.**—(See *Map or Chart, Isogonal*.)

**Isogonic.**—Pertaining to the isogonal lines.

**Isogonic Chart.**—(See *Chart, Isogonic*.)

**Isogonic Lines.**—(See *Lines, Isogonic*.)

**Isogonic Map.**—(See *Map, Isogonic*.)

**Isolated Electric Lighting.**—(See *Lighting, Electric, Isolated*.)

**Isolatine.**—A kind of insulating material.

**Isothermal Surfaces.**—(See *Surfaces, Isothermal*.)

**Isotropic Conductor.**—(See *Conductor, Isotropic*.)

**Isotropic Medium.**—(See *Medium, Isotropic*.)

## J

**J.**—A contraction proposed for Joule.

**Jablochkoff Candle.**—(See *Candle, Jablochkoff*.)

**Jacketed Magnet.**—(See *Magnet, Jacketed*.)

**Jacobi's Law.**—(See *Law, Jacobi's*.)

**Jar, Electric** — —A name formerly given to the Leyden jar.

**Jar, Leyden** — —A condenser in the form of a jar, in which the metallic coatings are placed opposite each other on the outside and the inside of the jar respectively.

The metal coatings should not extend to more than two-thirds of the height of the jar, the rest of the glass being varnished to avoid the creeping of the charges over the glass in damp weather. The inside coating is connected by means of a

metallic chain to a knob on the top of the jar, as shown in Fig. 313. The conductor supporting the knob passes through a dry cork or plug of some insulating material.

To charge the jar, the outside coating is connected with the earth, as by holding it in the hand, and the outside coating is connected with the conductor of a machine. (See *Condenser, Accumulator*.)

The inner coating of the jar is usually connected with the knob by means of a chain or wire as shown above. This necessitates a support for the ball and stem, which is generally obtained by a cork or wooden plug inserted in the mouth of



Fig. 313. Leyden Jar.



the jar. Such a form, however, is extremely objectionable, since, although the top of the jar be covered with shellac varnish to avoid leakage, it affords but a poor insulation in damp weather, because both the metallic rod supporting the ball and

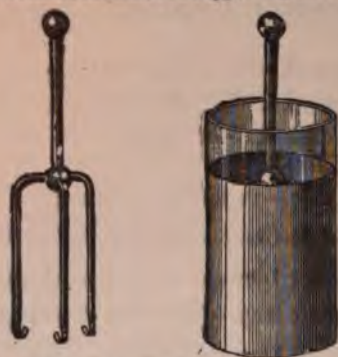


Fig. 314. Sir William Thomson's Leyden Jar.

the damp wood or cork are in connection with the glass and thus facilitate leakage.

To overcome these objections a form of jar has been devised by Sir William Thomson, in which the knob is supported on three feet, which rest on the inner coating. In this form the uncoated glass can be readily kept dry and clean. This form is shown in Fig. 314.

A layer of sulphuric acid is sometimes employed for the inner coating of the Leyden jar. This serves the double purpose of acting as a coating and an absorber of moisture during damp weather.

**Jar, Leyden, Capacity of** — The quantity of electricity a Leyden jar will hold at a given difference of potential.

The capacity of a jar is equal to the quantity of electricity divided by the difference of potential such quantity produces in the jar; or the capacity  $= \frac{Q}{V}$ , where  $Q$  = the quantity, and  $V$ , the difference of potential.

**Jar, Leyden, Coatings of** — (See *Coatings of Leyden Jar*.)

**Jar, Lightning** — A Leyden jar, the coatings of which consist of metallic filings.

As the discharge passes, an irregular series of sparks appear, which somewhat resemble in their shape a lightning flash. Hence the origin of the term.

**Jar of Secondary Cell.**—The containing

vessel in which the plates of a single secondary cell are placed.

**Jar, Porous** — A porous cell. (See *Cell, Porous*.)

**Jar, Scintillating** — A Leyden jar, the coatings of which, instead of being formed of continuous sheets of tin-foil or other conducting substances, are formed of small pieces of such substances, placed at regular intervals on the glass or dielectric so as to leave a small space between them.

Such a jar has received the name of scintillating jar, because when discharged by connecting its two opposite coatings the discharge appears as minute sparks, which jump across the space between the metallic pieces.

**Jar, Unit** — A small Leyden jar sometimes employed to measure approximately the quantity of electricity passed into a Leyden battery or condenser.

As shown in Fig. 315, the unit jar consists of a small Leyden jar  $j$ , whose outer coating is connected with a sliding metallic rod  $b$ , provided at each end with a rounded knob, and the inner coating of which is connected with a metallic knob  $c$ , placed as shown, inside a glass jar  $d$ , opposite a ball on the lower end of  $b$ .

When, now, the inside of the unit jar, or the end connected with  $c$ , is connected with the charging source, such as a machine, and the outside at  $a$ , is connected with the jar or jars to be charged, for every spark that passes be-



Fig. 315. Unit Jar.

tween  $d$  and  $c$ , a definite quantity has passed  $a$ .

The value of this unit charge may be varied by varying the distance between  $d$  and  $c$ .

The smaller the unit jar is in proportion to the jar to be charged, and the shorter the distance between  $c$  and  $d$ , the more reliable are the comparative results obtained.

**Jars, Leyden, Charging, by Cascade** — (See *Cascade, Charging Leyden Jars by*.)

**Jet, Gas, Carcel Standard** — A lighted gas jet employed for determining the candle-power of gas by measuring the height

of a jet of gas burning under a given pressure, and used in connection with the light of a larger gas burner, burning under similar conditions, for the photometric measurement of electric lights.



Fig. 316. Seven-Carcel Standard Gas Jet.



Fig. 317. Carcel Candle Burner.

In Fig. 316 is shown a section of a seven-carcel standard gas jet, and in Fig. 317, a section of a candle burner, connected within the same service pipe. The gas for both burners is received in a chamber, from whence it passes by an opening to the burner, under the constant pressure obtained by the weight of the bell C, and the tube A. The burner shown in Fig. 317, which is used as the standard of comparison, will give a candle-power determined from the height of the jet of the burning gas. This height is measured in millimetres by the motion of a circular screen.

The determination of the candle-power of gas by means of a jet photometer is only approximately correct, unless many precautions are taken.

**Jet Photometer.**—(See *Photometer, Jet*.)

**Jewelry, Electric** — Minute incandescent electric lamps substituted for the rarer gems in articles of jewelry.

The lamps are lighted by means of small primary or storage batteries, carried in the pocket or elsewhere on the person.

**Joint, American Twist** — A telegraphic or telephonic joint in which each of the two wires is twisted around the other. (See *Joint, Telegraphic or Telephonic*.)

The twisted joint is sometimes subsequently soldered.



Fig. 318. American Twist Joint.

The American twist joint is shown in Fig. 318. This joint is easily made and is very serviceable.

**Joint, Bell-Hanger's** — A joint for telegraphic or telephonic wires in which the ends are merely looped together. (See *Joint, Telegraphic or Telephonic*.)

**Joint, Britannia** — A telegraphic or telephonic joint in which the wires are laid side by side, bound together and subsequently soldered. (See *Joint, Telegraphic or Telephonic*.)



Fig. 319. Britannia Joint.

The Britannia joint is shown in Fig. 319. No. 16 wire, B. W. G., is used as the binding wire.

**Joint, Butt** — An end-to-end joint.

A joint effected in wires by placing the wires end on and subsequently soldering.

Butt joints are formed by bringing the ends to be joined together and securing them while in such position.

**Joint, Butt and Lap, of Belts** — The joint in a leather belt, employed for transmitting power from a line of shafting where the ends are simply brought together and laced, is called a butt joint, in contradistinction to a lap joint, or a joint formed by placing one end of the belt over the other and lacing or riveting the two.

In using delicate galvanometers, the slightest change in the speed of the engine driving the dynamo-electric machine producing the current, causes an annoying fluctuation of the needle that prevents accurate reading, when lap joints are used in the belt instead of butt joints, unless the former are very carefully made. Lap joints may also cause a flickering in the lights. When, however, lap joints are made by cutting the belt by an oblique section and properly securing them so that their



elevation at the joint is no greater than elsewhere, the lap joint is preferable to the butt joint.

**Joint, Expansion** — — A joint for underground conductors, tubes or pipes, exposed to considerable changes of temperature, in which a sliding joint is provided to safely permit a change of length on expansion or contraction.

**Joint, Insulation** — — A joint in an insulating material or covering in which a continuity is insured in the conducting as well as the insulating substance.

**Joint, Lap** — — A joint effected by overlapping short portions near the ends of the things to be joined, and securing them while in such position.

**Joint, Lap, for Wires** — — A joint effected between two wires by overlapping their ends and subsequently soldering.

**Joint, Magnetic** — — The line of junction between two separate parts of magnetizable material.

Magnetic joints should be of such a nature as to permit the passage of the lines of magnetic force with the least increase in the resistance of the magnetic circuit.

Magnetic joints in the field magnets of a dynamo-electric machine should be as few as possible, since the resistance of the best magnetic joint to the passage of the lines of force is necessarily greater than that of the same material without such joints.

**Joint, Metallic Conducting** — — A joint in a conductor in which a continuity of conducting power is secured.

**Joint Resistance of Parallel Circuits.** — (See *Resistance, Joint, of Parallel Circuits.*)

**Joint, Sleeve** — — A junction of the ends of conducting wires obtained by passing them through tubes and then twisting and soldering.

All joints should be soldered, but in so doing care must be taken that the soldering liquid or solid employed is free from acids or other corrosive materials, and that all traces of the soldering liquid or solid are removed from the wire before the joint is covered with insulating material.

Kerite, okonite or other insulating tape, should

preferably be wrapped around the joint after it is soldered.

In making a joint in a gutta-percha covered wire, such as a submarine cable, the following method may be employed: The bared and cleansed wires are twisted together and soldered. The soldered joint is then covered with a layer of plastic insulating material made of a mixture of gutta-percha, tar and rosin. (See *Chatterton's Compound.*) In order to insure a good junction between this and the gutta-percha covering on the rest of the wire, the outer surface of the gutta-percha is removed for about two inches from each side of the joint, so as to remove its oxidized surface. After the coating is put on, it is warmed gently by a warm joining tool, not by the flame of a lamp. A sheet of warmed gutta-percha is then wrapped around the joint, and while it and the joint are still hot, another coating of the plastic insulating material is applied. Successive layers of gutta-percha and some other insulating material are generally applied in the case of submarine cables. — (*Culley.*)

**Joint, Telegraphic, McIntire's Parallel Sleeve** — — A joint for telegraphic or other wires, in which the ends to be joined are slipped into parallel sleeves or tubes, which are afterward twisted around each other.

A general view of the parallel sleeve joint, both before and after twisting, is shown in Fig. 320.



Fig. 320. McIntire's Parallel Sleeve Joint.

The twisting is done by means of the specially devised twisting clamp shown in Fig. 321.



Fig. 321. Twisting Clamp for McIntire's Parallel Joint.

**Joint, Telegraphic or Telephonic** — — A juncture of the ends of two electric conductors so as to insure a permanent junction whose resistance shall not be appreciably greater per unit of length than that of the rest of the wire.

In making a joint, care should always be taken to scrape the insulating material from the wires and clean their surfaces before twisting them together.

Telegraph wires were formerly joined by the ordinary bell-hangers' joint; that is, the wires were simply looped together. The constant vibrations to which the wires are subjected caused such a joint to be abandoned and an improvement introduced by bolting the ends together, as shown in Fig. 322.



Fig. 322. Telegraphic Joint.

**Joint, Testing of**—Ascertaining the resistance of the insulating material around a joint in a cable.

The resistance of the insulating material of a cable at a joint is necessarily high, since the joint forms but a small part of length of the cable. It should not, however, be large as compared with an equal length of another part of the cable with a perfect core.

Two methods for testing cable joints are generally employed, viz.:

(1.) A conductor is charged through the joints for a given time, and the deflection obtained by its discharge compared with the discharge of the same condenser charged for an equal length of time through a few feet of perfect cable.

(2.) A charged conductor is permitted to discharge itself through the joint, and the amount lost in a given time noted.

For description of different methods, see Kempe's "Handbook of Electrical Testing."

**Joulad.**—A term proposed for the Joule.

This term is not generally adopted. (See *Joule*.)

**Joule.**—The unit of electric energy or work.

The volt-coulomb.

The amount of electric work required to raise the potential of one coulomb of electricity one volt.

The joule may be regarded as a unit of energy or work in general, apart from electrical work or energy.

- 1 joule..... = 10,000,000 ergs.
- 1 joule..... = .73732 foot-pounds.
- 1 joule..... = 1 volt-coulomb.
- 1 joule..... = .24 calorie.
- 4.2 joules..... = 1 small calorie.
- 1 joule per second = 1 watt.

The British Association proposed to call one joule the work done by one watt in one second.

**Joule, as a Heat Unit.**—The quantity of heat developed by the passage of a current of one ampère through a resistance of one ohm. (See *Joule*.)

**Joule Effect.**—(See *Effect, Joule*.)

**Joule's Cylindrical Electro-Magnet.**—(See *Magnet, Electro, Joule's Cylindrical*.)

**Joule's Law.**—(See *Laws of Joule*.)

**Junction Box.**—(See *Box, Junction*.)

**Jump-Spark Burner.**—(See *Burner, Jump-Spark*.)

**Junction, Thermo-Electric.**—A junction between any thermo-electric couple. (See *Cell, Thermo-Electric*.)

## K

**K.**—A contraction for electrostatic capacity. (See *Capacity, Electrostatic*.)

**K. C. C.**—In electro-therapeutics, a brief method of writing cathodic closure contraction, or the effects of muscular contraction observed at the kathode on the closure of a circuit.

**K. D. C.**—In electro-therapeutics, a brief method of writing cathodic duration con-

traction, or the effects of muscular contraction observed at the kathode after the current has been passing for some time.

**K. W.**—A contraction for kilo-watt. (See *Watt, Kilo*.)

**Kaolin.**—A variety of white clay sometimes employed for insulating purposes.

Jablochkoff sometimes employed kaolin between the parallel carbons of his electric candle



for the purpose of insulating them from each other. He also devised an electric lamp in which a spark of considerable difference of potential, obtained from an ordinary induction coil, was caused to raise a surface of kaolin to incandescence by passage over it.

**Kapp Lines.**—(See *Lines, Kapp*.)

**Kartavert.**—A kind of insulating material.

**Katelectrotonus.**—A word sometimes used instead of kathelectrotonus. (See *Kathelectrotonus*.)

**Kathelectrotonic State.**—(See *State, Kathelectrotonic*.)

**Kathelectrotonic Zone.**—(See *Zone, Kathelectrotonic*.)

**Kathelectrotonus.**—In electro-therapeutics, the condition of increased functional activity that occurs in a nerve in the neighborhood of the kathode or negative electrode. (See *Electrotonus*.)

**Kathion.**—The electro-positive ion, atom or radical into which the molecule of an electrolyte is decomposed by electrolysis. (See *Electrolysis, Ions*.)

*Kathion* is sometimes written *cathion*.

In electrolysis the *kathion*, or the electro-positive ion or radical, appears at the kathode or electro-negative electrode. Similarly, the *anion*, or the electro-negative ion or radical, appears at the anode or the electro-positive electrode.

**Kathodal.**—Pertaining to the kathode. (See *Kathode*.)

**Kathode.**—The conductor or plate of an electro-decomposition cell connected with the negative terminal or electrode of a battery or other source.

The word *kathode* is sometimes applied to the negative terminal of a battery or source, whether connected with a decomposition cell or not. It is preferable, however, to restrict its use to decomposition cells. (See *Anode*.)

The word *kathode* is sometimes written *cathode*.

**Kathodic.**—Pertaining to the kathode. (See *Kathode*.)

**Kathodic Electro-Diagnostic Reactions.**—(See *Reactions, Electro-Diagnostic*.)

**Keeper of Magnet.**—(See *Magnet, Keeper of*.)

**Kerite.**—An insulating material.

**Kerr Effect.**—(See *Effect, Kerr*.)

**Key Board.**—(See *Board, Key*.)

**Key, Capillary Contact** — — A form of fluid contact in which the circuit is closed or broken by means of a wire which is dipped into or removed from the surface of a mass of mercury.

In order to avoid an increase in the resistance of the circuit, due to the formation of oxide of mercury, the contact surface of the mercury is kept covered with a layer of dilute alcohol.

**Key, Discharge** — — A key employed to enable the discharge from a condenser or cable to be readily passed through a galvanometer for purposes of measurement.

**Key, Discharge, Kempe's** — — A discharge key constructed as shown in Fig. 323.




Fig. 323. Kempe's Discharge Key.

The solid lever, hinged at one extremity, plays between two contacts connected to two terminals, and has two finger triggers at its free end marked "Discharge" and "Insulate," connected respectively to two ebonite hooks. The hook attached to that marked "Discharge" is a little higher than the other, so that when the lever is caught against it, the key rests in an intermediate position between the contacts, and, when caught against the lower trigger, it rests against the bottom contact. When in the last position, a depression of the "Insulate" trigger causes the lever to spring up against the second hook, thus insulating it from either contact, and on the depression of the "Discharge" trigger, the lever springs up against the top contact.

**Key, Discharge, Webb's** — — A discharge key constructed as shown in Fig. 324.

A horizontal lever L, Fig. 324, passing between two contacts and hinged at J, is pressed upward by a spring. The free end of this lever terminates in two steps, 1 and 2. A vertical lever, pro-

vided with an insulating handle, is jointed at J', and has at C, a projecting metallic tongue that engages in the upper step when the lever H, is vertical, and on the lower step when it is slightly moved from the free end.

When the projection C, rests on the lower step 2, the lever L, is intermediate between the top and bottom contacts, and is, therefore, discon-



Fig. 324. Webb's Discharge Key.

nected from either of them; but, when it rests on the upper step, it is in contact with the lower contact.

When the lever H, is so moved as to have the projection C, away from both steps, the lever L, is pressed by its spring against the upper contact.

The battery terminals are connected with the condenser terminals when the lever L, is touching the lower contact, but when the lever L, touches the top contact, the condenser is connected with the galvanometer terminals.

**Key, Double-Contact Form of Bridge, Sprague's** — — A key designed to successively close two separate circuits.

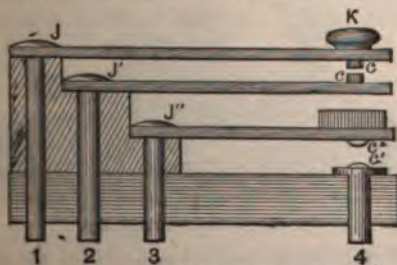


Fig. 325. Sprague's Double-Contact Key.

Sprague's double-contact key is shown in Fig. 325. On depressing K, the contacts c, c, are first closed and afterwards contacts at c', c'. Metallic

pieces, 1, 2, 3 and 4, serve to make contacts with apparatus used in connection with the key.

The battery circuit is connected to 1 and 2, and the galvanometer to 3 and 4, so that the battery circuit is closed first, and the galvanometer afterwards. This form of key is used in connection with the Wheatstone Bridge.

**Key, Double-Contact, Lambert's** — —

A key used in cable-work, and constructed as shown in Fig. 326.

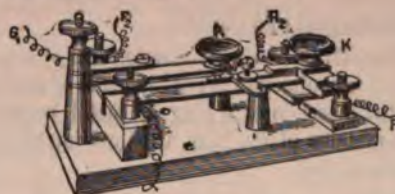


Fig. 326. Lambert's Double-Contact Key.

In Thomson's method for the determination of electrostatic capacity, the capacity of the cable is compared with that of a condenser containing a known charge. These two charges are so connected electrically as to discharge into and neutralize each other if equal, but if not, to produce a galvanometer deflection by a charge equal to their difference.

A Lambert double contact key is shown in Fig. 326. The connections are such that the pushing forward of K, depresses keys that permit a battery to simultaneously charge the condenser and the cable. On drawing K, back, the two charges are allowed to mix. Then on depressing K, the difference of the charges, if any, is discharged through the galvanometer.

**Key, Double-Tapper** — — The key used in a system of needle telegraphy to send electric impulses through the lines in alternately opposite directions. (See *Telegraphy, Single-Needle*.)

**Key, Increment** — — A telegraphic key so connected that an increase or increment in the line current occurs whenever the key is depressed.

The increment key is used in duplex and quadruplex systems of telegraphic transmission.

**Key, Increment, of Quadruplex Telegraphic System** — — A key employed to increase the strength of the current and so operate one of the distant instruments in a



quadruplex system by an increase in the strength of the current. (See *Telegraphy, Quadruplex*.)

**Key, Magneto-Electric** — —A telegraph key for sending an electric impulse into a line, so arranged that a coil of wire on an armature connected with the key lever is, by the movements of the key, moved toward or from the poles of a permanent magnet, the movements of the key thus producing the currents sent into the line.

**Key, Plug** — —A simple form of key in which a connection is readily made or broken by the insertion of a plug of metal between two metallic plates that are thus introduced into a circuit.

A form of plug key is shown in Fig. 327.

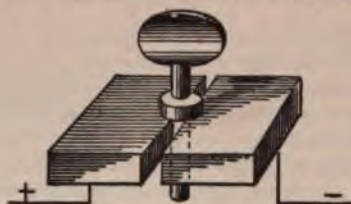


Fig. 327. Plug Key.

**Key, Reversing** — —A key inserted in the circuit of a galvanometer for obtaining deflections of the needle on either side of the galvanometer scale.

A form of reversing key is shown in Fig. 328. The galvanometer terminals are connected to the binding posts 2 and 3, and the circuit terminals to the other two posts. On depressing K, the



Fig. 328. Reversing Key.

current flows in one direction and on depressing K', it flows in the opposite direction. Clamps, operated by handles, are provided so as to close either of the keys permanently, if so desired.

**Key, Reversing, of Quadruplex Telegraphic System** — —A key employed to reverse the direction of the current and so operate one of the distant instruments, in a quadruplex system, by a change in the direction of the current. (See *Telegraphy, Quadruplex*.)

**Key, Short-Circuit** — —A key which in its normal condition short circuits the galvanometer.

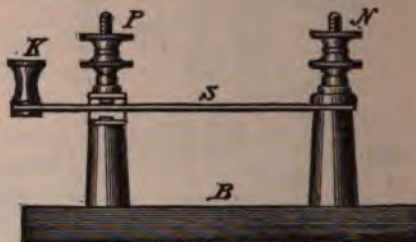


Fig. 329. Short-Circuit Key.

Such a short-circuit key is provided for the purpose of protecting the galvanometer from injury by large currents being accidentally passed through its coils. In the form shown in Fig. 329, the spring S, rests against a platinum contact; but when depressed by the insulated head at K, it rests against an ebonite contact, and throws the galvanometer into the desired circuit.

The key is provided with double binding posts at P and N, for convenience of attachment to resistance coils, batteries, etc.

In the form of a short-circuit key shown in Fig. 330, a catch is provided for the purpose of keeping the key down when once depressed. Its arrangement will be readily understood from an inspection of the figure.



Fig. 330. Short-Circuit Key.

**Key, Sliding-Contact** — —The key employed in the slide form of Wheatstone bridge, to make contact with the wire over which the sliding contact passes. (See *Bridge, Electric, Slide Form of*.)

**Stationary Floor** — —An electric push button placed on the floor so as readily closed by the foot.

form of key is especially suitable for use with an electric bell and annunciator, readily calling an attendant. (See *Annunciator-Electro-Magnetic*.)

**Telegraphic** — —The key employed for sending over the line the successive dots and breaks that produce the dots and dashes of the Morse alphabet, or the deflection of the needle of the needle telegraph. (See *Telegraphy, American System of*.)

**Recoil** — —A recoil.

**Kicking Coil** — —(See *Coil, Kicking*.)

**Thousand** (as a prefix). — One thousand times.

**Ampère** — —One thousand amperes.

**Ampère Balance** — —(See *Balance, Ampère*.)

**Dyne** — —One thousand dynes. (See *Dyn*.)

**Gramme** — —One thousand grammes, 2.2046 pounds avoirdupois. (See *Weights, Metric System of*.)

**Joule** — —One thousand joules.

**Metre** — —One thousand metres.

**Watt** — —One thousand watts.

**Watt Hour** — —(See *Hour, Kilowatt*.)

**Unit of velocity** proposed by the Association.

One equals 1 centimetre per second.

**Electric Energy** — —(See *Energy, Kinetic*.)

**Electric Theory of Matter** — —(See *Matter, Electric Theory of*.)

**Electricity, Electro** — —A term sometimes applied to the phenomena of electric currents, or electricity in motion, as distinguished from electrostatics, or the phenomena of electric charges, or electricity at rest.

**Telegraph** — —A device for the simultaneous production of a distant stage and its effects under circumstances such that the audience can be heard at any distance from the stage.

The sounds heard by the distant audience are reproductions of those uttered during the

performance, though not at the time of their utterance. The appearance of the stage and its actors represents the appearance of a previous reproduction of the play or opera or other performance, as taken by means of a Kodak camera with a film cylinder and drop shutter, operated by an electric motor, exposing, say, forty plates a second. By means of a projecting lantern these photographic pictures are thrown on a curtain on a stage at the distant theatre in regular order of sequence, while a loud-speaking phonograph puts song and speech into the mouths of the mimic actors and thus gives the phantom stage the semblance of life and reality.

**Kite, Franklin's** — —A kite raised in Philadelphia, Pa., in June, 1752, by means of which Franklin experimentally demonstrated the identity between lightning and electricity, and which, therefore, led to the invention of the lightning rod.

It is true that Dalibard, on the 10th of May, 1752, prior to Franklin's experiment, succeeded in drawing sparks from a tall iron pole he had erected in France. This experiment was, however, tried at the suggestion of Franklin, to whom it must properly be ascribed.

A description of this kite is given by Franklin in the following letter:

Letter XI, from BENJ. FRANKLIN, Esq., of Philadelphia, to PETER COLLINSON, Esq., F. R. S., London.

"OCT. 19, 1752.

"As frequent mention is made in public papers, from Europe, of the success of the Philadelphia experiment for drawing the electric fire from clouds by means of pointed rods of iron erected on high buildings, etc., it may be agreeable to the curious to be informed that the same experiment has succeeded in Philadelphia, though made in a different and more easy manner, which is as follows:

"Make a small cross of two light strips of cedar, the arms so long as to reach to the four corners of a large thin handkerchief when extended; tie the corners of the handkerchief to the extremities of the cross, so you have the body of a kite, which, being properly accommodated with a tail, loop and string, will rise in the air like those made of paper, but this, being of silk, is fitter to bear the wet and wind of a thunder gust without tearing. To the top of the upright stick of the cross is to



be fixed a very sharp pointed wire rising a foot or more above the wood. To the end of the twine, next the hand, is to be tied a silk ribbon, and where the silk and twine join, a key may be fastened. This kite is to be raised when a thunder gust appears to be coming on, and the person who holds the string must stand within a door or window, or under some cover, so that the silk ribbon may not be wet, and care must be taken that the twine does not touch the frame of the door or window. As soon as any of the thunder clouds come over the kite the pointed wire will draw the electric fire from them, and the kite, with all the twine, will be electrified, and the loose filaments of the twine will stand out every way, and be attracted by an approaching finger. And when the rain has wet the kite and twine so that it can conduct the electric fire freely, you will find it stream out plentifully from the key on the approach of your knuckle. At this key the phial may be charged, and from electric fire thus obtained spirits may be kindled, and all the other electric experiments be performed, which are usually done by the help of a

rubbed glass globe or tube, and thereby the sameness of the electric matter with that of lightning completely demonstrated.

"B. FRANKLIN."

**Knife Break Switch.**—(See *Switch, Knife Break*.)

**Knot or Nautical Mile.**—A length equal to 6,087 feet.

The English statute mile is equal to 5,280 feet. The value of the nautical mile is therefore in excess of that of the statute mile.

**Kohlrausch's Law.**—(See *Law of Kohlrausch*.)

**Krizik's Bars.**—(See *Bars, Krizik's*.)

**Kyanized.**—Subjected to the kyanizing process. (See *Kyanizing*.)

**Kyanizing.**—A process employed for the preservation of wooden telegraphic poles by injecting a solution of corrosive sublimate into the pores of the wood. (See *Pole, Telegraphic*.)

## L

**L.**—A contraction for co-efficient of inductance. (See *Inductance, Co-efficient of*.)

**L.**—A contraction for length.

**Labile Galvanization.**—(See *Galvanization, Labile*.)

**Lag, Angle of** — —The angle through which the axis of magnetism of the armature of a dynamo-electric machine is shifted by reason of the resistance its core offers to sudden reversals of magnetization.

An armature of a bi-polar dynamo-electric machine has its magnetism reversed twice in every rotation. The iron of the core resists these magnetic reversals. The result of this resistance is to shift the axis of magnetism in the direction of rotation. The angle through which the axis has thereby been shifted is called the *angle of lag*.

The term, angle of lag, is sometimes incorrectly applied so as to include a similar result produced by the magnetization due to the armature current itself. It is this latter action which, in armatures with soft iron cores, is the main cause of the angle

of lead. (See *Brushes, Lead of. Lead, Angle of*.)

**Lag, Angle of, of Current** — —An angle whose tangent is equal to the ratio of the inductive to the ohmic resistance.

An angle, the tangent of which is equal to the inductive resistance of the circuit, divided by the ohmic resistance of the circuit.

An angle, the co-sine of which is equal to the ohmic resistance of the circuit, divided by the impedance of the circuit.

**Lag, Magnetic** — —A magnetic viscosity as manifested by the sluggishness with which a magnetizing force produces its magnetizing effects in iron.

The tendency of the iron core of a magnet, or of the armature of a dynamo-electric machine, to resist, and, therefore, retard magnetization.

This retardation, or lag, is called the *magnetic lag*.

The lead necessary to give the brushes of a dynamo-electric machine to insure quiet action has by

some been erroneously ascribed to the magnetic lag. The lead, though due to lag in part, in reality is mainly due to the resultant magnetization of the armature both by the field magnets and by its own current. (See *Lead, Angle of*.) This displacement of the brushes is measured by an angle sometimes, though erroneously, called the angle of lag. (See *Lag, Angle of*.)

**Lamellar Distribution of Magnetism.**—(See *Magnetism, Lamellar Distribution of*.)

**Laminated Core.**  
—(See *Core, Laminated*.)

**Laminating Core.**  
—(See *Core, Lamination of*.)

**Lamination of Armature Core.**—  
(See *Core, Armature, Lamination of*.)

**Lamination of Cores.**—(See *Core, Lamination of*.)

**Lamp, All-Night**  
—A term sometimes applied to a double-carbon arc lamp. (See *Lamp, Electric Arc, Double-Carbon*.)

A form of all-night arc lamp is shown in Fig. 331. When the consumption of the first pair of carbons has reached a certain limit the current is automatically switched over to the other pair.

**Lamp, All-Night Electric** —A lamp provided with carbon electrodes so as to burn all night without recarboning.

A double-carbon electric lamp. (See *Lamp, All-Night*.)

**Lamp, Arc** —An electric lamp, the source of whose light is a voltaic arc.

**Lamp, Arc, Electric** —An electric lamp in which the light is produced by a voltaic arc formed between two or more carbon electrodes.

The carbon electrodes are placed in various positions, either parallel, horizontal, inclined to one another or vertically one above the other. The latter is the form most generally adopted, since it permits the ready feeding of the upper carbon.

The carbons are maintained during their consumption at a constant distance apart, by the aid of various feeding devices. Such devices are operated generally by trains of wheel-work, by mechanical or electrical motors, or by the simple action of a spring, by gravity or by the attraction of a solenoid.

The carbon pencils or electrodes are held in carbon holders, consisting of clutches or clamps, attached to the end of the lamp rods.

When the lamp is not in operation the carbons are usually in contact with one another; but, on the passage of the current, they are separated the required distance by the action of an electro-magnet whose coils are traversed by the direct or main current.

In order to maintain the electrodes a constant distance apart, the upper carbon in some lamps is held in position by the operation of a clutch, or, in others, by a detent, that engages in a toothed wheel. The position of this clutch or detent is controlled by the action of an electro-magnet whose coils are usually situated in a *shunt* or *derived circuit*, of high resistance, around the electrodes. When the carbons are at their normal distance apart, the shunt current is not of sufficient strength to move the clutch or detent from the position in which it prevents the downward motion of the upper carbon rod. When, however, by the burning or consumption of the carbons, the resistance of the arc has increased to an extent which can be predetermined, the increased current that is thereby passed through the shunt circuit is now sufficiently strong to release the clutch or detent, thus permitting the fall or feed of the upper carbon. In a well designed lamp this occurs



Fig. 331. All-Night Arc Lamp.



Fig. 332. Arc Lamp.



so gradually as to produce no perceptible effect on the steadiness of the light.

Arc lamps are generally placed in *series circuits*, that is, in circuits in which the current passes successively through all the lamps in the circuit, and returns to the source. In order to avoid the breaking of the entire circuit through the extinguishing of a single arc, on the breaking of its circuit, an *automatic safety device* is provided for each lamp. This safety device consists essentially of an electro-magnet so placed in a shunt circuit, that, as the resistance of the arc becomes too great, the increased current, which will then flow through the coils of the electro-magnet, at last produces a movement of its armature which closes a short circuit around the lamp, and thus cuts it out of the circuit.

Arc lamps assume a great variety of forms. A well known form is shown in Fig. 332.

**Lamp, Arc, Triple Carbon** — — An arc lamp in which three carbon electrodes are used.

The positive carbons consist of two ordinary cylindrical carbons, placed parallel to each other. The negative carbon is shaped like the figure 8. The arc is established between one of the positive carbons and the corresponding side of the negative carbon. The feeding of the lamp is attended by a shifting back and forth of the arc between the positive carbons and from side to side of the negative carbons.

The design of the triple carbon arc lamp is to produce a lamp of long life.

**Lamp Bracket, Electric** — — (See *Bracket, Lamp, Electric*.)

**Lamp Bulb.**—(See *Bulb, Lamp*.)

**Lamp, Carcel** — — An oil lamp employed in France as a photometric standard.

Fig. 333 shows a form of carcel lamp. Like the standard candle, the carcel is a standard only when it consumes a given weight of the light-producing substance in a given time.

**Lamp, Chamber of** — —

The glass bulb or chamber of an incandescing electric lamp in which the incandescing conductor is

placed, and in which is maintained a high vacuum.

The transparency of the lamp chamber and consequently the efficiency of the lamp may decrease—

(1.) From the settling of dust or dirt on its outer walls.

(2.) From the deposit of carbon or metal on its inner walls.

To obviate the first cause of diminished transparency the outside of the lamp chamber should be frequently cleansed. The diminished transparency, due to the second cause, cannot be removed. When it has reached a certain point, it is more economical to replace the old lamp by a new lamp.

In a properly made lamp the dimming of the lamp chamber is not apt to occur unless a stronger current than the normal current is passed through the lamp.

**Lamp Clamp.**—(See *Clamp for Arc Lamps*.)

**Lamp, Contact** — — A form of semi-incandescing electric lamp in which a carbon pencil is pressed against a slab of carbon or other refractory material.

The source of light in an electric contact lamp is twofold, viz.:

(1.) A minute arc formed at the points of imperfect contact.

(2.) The incandescence of the carbon pencil, and the points of the slab of carbon against which it is pressed.

**Lamp Contacts.**—(See *Contacts, Lamp*.)

**Lamp, Electric, Arc, Carbon Electrodes for** — — (See *Electrodes, Carbon, for Arc Lamps*.)

**Lamp, Electric, Arc, Differential** — — An arc lamp in which the movements of the carbons are controlled by the differential action of two magnets opposed to each other, one of whose coils is in the direct and the other in a shunt circuit around the carbons.

Sometimes the differential coils are placed on the same magnet core.

**Lamp, Electric, Arc, Double Carbon** — — An electric arc lamp provided with two pairs of carbon electrodes, so arranged that when one pair is consumed, the circuit is automatically completed through the other pair.



Fig. 333.  
Carcel Lamp.



**Lamp, Electric Glow** — — A term employed mainly in Europe for an incandescent electric lamp. (See *Lamp, Electric, Incandescent*.)

**Lamp, Electric, Incandescent** — — An electric lamp in which the light is produced by the electric incandescence of a strip or filament of some refractory substance, generally carbon.

The carbon strip or filament is usually bent into the form of a horseshoe or loop, and placed inside a glass vessel called the lamp chamber. The lamp chamber is exhausted by means of a mercury pump, generally to a fairly high vacuum.

In order to insure the complete removal from the lamp chamber of all the air it originally contained, the carbon strips that are placed within it are maintained at a high temperature during the process of exhaustion. This temperature, in practice, is obtained by sending the current through the carbon strip as soon as nearly all the air is removed. Towards the end of the pumping operation the current is increased so as to raise the carbons to their full brilliancy.

The lamp chamber is also maintained at a fairly high temperature.

To insure this heating of the walls of the lamp chamber by the incandescent carbons during pumping, for the purpose of driving off all the air adhering to the walls of the chamber, they are sometimes covered with some readily removable preparation of lamp black.

The operation of driving off the gases absorbed by the carbons is termed the *occluded gas process*, and is essential to the successful sealing of an incandescent lamp. By its means, a considerable quantity of air or other gaseous substances shut up or occluded by the carbon is driven out of the carbon, which it would be impossible to get rid of by the mere operation of pumping. In order to insure the success of the operation, it is necessary that the heating must take place while the lamp is being exhausted, since otherwise the expelled gases would be re-absorbed. (See *Gas, Occlusion of*.)

Both the exhaustion and the incandescence continue up to the moment the lamp chamber is hermetically sealed; otherwise, some of the air might remain in the lamp chamber.

The lamp chamber is hermetically sealed, usually by the fusion of the glass in the manner

adopted in the sealing of Geissler tubes or Crookes' radiometers.

For the preparation of the carbon strip, its carbonization and the flashing of the strip, see *Carbonization, Processes of*. *Carbons, Flashing Process for*.

The ends of the carbon strip, or filament, are attached to *leading-in wires* of platinum that pass through the glass walls of the lamp chamber, and are fused therein by melting the glass around them in the same manner as are the leading-in wires of the Geissler tubes and other similar apparatus.

Incandescent lamps are generally connected to the leads or circuits in multiple-arc or in multiple-series. They are, however, sometimes connected to the line in series. (See *Circuits, Varieties of*.)

In the case of multiple-arc or multiple-series connection, the resistance of the filament is comparatively high. In the case of series-connection the resistance is comparatively low.

Incandescent electric lamps assume a variety of different forms. In all cases, however, the shape

of the filament is such that the leading-in wires that carry the current to and from the filament shall enter and leave the lamp chamber at points that are comparatively near together. This is for the purpose of avoiding the unnecessary production of shadows.

Commercial incandescent electric lamps are generally marked with the potential difference in volts that must be applied at the terminals in order to furnish the current necessary to properly operate them. If this potential difference is made greater, the can-



Fig. 334. Incandescent Electric Lamp.



Fig. 335. Swan Incandescent Lamp.



the power of the lamp is greatly increased, but its life greatly decreased.

The lamp chamber is more liable in such cases to become less transparent from the deposit of a thin layer of carbon or metal on its inner surfaces.

In the Swan lamp the filament is made of cotton thread. These threads are immersed in a mixture of two parts of sulphuric acid and one of water, which converts the cellulose of the thread into artificial parchment. The filaments are rapidly washed as soon as they are removed from the sulphuric acid until all traces of the acid are removed. They are then passed through discs so as to insure a uniform area of cross-section, and are then wrapped on rods of carbon or earthenware of the required outline, packed in a crucible filled with powdered charcoal, and carbonized.

The form generally given to the Swan filament is that shown in Fig. 335.

#### Lamp, Electric, Incandescent Ball —

—An incandescent electric lamp in which the light is produced by a sphere or ball of carbon placed in an exhausted receiver of glass.

When subjected to the effects of electrostatic waves of high frequency of alternation, such a lamp becomes luminous from the incandescence of the carbon ball or sphere. Tesla's incandescent ball electric lamp is a modification of his straight filament lamp. (See *Lamp, Incandescent, Straight Filament*.)

The construction of Tesla's ball incandescent electric lamp will be readily understood from an inspection of Fig. 336.



Fig. 336. Tesla's Incandescent Ball Electric Lamp.

**Lamp, Electric, Incandescent, Half-Shades for —** —(See *Half-Shades for Incandescent Lamps*.)

#### Lamp, Electric, Incandescent, Life of —

—The number of hours that an incandescent electric lamp, when traversed by the normal current, will continue to afford a good commercial light.

The failure of an electric incandescent lamp results either from the volatilization or rupture of the carbon conductor, or from the failure of the

vacuum of the lamp chamber. Since the employment of the flashing process, and the process for removing the occluded gases, it is not unusual for incandescent lamps to have a life of several thousand hours. (See *Carbons, Flashing Process for*.)

The life of an incandescent electric lamp should not be considered as continuing until the filament actually breaks. As soon as the lamp chamber has become covered with such a deposit of carbon or coating of metal as to considerably decrease the amount of light which passes through the chamber, the lamp should be considered as useless.

#### Lamp, Electric, Incandescent, Three-Filament, for Multi-Phase Circuits —

—An incandescent lamp for use on multi-phase circuits, provided with three leading-in wires, connected to the free ends of three filaments, the other ends of which are connected in a common joint.

When properly acting, the current passing through each filament should, at any instant, equal the sum of the currents in the other two filaments, which, as is well known, is the property of any three-phase circuit.

#### Lamp, Electric, Outrigger for — —

(See *Outrigger for Electric Lamp*.)

#### Lamp, Electric, Pendant —

—An incandescent electric lamp suspended by flexible twin-wire.

#### Lamp, Electric, Safety —

—An incandescent electric lamp, with thoroughly insulated leads, employed in mines, or other similar places, where the explosive effects of readily ignitable substances are to be feared.

Such lamps are often directly attached to a portable battery, in which case they can be readily carried about from place to place.

#### Lamp, Electric, Semi-Incandescent —

—An electric lamp in which the light is due to the combined effects of a voltaic arc and electric incandescence.

In the Reynier semi-incandescent lamp, shown in Fig. 337, a thin pencil of carbon C, is gently pressed against a block of graphite B. A lateral contact is provided at L, through a block of graphite I, by means of which the current is con-

to the lower part only of the movable rod which part alone is rendered incandescent. In this lamp, the light is due both to the incan-

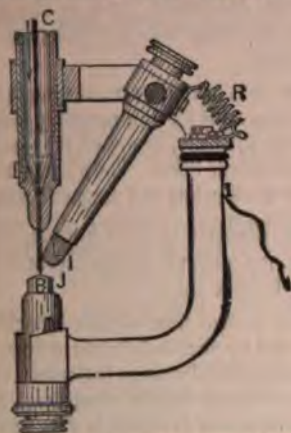


Fig. 337. Semi-Incandescent Lamp.

ce of the rod C, and to the small arc formed between its lower end and the contact block which mainly from the latter. The semi-incandescent electric lamp has not as yet been improved to any considerable extent.

**Lamp, Electric, Series-Connected Incandescent** — An incandescent electric lamp adapted for use in series circuits.



Fig. 338. Series Incandescent Electric Lamp.

form of series incandescent lamp, attached to a stand and shade, is shown in Fig. 338.

The series connected incandescent lamp, unlike the multiple-connected incandescent electric lamp, has the resistance of the filament is low. This is done in order to prevent the total resistance of

the circuit from requiring too high an electromotive force for operation. In order to preserve the continuity of the circuit on the failure of any lamp to operate, some form of automatic cut-out is employed. This is generally some form of film cut-out. (See *Cut-Out, Film.*)

**Lamp Hour.**—(See *Hour, Lamp.*)

**Lamp, Incandescent, Electric Filament of** — A term now generally applied to the incandescing conductor of an incandescent electric lamp, whether the same be of very small cross-section or of comparatively large cross-section.

The term filament is properly applied to a conductor containing fibres or filaments extending in the general direction of the length of the incandescing conductor. Such a conductor is made of carbonizable fibrous material, cut or shaped prior to carbonization so as to have its fibres extending with their greatest length in the direction of length of the filament.

**Lamp, Incandescent, Straight Filament** — An incandescent electric lamp in which a straight filament, placed in an exhausted glass chamber, is rendered luminous by the effects of electrostatic waves or thrusts of high frequency.

The straight filament incandescent lamp is the invention of Tesla. One form of such a lamp is shown in Fig. 339.

The glass globe b, of the lamp is provided with a cylindrical neck, inside of which is placed a tube m, of conducting material, on the side and over the end of the insulating plug n.

The light-giving filament e, is a straight carbon stem, connected to the plate by a conductor covered with a refractory insulating material k. An insulated tube-socket p, provided with a metallic lining s, serves to support the lamp and connect it with one pole of the source of current. It will be noticed that the coat

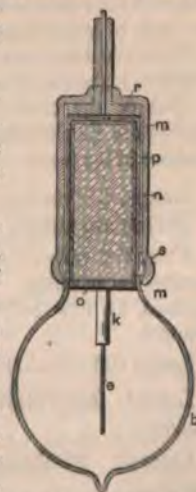


Fig. 339. Tesla's Straight Filament Incandescent Lamp.



ings *s* and *m*, form the plates of a condenser. The other terminal of the machine may be connected to the metal coated walls of the room, or to metallic plates suspended from the ceiling.

**Lamp Indicator.**—(See *Indicator, Lamp*.)

**Lamp, Pilot** — —In systems for the operation of electric lamps, an incandescent lamp employed in a station to indicate the difference of potential at the dynamo terminals, by means of the intensity of its emitted light.

**Lamp Rod.**—(See *Rod, Lamp*.)

**Lamp Socket Switch.**—(See *Switch, Lamp Socket*.)

**Lamps, Bank of** — —A term applied to a number of lamps, equal to about half the load, that were formerly placed in view of the attendant in circuit with a dynamo that is to be placed in a parallel circuit with another dynamo, one of the lamps of which is also in view.

When the lamps "in bank" were judged to be of the same brilliancy as the one fed by the other dynamo, the attendant switched the dynamo parallel with the other, and at the same time cut off the bank of lamps from the switched in dynamo.

The method is, however, wrong. The proper way is to make the voltage of the dynamo equal to that of the circuit. Then connect it and finally raise its electromotive force until it takes its share of the load.

**Lamps, Carboning** — —Placing carbons in electric arc lamps.

When the carbons are consumed, the lamp requires recarboning. The old carbon ends are replaced by new carbons, and the lamp rods cleansed.

**Large Calorie.**—(See *Calorie, Great*.)

**Latent Electricity.**—(See *Electricity, Latent*.)

**Lateral Discharge.**—(See *Discharge, Lateral*.)

**Lateral Induction.**—(See *Induction, Lateral*.)

**Lateral Leakage of Lines of Magnetic Force.**—(See *Leakage, Lateral, of Lines of Magnetic Force*.)

**Lateral Magnetic Leakage.**—(See *Leakage, Lateral, of Lines of Magnetic Force*.)

**Latitude, Magnetic** — —The distance a place is situated north or south of the magnetic equator.

All places that have the same magnetic latitude have the same value for the magnetic inclination and magnetic intensity, or are on the same isoclinical and isodynamic lines. The magnetic latitude is the same at all points of a magnetic parallel.

**Launch, Electric** — —A boat, the motive power for which is electricity, suitable for launching from a ship.

Up to the present time electric launches have been propelled by means of electric motors, driven by means of powerful storage batteries.

A form of electric launch constructed for the English Government is shown in Fig. 340. It is



Fig. 340. Electric Launch.

48½ feet in length over all, by 8 feet 9 inches beam, with an average draft of 2 feet 3 inches. Its speed is 8 knots per hour. It will carry forty fully equipped soldiers.

**Law, Jacobi's** — —The maximum work done by a motor is reached when the counter-electromotive force is equal to one-half of the impressed electromotive force, or,

$$E = \frac{e}{2}$$

**Law, Joule's** — —The heating power of a current is proportional to the product of the resistance and the square of the current strength. (See *Heat, Electric*.)

**Law, Natural** — —A correct expression of the order in which the causes and effects of natural phenomena follow one another.

The law of gravitation, for example, correctly expresses the order of sequence of the phenomena which result when unsupported bodies fall to the earth. It should be carefully borne in mind, however, that natural laws cannot be regarded as explaining the ultimate causes of natural phenomena.

r, but merely express their order of occurrence or sequence.

are ignorant, for example, of the true cause of attraction and are only acquainted with its effects. This is true of all ultimate physical sciences, save for our belief in their origin in a divine will.

**Law of Electro-Chemical Equivalence.**  
See *Equivalence, Electro-Chemical, Law*

**Law of Kohlrausch.**—In electrolytic conduction, each atom has a rate of motion for a given liquid, which is independent of the solvent with which it may have been combined.

In the following table, the rate of motion of various kinds of atoms through nearly pure water at a difference of potential of one volt per linear centimetre, is given:

H.....	1.08	centimetres per hour.
K.....	0.205	centimetre "
Na.....	0.126	" "
Li.....	0.094	" "
Ag.....	0.166	" "
C.....	0.213	" "
I.....	0.216	" "
NO <sub>3</sub> .....	0.174	" "

**Law of Ohm, or Law of Current Strength.**—The strength of a continuous current is directly proportional to the difference of potential or electromotive force in the circuit, and inversely proportional to the resistance of the circuit, *i. e.*, is equal to the quotient arising from dividing the electromotive force by the resistance.



Fig. 341. Current Strength in Circuit.

Ohm's law is expressed algebraically thus:

$$C = \frac{E}{R}; \text{ or, } E = C R.$$

If the electromotive force is given in volts, and the resistance in ohms, the formula will give the current strength directly in amperes.

The resistance of any electric circuit, as, for example, that shown in Fig. 341, consists of three parts, viz.:

- (1.) The internal resistance of the source,  $r$ .
- (2.) That of the conducting wires or leads,  $r'$ ; and
- (3.) That of the electro-receptive,  $r''$ , energized by the current. Ohm's law applied to this case would be:

$$C = \frac{E}{r + r' + r''}.$$

That is, the resistance of the entire circuit is equal to the sum of the separate resistances of its different parts.

$$\text{Since } C = \frac{E}{R}, (1); \text{ then } E = C R, (2);$$

$$\text{and } R = \frac{E}{C}, (3).$$

But, since a current of one ampère is equal to one coulomb per second, then, in order to determine in coulombs the quantity of electricity passing in a given number of seconds, it is only necessary to multiply the current by the time in seconds, or  $Q = C T$  (4).

Hence, referring to the above equations (1), (2), (3) and (4); according to Ohm's law:

(1.) The current in amperes is equal to the electromotive force in volts divided by the resistance in ohms.

(2.) The electromotive force in volts is equal to the product of the current in amperes and the resistance in ohms.

(3.) The resistance in ohms is equal to the electromotive force in volts divided by the current in amperes.

(4.) The quantity of electricity in coulombs is equal to the current in amperes multiplied by the time in seconds.

**Law of Volta, or Law for Contact-Series.**  
—A law for the differences of electric potential produced by the contact of dissimilar metals or other substances.

"The difference of potential between any two metals is equal to the sum of the differences of potential between the intervening substances in the contact series." (See *Electricity, Contact, Series, Contact.*)

**Law, Pflüger's** — A given tract of nerve is stimulated by the appearance of kathelectrotonus and the disappearance of anelectrotonus; not, however, by the disap-



pearance of kathelectrotonus nor by the appearance of anelectrotonus.—(*Landois and Stirling.*)

**Law, Poynting's** — — At any point in a magnetic field, or a conductor conveying current, the energy moves perpendicularly to the plane containing the lines of electric force or the lines of magnetic force, and the amount of energy crossing the unit of area of this plane per second is equal to the product of the intensities of the two forces multiplied by the sine of the angle between them, divided by  $4\pi$ .

If  $E$ , represents the electric force of a small body charged with positive electricity, and  $H$ , the magnetic force or forces of a smaller free unit north pole, and, if these forces at any point in the magnetic field are inclined at an angle,  $\theta$ , then  $e$ , the flow of energy per second at this point, in a direction perpendicular to the planes of  $E$  and  $H$  is,

$$e = \frac{E H \sin. \theta}{4 \pi}.$$

There is, therefore, a difference in the direction of the flow of electricity and the flow of electric energy. Electricity may be conceived as passing through the conductor something like water through a pipe, but electrical energy does not travel in this way. Electrical energy travels through the surrounding dielectric, which is thereby strained, and it propagates this strain from point to point until it reaches the conductor and is there dissipated.

**Law, Voltametric** — — The chemical action produced by electrolysis in any electrolyte is proportional to the amount of electricity which passes through the electrolyte.

This is called the Voltametric law, because any vessel containing an electrolyte, and furnished with electrodes, so that electrolysis may take place on the passage of the current, and is provided with means for measuring the amount of the electrolysis which occurs, is called a Voltameter. (See *Voltameter. Electrolysis.*)

**Laws, Ampère's, or Laws of Electro-Dynamic Attraction and Repulsion** — — Laws expressing the attractions and repulsions of electric circuits on one another or on magnets.

**Laws, Dub's** — — "The magnetism excited at any transverse section of a magnet is proportional to the square root of the distance between the given section and the near end of the magnet."

"The free magnetism at any given transverse section of a magnet is proportional to the difference between the square root of half the length of the magnet and the square root of the distance between the given section and the nearest end."

**Laws, Kirchhoff's** — — The laws for branched or shunted circuits.

These laws may be expressed as follows:

(1.) In any number of conductors meeting at a point, if currents flowing to the point be considered as  $+$ , and those flowing away from it as  $-$ , the algebraic sum of the meeting currents will be zero.

This is the same thing as saying as much electricity must flow away from the point as flows toward it.

(2.) In any system of closed circuits the algebraic sum of the products of the currents into the resistances is equal to the electromotive force in the circuit.

In this case all currents flowing in a certain direction are taken as positive, and those flowing in the opposite direction as negative. All electromotive forces tending to produce currents in the direction of the positive current are taken as positive, and those tending to produce currents in the opposite direction, as negative.

This follows from Ohm's law; for, since  $C = \frac{E}{R}$ ,

the electromotive force  $E = CR$ , and this is true, no matter how often the circuit is branched.

**Laws, Lenz's** — — Laws for determining the directions of currents produced by electrodynamic induction.

The direction of the currents set up by electrodynamic induction is always such as to oppose the notions by which such currents were produced.

**Laws of Becquerel, or Laws of Magneto-Optic Rotation.** — Laws for the magneto-optic rotation of the plane of polarization of light. (See *Rotation, Magneto-Optic.*)

**Laws of Coulomb, or Laws of Electro-**

**static and Magnetic Attractions and Repulsions.**—Laws for the force of attraction and repulsion between charged bodies or between magnet poles.

The fact that the force of electrostatic attraction or repulsion between two charges, is directly proportional to the product of the quantities of electricity of the two charges and inversely proportional to the square of the distance between them, is known as *Coulomb's Law*. Coulomb also ascertained that the attractions and repulsions between magnet poles are directly proportional to the product of the strength of the two poles, and inversely proportional to the square of the distance between them. This is also called *Coulomb's Law*.

Coulomb's law, in order to be accurate, must take into account the specific inductive capacity of the intervening medium. The correct expression for the force between two quantities  $q$  and  $q'$ , of electricity would be, therefore,

$$F = \frac{q q'}{r^2 K},$$

where  $K$ , is equal to the specific inductive capacity of the medium separating the two charges.

In a similar manner when the force is exerted between two magnet poles, to be accurate, we must take into account the magnetic permeability of the medium between the two magnets. The correct expression for the force between two magnet poles is, therefore,

$$F = \frac{m m'}{r^2 \mu},$$

when  $\mu$ , is the magnetic permeability.

#### Laws of Faraday, or Laws of Electrolysis

—Laws for the effects of electrolytic decomposition. (See *Electrolysis*.)

These laws are as follows:

(1.) The amount of an electrolyte decomposed is directly proportional to the quantity of electricity which passes through it; or, the rate at which a body is electrolyzed is proportional to the current strength producing such electrolysis.

(2.) If the same current be passed through different electrolytes, the quantity of each ion evolved is proportional to its chemical equivalent.

**Laws of Joule.**—Laws expressing the development of heat produced in a circuit by an electric current.

These laws may be expressed as follows:

(1.) The amount of heat developed in any cir-

cuit is proportional to its resistance, providing the current strength is constant.

(2.) The amount of heat developed in any circuit is proportional to the square of the current passing, providing the resistance is constant.

(3.) The amount of heat developed in any circuit is proportional to the time the current continues.

$$\text{Or, } H = C^2 R t \times 0.24.$$

Where  $H$ , equals the heat in small calories,  $C$ , equals the current in ampères,  $R$  equals the resistance in ohms,  $t$ , equals the time in seconds, and 0.24, the heat-units per second developed in a resistance of 1 ohm by the passage of 1 ampère.

**Lay Torpedo.**—(See *Torpedo, Lay*.)

**Layer, Crookes' —**—A layer, or stratum, of the residual atmosphere of a vacuum space, in which the molecules, recoiling from a heated or electrified surface, do not meet other molecules, but impinge on the walls of the vessel directly opposite such heated or electrified surface.

A Crookes layer may result as the effect of two different causes, viz.:

(1.) The rarefaction of the gas is such that the distance between the walls of the vessel and the heated surface is less than the mean-free-path of the molecules.

(2.) The wall is so near the heated surface that the distance between the two is less than the actual mean-free-path of the molecules. Under these last-named circumstances Crookes' layers may result, whatever be the density of the gas.

**Laying-Up Cables.**—(See *Cables, Laying-Up*.)

**Lead, Angle of —**—The angular deviation from the normal position, which must be given to the collecting brushes on the commutator cylinder of a dynamo-electric machine, in order to avoid destructive burning. (See *Commutator, Burning at*.)

The necessity for giving the collecting brushes a lead, arises both from the magnetic lag and from the distortion of the field of the machine by the magnetization of the armature current. The angle of lead is, therefore, equal to the sum of the angle of lag, and the angular distortion due to the magnetization produced by the armature current.



**Lead, Cable** — —A lead containing a conductor formed of several stranded conductors, as distinguished from a wire lead or a lead containing a single conductor.

**Lead, Flexible** — —A conductor formed of a number of small stranded conductors for the purpose of obtaining flexibility.

**Lead, Flexible Twin** — —A flexible conductor in which two parallel and separately insulated wires are placed.

**Lead of Brushes of Dynamo-Electric Machine.**—The angular deviation from the normal position, which it is necessary to give the brushes on the commutator of a dynamo-electric machine, in order to obtain efficient action. (See *Lead, Angle of*.)

**Lead Scoring Tool.**—(See *Tool, Scoring, Lead*.)

**Lead Sleeve.**—(See *Sleeve, Lead*.)

**Lead, Tee.**—(See *Tee, Lead*.)

**Lead, Wire** — —A lead consisting of a single conductor, as distinguished from a cable lead, or a lead containing a number of stranded conductors.

**Lead Wire.**—(See *Wire, Lead*.)

**Leading Horn of Pole Pieces of Dynamo-Electric Machine.**—(See *Horns, Leading, of Pole Pieces of a Dynamo-Electric Machine*.)

**Leading-In Wires.**—(See *Wires, Leading-In*.)

**Leading-Up Wires.**—(See *Wires, Leading-Up*.)

**Leads.**—The conductors in any system of electric distribution.

In distribution by parallel, the conductors through which the current flows from the source are sometimes called the leads in contradistinction to those through which it returns to the source.

The leads, or main conductors, in a multiple system of electric lighting, must maintain a constant potential at the lamp terminals. The dimensions of the leads are, therefore, so proportioned as to absorb as small an amount of potential as possible. Since, in incandescent lighting, where the lamps are connected to the leads in multiple-arc, the total resistance of the lamps is comparatively

small, the resistance of the leads must be quite small in order to avoid a marked drop of potential. Comparatively large conductors must, therefore, be used.

The main conductor for series circuits, such as for arc-lights, has in all parts the same current strength. Since the sum of the resistances of the lamps in such a circuit is quite high, a comparatively high resistance in the conductor may be employed without a proportionally large absorption of potential. Comparatively small conductors can therefore be used. (See *Electricity, Distribution of, by Constant Currents, Electricity, Distribution of, by Alternating Currents*.)

**Leads, Armature, Twist in** — —A displacement of the ends of the wires connected to the commutator segment, with respect to the position of the coils on the armature, for the purpose of obtaining a more convenient position for the diameter of commutation, that is, for the collecting brushes.

**Leak, Oscillatory** — —A leak or gradual loss of electricity which takes place in alternately opposite directions.

**Leak, Unidirectional** — —A gradual loss or leakage of electricity which takes place in one and the same direction.

The term has been employed to distinguish such a leak from an oscillatory leak.

**Leakage Conductor.**—(See *Conductor, Leakage*.)

**Leakage, Electric** — —The gradual dissipation of a current due to insufficient insulation.

Some leakage occurs under nearly all circumstances. On telegraphic lines, during wet weather, the leakage is often so great as to interfere with the proper working of the lines.

**Leakage, Electrostatic** — —The gradual dissipation of a charge due to insufficient insulation.

The leakage of a well insulated conductor, placed in a high vacuum, is almost inappreciable. Crookes has maintained electric charges in high vacua for years without appreciable loss.

**Leakage, Lateral, of Lines of Magnetic Force** — —The failure of lines of magnetic

to pass approximately parallel to one another through a bar of iron or other magnetic material, when it has come to rest in a magnetic field in which it is free to

escape of the lines of magnetic force from the sides of a bar or other similar material, instead of from the poles at the ends.

If a bar of magnetizable material, susceptible as to be free to move, comes to rest in a magnetic field in which it is undergoing magnetization, it has its greatest length parallel to the direction of the lines of force. If the bar is a thin, straight bar, the lines of force do not enter or come out at its ends. On the contrary, these lines of force or induction enter or come out at other points. The magnetization is, therefore, unequal at different points of the bar. In other words, the magnetic flux or intensity is not constant per unit of cross-sections of such bar.

**Magnetic Leakage.** — A useless dispersion of the lines of magnetic force of a dynamo-electric machine, or other similar apparatus, by their failure to pass through the parts where they are needed.

Less dissipation of lines of magnetic force outside that portion of the field of a dynamo-electric machine through which the current moves.

A leakage can be detected by an instrument called a *magnetophone*. (See *Magnetophone*.)

Magnetic leakage results in lowering the efficiency of the dynamo. (See *Co-efficient, Economy of a Dynamo-Electric Machine*.)

**Leclanché's Voltaic Cell.** — (See *Cell, Leclanché's*.)

In a system of telephonic exchange, a ground return is used, a single wire, or a metallic circuit is employed, two wires for connecting a subscriber with the switchboard, by means of which any subscriber may be legged or placed directly in communication with two or more other parties.

**Leg of Circuit.** — (See *Circuit, Leg of*.)

**Left Earth Quadrant.** — (See *Quadrant, Earth's*.)

1. 1

**Legal Ohm.** — (See *Ohm, Legal*.)

**Legging-Key Board.** — (See *Board, Legging-Key*.)

**Length of Spark.** — (See *Spark, Length of*.)

**Lens, Achromatic.** — A lens the images formed by which are free from the false coloration produced in other lenses by dispersion.

An ordinary lens can be rendered approximately achromatic by the use of a diaphragm. Achromatic lenses generally consist of the combination of a double convex lens of flint glass and a concave lens of crown glass.




Fig. 342. Equal and Opposite Refracting Angles.

combination of a double convex lens of flint glass and a concave lens of crown glass.

The ray of light entering the prism ABC, Fig. 342, suffers dispersion (separation into prismatic colors). This dispersion in the same




Fig. 343. Principle of Achromatism.

medium is proportional to the angle  $g$ , between the incident and emergent faces, called the *refracting angle*.

If, now, another prism BCD, of the same material, with a refracting angle  $g'$ , equal to  $g$ , is combined with the first prism in the manner shown in Fig. 342, it will produce an equal but opposite dispersion, so that the ray of light will emerge at  $R'$ , free from rainbow tints, but parallel to its original direction.

The variety of glass called *crown glass* produces only half as great dispersion of light as the variety called *flint glass*, under the same refract-



ing angle  $g$ . If the prism  $A B C$ , of crown glass, Fig. 343, whose angle  $g$ , is twice as great as the refracting angle  $g'$ , of the prism  $B C D$ , of flint glass, be placed together in the manner shown, then the ray  $R$ , will be transmitted at  $R'$ , free from color, but will not emerge parallel to its original direction; in other words, it suffers refraction or bending. Consequently such a combination can be used to free a pencil of light from false coloration and yet permit it to undergo refraction, and thus act as a lens. (See *Refraction*.)

The construction of achromatic lenses is based on this principle.

The crown glass is generally made with two

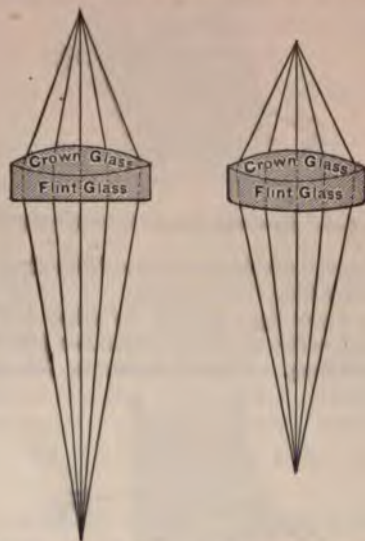


Fig. 344. Plano-Convex Achromatic Lens.

Fig. 345. Achromatic Lens.

convex surfaces; the flint glass, with one concave and one plane surface, as shown in Fig. 344.

Sometimes both surfaces of the flint glass are made curved, as in Fig. 345.

**Lenz's Law.**—(See *Law, Lenz's*.)

**Letter Box, Electric** — —A device that announces the deposit of a letter in a box by the ringing of a bell, or by the movement of a needle or index.

These devices generally act by the closing or opening of an electric circuit on the fall of the letter into the box.

**Leyden Jar.**—(See *Jar, Leyden*.)

**Leyden Jar Pattery.**—(See *Battery, Leyden Jar*.)

**Lichtenberg's Dust Figures.**—(See *Figures, Lichtenberg's Dust*.)

**Life Curve of Incandescent Electric Lamp.**—(See *Curve, Life, of Incandescent Electric Lamp*.)

**Life of Electric Incandescent Lamp.**—(See *Lamp, Incandescent, Life of*.)

**Light, Auroral** — —The light given off during the prevalence of an aurora. (See *Aurora Borealis*.)

**Light, Electric** — —Light produced by the action of electric energy.

Electric light is produced by electric energy in various ways, the most important of which are as follows, viz.:

(1.) By the passage of an electric discharge through a gas or vapor, either in a rarefied condition, at ordinary atmospheric pressure, or at pressures higher than that of the ordinary pressure. In any of these cases the gas or vapor is heated to incandescence by the passage of the discharge.

(2.) By the incandescence of a solid by the heating power of the current, as in the incandescent lamp.

(3.) By the incandescence of a solid by the action of a rapidly alternating electrostatic field, as in Tesla's incandescent lamp.

(4.) By the volatilization of a solid and the formation thereby of a voltaic arc.

(5.) By the combination of the effects of incandescence and the voltaic arc.

The amount of light produced in proportion to the amount of energy expended to produce it is probably least in the case of light produced by the sparks of a Wimshurst or Holtz machine, or as in (1), than in any other case in which electric energy acts to produce luminous energy.

**Light, Electric, Pumping of** — —(See *Pumping of Electric Light*.)

**Light, Intensity of** — —The brilliancy or illuminating power of a light as measured by a photometer in standard candles or other standard units. (See *Photometer, Candle, Standard*.)

**Light, Maxwell's Electro - Magnetic Theory of** — —A hypothesis for the

e of light proposed by Maxwell, based on the relations existing between the phenomena of light and those of electro-magnet-

ism. Maxwell's electro-magnetic theory of light assumes that the phenomena of light and magnetism are each due to certain motions of the ether, electricity and magnetism being due to its rotation, and light to oscillations, or its to-and-fro motions.

Maxwell proposed this theory to show that the phenomena of light, heat, electricity and magnetism could all be explained by one and the same principle, viz., a vibratory or oscillatory motion of particles of the hypothetical ether. Maxwell has not yet completed his hypothesis, and it has not yet been sufficiently developed to thoroughly entitle it to the name of a theory. This theory has more recently been elaborated by Hertz. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves.*)

There are, however, numerous considerations which render it probable that electric and magnetic phenomena, like those of light and heat, have their origin in a vibratory or oscillatory motion of the luminiferous ether. A few of these, pointed out by Maxwell, S. P. Thompson, W. G. L. Lardner and others, are as follows:

It is possible that the thing called electricity is the ether itself, negative electrification being an excess of the ether, and positive electrification a deficit. (See *Electricity, Similitude Hypothesis of.*)

It is possible that electrostatic phenomena result in a strain or deformation of the ether. Electricity may differ from a conductor in that a former may have such an attraction for the ether as to give it the properties of an elastic solid while in the latter the ether is so free to move that no strain can possibly be retained by it. (See *Dielectric, Conductor.*)

Dielectrics are transparent and conductors opaque.

There are exceptions to this in the case of vulcanized rubber and many other excellent dielectrics. Nor is this similarity to be expected to be general in view of the well known differences that exist between diathermancy and transparency.

It is possible that an electric current consists of a real motion or translation of the ether through a conductor.

It is possible that electromotive force re-

sults from differences of ether pressures. This would of course follow from (4).

(6.) The vibrations of light are propagated in a direction at right angles to the direction in which the light is moving. The magnetic field of a current is propagated in planes at right angles to the direction in which the current is flowing.

(7.) It is possible that lines of electrostatic and magnetic force consist of chains of polarized ether particles.

(8.) The velocity of propagation of light agrees very nearly with the velocity of propagation of electro-magnetic induction. (See *Ratio Velocity.*)

(9.) In certain axial crystals the difference of transparency in the direction of certain axes, corresponds with the direction in which such crystals conduct electricity.

Recent investigations render it almost certain that light and electro-magnetic waves or radiations are one and the same, and, therefore, have the same velocity of propagation through free ether. Through fixed ether, that is, through the ether that exists between the molecules of different kinds of matter, as is well known, the velocity of propagation differs with different substances. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves.*)

**Light, Northern** — — (See *Aurora Borealis.*)

**Light, Platinum-Standard** — — The light emitted by a surface of platinum one square centimetre in area, at its temperature of fusion.

This is called the Violle Standard and is extensively used in France.

**Light, Search, Automatic** — — A search light in which a parallel or slightly diverging beam of light is automatically caused to sweep the horizon, and thus disclose the approach of a torpedo boat or other similar danger.

This is called an automatic search light because it may be caused to automatically sweep the horizon, instead of being manipulated by hand, as usual.

**Light, Search, Electric** — — An electric arc light placed in a focusing lamp before a lens or mirror, so as to obtain either a parallel beam or a slightly divergent pencil of light



for lighting the surrounding space for purposes of exploration.

**Light, Southern** — — (See *Aurora Australis*.)

**Light, Tail** — — A light displayed at the rear end of trains in order to avoid rear collisions. (See *Railroads, Block System for*.)

**Lighter, Cigar, Electric** — — An apparatus for electrically lighting a cigar.

A cigar lighter consists essentially of a wire or rod of refractory substance, rendered incandescent by the passage of a current obtained from a voltaic battery, secondary generator, or other electric source.

**Lighter, Electric, Argand** — — A name sometimes given to an argand electric plain-pendant burner. (See *Burner, Argand-Electric, Plain-Pendant*.)

**Lighter, Electric, Argand Valve** — — A name sometimes given to an argand electric ratchet-pendant burner. (See *Burner, Argand-Electric, Ratchet-Pendant*.)

**Lighthouse Illumination, Electric** — — (See *Illumination, Lighthouse, Electric*.)

**Lighting, Arc** — — Artificial illumination obtained by means of an arc light.

The term arc lighting is used in contradistinction to incandescent lighting. In the United States, and, indeed, generally, a number of arc lights are placed in series on the line circuit, connected generally with a series dynamo. Each of the lamps is provided with a safety cut-out, which cuts out or removes a defective lamp from the circuit by automatically turning or switching the current through a shunt of low resistance.

**Lighting, Electric, by High Frequency Currents** — — A system of electric lighting, in which rods, bars or filaments of carbon or other refractory substances are raised to incandescence when placed in a rapidly alternating electrostatic field.

This system of electric lighting was invented by Nikola Tesla. Its general principles will be understood from an inspection of Fig. 346.

G, is a dynamo producing alternating currents of comparatively low potential. A portion of its current P, acting as the primary of an induction coil, induces alternating currents of high

potential in the secondary circuit S, which, charging the condenser C, is disruptively discharged into the circuit A, provided with an air gap at A' through P'. The inductive action of P', on S', produces oscillatory currents of

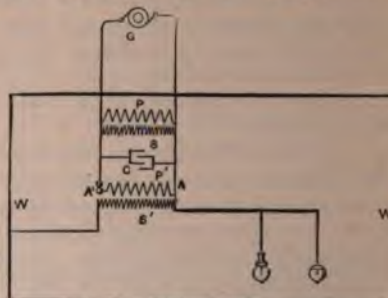


Fig. 346. Tesla's High Frequency Currents System of Lighting.

enormous frequency and potential in the secondary circuits connected therewith. In the apparatus shown in Fig. 346, two incandescent electric lamps are connected with the secondary circuit, one with a single straight filament, and the other with a ball conductor. The other terminal of S', is connected to the walls of the room to be lighted. (See *Lamp, Incandescent, Straight Filament. Lamp, Electric, Incandescent Ball*.)

**Lighting, Electric, Central Station** — — The lighting of a number of houses or other buildings from a single station, centrally located.

Central station lighting is distinguished from isolated lighting by the fact that a number of separate buildings, houses or areas, are lighted by the current produced at a single station, centrally located, instead of from a number of separate electric sources located in each of the houses, etc., to be lighted. (See *Electricity, Distribution of*.)

**Lighting, Electric Gas** — — Igniting gas jets by means of electric discharges.

Electric sparks are caused to pass through a jet of escaping gas, and thus to light it. These sparks are obtained from a spark-coil, i. e., a coil of insulated wire connected in series with the circuit so as to produce an extra current on the sudden breaking of the circuit, the discharge of which produces a spark capable of igniting the gas. In cases where a number of burners are to be simultaneously lighted the sparks required for



lighting the gas are obtained from the secondary of an induction coil. (See *Burner, Automatic Electric*.)

**Lighting, Electric, Isolated** — —A system of electric lighting where a separate electric source is placed in each house or area to be lighted, as distinguished from the central station lighting, where electric sources are provided for the production of the current required for an entire neighborhood.

**Lighting, Electric, Long-Arc System of** — —A system of electric lighting in which long arcs are maintained between the carbon electrodes.

**Lighting, Electric, Short-Arc System** — —A system of electric lighting in which short voltaic arcs are maintained between the carbon electrodes.

Systems of short arcs require an electromotive force of about 25 volts, which is about one-half that employed in long arcs. To develop an equal amount of heat energy in a short arc as in a long arc, therefore, requires that the current be of double strength.

The greater part of the light of a voltaic arc is given off from a tiny crater, which is formed in the end of the positive carbon. In the short-arc system the crater lies so near the negative carbon that much of its light is necessarily obscured, and troublesome shadows are sometimes produced. The long-arc system avoids these difficulties.

**Lightning.**—The spark or bolt that results from the disruptive discharge of a cloud to the earth, or to a neighboring cloud. (See *Electricity, Atmospheric, Kite, Franklin's*.)

**Lightning Arrestor.**—(See *Arrester, Lightning*.)

**Lightning, Back-Stroke of** — —An electric discharge, caused by an induced charge, which occurs after the direct discharge of a lightning flash.

The shock is not caused by the lightning flash itself, but most probably by a charge which is induced in neighboring conductors by the discharge. A similar effect may be noticed by standing near the conductor of a powerful electric machine, when shocks are felt at every discharge.

The back-stroke has been ascribed by many to

the oscillations by which a disruptive discharge is effected. (See *Discharge, Oscillating*.)

The effects of the return shock are sometimes quite severe. They are often experienced by sensitive people, on the occurrence of a lightning discharge, at a considerable distance from the place where the discharge occurred.

In some instances, the return stroke has been sufficiently intense to cause death. In general, however, its effects are much less severe than those of the direct lightning discharge.

**Lightning, Ball** — —A name sometimes given to globular lightning. (See *Lightning, Globular*.)

**Lightning, Chain** — —A variety of lightning flash in which the discharge takes a rippling path, somewhat resembling a chain.

**Lightning Conductor.**—(See *Rod, Lightning*.)

**Lightning, Forked** — —A variety of lightning flash, in which the discharge, on nearing the earth or other object, divides into two or more branches.

**Lightning, Globular** — —A rare form of lightning, in which a globe of fire appears, which quietly floats for a while in the air, and then explodes with great violence.

The exact cause of globular lightning is unknown. Phenomena allied to it, however, have been observed by Planté during the series discharge of his rheostatic machine. Similar phenomena are sometimes, though rarely, observed during the discharge of a powerful Leyden battery. Sir Wm. Thomson ascribes the effect to an optical illusion due to the persistence of the visual impression of a bright flash. This, however, would not account for the explosion which almost invariably attends globular lightning.

**Lightning Guard.**—(See *Guard, Lightning*.)

**Lightning, Heat** — —A variety of lightning flash in which the discharge lights up the surfaces of the neighboring clouds.

Sheet lightning is unaccompanied by thunder. It may be regarded as a brush discharge from one cloud to another.

Heat lightning is a variety of sheet lightning (See *Lightning, Sheet*.)



**Lightning Jar.**—(See *Jar, Lightning*.)

**Lightning, Return-Stroke of** — —A term sometimes applied to the back-stroke of lightning. (See *Lightning, Back-Stroke of*.)

**Lightning Rod.**—(See *Rod, Lightning*.)

**Lightning Rod for Ships.**—(See *Rod, Lightning, for Ships*.)

**Lightning, Sheet** — —A variety of lightning flash unaccompanied by any thunder audible to the observer, in which the entire surfaces of the clouds are illumined.

The cause of sheet lightning has been ascribed to reflection from clouds of lightning flashes that occur too far below the horizon either to permit them to be directly seen, or the thunder to be heard.

If a Geissler tube, which contains several concentric tubes, be charged by a Holtz machine, and then touched at different parts by the hands, a succession of luminous discharges will be seen in the dark, that bear a remarkable resemblance to the flashes of heat or sheet lightning.

**Lightning Stroke.**—(See *Stroke, Lightning*.)

**Lightning Stroke, Back or Return** — —(See *Stroke, Lightning, Back or Return*.)

**Lightning, Summer** — —A name sometimes given to heat lightning. (See *Lightning, Heat*.)

**Lightning, Volcanic** — —The lightning discharges that attend most volcanic eruptions.

Volcanic lightning is possibly sometimes due to the friction of volcanic dust particles against one another, or against the air, but is more probably caused by the sudden condensation of the water vapor that is generally disengaged during volcanic eruptions.

**Lightning, Zigzag** — —The commonest variety of lightning flashes, in which the discharge apparently assumes a forked zigzag, or even a chain-shaped path.

This form is seen in the discharge of a Holtz machine, or of a *Ruhmkorff Induction Coil*.

Photographic pictures of such lightning discharges appear to show that these discharges are in reality zigzag curves, rather than sharp angular zigzags.

**Limiting Stop.**—(See *Stop, Limiting*.)

**Limb, Rheoscopic** — —A term sometimes applied to a sensitive nerve muscle preparation, employed to detect the presence of an electric current. (See *Frog, Galvanoscope*.)

**Line.**—A wire or other conductor connecting any two points or stations.

**Line, Aclinic** — —A line connecting places on the earth's surface which have no magnetic inclination.

The magnetic equator of the earth. (See *Equator, Magnetic*.)

**Line Adjuster.**—An instrument invented by Delany for overcoming the effects of leakage on the adjustment of the relays in a way line.

When any key is opened, the line circuit is simultaneously broken at both ends so that there is a moment of no current, which causes all the relays to respond.

**Line, Aerial** — —An air line as distinguished from an underground conductor.

**Line, Agonic** — —A line connecting places on the earth's surface where the magnetic needle has no declination, or where it points to the true geographical north. (See *Agonic*.)

**Line, Artificial** — —A line so made up by condensers and resistance coils as to have the same inductive effects on charging or discharging as an actual telegraph line.

In duplex telegraphy by the differential method, the artificial line used must have its capacity balanced against that of the line, so as to avoid the effects of self-induction, and other effects produced by charging and discharging.

**Line, Capacity of** — —The ability of a line or cable to act like a condenser, and therefore like it to possess a capacity. (See *Cable, Capacity of*.)

**Line Circuit.**—(See *Circuit, Line*.)

**Line Circuit, Telegraphic** — —(See *Circuit, Line, Telegraphic*.)

**Line, Neutral, of a Magnet** — —A line joining the neutral points of a magnet of

points approximately midway between the poles.

This is sometimes called the equator of the magnet.

The neutral point is the point where the lines of force outside the magnet extend parallel to the surface of the magnet.—(*Hering.*)

**Line, Neutral, of Commutator Cylinder** — —A line on the commutator cylinder of a dynamo-electric machine connecting the neutral points, or the points of maximum positive and negative difference of potential. (See *Machine, Dynamo-Electric.*)

**Line of Least Sparking.**—(See *Sparking, Least Line of.*)

**Line, Single-Wire** — —A term sometimes used for a solid-wire conductor. (See *Line, Solid.*)

**Line, Solid** — —A line formed of a single conductor, as distinguished from a line formed of several conductors or by a stranded cable.

**Line, Stranded** — —A line formed of several strands or separate conductors twisted into one.

**Line, Telegraphic, Telephonic, etc.** — —The conducting circuit provided for the transmission of the electric impulses or currents employed in any system of electric transmission.

**Line, Telpher** — —The conducting line used in a system of telpherage. (See *Telpherage.*)

**Line, Through** — —A line extending between two terminal points, as distinguished from a line containing way stations.

**Line, Trunk** — —In a system of telephonic communication any line connecting distant stations and used by a number of subscribers at each end for purposes of intercommunication.

**Line, Way** — —A line communicating with way stations.

**Line Wire.**—(See *Wire, Line.*)

**Lineman.**—One who puts up and repairs line circuits and attends to the devices connected therewith.

In a system of electric lighting the lineman attends to carboning the lamps, cleaning the lamp rods, and, generally, to the minor details of the lines, insulators and the electro-receptive devices placed on the line.

**Lines, Halleyan** — —A term sometimes applied to the isogonal lines.

The isogonal lines are sometimes called the Halleyan lines, from Halley, who published the first chart of such lines in the year 1701.

**Lines, Isobaric** — —Lines connecting places on the earth's surface which simultaneously have the same barometric pressure.

The isobaric lines are sometimes called isobars.

**Lines, Isocline** — —Lines connecting places that have the same angle of magnetic dip or inclination. (See *Dip, Magnetic.*)

**Lines, Isodynamic** — —Lines connecting places which have the same total magnetic intensity.

The magnetic intensity of a place is determined by the number of oscillations that a small magnetic needle, moved from its position of rest in the magnetic meridian of any place, makes in a given time. This method is similar to that employed for determining the intensity of gravity at any place by observing the number of oscillations that a pendulum of a given length makes in a given time at that place. If, for example, a magnetic needle at one place makes 211 oscillations in ten minutes, and 245 in the same time at another place, then the relative intensities of magnetism at these places are as the squares of those numbers, or as 44,521 : 60,025, or as 1 : 1.348.

**Lines, Isogonal** — —Lines connecting places that have the same magnetic declination. (See *Declination.*)

**Lines, Isogonic** — —A term sometimes used for isogonal lines. (See *Lines, Isogonal.*)

**Lines, Isothermal** — —Lines connecting points or places which have the same mean temperature.

**Lines, Kapp** — —A term proposed by Mr. Gisbert Kapp for a unit of lines of magnetic force.

One Kapp line = 6,000 C. G. S. magnetic lines.  
Since there are 6.4514 square centimetres in a square inch, 1 Kapp line per square inch  

$$= \frac{6,000}{6.4514} = 930 \text{ C. G. S. lines per square cm.}$$



The total number of Kapp lines passing through a magnet and air space is equal to the ampère turns divided by the total magnetic reluctance in the magnetic circuit.—(*Urquhart.*)

**Lines of Electric Displacement.**—(See *Displacement, Electric, Lines of.*)

**Lines of Electrostatic Force.**—(See *Force, Electrostatic, Lines of.*)

**Lines of Force, Cutting** — — (See *Force, Lines of, Cutting.*)

**Lines of Force, Direction of** — — (See *Force, Lines of, Direction of.*)

**Lines of Inductive Action.**—(See *Action, Inductive, Lines of.*)

**Lines of Magnetic Force.**—(See *Force, Magnetic, Lines of.*)

**Lines of Magnetic Force, Conducting Power for** — — (See *Force, Magnetic, Lines of, Conducting Power for.*)

**Lines of Magnetic Induction.**—(See *Induction, Magnetic, Lines of.*)

**Lines, Overhead** — — A term applied to telegraph, telephone and electric light or power lines that run overhead, in contradistinction to similar lines placed underground.

**Lines, Vortex-Stream** — — Lines extending in the direction in which the particles of a fluid are moving.

A vortex stream is supposed to be composed of a number of vortex-stream lines.

**Linked Magnetic and Electric Chain.**—(See *Chain, Linked Magnetic and Electric.*)

**Links, Fuse** — — Strips or plates of fusible metal in the form of links, employed for safety fuses for incandescent or other circuits.

**Liquid, Bright Dipping** — — A liquid used in electro-plating for dipping articles preparatory to electro-plating, so as to insure a bright plating deposit on them when afterwards subjected to the plating process.

A bright dipping liquid is prepared by the addition of 1 volume of common table salt to a mixture of 100 volumes each of sulphuric and nitric acids. For small objects or articles of copper, or other readily corroded metals, the

above solution is diluted by the addition of one eighth its volume of water.

**Liquid, Electropoison** — — A battery liquid consisting of 1 pound of bichromate of potash dissolved in 10 pounds of water, to which 2½ pounds of commercial sulphuric acid has been gradually added.

This liquid is employed with the carbon-zinc cell or the bichromate of potash cell.

**Liquid, Exciting, of Voltaic Cell** — — The electrolyte or liquid in a voltaic cell, which acts on the positive plate.

**Liquid Level Alarm.**—(See *Alarm, Water or Liquid Level.*)

**Liquid Resistance Load.**—(See *Load Liquid Resistance.*)

**Liquid, Stripping** — — A liquid employed to remove a coating of one metal from the surface of another, without affecting the other metal.

The character of the stripping liquid used will depend on the kind of metal to be removed, and whether the stripping is to be accomplished by solution effected by chemical action, or by electrolytic action.

**Liquid, Specific Resistance of** — — (See *Resistance, Specific, of Liquid.*)

**Liquor, Spent** — — Any liquor, such as that in the acid or other baths used in electro-plating, that has become weakened by use.

**Listening Cam.**—(See *Cam, Listening.*)

**Load, Liquid Resistance** — — An artificial load for a dynamo-electric machine, consisting of a mass of liquid interposed between electrodes.

A liquid is generally rendered better conducting by the addition of a small quantity of soluble salt, such, for example, as sulphate of soda.

**Local Action of Dynamo-Electric Machine.**—(See *Action, Local, of Dynamo-Electric Machine.*)

**Local Action of Voltaic Cell.**—(See *Action, Local, of Voltaic Cell.*)

**Local Battery.**—(See *Battery, Local.*)

**Local Battery Circuit.**—(See *Circuit Local-Battery.*)

**Local Currents.**—(See *Currents, Local*.)

**Local Faradization.**—(See *Faradization, Local*.)

**Local Galvanization.**—(See *Galvanization, Local*.)

**Localization of Faults.**—(See *Faults, Localization of*.)

**Lock, Electric** — — A lock that is automatically unlocked by the aid of electricity.

The electric lock is so arranged that the action of a push button at a distance unlocks the door. A speaking tube communicates with the house, and the pressing of a push button on any floor of the house unlocks the door. The mere shutting of the door locks it.

A form of electric lock is shown in Fig. 347.



Fig. 347. Electric Lock.

**Locomotive, Electric** — — A railway engine whose motive power is electricity. (See *Railroads, Electric*.)

**Locomotive Head Light, Electric** — — (See *Head Light, Locomotive*.)

**Lodestone.**—A name formerly applied to an ore of iron (magnetic iron ore), that naturally possesses the power of attracting pieces of iron to it.

Lodestone, or magnetic iron ore, must be regarded as a magnetizable substance that has become permanently magnetic from its situation in the earth's magnetic field. Such beds of ore concentrate the lines of the earth's magnetic field on them, and thus become magnetic.

**Lodge's Standard Voltaic Cell.**—(See *Cell, Voltaic, Standard, Lodge's*.)

**Log, Electric** — — An electric device for measuring the speed of a vessel.

A log, operated by the rotation of a wheel, is caused to register the number of its rotations by a step-by-step recording apparatus operated by breaks in the circuit, made during the rotation of the wheel, at any given number of turns, say 100, or some other convenient multiple. Such a log may be kept constantly in the water, and observed when required, or it can be caused to make a permanent record of its actual speed at any time during the entire run.

**Logarithm.**—The exponent of the power to which it is necessary to raise a fixed number, in order to produce a given number.

A table of logarithms enables the operations of multiplication, division, the raising of powers, and the extraction of roots, to be readily performed by simple addition, subtraction, multiplication or division, respectively. When thoroughly understood, logarithms greatly reduce the labor of mathematical calculations. For the manner in which they are used, the student is referred to any standard work on mathematics.

**Logarithmic Curve.**—(See *Curve, Logarithmic*.)

**Long-Coil Magnet.**—(See *Magnet, Long-Coil*.)

**Long-Core Electro-Magnet.**—(See *Magnet, Electro, Long-Core*.)

**Long-Shunt Compound-Wound Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Compound-Wound, Long-Shunt*.)

**Longitude, Electric Determination of** — — The determination of the longitude of a place, by differences in time between it and a place on the prime meridian, as simultaneously determined telegraphically.

In determinations of this character allowance must be made for the retarding effects of long telegraphic lines, or cables.

**Loom, Electric** — — A device by means of which Jacquard cards in the ordinary loom are replaced by a simple perforated metal plate, the perforations in which correspond to those in the Jacquard card.



The necessary movements are effected by means of electro-magnets.

**Loop Break.**—A device for introducing a loop in a break made at any part of a circuit.

The rigidity of the line wire, between the points of attachment of the loop introduced, is maintained by means of some inflexible non-conducting material inserted in the break.

**Loop Circuit.**—(See *Circuit, Loop*.)

**Loop, Drip** — — An inclined loop placed where the outside conductors enter a building.

The inclination is upwards towards the point of entrance to the building. This device of a drip loop is adopted for the purpose of preventing the rain water from flowing along the inclined wire into the building. This is effected by making the wire incline from the building, thus throwing the drainage from the building.

**Loop, Electric** — — A portion of a main circuit consisting of a wire going out from one side of a break in the main circuit and returning to the other side of the break.

Loops are employed for the purpose of connecting a branch telegraph office with the main line; for placing one or more electric arc lamps on the main line circuit; for connecting a *mes-senger call* or *telephone circuit* with a main line; and for numerous similar purposes.

**Loops of Force.**—(See *Force, Loops of*.)

**Loops of Mutual Induction.**—(See *Induction, Mutual, Loops of*.)

**Low-Resistance Magnet.**—(See *Magnet, Low-Resistance*.)

**Low-Tension Electric Fuse.**—(See *Fuse, Electric, Low-Tension*.)

**Loxodograph.**—An apparatus for electrically recording on paper the actual course of a ship by the combined action of magnetism and photography.

**Luces.**—Plural of lux. (See *Lux*.)

**Luminescence.**—A limited power of emitting light, possessed by certain bodies which have previously acquired potential energy by exposure to light or radiant energy.

The term luminescence was proposed by E. Wiedemann to cover the case of the emission of

light under circumstances differing from the emission or radiation of light by incandescence. Luminescence applies to the case of a radiation, generally selective in character, that is apparently due to effects allied to, or the same as, those of fluorescence and phosphorescence. For example, magnesium oxide or zinc oxide, when heated above a certain critical temperature, radiates far more light than equally hot carbon.

The spectrum of such luminescent light is especially rich in certain wave lengths. The ability of the substance to continue to furnish this extra light is, however, limited. After a comparatively short time, the additional light, or selective radiation, disappears. The luminescent light is apparently due to molecular potential energy stored in the substance during its exposure to light. Luminescence may be developed in bodies in the following manner, viz.:

- (1.) By heat.
- (2.) By chemical action.
- (3.) By friction.
- (4.) By exposure to the sun, or by actual impact of light waves.
- (5.) By electricity.
- (6.) By vital forces, as in the fire fly, or the glow worm.

**Luminescence, Rejuvenation of** — — Reimparting by exposure to light, or any other suitable means, the power of luminescence to a substance after it has lost this power.

**Luminous Absorption.**—(See *Absorption, Luminous*.)

**Lunar Inequality of Earth's Magnetic Variation or Inclination.**—(See *Inequality, Lunar, of Earth's Magnetic Variation or Inclination*.)

**Lunar Inequality of Earth's Magnetism.**—(See *Inequality, Lunar, of Earth's Magnetism*.)

**Lux.**—A name proposed by Preece for the unit of intensity of illumination.

The illumination given by a standard candle at the distance of 12.7 inches.

The illumination given by 1 carcel at the distance of 1 metre.

The illumination given by a lamp of 10,000 candles at 105.8 feet. (See *Illumination Unit of*.)

## M

**M.**—A contraction sometimes used to express a gaseous pressure of the .000001 of an atmosphere.

1,000,000 M. equals 760 mm. of mercury or 1 atmosphere of pressure.

A vessel containing air, which has been exhausted to the .000001 of its pressure at 760 mm., or one atmosphere, has a pressure or tension of 1 M.

This contraction is used by Crookes in his researches on the properties of radiant matter. (See *Matter, Radiant, or Ultra Gaseous.*)

**m.**—A contraction used in mathematical writings for magnetic permeability, or the specific conductivity of any substance for lines of magnetic force.

**mm.**—A contraction for millimetre. (See *Weights, French System of.*)

**M. P. H.**—A contraction sometimes used in railroad work to indicate miles per hour.

**Machine, Armstrong's Hydro-Electric** — — A machine for the development of electricity by the friction of a jet of steam passing over a water surface.

Steam generated in a suitably insulated boiler,



Fig. 348. Armstrong's Hydro-Electric Machine.

Fig. 348, is allowed to escape through a tortuous nozzle, from a series of apertures opposite a pointed comb, attached to an insulated conductor.

The cooling of the steam during its passage through a flat box, termed the *cooling box*, connected with the nozzles, causes a partial condensation, so that the box always contains a small quantity of water.

The friction of the drops of water against the orifice, and, possibly, their friction against the water surface itself, are the cause of the electricity produced.

A conductor connected with the pointed comb furnishes positive electricity. The boiler furnishes negative electricity. The hydro-electric machine is not a very economical source of electricity, and is only employed for experimental purposes. It was discovered accidentally through a shock given to an engineer, who placed his hand in a jet of steam escaping from a leaking boiler he was endeavoring to mend. The causes were first studied by Sir Wm. Armstrong, who, in 1840, devised the apparatus just described.

**Machine, Dynamo-Electric** — — A machine for the conversion of mechanical energy into electrical energy, by means of magneto-electric induction.

The term is also applied to a machine by means of which electrical energy is converted into mechanical energy by means of magneto-electric induction. Machines of the latter class are generally called *motors*, those of the former, *generators*.

Prof. S. P. Thompson defines a dynamo-electric machine as follows, viz.: "A machine for converting energy in the form of mechanical power into energy in the form of electric currents, or vice versa, by the operation of setting conductors (usually in the form of coils of copper wire) to rotate in a magnetic field, or by varying a magnetic field in the presence of conductors."

The term dynamo was first applied to such machines, because in the form in which this machine first appeared, viz.: the series-wound machine, it was self-exciting, or required no excitement other than what it received by the rotation of its armature in the field of its magnets, or, indeed, in the field of the earth. (See *Machine, Dynamo-Electric, Reaction Principle of.*)

A dynamo-electric generator, or a dynamo-elec.



*tric machine* proper, consists of the following parts, viz.:

(1.) The revolving portion, usually the *armature*, in which the electromotive force is developed, which produces the current.

It must be borne in mind that it is not current, but *difference of electric potential*, or *electromotive force*, that is developed by any electric source from which a current is obtained. For ease of reference, however, we will speak of an electric current as being generated by the armature, or by the source. No ambiguity will be introduced if the student bears the above in mind.

(2.) The *field magnets*, which produce the field in which the armature revolves.

(3.) *h<sub>2</sub> pole pieces*, or free terminals of the field magnets.

(4.) The *commutator*, by which the currents developed in the armature are caused to flow in one and the same direction. In alternating machines, and in some continuous current dynamos this part is called the *collector*, and does not rectify the currents.

(5.) The *collecting brushes*, that rest on the *commutator cylinder* and take off the current generated in the armature.

**Machine, Dynamo-Electric, Alternating-Current** — —A dynamo-electric machine in which alternating currents are produced.

The field magnets may be either permanent magnets or electro-magnets. When electro-magnets are used, their coils may be separately excited by another machine whose current is continuous; or, they may be excited by the commuted current of a separate coil on the armature; or, they may be partly excited by commuted currents and partly by commuted currents from a transformer, placed in the main circuit of the dynamo.

**Machine, Dynamo-Electric, Armature of** — —(See *Armature, Dynamo-Electric Machine*.)

**Machine, Dynamo-Electric, Bed-Piece of** — —The frame or base on which a dynamo is supported.

The bed-piece is sometimes called the dynamo frame or base.

**Machine, Dynamo-Electric, Bi-Polar** — —A dynamo-electric machine, the armature of which rotates in a field formed by two magnet poles, as distinguished from a ma-

chine the armature of which rotates in a field formed by more than two magnet poles.

A dynamo-electric machine whose armature rotates in the field formed by more than two poles is called a multi-polar machine. (See *Machine, Dynamo-Electric, Multi-Polar*.)

**Machine, Dynamo-Electric, Carcass of** — —A term sometimes used in place of the field magnet frame of a dynamo-electric machine. (See *Machine, Dynamo-Electric, Frame of*.)

The term, field magnet frame, would appear to be the preferable term. The term, however, is used in France, and is derived from the French word for skeleton.

**Machine, Dynamo-Electric, Closed-Coil** — —A dynamo-electric machine, the armature coils of which are grouped in sections, communicating with successive bars of a collector, so as to be connected continuously together in a closed circuit.

The Gramme dynamo and most continuous-current dynamos are closed-coil dynamos.

**Machine, Dynamo-Electric, Closed-Coil Disc** — —A closed-coil dynamo-electric machine, the armature core of which is disc-shaped.

**Machine, Dynamo-Electric, Closed-Coil Drum** — —A closed-coil dynamo-electric machine, the armature core of which is drum-shaped.

**Machine, Dynamo-Electric, Closed-Coil Ring** — —A closed-coil dynamo-electric machine, the armature core of which is ring-shaped.

**Machine, Dynamo-Electric, Collectors** — —(See *Collectors of Dynamo-Electric Machines*.)

**Machine, Dynamo-Electric, Compound Winding of** — —(See *Winding, Compound, of Dynamo-Electric Machine*.)

**Machine, Dynamo-Electric, Compound-Wound** — —Machines whose field magnets are excited by more than one circuit of coils, or by more than a single electric source.

The object of compound winding is to make



dynamo self-regulating under changes in its load. A shunt-wound dynamo renders series and multiple circuits approximately equal as regards their working. Multiple circuits, however, require great constancy of potential for this purpose the compounding of the coils is necessary.

In the compound dynamo, the shunt coils are wound on the series coils, or are used in conjunction with them. The shunt coils consist of a greater number of convolutions of fine wire than the series coils, which are of coarse wire. The rate of excitation is sometimes compounded with series or with shunt field magnet

Compound dynamos are of two classes, viz.:  
Those designed to produce a constant potential,  
Those designed to produce a constant current.

#### Constant Potential :

In the long-shunt compound-wound dynamo, the terminals of the shunt coil are connected with the binding posts of the machine. As the current leaves the armature it has two paths to take: one through the thick series coils, to the external circuit, and the other through the finer and longer shunt coils. The resistance of the shunt coils is greater than that of the series coils. Current variations in the armature will, therefore, produce no appreciable variation in the magnetizing power of the shunt, which acts as a nearly uniform exciter of the field. In a shunt-wound dynamo connected to a series circuit, the introduction of an additional load or of receptive devices into the circuit requires more current, and this would tend to cause a drop in the potential. The object of the shunt coils is to prevent this drop. The series coils, therefore, act as compensators. If the shunt coils are too powerful the compensation will have the effect of increasing the potential.

A combination of a series and separately excited machine is shown in Fig. 351. The field is excited with the armature, but has also an additional and separate excitation.

A combination of a series and shunt machine in which the excitation of the field both by the armature and by the shunted current. Such a combination is shown in Fig. 353.

#### Constant Current :

A combination of shunt and separately excited machines is shown in Fig. 356. In this the field is excited by means of a shunt

to the external circuit, and by a current produced by a separate source.

The combination of a series and magneto machine is shown in Fig. 352. This, also, is designed to give a constant current.

**Machine, Dynamo-Electric, Compound-Wound, Long-Shunt** — — A compound-wound dynamo-electric machine, in which the shunt-field magnet coils form a shunt to the binding posts of the machine.

In the short-shunt compound-wound dynamo-electric machine, the ends of the shunt coil are connected to the brushes of the machine.

**Machine, Dynamo-Electric, Compound-Wound, Short-Shunt** — — A compound-wound dynamo-electric machine in which the shunt-field magnet coils form a shunt to the armature only, as distinguished from the armature and series coils combined.

In the short-shunt dynamo-electric machine, the ends of the shunt coil are connected to the brushes of the machine, and not to the binding posts of the machine, or to the external circuit, as in the long-shunt machine.

**Machine, Dynamo-Electric, Continuous-Current** — — A dynamo-electric machine, the current of which is commuted so as to flow in one and the same direction, as distinguished from an alternating dynamo.

**Machine, Dynamo-Electric, Double-Magnet** — — A term sometimes applied to a dynamo-electric machine, the field magnets of which have two consequent poles.

**Machine, Dynamo-Electric, Economic Co-efficient of** — — A name formerly applied to the efficiency of a dynamo-electric machine. (See *Machine, Dynamo-Electric, Efficiency of*.)

**Machine, Dynamo-Electric, Efficiency of** — — The ratio between the electric energy or the electrical horse-power produced by a dynamo, and the mechanical energy or horse-power expended in driving the dynamo.

The *Efficiency* may be the *Commercial Efficiency*, which is the useful or available energy in the external circuit divided by the total mechanical energy; or it may be the *Electrical Efficiency*, which is the available electric energy divided by the total electric energy.



The *Efficiency of Conversion* is the total electrical energy developed, divided by the total mechanical energy applied.

If  $M$ , equals the mechanical energy,

$W$ , the useful or available electrical energy, and

$w$ , the electrical energy absorbed by the machine, and

$m$ , the *Stray Power*, or the power lost in friction, eddy currents, air friction, etc.

Then, since

$$M = W + w + m,$$

$$\text{Commercial Efficiency} = \frac{W}{M} = \frac{W}{W + w + m}.$$

$$\text{Electrical Efficiency} = \frac{W}{W + w}.$$

$$\text{Efficiency of Conversion} = \frac{W + w}{M} = \frac{W + w}{W + w + m}.$$

#### Machine, Dynamo-Electric, Flashing of

—A name given to long flashing sparks at the commutator, due to the short circuiting of the external circuit at the commutator, by arcing over the successive commutator insulating strips.

#### Machine, Dynamo-Electric, Frame of

—The bed-piece that supports a dynamo-electric machine.

The frame is sometimes called the dynamo bed-piece.

The word frame is sometimes applied to the field magnet cores and yokes.

**Machine, Dynamo-Electric, Local Action of** — (See *Action, Local, of Dynamo-Electric Machine*.)

**Machine, Dynamo-Electric, Mouse-Mill, Sir Wm. Thomson's** — A dynamo-electric machine designed by Sir Wm. Thomson, named from the resemblance of its armature to a mouse mill.

The armature conductor of this dynamo consists of parallel bars of copper, arranged on a hollow cylinder, like the bars on a mouse mill.

#### Machine, Dynamo-Electric, Multipolar

—A dynamo-electric machine, the armature of which revolves in a field formed by more than a single pair of poles.

This form is usually adopted for large machines as being more economical.

Fig. 349 shows a multipolar dynamo with four poles.

#### Machine, Dynamo-Electric, Open-Coil

—A dynamo-electric machine, the armature coils of which, though connected to



Fig. 349. Multipolar Dynamo with Four Poles.

the successive bars of the commutator, are not connected continuously in a closed circuit.

The Brush and the Thomson-Houston arc dynamos are open-coil machines.

#### Machine, Dynamo-Electric, Open-Coil

**Disc** — An open-coil dynamo-electric machine, the armature of which is disc-shaped.

#### Machine, Dynamo-Electric, Open-Coil

**Drum** — An open-coil dynamo-electric machine, the armature core of which is drum-shaped.

#### Machine, Dynamo-Electric, Open-Coil

**Ring** — An open-coil dynamo-electric machine, the armature core of which is ring-shaped.

#### Machine, Dynamo-Electric, Output of

—The electric power of the current generated by a dynamo-electric machine expressed in volt-amperes, watts or kilo-watts.

S. P. Thompson suggests that dynamo-electric machines be rated as to their practical safe capacity in *units of output of 1,000 watts*, or one *kilo-watt*. According to this, an 8-unit machine might give, say, 100 amperes at a difference of potential of 80 volts, or 2,000 amperes at a difference of potential of 4 volts. Such a unit would be far more expressive than the usual method of rating a machine as having a capacity of such and such a number of lights.

#### Machine, Dynamo-Electric, Reaction

**Principle of** — The mutual interaction

the current generated in the armature of a dynamo-electric machine and the field of the machine, each strengthening the other until the full working current, which the machine is capable of developing, is reached.

In the armature of a series or shunt dynamo, as it rotates, the differences of potential induced in its coils are very small, since the field of the magnet is weak, being merely the magnetism of the armature. The current so produced in the armature, circulating through the field coils, increases the intensity of the magnetic field of the machine, and this, reacting on the armature, results in a more powerful current. This current again increases the intensity of the magnetic field of the machine, which again reacts to increase the current in the armature coils, and this continues until the machine is producing its full output. A dynamo-electric machine very rapidly "builds up," or reaches its maximum current. The reaction principle was discovered by Søren Hjorth, of Copenhagen.

**Machine, Dynamo-Electric, Reversibility** — The ability of a dynamo to act as

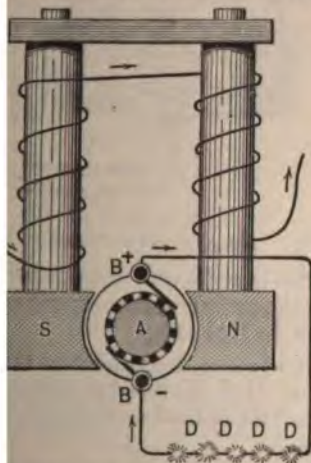


Fig. 350. Separately Excited Dynamo

when traversed by an electric current. (See *Motor, Electric*.)

**Machine, Dynamo-Electric, Separate Excited** — A dynamo-electric machine in which the field magnets are excited by means

of coils on the armature, separate and distinct from those which furnish current to the external circuit.

**Machine, Dynamo-Electric, Separately Excited** — A dynamo-electric machine in which the field magnet coils have no connection with the armature coils, but receive their current from a separate machine or source.

A separately excited dynamo-electric machine is shown in Fig. 350.

Separate excitation for constant current machines has not come into any extended use in the United States.

**Machine, Dynamo-Electric, Series and Magneto** — A compound-wound dynamo-electric machine in which the armature circuit of a magneto-electric machine is connected in series with the armature and field magnet circuits of a series dynamo.

The circuit connections of a series and magneto dynamo are shown in Fig. 351.

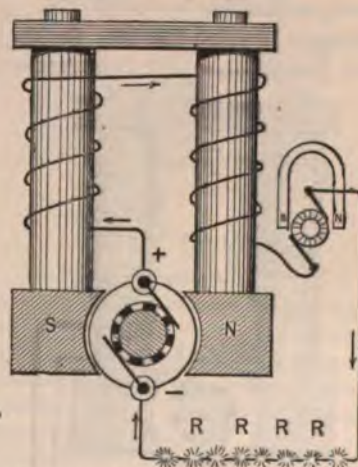


Fig. 351. Series and Magneto Dynamo.

**Machine, Dynamo-Electric, Series and Separately Excited** — A compound-wound dynamo-electric machine in which there are two separate circuits on the field magnet cores, one of which is connected in series with the field magnets and the external circuit, and the other with some source by which it is separately excited.



A series and separately excited compound-wound dynamo-electric machine is shown in Fig. 352.

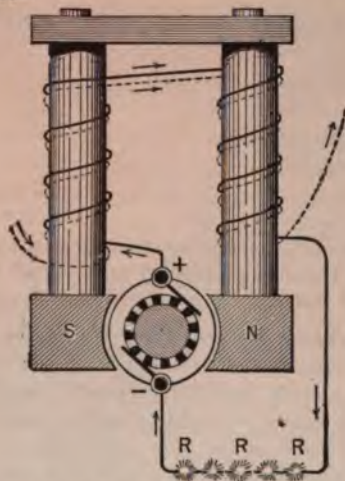


Fig. 352. Series and Separately Excited Dynamo.

This machine is employed for maintaining a constant potential at its terminals.

**Machine, Dynamo-Electric, Series and Shunt Wound** — A compound-wound

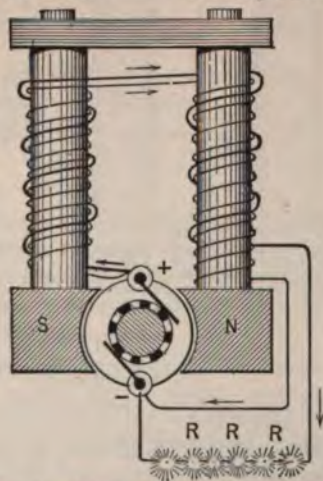


Fig. 353. Series and Shunt-Wound Dynamo.

dynamo-electric machine in which the field magnets are wound with two separate coils, one of which is in series with the armature and the external circuit, and the other in shunt with the armature.

This is usually called a compound-wound machine. (See *Machine, Dynamo-Electric, Compound-Wound*.)

A compound-wound series and shunt dynamo-electric machine is shown in Fig. 353. This machine is designed to maintain constant potential at its terminals.

There are two varieties of series and shunt-wound dynamos, viz.:

- (1.) Long-shunt compound-wound dynamo.
- (2.) Short-shunt compound-wound dynamo.

(See *Machine, Dynamo-Electric, Compound-Wound, Long-Shunt, Machine, Dynamo-Electric, Compound-Wound, Short-Shunt*.)

**Machine, Dynamo-Electric, Series-Wound**

— A dynamo-electric machine, in which the field circuit and the external circuit are

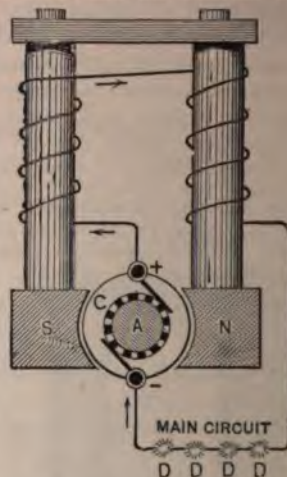


Fig. 354. Series Dynamo.

connected in series with the armature circuit, so that the entire armature current must pass through the field coils.

A series dynamo-electric machine is shown in Fig. 354. Here the armature circuit, the field circuit and the external circuit are all connected in series.

Since in a series-wound dynamo the armature coils, the field and the external series circuit are in series, any increase in the resistance of the external circuit will decrease the electromotive force from the decrease in the magnetizing currents. A decrease in the resistance of the external circuit will, in a like manner, increase the electromotive force from the increase in the magnetizing current.

of a regulator avoids these changes in electromotive force.

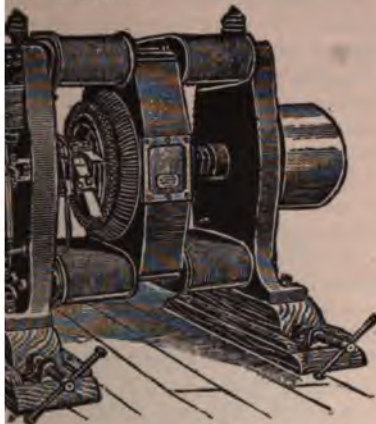


Fig. 355. Series Dynamo.

The dynamo shown in Fig. 355 is series connected. The armature is ring shaped. The core consists of a ring made of soft iron. The field is bi-polar, and is obtained by four magnet coils and two consequent

**Shunt and Separately Excited Dynamo.**—A compound-dynamo-electric machine, in which

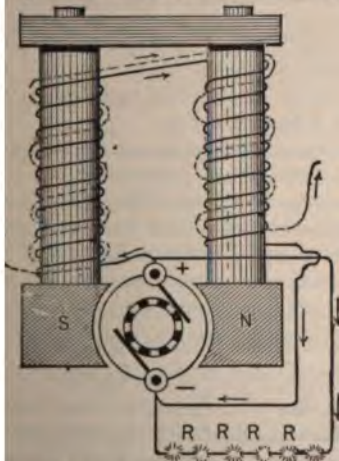


Fig. 356. Shunt and Separately Excited Dynamo.

The machine is excited both by means of a separate source and by the current produced by the armature circuit, and by a separate source. It is a compound-dynamo-electric machine, in which

wound dynamo-electric machine is shown in Fig. 356. This machine maintains a constant current in its circuit, notwithstanding changes in its external circuit.

#### Machine, Dynamo-Electric, Shunt-Wound

—A dynamo-electric machine in which the field magnet coils are placed in a shunt to the armature circuit, so that only a portion of the current generated passes through the field magnet coils, but all the difference of potential of the armature acts at the terminals of the field circuit.

A shunt dynamo-electric machine is shown in Fig. 357.

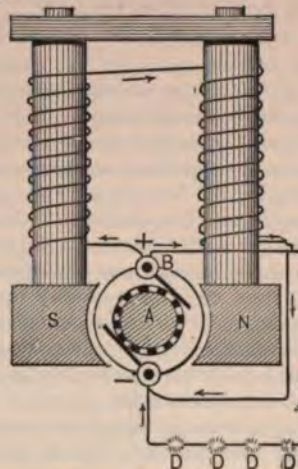


Fig. 357. Shunt Dynamo.

In a shunt dynamo-electric machine, an increase in the resistance of the external circuit increases the electromotive force, and a decrease in the resistance of the external circuit decreases the electromotive force. This is just the reverse of the series-wound dynamo.

In a shunt-wound dynamo a continuous balancing of the current occurs. The current dividing at the brushes between the field and the external circuit in the inverse proportion to the resistance of these circuits, if the resistance of the external circuit becomes greater, a proportionately greater current passes through the field magnets, and so causes the electromotive force to become greater.

If, on the contrary, the resistance of the external circuit decreases, less current passes through the field, and the electromotive force is proportionately decreased.



In a shunt-wound dynamo the resistance of the shunt should be at least four hundred times that of the armature. It is sometimes as much as one thousand times as great.—(*Urquhart.*)

To obtain complete regulation of the machine some form of compounding is necessary. (See *Machine, Dynamo-Electric, Compound-Wound.*)

**Machine, Dynamo-Electric, Single Magnet** — —A dynamo-electric machine, in which the field magnet poles are obtained by means of a single coil of insulated wire, instead of by more than a single coil.

**Machine, Dynamo-Electric, Sparking of** — —An irregular and injurious operation of a dynamo-electric machine, attended with sparks at the collecting brushes.

Sparking consists in the formation of small arcs under the collecting brushes. One cause of sparking is to be found in the brushes leaving one commutator strip before making connection with the next strip.

Sparking from this cause may be avoided by so placing the brushes as to cause them to bridge over the space between two consecutive bars, thus permitting them to touch one bar before leaving the other. Two brushes, electrically connected, are sometimes employed for this purpose, or the slots between contiguous bars are slightly inclined to the axis of rotation.

Sparking causes a burning of the commutator strips, and an irregular consumption of the brushes, both of which produce further irregularities by the wear of the brushes against the commutator bars.

At the moment the brush touches two contiguous commutator bars, it short circuits the coil terminating at those bars. On the breaking of this closed circuit, a spark appears under the brushes. This spark is often considerable, since from the comparatively small resistance of the coil, it is apt, when short-circuited, to produce a heavy current if not exactly at the neutral point.

Another cause of sparking is to be found in the self-induction of the armature coils. The extra current on breaking forms an injurious spark under the brushes. This spark may be considerable, since the current produced in the coil on momentarily short circuiting it by the brushes simultaneously touching the adjoining commutator currents may be large.

Sparking occurs when the brushes are not set

close to the neutral line. Since the principal cause for the change in the lead of the brushes is the magnetizing effect of the armature coils, it is preferable to make the number of windings of these as few as possible, and to obtain the necessary differences of potential by increasing the speed of rotation and the strength of the magnetic field of the machine. Short armature coils also lessen the sparking due to *self-induction*.

Sparking at the brushes is also caused by the jumping of improperly supported or constructed brushes.

When the brushes are not set close to the neutral point, long *flashing sparks* are apt to occur.

A lack of symmetry of winding of the armature coils will necessarily be attended by injurious flashing, from the impossibility of properly adjusting the brushes.

**Machine, Dynamo-Electric, Synchronizing** — —Adjusting the phases of two alternating current dynamos so as to permit their being coupled or joined in parallel.

**Machine, Dynamo-Electric, to Short Circuit a** — —To put a dynamo-electric machine on a circuit of comparatively small electric resistance.

**Machine, Dynamo-Electric, Unit of Output of** — —A unit for the electric power furnished by the current of a dynamo-electric machine.

A unit of output equal to 1,000 watts or 1 kilowatt.

A machine furnishing a current of 100 amperes at a difference of potential of 80 volts, would have an output of 8,000 watts, and would, therefore, be rated as an 8-unit machine.

**Machine, Electric, Rubber of** — —A cushion of leather covered with an electric amalgam, and employed to produce electricity by its friction against the plate or cylinder of a frictional electric machine. (See *Machine, Frictional Electric.*)

**Machine, Electrostatic Induction of** — —A machine in which a small initial charge produces a greatly increased charge by its inductive action on a rapidly rotated disc of glass or other dielectric.

An excellent type and example of such a machine is found in the Holtz machine, which con-

following parts, as shown in Fig. 358,

primary glass plate A, fixed at its  
rotated supports.  
secondary plate B, capable of rapid rota-  
tion about a horizontal axis, by a driving pulley.



Fig. 358. Holtz Electric Machine.

pieces of varnished paper  $f, f'$ , placed  
on the sides of the fixed plate at holes or  
notches cut in the plate. The armatures  
are placed on the side of the fixed plate away from  
the disc, or on the back of the plate, so that  
on rotation, moves towards tongues of  
paper to the middle of the armature.

Combs placed in front of the movable  
disc armatures, and connected with  
terminals  $m, n$ , one of which is movable  
from the other by means of a suitably  
sliding handle connected with it.

A partial charge is given to one of the  
plates, holding a plate of electrified vul-  
canite, and rotating the machine while  
the plates are in contact. As soon as the ma-  
chine is started the balls are gradually separated,  
and a series of sparks will pass between them  
as the plate is rotated.

If the balls are separated too far the sparks

The balls must then be again  
in contact and gradually separated as

This machine can be regarded as a re-  
phorus provided with means for  
charging and recharging the upper  
(See *Electrophorus*.)

The effect of the machine is well described by  
Prof. Thompson in his "Elementary Lessons on  
Magnetism," as follows:

A small + charge to be imparted at  
the right armature  $f'$ ; this charge acts

inductively across the disc upon the metallic  
comb, repels electricity through it, and leaves the  
points negatively electrified. They discharge  
negatively electrified air upon the front surface of  
the movable disc; the repelled charge passes  
through the brass rods and balls, and is dis-  
charged through the left comb upon the front side  
of the movable disc. Here it acts inductively  
upon the paper armature, causing that part of it  
which is opposite itself to be negatively charged  
and repelling a + charge into its farthest part,  
viz., into the tongue, which being bluntly pointed,  
slowly discharges a + charge upon the back of the  
movable disc. If now the disc be turned round,  
this + charge on the back comes over from the  
left to the right side, in the direction indicated by  
the arrow, and, when it gets opposite the comb,  
increases the inductive effect of the already exist-  
ing + charge on the armature, and therefore  
repels more electricity through the brass rods and  
knob into the left comb. Meantime the — charge,  
which we saw had been induced in the left arma-  
ture, has in turn acted on the left comb, causing  
a + charge to be discharged by the points upon  
the front of the disc; and drawing electricity  
through the brass rods and knobs, has made the  
right comb still more highly —, increasing the  
discharge of —ly electrified air upon the front  
of the disc, neutralizing the + charge which is be-  
ing conveyed over from the left. These actions re-  
sult in causing the top half of the moving disc to  
be —ly electrified. The charges on the front  
serve, as they are carried round, to neutralize the  
electricities let off by the points of the combs,  
while the charges on the back, induced respect-  
ively in the neighborhood of each of the arma-  
tures, serve, when the rotation of the disc con-  
veys them round, to increase the inductive influ-  
ence of the charge on the other armature."

The student will be aided in following Prof.  
Thompson's explanation by the diagrammatic  
sketch, shown in Fig. 359. Here the rotating plate  
is shown for convenience in the form of a cylinder.  
The armatures are shown on the back of the plate  
at  $f'$  and  $f$ , opposite the brass collecting combs  $P'$   
and  $P$ , with their discharging rods and balls  $a, a$ .

The effect of the positive charge given to the  
right hand armature  $f'$ , directly through the  
comb  $P'$ , rods  $a, a$ , comb  $P$ , to left hand arma-  
ture  $f$ , is readily seen. The rotation of the plate  
being in the direction of the curved arrows, the  
charging of the front of the plate by convection  
streams from the combs, and the back of the plate



from the points of the paper armatures, as well as the character of the charge, will be understood. There thus results, as is shown, a positive charge on both the front and back of the upper half of



Fig. 359. Plate of Holtz Machine.

the rotating plate, and a negative charge on both sides of its lower half. A reversal of polarity of the plate occurs at the line  $P a a P'$ . Sometimes the reversal does not occur, and the machine either loses its charge entirely, or in part. A conductor  $S S$ , furnished with points, is sometimes provided to lessen the chances of lack of reversal.

**Machine, Faradic** — A machine for producing faradic currents.

There are two varieties of faradic machines, viz.: magneto-faradic apparatus and simple induction apparatus.

**Machine, Frictional Electric** — A machine for the development of electricity by friction.

A frictional electric machine consists of a plate or cylinder of glass  $A$ , Fig. 360, capable of rotation on a horizontal axis.

A rubber formed of a chamois skin, covered with an amalgam of tin and mercury, is placed at  $B$ . By the rotation of the plate the



Fig. 360. Frictional Electric Machine.

rubber becomes negatively and the glass positively excited. An insulated conductor  $D$ , called the *prime* or *positive conductor*, provided with a comb of points, becomes positively charged by induction. The machine will develop electricity

best if a conductor attached to the rubber is connected with the ground, as by a chain.

**Machine, Holtz** — A particular form of electrostatic induction machine. (See *Machine, Electrostatic Induction*.)

**Machine, Influence** — An electrical machine depending for its action on electrostatic induction.

The Wimshurst and Holtz machines are influence machines. (See *Machine, Electrostatic Induction*. *Machine, Wimshurst Electrical*. *Machine, Holtz*.)

**Machine, Influence, Wimshurst's Alternating** — An electrostatic induction machine by means of which a series of rapidly alternating charges are produced.

Although such a machine furnishes a torrent of sparks between its terminals, yet it is unable to furnish a permanent charge to a Leyden jar or condenser, since its oscillatory discharges, continually undo at any small interval of time what was done at the preceding interval, and thus leave the jar uncharged.

**Machine, Magneto Blasting** — A magneto-electric machine employed for generating the current used in electric blasting.




Fig. 361. Magneto-Electric Machine.

**Machine, Magneto-Electric** — A machine in which there are no field magnet coils, the magnetic field of the machine being due to the action of permanent steel magnets.

A dynamo in which currents are produced by the motion of armature coils past permanent magnets. (See *Machine, Dynamo-Electric*.)

A magneto-electric machine is shown in Fig. 361.

Another form of magneto-electric machine is shown in Fig. 362.

This latter form of machine is known as a hand generator, in contradistinction to one driven by power and called a power generator.

field is obtained by means of a number of permanent magnets so combined as to




Fig. 362. Magneto-Electric Machine.

a single magnet. The armature is rotated.

**Machine, Mouse-Mill** — A form of convection induction machine, invented by William Thomson to act as the receiver of his electrometer. (See *Machine, Electrostatic Induction*.)

**Machine, Rheostatic** — A machine invented by Planté in which continuous effects of considerable intensity are produced by charging a number of condensers in multiple-arc and discharging in series.

condensers are charged by connecting with a number of secondary or storage bat-

**Machine Telegraphy**.—(See *Telegraphy*, *etc.*)

**Machine, Töppler-Holtz** — A modified form of Holtz machine in which the initial charge of the armatures is obtained by the action of metallic brushes against the plates.

**Machine, Wimshurst Electrical** — A form of convection electric machine invented by Wimshurst.

Like the Holtz machine, the Wimshurst machine is a convection induction machine. It is, however, more efficient in action, and will probably supersede the former machine. The Wimshurst machine consists of two shellac-varnished glass plates that are rapidly rotated in opposite directions. Thin metallic strips are placed outside of each of the plates, in the radial positions shown in Fig. 363. These strips act

both as *inductors* and *carriers*; the carriers of one plate acting as inductors to the other plate.

Two curved brass rods, terminating in fine wire brushes that touch the plates, are placed as shown, one at the front of the plate, and one at the back, at right angles to each other. Pairs of conduct-



Fig. 363. The Wimshurst Electrical Machine.

ors, connected together, provided with collecting points, are placed diametrically opposite each other, as shown. Sliding conductors, terminated with metallic balls, are provided for discharging the conductors. Leyden jars, the inner coatings of which are connected with two discharging rods, and the outer coatings together, may be employed in this as in the Holtz machine.

The exact action of this machine is not thoroughly understood.

**Machines, Dynamo-Electric, Varieties of** — Dynamo-electric machines may be divided into classes according to—

- (1.) The manner in which the magnetism of the field magnets is obtained.
- (2.) The character of their armatures.
- (3.) The nature of the current obtained, whether continuous or alternating.
- (4.) The form of their field magnets.
- (5.) The nature of their magnetic fields.
- (6.) The manner in which the current of the field magnets, the armature and the external circuits are connected.

**Mack** — A term proposed by Mr. Oliver Heaviside for a unit of self-induction.

The term Mack is derived from Maxwell. The unit of self-induction has also been a secohm and a quadrant.



The term Max would seem to be indicated. In the United States the unit of self-induction is called a Henry, after Prof. Joseph Henry. (See *Henry, A.*)

**Made Circuit.**—(See *Circuit, Made*.)

**Magazine Fuse.**—(See *Fuse, Magazine*.)

**Magne-Crystalline Action.**—(See *Action, Magne-Crystalline*.)

**Magnet.**—A body possessing the power of attracting the unlike pole of another magnet or of repelling the like pole; or of attracting readily magnetizable bodies like iron filings to either pole.

A body possessing a magnetic field. (See *Field, Magnetic*.)

The lines of force are assumed in passing through the magnetic field to come out at the north pole of the magnet and to go in at the south pole. All lines of force form closed magnetic circuits. If a magnetizable body is brought into a magnetic field, the lines of magnetic force are concentrated on it and pass through it. The body therefore becomes magnetic. The intensity of the resulting magnetism depends on the number of lines of force that pass through the body, and the polarity on the direction in which they pass through it.

A magnetized bar cannot be regarded as a source of energy in itself. Energy must be expended to magnetize the iron, and must also be expended to demagnetize it.

**Magnet, Anomalous** — — A magnet possessing more than two free poles.

There is no such thing as a unipolar magnet.



Fig. 364. Anomalous Magnet.

All magnets have two poles. Sometimes, however, several magnets are so grouped that there appear to be more than two poles in the same magnet.




Fig. 365. Anomalous Magnet.

Thus, in Fig. 364, the magnet A B C appears to possess three poles, two positive poles at A and C, and a central negative pole at B.

It is clear, however, that the central pole is in reality formed of two juxtaposed negative poles, and that A B C actually consists of two magnets with two poles to each.

The magnet A B C D Fig. 365, which in like manner appears to possess four separate poles, in reality is formed of three magnets with two poles to each.

Since unlike magnetic poles neutralize each other, it is clear that only similar poles can thus be placed together in order to produce additional magnet poles.




Fig. 366. Anomalous Magnet.

The six-pointed star shown in Fig. 366, is an anomalous magnet with apparently seven poles. The formation of the central N-pole, as is evident from an inspection of the drawing, is due to the six separate north poles, n, n, n, n, n, n, of the six separate magnets Sn, Sn, etc. Such a magnet would be formed by touching the star at the point N, with the S-pole of a sufficiently powerful magnet.

The extra poles are sometimes called *insequent poles*. Their presence may be shown by means of a compass needle, or by rolling the magnet in iron filings, which collect on the poles.

**Magnet, Artificial** — — A magnet produced by induction from another magnet, or from an electric current.

Any magnet not found in nature is called an artificial magnet.

**Magnet, Axial** — — A name sometimes given to a solenoid with an axial or straight core.

**Magnet, Bell-Shaped** — — A modification of a horseshoe magnet in which the approached poles are semi-annular in shape, and form a split tube.

Bell-shaped magnets are used in many galvanometers.

ers, because they can be readily dampened surrounding them by a mass of copper. The in its motion produces currents that tend to stop, and, therefore, to stop its motion. (*Laws, Lenz's.*)

**Magnet, Club-Footed** — — — An electro-magnet whose core is in the form of a club-shoe and is provided with a magnetizing coil on one pole only.

**Magnet Coil.** — (See *Coil, Magnet.*)

**Magnet, Compensating** — — — A magnet placed over a magnetic needle, generally the magnetic needle of a galvanometer for the purpose of varying the direction and intensity of the magnetic force of earth on such needle. (See *Galvanometer, Reflecting.*)

**Magnet, called a compensating magnet**, is sometimes placed on a ship, near the compass for the purpose of neutralizing the local forces produced on the compass needle by magnetism of the ship.

**Magnet, Compound** — — — A number of magnets placed parallel with their similar poles facing one another, as shown in Fig. 367.

Compound magnets are made in proportion to their size than single magnets.

**Magnet, Compound**

**hoes** — — — A horse-

magnet composed

of several separate horse-

magnets placed with

similar poles to-

gether.

A compound horseshoe magnet is shown in Fig. 367.

A horseshoe magnet possesses greater portative power than a straight bar magnet of the same size.

(See *Power, Portative.*)

Because its opposite poles are nearer to each other.

Because the magnetic resistance of its core is less, the lines of magnetic force closing the armature, and thus concentrating the magnetic attraction on the armature.

Compound magnets are generally made of the same shape.



Fig. 367. Compound Magnet.

**Magnet, Controlling** — — — A name sometimes applied to the controller in the Thomson-Houston automatic system of current regulation. (See *Controller.*)

Generally any magnet which controls some particular action.

**Magnet, Cylindrical** — — — A magnet in the shape of a cylinder.

A helix or solenoid through which a current of electricity is passing is, so far as external space is concerned, the exact magnetic equivalent of a cylindrical magnet.

**Magnet, Damping**

— — — Any magnet employed for the purpose of checking the velocity of motion of a moving body or magnet.

Dampening magnets generally act by the resistance which they offer to the passage of a metallic disc, so moved as to cut the lines of force of their field.

**Magnet, Electro** — — — A magnet produced by the passage of an electric current through a coil of insulated wire surrounding a core of magnetizable material.

The magnetizing coil is called a helix or solenoid. (See *Magnetism, Ampère's Theory of.*)

Strictly speaking, the term electro-magnet is limited to the case of a magnet provided with a soft iron core, which enables it to rapidly acquire its magnetism on the passage of the magnetizing current, and as rapidly to lose its magnetism on the cessation of such current.

An electric current passed around a bar of magnetizable material, in the manner and direction shown in Fig. 369, will produce the polarity N and S, at its ends or extremities as marked.

The directions of the currents required to produce N and S, poles respectively are shown in Fig. 370.

The cause of this difference of polarity will be readily understood from a study of the direction

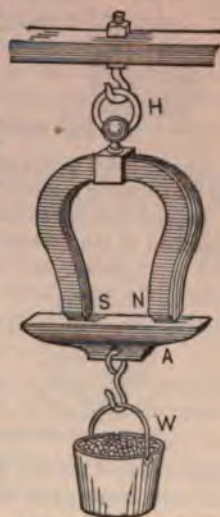


Fig. 368. Compound Horseshoe Magnet.



of lines of magnetic force in the field produced by an electric current.

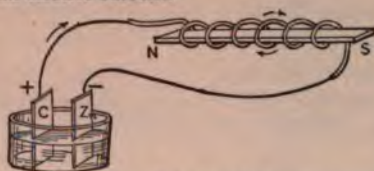


Fig. 369. Polarity of Current.

The direction of this polarity may be predicted by the following modification of a rule by Ampère:

Imagine yourself swimming in the wire in the direction of the current; if, then, your face is



Fig. 370. North and South Magnet Poles.

turned toward the bar that is being magnetized, its North seeking pole will be on your left.

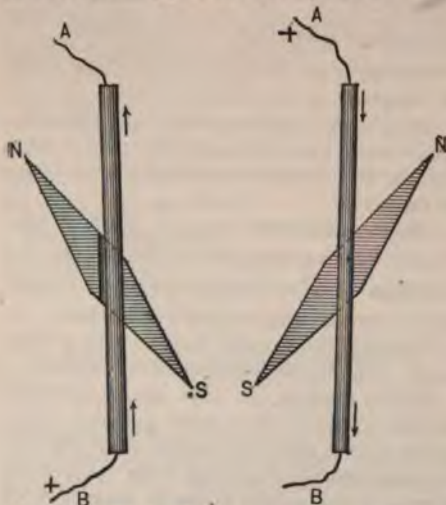


Fig. 371. Deflection of Magnetic Needle.

Fig. 372. Deflection of Magnetic Needle.

If, for example, the conductor A B, be traversed by a current in the direction from B, to A, as shown in Fig. 371, the north pole N, of the needle N S, placed under the conductor, is deflected, as shown, to the left of the observer, who is supposed to be swimming in the current, facing the needle. If the current flow in the opposite

direction, as from A, to B, as shown in Fig. 372, the N, pole of the needle is deflected as shown, but still to the left of the observer supposed to be swimming as before.

In any electric circuit, the lines, of magnetic force, produced by the passage of the current, form circles around the circuit in planes at right angles to the direction of the current, as shown in Fig. 373. The direction of these lines of force is the same as that of the hands of a watch, if the current be supposed to flow away from the observer. (See *Field, Magnetic, of an Electric Current.*)

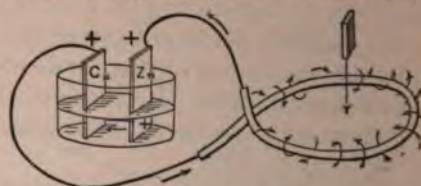


Fig. 373. Direction of Lines of Force.

Remembering now that the lines of force are supposed to come out at the north pole of a magnet, and to pass in at the south pole, it is evident that if the current flows in the direction shown in Fig.

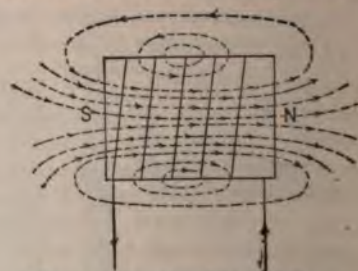


Fig. 374. Direction of Lines of Force.

374, the lines of force will come out at the north pole and pass in at the south pole.

Since in a right-handed helix the wire passes around the axis in the opposite direction to that in which it passes in a left-handed helix, it is evident that the helices shown in Fig. 375 at 1, and 2, will produce opposite polarities at the points of entrance and exit by a current flowing in the direction of the arrows.

If the current be sent through the right-handed helix, shown at 1, from b, to a, that is, from the left to the right in the figure, a south pole will be produced at b, and a north pole at a. If, however, it be sent from a, to b, the polarity will be reversed.

If the current be sent through the left-handed

helix, shown at 2, from a, to b, that is, from the left to the right in the figure, a north pole will be produced at a, and a south pole at b. If, however, it be sent in the opposite direction, the polarity will be reversed.

Therefore, in an electro-magnet, on the core of which several layers or thicknesses of wire are wound, in which the current flows through one layer, in, say a direction from right to left, the current must return through the next layer in the opposite direction, or from left to right. The polarities of the same extremities of the helices are, however, the same in all cases, *since the layers are successively right and left handed* to the current. The winding shown at 3, produces consequent poles.

The following laws express the more important principles concerning electro-magnets:

(1.) The magnetic intensity (strength) of an electro-magnet is nearly proportional to the strength of the magnetizing current, provided the core is not saturated.

(2.) The magnetic strength is proportional to the number of turns of wire in the magnetizing coil; that is, to the number of ampère turns. (See *Turns, Ampère.*)

(3.) The magnetic strength is independent of the thickness or material of the conducting wires.

These laws may be embraced in the more general statement that the strength of an electro-

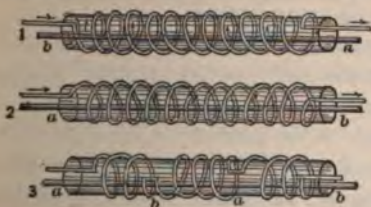


Fig. 375. Right-Handed, Left-Handed and Anomalous Helices.

magnet, the size of the magnet being the same, is proportional to the number of its ampère turns. (See *Turns, Ampère.*)

A short interval of time is required for a current to thoroughly magnetize a powerful electro-magnet.

A few moments are also required for a powerful magnet to thoroughly lose its magnetism. At the same time electro-magnets are capable of acquiring or losing their magnetism with very great rapidity. It is, in fact, on this ability possessed to so remarkable a degree by soft iron, that

the value of an electro-magnet for many purposes depends. (See *Lag, Magnetic.*)

A difference exists between the action of a magnetized disc and a hollow coil of wire through which a current of electricity is passing. So far as the space outside either is concerned, the action is the same, but the coil is penetrable on the inside and the disc is not, and for the inside of the space, therefore, there is a difference in the action.

**Magnet, Electro, Bar** — — An electro-magnet, the core of which is in the form of a straight bar or rod.

**Magnet, Electro, Cylindrical** — — An electro-magnet, the core of which consists of a hollow cylinder provided with a slot extending parallel to its axis.

The gap in the cylinder suffices for the placing of the magnetizing coils, and forms the poles. This form of electro-magnet was devised by Joule. Its construction will be understood from an inspection of Fig. 376.



Fig. 376. Cylindrical Electro-Magnet.

**Magnet, Electro, Horseshoe** — — An electro-magnet, the core of which is in the shape of a horseshoe or U.

**Magnet, Electro, Hughes'** — — An electro-magnet in which a U-shaped permanent magnet is provided with pole pieces of soft iron, on which only are placed the magnetizing coils.

A quick acting electro-magnet, in which the magnetizing coils are placed on soft iron pole pieces that are connected with and form the prolongations of the poles of a permanent horseshoe magnet.

Hughes devised this form of electro-magnet in order to obtain the best effects from currents of but short duration.

He thus obtained a quick acting magnet, necessary to insure the success of his system of printing telegraph, where the magnetizing currents at times have a duration of but the .20 of a second.



**Magnet, Electro, Joule's Cylindrical** — An electro-magnet provided with a hollow cylindrical core. (See *Magnet, Electro, Cylindrical*.)

**Magnet, Electro, Iron-Clad** — An electro-magnet whose magnetizing coil is almost entirely surrounded by iron.

The effect of the iron casing is to greatly reduce the magnetic resistance of the circuit. A form of iron-clad electro-magnet is shown in Fig. 377. Here one of the poles is connected with a casing of iron, external to the coils, and is thus brought nearer to the other pole.



Fig. 377. Iron-Clad Electro-Magnet.

**Magnet, Electro, Long-Core** — An electro-magnet with a long core of iron.

A long-core electro-magnet magnetizes and demagnetizes much more slowly than a short-core electro-magnet.

**Magnet, Electro, Short-Core** — An electro-magnet with a short core of iron.

A short-core electro-magnet possesses the power of being magnetized and demagnetized much more rapidly than a long-core magnet.

**Magnet, Electro, Yoked-Horseshoe** — A horseshoe electro-magnet, in which the two straight limbs are formed of two straight rods or bars, yoked together at one pair of ends by a yoke or bar of iron.

In some cases the magnetizing coils are placed on each of the limbs. Sometimes, however, a single coil is placed at the middle of the yoke and the limbs are left bare.

Even with the closest possible fitting the resistance of the magnetic circuit is much greater in this form of electro-magnet, owing to the smaller permeability of the air gap at the joints, than it would be if the entire core were made of a single piece of iron. A yoked electro-magnet is, however, more convenient to make and use.

**Magnet, Electro, Zigzag** — A multipolar electro-magnet, the magnetizing coils of which are separately wound in grooves cut in the face of straight or curved bars.

A form of zigzag electro-magnet devised by Joule is shown in Fig. 378. The spiral character of the winding produces the alternate North and South polarities shown in the figure.

**Magnet, Equator of** — A point approximately midway between the poles of a straight bar magnet, or nearly midway



Fig. 378. Zigzag Electro-Magnet.

from the poles of a horseshoe magnet if measured along the bar from each pole.

This term was proposed by Dr. Gilbert. It is now almost entirely displaced by the term *neutral point*.

**Magnet, High-Resistance** — A term sometimes used in place of long-coil magnet whose coils have a high electric resistance. (See *Magnet, Long-Coil*.)

The term long-coil magnet is, perhaps, the preferable one, because the resistance of a coil, *per se*, has nothing to do with its magnetizing power, which is determined by its ampère turns. (See *Turns, Ampère. Magnet, Long-Coil*.)

**Magnet, Horseshoe** — magnetized bar of steel or iron bent in the form of a horseshoe or letter U.

**Magnet, Iron-Clad** — A magnet whose magnetic resistance is lowered by a casing of iron connected with the core and provided for the passage of the lines of magnetic force. (See *Magnet, Tubular*.)

**Magnet, Jacketed** — A term sometimes applied to a form of iron-clad magnet. (See *Magnet, Iron-Clad*.)

**Magnet, Keeper of** — A mass of soft iron applied to the poles of a magnet through which its lines of magnetic force pass. (See *Field, Magnetic*.)

The keeper of a magnet differs from its *armature* in that the keeper while acting as such is always kept on the poles to prevent loss of magnetization, while the armature, besides acting as a keeper, may be attracted towards, or, if an electro-magnet, be repelled from the magnet poles. While performing its functions the keeper is always fixed, the armature generally, though

ys, is in motion. A keeper is, of course, ed with permanent magnets.  
on is divided as to the efficacy of the in preventing loss of magnetization in cases.

**Magnet, Long-Coil** — —An electro- whose magnetizing coil consists y turns of thin wire.

**Magnet, Low-Resistance** — —A term mes used in place of short-coil t. (See *Magnet, Short-Coil*.)  
term, *short-coil magnet*, is the preferable

**Magnet, Marked Pole of** — —A name ly applied to that pole of a magnet points approximately to the geol north.

the pole of the magnet that points to the hical north be in reality the north pole magnet, then the earth's magnetic pole in rthern Hemisphere is of south magnetic . In the United States, and Europe y, this is regarded as the fact.

French, however, formerly called the the needle that points to the earth's geol north, the *south* or *austral* pole. In a and England it is called the *north pole*, *marked pole*, or the *north-seeking pole*, and rthern Hemisphere is assumed to possess magnetic polarity. (See *Pole, Magnetic*, *Pole, Magnetic, Boreak*.)

**Magnet, Moment of** — —The effective f a magnetic couple as obtained by yling one of the forces of the couple e perpendicular distance between ections of the forces.

moment of a magnet is equal to the prod- the volume of the magnet and the inor magnetization, or simply its magnetiza-

**Magnet, Natural** — —A name some- given to a lodestone. (See *Lode-*

**Magnet, Neutral Line of** — —(See *Line, d, of a Magnet*.)

**Magnet, Permanent** — —A magnet of ed steel or other paramagnetic sub- which retains its magnetism for a me after being magnetized.

A permanent magnet is distinguished, in this respect, from a temporary magnet of soft iron, which loses its magnetization very shortly after being taken from the magnetizing field.

**Magnet, Portative Power of** — —The lifting power of a magnet.

The *portative* or *lifting power* of a magnet, depends on the form of the magnet, as well as on its strength. A horseshoe magnet, for example, will lift a much greater weight than the same magnet if in the form of a straight bar.

This is due not only to the mutual action of the approached poles, but also to the decreased resistance of the magnetic circuit, and to the greater number of lines of magnetic force that pass through the armature. The portative power is proportional to the area of contact and the square of the magnetic intensity, the formula being

$$P = \frac{A \times B^2}{8 \pi \times 981},$$

in which P, is the lifting power in grammes, A, the area of contact in square centimetres, and B, is the number of lines of force per square centimetre.

**Magnet Operation** — —(See *Operation, Magnet*.)

**Magnet, Receiving** — —A name some- times given to the relay of a telegraphic system. (See *Relay*.)

In general, any magnet, used directly in the receiving apparatus, at the receiving end of a line connecting a system of electric communication between transmitting and receiving instruments.

**Magnet, Regulator** — —A magnet, the operation of which is to automatically effect any desired regulation.

The magnet in the Thomson-Houston system of automatic regulation, by means of which the commutator collecting brushes are automatically shifted to such positions on the commutator as will maintain the current practically constant, despite the changes in the resistance of the circuit external to the machine. (See *Regulation, Automatic*.)

**Magnet, Relay** — —An electro-magnet, whose coils are connected to the main line of a telegraphic circuit, and the movements



of whose armature is employed to bring a local battery into action at the receiving station, the current of which operates the register or sounder.

**Magnet, Short-Coil** — —An electro-magnet whose magnetizing coil consists of a few turns of short, thick wire.

**Magnet, Simple** — —A simple magnetized bar.

The term simple magnet is used in contradistinction to compound magnet. (See *Magnet, Compound*.)

**Magnet, Sluggish** — —A magnet that magnetizes or demagnetizes sluggishly.

An electro-magnet becomes sluggish when surrounded by a sheathing of copper, on account of the currents induced in the sheathing in a direction opposite to those passing through the magnetizing coil.

**Magnet, Solenoidal** — —A thin, uniformly magnetized straight bar of steel, of such a length that its poles, situated at extremities or ends of its longer axis, act on external objects as if equal and opposite quantities of magnetism were concentrated at such extremities.

It derives its name solenoidal from the similarity between its action and that of a solenoid. Unless very carefully magnetized, a magnet will not act as a solenoid magnet. (See *Magnet, Electro. Magnetism, Solenoidal Distribution of*.)

**Magnet, Tubular** — —A form of horseshoe magnet, in which one pole is brought near the opposite pole by a hollow cylinder or tube of iron, which is placed in contact with one of the magnetic poles, so as to completely surround the other, except in the plane of cross-section of that pole.

A form of iron-clad magnet. (See *Magnet, Iron-Clad*.)

There is thus obtained a magnet, with two concentric poles, one solid and the other annular, the portative power of which is much greater than that of a horseshoe magnet of equal dimensions.

**Magnet, Field, of Dynamo-Electric Machine** — —One of the electro-magnets employed to produce the magnetic field of a dynamo-electric machine.

The field magnets consist of a suitable *frame* or *core*, on which the *field magnet coils* are wound.

The *field magnet cores* are made of thick and solid iron, as soft as possible. They should contain plenty of iron in order to avoid too ready *magnetic saturation*.

All edges and corners are to be avoided, since they tend to cause an irregular distribution of the field.

The field magnets should in general have sufficient magnetic strength to prevent the magnetizing effect of the armature from unduly influencing the field, and thus, by causing too great a *lead*, produce injurious *sparking*.

**Magnetic or Magnetical**.—Pertaining to magnetism.

**Magnetic Adherence**.—(See *Adherence, Magnetic*.)

**Magnetic Air Circuit**.—(See *Circuit, Air, Magnetic*.)

**Magnetic Air Gap**.—(See *Gap, Air, Magnetic*.)

**Magnetic Attraction**.—(See *Attraction, Magnetic*.)

**Magnetic Axis**.—(See *Axis, Magnetic*.)

**Magnetic Axis of a Straight Needle**.—(See *Axis, Magnetic, of a Straight Needle*.)

**Magnetic Azimuth**.—(See *Azimuth, Magnetic*.)

**Magnetic Battery**.—(See *Battery, Magnetic*.)

**Magnetic Bridge**.—(See *Bridge, Magnetic*.)

**Magnetic Circuit**.—(See *Circuit, Magnetic*.)

**Magnetic Closed-Circuit**.—(See *Circuit, Closed Magnetic*.)

**Magnetic Conductance**.—(See *Conductance, Magnetic*.)

**Magnetic Core, Closed** — —(See *Core, Closed-Magnetic*.)

**Magnetic Core, Open** — —(See *Core, Open-Magnetic*.)

**Magnetic Couple**.—(See *Couple, Magnetic*.)

**Magnetic Curves.**—(See *Curves, Magnetic.*)

**Magnetic Day of Disturbance.**—(See *Day of Disturbance, Magnetic.*)

**Magnetic Declination.**—(See *Declination, Magnetic.*)

**Magnetic Density.**—(See *Density, Magnetic.*)

**Magnetic Dip.**—(See *Dip, Magnetic.*)

**Magnetic Elements of a Place.**—(See *Elements, Magnetic, of a Place.*)

**Magnetic Equalizer.**—(See *Equalizer, Magnetic.*)

**Magnetic Explorer.**—(See *Explorer, Magnetic.*)

**Magnetic, Ferro** — —Magnetic after inner of iron or other paramagnetic (See *Paramagnetic.*)

**Magnetic Field.**—(See *Field, Magnetic.*)

**Magnetic Field, Reversing.** — —(See *Magnetic, Reversing.*)

**Magnetic Field, Shifting.** — —(See *Magnetic, Shifting.*)

**Magnetic Figures.**—See *Figures, Magnetic Field, Magnetic.*

**Magnetic Filament.** — (See *Filament, Magnetic.*)

**Magnetic Flow.**—(See *Flow, Magnetic.*)

**Magnetic Flux.**—(See *Flux, Magnetic.*)

**Magnetic Force.**—(See *Force, Magnetic.*)

**Magnetic Inclination.**—(See *Inclination, Magnetic.*)

**Magnetic Induction.** — (See *Induction, Magnetic.*)

**Magnetic Induction, Dynamic.** — —*duction, Magnetic, Dynamic.*)

**Magnetic Induction, Static.** — —(See *Induction, Magnetic, Static.*)

**Magnetic Inertia.**—(See *Inertia, Magnetic.*)

**Magnetic Intensity.** — (See *Intensity, Magnetic.*)

**Magnetic Joint.**—(See *Joint, Magnetic.*)

**Magnetic Lag.**—(See *Lag, Magnetic.*)

**Magnetic Latitude.**—(See *Latitude, Magnetic.*)

**Magnetic Leakage.**—(See *Leakage, Magnetic.*)

**Magnetic Lines of Force.**—(See *Force, Magnetic, Lines of.*)

**Magnetic Mass.**—(See *Mass, Magnetic.*)

**Magnetic Memory.**—(See *Memory, Magnetic.*)

**Magnetic Meridian.** — (See *Meridian, Magnetic.*)

**Magnetic Moment.**—(See *Moment, Magnetic.*)

**Magnetic Normal Day.**—(See *Day, Normal, Magnetic.*)

**Magnetic Observatory.** — (See *Observatory, Magnetic.*)

**Magnetic Output.**—(See *Output, Magnetic.*)

**Magnetic Parallel.**—(See *Parallels, Magnetic.*)

**Magnetic Permeability.** — (See *Permeability, Magnetic.*)

**Magnetic Permeance.**—(See *Permeance, Magnetic.*)

**Magnetic Permeation.**—(See *Permeation, Magnetic.*)

**Magnetic Poles.**—(See *Poles, Magnetic.*)

**Magnetic Poles, False.** — —(See *Pole, Magnetic, False.*)

**Magnetic Proof Piece.**—(See *Piece, Magnetic Proof.*)

**Magnetic Proof Plane.**—(See *Plane, Proof, Magnetic.*)

**Magnetic Reluctance.**—(See *Reluctance, Magnetic.*)

**Magnetic Repulsion.** — (See *Repulsion, Magnetic.*)

**Magnetic Resistance.**—(See *Resistance, Magnetic.*)

**Magnetic Retardation.** — (See *Retardation Magnetic.*)



**Magnetic Retentivity.**—(See *Retentivity, Magnetic.*)

**Magnetic Saturation.**—(See *Saturation, Magnetic.*)

**Magnetic Screen or Shield.**—(See *Screen or Shield, Magnetic.*)

**Magnetic Screening.**—(See *Screening, Magnetic.*)

**Magnetic, Self-Induction.**—(See *Induction, Self, Magnetic.*)

**Magnetic Shells.**—(See *Shells, Magnetic.*)

**Magnetic Shunt.**—(See *Shunt, Magnetic.*)

**Magnetic Sidero** — — A term proposed by S. P. Thompson to replace the term ferro-magnetic. (See *Magnetic, Ferro.*)

**Magnetic Solenoid.**—(See *Solenoid, Magnetic.*)

**Magnetic Sounds.**—(See *Sounds, Magnetic.*)

**Magnetic Spin.**—(See *Spin, Magnetic.*)

**Magnetic Storm.**—(See *Storm, Magnetic.*)

**Magnetic Strain.**—(See *Strain, Magnetic.*)

**Magnetic Stress.**—(See *Stress, Magnetic.*)

**Magnetic Susceptibility.**—(See *Susceptibility, Magnetic.*)

**Magnetic Theodolite.**—(See *Theodolite, Magnetic.*)

**Magnetic Unit Pole.**—(See *Pole, Unit, Magnetic.*)

**Magnetic Units.**—(See *Units, Magnetic.*)

**Magnetic-Vane Ammeter.**—(See *Ammeter, Magnetic-Vane.*)

**Magnetic-Vane Voltmeter.**—(See *Voltmeter, Magnetic-Vane.*)

**Magnetic Variations.**—(See *Variations, Magnetic.*)

**Magnetic Variation Transit.**—(See *Transit, Magnetic Variation.*)

**Magnetic Variometer.**—(See *Variometer, Magnetic.*)

**Magnetic Viscosity.**—(See *Viscosity, Magnetic.*)

**Magnetic Whirl.**—(See *Whirls, Magnetic.*)

**Magnetic Whirl, Expanding** — — (See *Whirl, Magnetic, Expanding.*)

**Magnetics, Electro** — — That branch of electric science which treats of the relations that exist between electric circuits and magnets.

**Magnetism.**— That branch of science which treats of the nature and properties of magnets and the magnetic field. (See *Field, Magnetic.*)

A property or condition of matter attended by the existence of a magnetic field.

**Magnetism, Ampère's Theory of** — — A theory or hypothesis proposed by Ampère, to account for the cause of magnetism, by the presence of electric currents in the ultimate particles of matter.



Fig. 379. Unmagnetized Bar (after Ampère).



Fig. 380. Magnetized Bar (after Ampère).

This theory assumes :

(1.) That the ultimate particles of all magnetizable bodies have closed electric circuits in which electric currents are continually flowing.

(2.) That in an unmagnetized body these circuits neutralize one another because they have different directions.

(3.) That the act of magnetization consists in such a polarization of the particles as will cause these currents to flow in one and the same direction, magnetic saturation being reached when all the separate circuits are parallel to one another.

(4.) That *coercive force* is due to the resistance these circuits offer to a change in the direction of their planes.

Figs. 379 and 380 show the circular paths of some of these circuits. Fig. 379 shows the as-

condition of an unmagnetized bar. Fig. 1 shows the assumed condition of a magnetized

careful inspection of the figures will show that in a magnetized bar all the separate currents flow in the same direction. *All the circuits except at the extreme edge of the bar will, therefore, have the currents flowing in them in opposite directions to that in their neighboring circuits, and therefore, will neutralize one another. There remains, however, a current in a circuit on the surface of the bar, which must therefore be regarded as the magnetizing current.*

Guided by these considerations, Ampère proposed a coil of wire, called a *solenoid*, which is equivalent to the magnetizing circuit assumed in the theory.

It therefore follows that an electric current sent through a coil of insulated wire surrounding a bar of soft iron, or other readily magnetizable material, will make the same a magnet. A bar so produced is called an *electro-magnet*. (*Magnet, Electro.*)

A magnetizing coil is called a *helix* or *solenoid*. (See *Solenoid, Electro-Magnetic.*)

The polarity of the magnet depends on the direction of the current, or on the direction of rotation of the helix or solenoid. (See *Solenoid, Normal. Solenoid, Dextrorsal.*)

The improbability of an electric current continuing to flow in a circuit without the expenditure of energy, has led, perhaps, the majority of scientists to reject Ampère's theory of mag-

netism, however, does not agree with the majority of physicists in regarding a constant flow of electricity through the molecules of magnetizable substances as an impossibility. On the supposition that the atoms or molecules possess electrical resistance, the current would flow through them forever. He says: "To all intents and purposes, certainly atoms are infinitely elastic, and could they not also be infinitely conducting? Should the dissipation of energy occur, in connection with an electric current circulating wholly within an atom? There is no reason why it should."

**Magnetism, Animal** — A term sometimes applied to hypnotism or artificial somnambulism.

**Magnetism, Earth's, Theories as to Cause**

— The various theories or hypotheses

respecting the cause of the earth's magnetism.

Any theory or hypothesis which shall satisfactorily explain the cause of the earth's magnetism must account for the following phenomena, viz. ;

(1.) Variations in the intensity of the earth's magnetic field.

(2.) Variations in the earth's magnetic inclination, declination and intensity.

The following hypotheses have been proposed:

1st. That the earth's magnetism is due to the circulation round the earth of electric currents produced by differences of temperature which the earth's surface acquires from exposure to the sun during its rotation.

As the earth rotates from west to east, the area of greatest heat would move round the earth in the opposite direction, or from east to west. If now those differences of temperature could produce, in a manner not as yet explained, thermoelectric currents circulating round the earth from east to west, such currents would produce, in the Northern Hemisphere of the earth, south magnetic polarity, and in the Southern Hemisphere north magnetic polarity, which would account for the magnetic polarity of the earth.

Differences in the intensity of the earth's magnetic field, and in the inclination and direction of its lines of magnetic force, would be explained, according to this hypothesis, by the differences in the amount of the solar radiation at different times.

The objection to this theory is to be found in the fact that by far the larger part of the earth's surface at the Equator is composed of water, so that the differences of potential at such parts, produced by the differences of temperature, are not readily set up in the earth's crust, if, indeed, they are set up at all.

2d. That the earth's magnetism is due to induction from an already magnetized sun. This theory was brought forward by Seccchi and others. It is not generally credited.

3d. A theory proposed by Biglow, which accounts for the earth's magnetism by rotation in the magnetic field of the sun's light and radiation.

Biglow believes that the earth's magnetism is due to its rotation in the magnetic field of the sun's light. As the sun's light illumines one-half of the earth's surface, the earth's rotation causing different portions of the surface to pass through



this illuminated area, produces, in Prof. Biglow's opinion, the differences in the direction and intensity of the magnetic lines of the earth's field that correspond to differences in the earth's magnetic intensity, declination and inclination.

It will be observed that in all these theories the sun is the prime factor in the production of the earth's magnetism.

The evident connection between the earth's magnetism and the solar radiation is established from the well known connection between the so-called magnetic storms and variations in the intensity of the earth's magnetism.

Magnetic storms are always attended by outbursts of solar energy, known technically as sun spots. A series of observations on the numbers and frequency of sun-spots, plotted in the form of a curve, the ordinates of which represent the times of occurrence of the spots and the abscissas, the number of such spots, prove that such curve agrees, in a remarkable manner, with a similar curve representing the variations of the earth's magnetic field.

An evident connection, too, exists between the earth's magnetism and the prevalence of the aurora borealis.

**Magnetism, Electro** — — Magnetism produced by means of electric currents.

The discovery by Oersted, in 1820, of the action of an electric current on a magnetic needle, was almost immediately followed by the simultaneous and independent discoveries by Arago and Davy, of the method of magnetizing iron by the passage of an electric current around it.

These observations were first reduced to a theory by Ampère (See *Magnetism, Ampère's Theory of. Magnet, Electro.*)

**Magnetism, Ewing's Theory of** — — A theory of magnetism proposed by Prof. Ewing, based on the assumption of originally magnetized particles.

Ewing's theory of magnetism assumes that the ultimate particles of matter are naturally magnetic and possess polarity. In this respect Ewing's theory agrees with the theories of Hughes and Weber. Ewing does not believe, however, in the necessity for the assumption of any arbitrary restraining or constraining force to the movements of these ultimate magnetic particles other than those due to their own mutual magnetic attractions and repulsions. He assumes that in a magnet,

the centres about which the molecular magnets rotate are maintained at constant distances from one another, save only as they are affected by the action of strain.

He has experimentally demonstrated the principles of his theory by means of a model in which a number of small magnetic needles are so supported as to be capable of free motion in a horizontal plane, when under varying magnetic forces.

According to Ewing, "magnetic hysteresis" is not the result of any quasi-frictional resistance to molecular rotation, but arises from a molecule moving from one position of stable equilibrium to another position of stable equilibrium through a position of unstable equilibrium. "This process" says Ewing, "considered mechanically, is not reversible. The forces are different for the same displacement, going and coming, and there is dissipation of energy. In the model, the energy thus expended sets the little bars swinging, and their swings take some time to subside. In the actual solid, the energy which the molecular magnet loses as it swings through unstable positions, generates eddy currents in surrounding matter. Let the magnets of the model be furnished with air vanes to damp their swings and the correspondence is complete."

In Hughes' modification of Weber's theory of magnetism, it was held, that when magnetized iron was suddenly demagnetized by torsion or flexure, it lost its magnetization because the molecular magnets came to rest in closed chains, which produced no external effects. Experimentation with Ewing's model of a magnet shows that when the separate magnets after having been placed in any particular grouping are permitted to come to rest free from any external magnetic force, they do not arrange themselves in closed chains, but in general the tendency appears to be the formation of lines consisting of two, three or more magnets, each member of a line being strongly controlled by its next member in that line, but influenced by the neighbors which lie off the line on either side.

The fact that a given force, suddenly applied, produces more magnetic induction than when gradually applied, and leaves less residual magnetism when suddenly than when gradually removed, is presumably due to the inertia of the molecules.

The influence of mechanical vibration in increasing the magnetic susceptibility and decreas-



magnetic retentiveness, is ascribed by to the fact that the vibrations cause variations in the distances between the of rotation of the magnetic molecules; making the molecular magnets respond more to changes of magnetic force during the they are moving away from one another, their magnetic stability is less, but also in the ease with which they respond to of magnetic force, by causing them to

g discusses the theoretical effects of tem- e on magnetism as follows, viz.: Suppose rate magnetizing force to be applied so thing like saturation is obtained, if now perature be raised; then

The magnetic permeability increases until perature reaches a certain (high) critical

At this temperature there is suddenly an complete disappearance of magnetic

explains these facts as follows, viz.: An e of temperature by increasing the distance e the molecular centres causes a decrease stability.

loss of magnetic qualities, when a certain ture is reached, is, he believes, due to the at at such temperatures the magnetic es are set into actual rotation, when, y, all traces of polarity would disappear. g's theory of magnetism also accounts to lerable extent for the effects of stress and ent elastic strain on the magnetic qualities nickel and cobalt.

Following general summary of his theory n mainly from Prof. Ewing's original as published in the *Journal of the Society*

That in considering the magnetization of d other magnetic metals to be caused by ing of permanent molecular magnets, we ok simply to the magnetic forces which ecular magnets exert upon one another as e of their directional stability. There is l to suppose the existence of any quasi-directing force, or any quasi-frictional re to rotation.

That the intermolecular magnetic forces are t to account for all the general character- the process of magnetization, including tations of susceptibility which occur as gnetizing force is increased,

ol. 1

(3.) That the intermolecular magnetic forces are equally competent to account for the known facts of retentiveness and coercive force, and the characteristics of cyclic magnetic processes.

(4.) The magnetic hysteresis and the dissipation of energy which hysteresis involves are due to molecular instability, resulting from intermolecular magnetic actions, and are not due to anything in the nature of frictional resistance to the rotation of the molecular magnets.

(5.) That this theory is wide enough to admit an explanation of the differences in magnetic quality which are shown by different substances, or by the same substance in different states.

(6.) That it accounts in a general way for the known effects of vibration, of temperature, and of stress, upon magnetic quality.

(7.) That, in particular, it accounts for the known fact that there is hysteresis in the relation of magnetism to stress.

(8.) That it further explains why there is in magnetic metals hysteresis in physical quality generally with respect to stress.

(9.) That, in consequence, any (not very small) cycle of stress occurring in a magnetic metal involves dissipation of energy.

It can be demonstrated by means of experiments with a model constructed according to Ewing's hypothesis, that this hypothesis comes nearer than any which had been proposed before in explaining the following effects:

(1.) The behavior of a piece of iron when placed in a magnetic field whose strength is made to pass through a cycle of changes.

(2.) That nearly all reversals of sign on the change of the magnetizing force are accompanied by small changes in the magnetization.

(3.) That a piece of iron submitted to vibrations or mechanical shocks, is magnetized and demagnetized more readily and with a smaller hysteretical area than if it had remained undisturbed by vibrations.

(4.) The phenomenon of "time lag" in magnetization.

(5.) The phenomena of stress, both those which occur when a body has first been placed in a magnetic field and the stress made to vary, and those which occur when a body is first placed in a constant stress and the magnetizing force is made to vary.

(6.) The effects of heat on magnetization, both as regards the effect of comparatively low heating on increase of magnetic susceptibility, and the







quently magnetized it was found to be much more powerful in comparison to its size than any other magnet.

Mr. Shelford Bidwell has shown that the act of magnetization produces a shortening rather than a lengthening of the magnetizable material. When the magnetization is moderate there is a true lengthening of the material, but when a more powerful magnetizing force is exerted a true contraction or shortening is observed.




Fig. 383. Bidwell Apparatus.

The Bidwell apparatus is shown in Fig. 383. The bar of iron to be magnetized is shown at R R. The magnetization is obtained by means of the coil of wire C. The upper end of the bar presses against the rod L, fulcrumed at F. The other end of the bar bears against a pivoted mirror M, from which a spot of light is reflected.

In the case of the magnetization of nickel, the experiments of Bidwell showed the existence of contraction for both weak and strong currents. This contraction is much greater than in the case of iron.

#### Magnetism, Lamellar Distribution of

—The distribution of magnetism in magnetic shells.

A term sometimes applied to such a distribution of magnetism in a plate, that the magnetized particles are arranged with their greatest length in the direction of the thickness of the plate, so that the poles are situated at the faces of the plate, and consequently the extent of such polar surfaces is great when compared with the thickness of the plate.

The term lamellar distribution of magnetism is used in contradistinction to solenoidal distribution. (See *Magnetism, Solenoidal Distribution of*.)

A thin sheet or disc of magnetized material whose opposed extended faces are of opposite

magnetic polarities, and the extent of whose surface is very great as compared with its thickness, is sometimes called a *magnetic shell*.

The field produced by a magnetic shell is exactly similar to that produced by a closed voltaic circuit, the edges of the space inclosed by which correspond to the edges of the magnetic shell.

The magnetic intensity, or the number of lines of force per unit area of cross-section, is equal over all parts of the surface of a simple magnetic shell.

A magnetic shell may be conceived as consisting of a very great number of short, straight magnetic needles, placed side by side, with their north poles terminating at one of the faces of the sheet and their south poles at the opposite face, the breadth of the sheet being very great as compared with its thickness. Such a distribution of magnetism is known as a *lamellar distribution*.

**Magnetism, Residual** —The magnetism remaining in the core of an electro-magnet on the opening of the magnetizing circuit.

The small amount of magnetism retained by soft iron when removed from any magnetizing field.

When hard iron or steel is removed from a magnetizing field it retains nearly all its magnetism. Such magnetism is also, in reality, residual magnetism, but the term is generally limited to the case of soft iron.

#### Magnetism, Solenoidal Distribution of

—A term sometimes applied to such a distribution of magnetism in a bar that the magnetized particles are arranged with their poles in the direction of the length of the bar, the ends of which are of opposite magnetic polarities, and the extent of whose surfaces is small as compared with the length of the bar.

The term solenoidal distribution is used in contradistinction to lamellar distribution. (See *Magnetism, Lamellar Distribution of*.)

**Magnetism, Strength of** —A term sometimes used in the sense of intensity of magnetization. (See *Magnetization, Intensity of*.)

The term, strength of magnetism, is sometimes used for flux or quantity of magnetism.

Intensity of magnetization, is the preferable term.



**Magnetism, Terrestrial** — —A name applied to the magnetism of the earth.

Terrestrial magnetism has been ascribed to a variety of causes. (See *Magnetism, Earth's, Theories as to Cause of.*)

**Magnetism, Vertical Component of Earth's** — —(See *Component, Vertical, of Earth's Magnetism.*)

**Magnetite.**—Magnetic oxide of iron, or  $\text{Fe}_3\text{O}_4$ , found in nature, as an ore or mineral.

Lode-stone consists of pieces of magnetized magnetite.

**Magnetizable.**—Capable of being magnetized after the manner of a paramagnetic substance like iron.

The most magnetizable metals are iron, nickel, cobalt and manganese. (See *Paramagnetism.*)

**Magnetization.**—The act of calling out or of endowing with magnetic properties.

Magnetizable substances are magnetized by being placed in magnetic fields. (See *Field, Magnetic. Magnetization, Methods of.*)

The act of initial magnetization is not exactly the same as the act of subsequent magnetization.

A piece of steel, which has once been magnetized and subsequently demagnetized, is a thing entirely distinct, as regards its magnetization, from a piece of steel which has never before been magnetized, and such a piece can never be placed exactly in the same position as regards a magnetizing force, unless it is actually melted and recast, or, perhaps, maintained for a comparatively long time at a white heat.

**Magnetization, Anomalous** — —The magnetization obtained from an oscillatory discharge, such as that of a Leyden jar.

In 1842, Henry described the real character of anomalous magnetization, and showed that there was nothing anomalous in such magnetization, but rather in the fact that the magnetizing currents possessed no simple direction. He remarks on this subject as follows:

"This anomaly, which has remained so long unexplained, and which, at first sight, appears at variance with all our theoretical ideas of the connection of electricity and magnetism, was, after considerable study, satisfactorily referred to an action of the discharge of a Leyden jar which had never before been recognized. The discharge,

whatever may be its nature, is not correctly represented (employing the simplicity of Franklin) by the single transfer of an imponderable fluid from one side of the jar to the other; the phenomena require us to admit the existence of a principal discharge in one direction and then several reflex actions backward and forward, each more feeble than the preceding, until the equilibrium is obtained. All the facts are shown to be in accordance with the hypothesis, and a ready explanation is afforded by it of a number of phenomena which are to be found in the older works on electricity, but which have until this time remained unexplained."

**Magnetization by Touch.**—The production of magnetism in a magnetizable substance by touching it with a magnet.

There are three methods of magnetization by touch, viz.:

- (1.) Single touch.
- (2.) Separate touch.
- (3.) Double touch.

In single touch, the magnetization of a bar of iron or other magnetizable material is effected by the touch of a single magnet.

In Single Touch, the magnetizing magnet is drawn over the bar to be magnetized from end to end and returned through air, the stroke being repeated a number of times. The end of the bar the magnet leaves is magnetized oppositely to the magnetizing pole.

By some writers the method of single touch is described as that effected by placing the magnetizing magnet NS (Fig. 384) on the middle of the bar to be magnetized, and drawing it to the end and returning through the air as before, and then reversing the pole, placing it on the middle of the bar and drawing it towards the other end. The




Fig. 384. Magnetization by Single Touch.



Fig. 385. Magnetization by Separate Touch.

former would, however, appear to be the better use of the term single touch.

In Separate Touch, two magnetizing bars are placed with their opposite poles at the middle

bar to be magnetized and drawn away from the other towards its ends, as shown in Fig. 386. This motion is repeated a number of times, the bar being each time returned through the

position above, as in all cases of magnetization. In this method, better effects are produced, if the bar



Fig. 386. Magnetization by Double Touch.

When the bar magnet is magnetized, it is rested on the opposite poles of the horseshoe magnet, or, as shown in Fig. 386, near them.

In the method of Double Touch the two magnets are placed with their opposite poles together on the middle of the bar to be magnetized, as shown in Fig. 386. They are then moved to one end of the bar, instead of removing them and passing them through the air to the other end, they are moved over the surface of the bar to be magnetized to the other end, and these to-and-fro movements are repeated a number of times. The movement is stopped at the middle of the bar, when the magnetizing magnets are moving in the opposite direction to that at which they began to move. This ensures an equal number of strokes to the two halves of the bar. The method of double touch produces stronger magnetization than the other methods, but does not effect a uniform distribution of the magnetism, and it is not applicable to the magnetization of thin plates.

The variety of double touch is shown in Fig. 387. Four bars, to be magnetized, are placed in the form of a hollow rectangle, with only their corners touching at their edges, the angular spaces



Fig. 387. Magnetization by Double Touch.

The corners being filled with pieces of soft iron. A horseshoe magnet NS, is then moved around the rectangle several times in the same direction. This is believed to produce a more uniform mag-

netization than the ordinary method of double touch.

**Magnetization, Co-efficient of** — A number representing the intensity of magnetization produced in a magnetizable body, divided by the magnetizing force  $H$ .

Calling  $k$ , the co-efficient of magnetization;  $I$ , the intensity of the resulting magnetization, and  $H$ , the magnetizing force producing it, then

$$k = \frac{I}{H}.$$

The co-efficient of magnetization is sometimes called the magnetic susceptibility.

A paramagnetic body when placed in a magnetic field concentrates the lines of magnetic force on it, or causes them to pass through it. The intensity of the magnetization so produced depends, therefore,

- (1.) On the intensity of the magnetizing field.
- (2.) On the ability of the metal to concentrate the lines of force on it; that is, on the nature of the metal, or on its magnetic permeability. (See *Permeability, Magnetic. Paramagnetism. Diamagnetism.*)

The intensity of magnetization will, therefore, be equal to the product of the co-efficient of magnetization and the intensity of the magnetizing field. It will, also, of course, depend on the area of cross-section of the magnetized body.

The co-efficient of magnetization of paramagnetic bodies is said to be positive, and that of diamagnetic bodies to be negative, because paramagnetic bodies concentrate the lines of magnetic force on them, while diamagnetic bodies appear to repel the lines of force. (See *Paramagnetic. Diamagnetic.*)

**Magnetization, Critical Current of** —

—The current at which any certain or definite effect of magnetization is produced.

**Magnetization, Intensity of** — A quantity showing the intensity of the magnetization produced in a substance.

A quantity showing the intensity with which a magnetizable substance is magnetized.

The intensity of magnetization depends:

- (1.) On the intensity of the magnetizing field.
- (2.) On the magnetic permeability, or on the conducting power of the substance for lines of magnetic force.



The greater the strength of the magnetizing field, and the greater the magnetic permeability, the greater is the intensity of the magnetization produced.

When, therefore, a magnetizable substance is placed in a magnetizing field, the intensity of the magnetization will depend on the magnetic susceptibility of the substance; that is, on the ratio of the induced magnetization to the magnetizing force producing it.

Soft iron has a high co-efficient of magnetization, or its magnetic susceptibility is high. (See *Susceptibility, Magnetic. Magnetization, Co-efficient of.*)

The intensity of magnetization through a substance is measured by dividing the magnetic moment by the magnetic volume.

If a bar of soft iron is placed with its greatest length extending in the direction of the lines of force in a magnetic field, it will have induced in it a certain intensity of magnetization which may be expressed as follows:

$$\text{Intensity of Magnetization} = \frac{m \cdot l}{\text{Volume}} = k H,$$

where  $m$ , equals the strength of the magnet;  $l$ , its length;  $k$ , the co-efficient of magnetization, and  $H$ , the intensity of the magnetizing field.—(*S. P. Thompson.*)

"The moment of a magnet, or of any element of a magnet, may be considered numerically to be made up of two factors, one, its volume, and the other its *intensity of magnetization*, or simply its *magnetization*, and hence, for a uniformly magnetized small linear needle, we may define the intensity of its magnetization by saying that it has magnetic moment of unit volume."—(*Fleming.*)

**Magnetization, Maximum** — A term sometimes used for magnetic saturation.

Urquhart states, as the result of numerous experiments, that the number of lines of magnetic force that usually pass through a bar of soft iron 1 square centimetre in area of cross-section, when magnetized to a maximum, is equal to 32,000. Ewing gives the number in the particular case of a very extraordinary magnetization as being equal to 45,350 per square centimetre area of cross-section.

**Magnetization, Methods of** — Magnetization effected either by induction from another magnet, or by means of induction by an electric current.

The substance to be magnetized is brought into a magnetic field, so that the lines of magnetic force pass through it. All methods of magnetization may be divided into methods of *magnetization by touch* and *magnetization by the electric current*. (See *Magnetization by Touch.*)

#### **Magnetization, Permanent, Intensity of**

— A term employed for the intensity of a permanent magnetization produced in hard steel, as distinguished from the magnetization temporarily produced in soft iron. (See *Magnetization, Intensity of.*)

#### **Magnetization, Temporary, Intensity of**

— The intensity of the magnetization temporarily induced in a bar of soft iron, as distinguished from permanent magnetization induced in hard steel. (See *Magnetization, Intensity of.*)

**Magnetization, Time-Lag of** — A lag which appears to exist between the time of action of the magnetizing force and the appearance of the magnetism.

The time which must elapse in the case of a given paramagnetic substance before a magnetizing force can produce magnetization.

In the opinion of some physicists there is no such thing as a true magnetic time-lag, the apparent time-lag being due entirely either to hysteresis or to eddy currents. According to them, while the magnetizing force is increasing, it produces, in the iron, reversely-directed surface-eddy-currents, which produce a reversed or opposed magnetizing force in the more deeply seated layers of the iron, the time-lag being due to the interval which is required for these eddy currents to die away and thus permit the magnetizing force to produce its full magnetization.

According to others, however, a true time-lag does exist entirely apart from the existence of surface-eddy-currents.

**Magnetize.**—To endow with magnetic properties.

**Magnetized.**—Endowed or impressed with magnetic properties.

**Magnetizing.**—Causing or producing magnetism.

**Magneto-Blasting Machine.**—(See *Machine, Magneto-Blasting.*)

**magneto-Electric Bell.**—(See *Bell, Magneto-Electric.*)

**magneto-Electric Brake.**—(See *Brake, Magneto-Electric.*)

**magneto-Electric Call-Bell.**—(See *Call-Magneto-Electric.*)

**magneto-Electric Faradic Apparatus.**—*Apparatus, Faradic, Magneto-Elec-*

**magneto-Electric Induction.**—(See *Induction, Magneto-Electric.*)

**magneto-Electric Machine.**—(See *Machine, Magneto-Electric.*)

**magneto-Electric Medical Apparatus.**—*Apparatus, Magneto-Electric Medi-*

**magneto-Electricity.**—(See *Electricity, Magneto.*)

**magnetograph.**—The permanent record made from the action of a self-recording magnetometer. (See *Magnetometer, Self-Recording.*)

**magnetometer.**—An apparatus for the measurement of magnetic force.



Fig. 388. Magnetometer.

Some magnetometers the magnetic force is measured by the torsion of a wire, as in the *torsion balance*. (See *Balance, Coulomb's Torsion.*)

The magnetometer shown in Fig. 388, consists of a magnetized bar suspended by two wires passing over a pulley, as shown. The magnet is held by the frame S S, provided with a graduated scale K. The mirror S, is supported by a vertical post attached to the frame, and serves to reflect a scale placed below a distant reading telescope. This form of magnetometer, is called the bifilar magnetometer, and was the one used by Gauss in his study of the earth's magnetism.

A variety of forms have been given to delicate magnetometers. Some are self-recording. (See *Magnetometer, Self-Recording.*)

**Magnetometer, Differential** — A form of magnetometer in which the principles of the differential galvanometer, as applied to the electric circuit, are applied to the magnetic circuit.

The differential magnetometer of Eickemeyer is shown in Figs. 389 and 390. Its principles of operation will be understood from the following considerations.

Referring to Fig. 389. Suppose  $F_1$  and  $F_2$  are two electromotive forces connected in series, and  $x$  and  $y$ , two resistances to be compared. Each of the resistances  $x$  and  $y$ , is shunted respectively by two conductors  $a$  and  $b$ , whose resistance we wish to compare. Since the action of each of them on the galvanometer  $G$ , is opposite, its needle remains at zero, when the current in  $a$ , is equal to the current in  $b$ .

If, instead of electric circuit, we take the idea of magnetic circuit or the number of lines of magnetic force, and instead of potential difference,

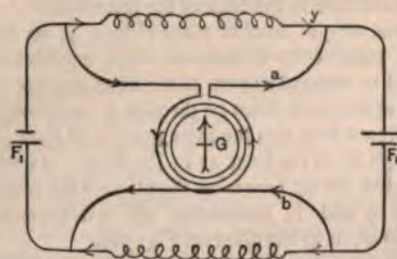


Fig. 389. Eickemeyer's Differential Magnetometer.

magneto-motive force, and instead of electric resistance, magnetic resistance, we have the principles on which the Eickemeyer differential magnetometer is founded.

The magnetic circuit of the differential magnetometer consists of two pieces of soft iron, shaped



as shown at  $F_1$  and  $F_2$ , Fig. 390. A magnetic coil  $C$ , surrounds the middle portion of each circuit as shown. The operation as described by Mr. Chas. Steinmetz, from whom the above description is mainly taken, is as follows, viz.: "The front part  $s_1$  of the left iron piece becomes south, and the back part  $n_1$  north polarity; the front part of the right iron piece  $n_2$  becomes north, and the back part south; and the lines of magnetic force travel in the front from the right to the left, from  $n_2$  to  $s_1$ ; in the back the opposite way, from the left to the right, or from  $n_1$  to  $s_2$ , either through the air, or, when  $n_2$  and  $s_1$ , or  $n_1$  and  $s_2$ , are connected by a piece of magnetizable metal, through this and through the air.

In the middle of the coil  $C$ , stands a small soft iron needle with an aluminum indicator, which plays over a scale  $K$ , and is held in a vertical position by the lines of magnetic force of the coil  $C$ , itself, deflected to the left by the lines of magnetic force traversing the front part of the instrument from  $n_2$  to  $s_1$ , deflected to the right by the lines traversing the back from  $n_1$  to  $s_2$ . This needle shows by its zero position that the magnetic flow through the air in front from  $n_2$  to  $s_1$  has the same strength as the magnetic flow in the back from  $n_1$  to  $s_2$  through the air.

Now we put a piece of soft iron  $x$  on the front of the instrument. A large number of lines go through  $x$ , less through the air from  $n_2$  to  $s_1$ ; but all these lines go from  $n_1$  to  $s_2$  through the air at the back part of the magnetometer, the front part and back part of the instrument being connected in series in the magnetic circuit. Therefore the needle is deflected to the right by the magnetic flow in the back of the instrument.

Now, we put another piece of iron,  $y$ , on the back part of the instrument, then equilibrium would be restored as soon as the same number of lines of magnetic force go through  $x$ , as through  $y$ , because then also the same number of lines go through air in the front as in the back. As will be noted, the air here takes the place of the resistances  $a$  and  $b$ , influencing the galvanometer needle  $G$ , as in the diagram Fig. 389.

The operation of the instrument is exceedingly simple and is as follows: Into the coil  $C$ , an electric current is sent which is measured by the ammeter  $A$ , and regulated by the resistance-switch  $R$ . Then the needle, which before had no fixed position, points to zero.

Now, we lay the piece of iron, the magnetic properties of which we want to determine, on the

back part of the instrument. The needle is deflected to the left. On the front of the instrument we put Norway iron rods of known cross-section and known conductivity, until equilibrium is again restored. Then the iron in the front has the same magnetic resistance as the iron in the back, and the ratio of the cross-sections gives directly the ratio of the conductivities; so that by a single reading the magnetic conductivity of any piece of iron can be compared with that of the Norway iron standard.

For absolute determinations, the iron is turned off into pieces of exactly 4 square centimetres cross-section and 20 centimetres in length, both ends fitting into holes in large blocks of Norway iron, which are laid against the pole pieces of the magnetometer, so that the transient resistance from pole face to iron is eliminated.

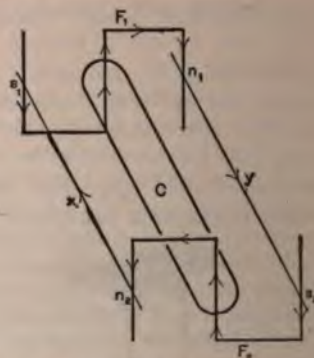


Fig. 390. Eichenmeyer's Differential Magnetometer.

**Magnetometer, Self-Recording** — A self-recording apparatus, by means of which the daily and hourly variations of magnetic needles in the earth's field, at any locality are continuously registered.

The self recording magnetometer employed in the observatory at Kew, consists essentially of means of obtaining a photographic record of a spot of light reflected from a mirror, attached to the needle whose variations are to be recorded. The photographic record is received on a strip of sensitized paper, maintained in uniform and continuous motion by means of suitable clock-work. The record so obtained is called a magnetograph.

**Magneto-Motive Force.** — (See *Force, Magneto-Motive.*)



**Magneto-Motive Force, Absolute Unit of** — — (See *Force, Magneto-Motive, Absolute Unit of*.)

**Magneto-Motive Force, Practical Unit of** — — (See *Force, Magneto-Motive, Practical Unit of*.)

**Magneto-Optic Rotation.**—(See *Rotation, Magneto-Optic*.)

**Magnetophone.**—A species of magnetic siren in which sounds are produced in an electro-magnetic telephone by the periodic currents produced in its coils by the rotation of a perforated metallic disc in a magnetic field.

As the speed of the disc increases, the pitch of the note increases. The apparatus was invented by Prof. Carhart, in 1883. A similar apparatus is useful in studying the distribution of the magnetic field of a dynamo-electric machine. In this case, a small, thin coil of insulated wire is held in the different regions around the machine, while the telephone is held to the ear of the observer. Magnetic leakage, or useless dissipation of lines of magnetic force outside the field proper of the machine, is at once rendered manifest by the musical note caused by variations in the intensity of the field.

Since the intensity of the note heard will vary according to the intensity of the field, and also according to the position in which the coil is held, such a coil becomes a *magnetic explorer*, and by its use the distribution and varying intensity of an irregular field can be ascertained. Its use is especially advantageous in proportioning dynamo-electric machines and electric motors. (See *Explorer, Magnetic*.)

**Magneto-Receptive Device.**—(See *Device, Magneto-Receptive*.)

**Magneto-Static Current Meter.**—(See *Meter, Current, Magneto-Static*.)

**Magneto-Static Screening.**—(See *Screening, Magneto-Static*.)

**Magneto-Statics.**—(See *Statics, Magneto*.)

**Magneto-Therapy.**—(See *Therapy, Magneto*.)

**Main Battery.**—(See *Battery, Main*.)

**Main-Battery Circuit.**—(See *Circuit, Main-Battery*.)

**Main, Electric** — — The principal conductor in any system of electric distribution.

**Main Feeder.**—(See *Feeder, Standard or Main*.)

**Main Fuse.**—(See *Fuse, Main*.)

**Main, House** — — A term employed in a system of multiple incandescent lamp distribution for the conductor connecting the house service conductors with a centre of distribution, or with a street main.

**Main-Line Cut-Out.**—(See *Cut-Out, Main-Line*.)

**Main, Street** — — In a system of incandescent lamp distribution the conductors extending in a system of networks through the streets from junction box to junction box, through which the current is distributed from the feeder ends, through cut-outs, to the district to be lighted, and from which service wires are taken.

**Main, Sub** — — A name sometimes given to the distributing conductor that is connected directly to a main.

The branch nearest the main. (See *Branch*.)

**Main Wire.**—(See *Wire, Main*.)

**Mains of Electric Railroads.**—The wires or conductors used for carrying the current from the feeders through the tap wires to the trolley wires.

**Make.**—A completion of a circuit.

**Make-and-Break.**—The periodic alternate completion and opening of a circuit.

**Make-and-Break, Automatic** — — A term sometimes employed for such a combination of contact points with the armature of any electro-magnet, that the circuit is automatically made and broken with great rapidity.

An automatic make-and-break is used in most forms of electric alarms in connection with some form of electric bell. (See *Alarm, Electric*.)

It is also used in the Ruhmkorff induction coil in order to produce the variations in the primary circuit. (See *Coil, Induction*.)

**Make-Induced Current.**—(See *Current, Make-Induced*.)



**Making the Primary.**—(See *Primary, Making the.*)

**Mallet, Electro-Magnetic Dental** —  
—(See *Dental-Mallet, Electro-Magnetic.*)

**Mangin Projector.**—(See *Projector, Mangin.*)

**Man-Hole, Compartment, of Conduit** —  
—A man-hole provided with suitably supported shelves or compartments, guarded by locked doors that protect different cable sections.

**Man-Hole of Conduit.**—An opening of sufficient size to admit a man, communicating from the surface of the roadbed with an underground conduit.

**Manipulator, Breguet's** — —The sending instrument employed by Breguet in his system of step-by-step or dial telegraphy. (See *Telegraphy, Step-by-Step.*)

**Manometer.**—An apparatus for measuring the tension or pressure of gases.

Manometers are either mercurial or metallic. Mercurial manometers are of two classes, viz., manometers with free air and manometers with compressed air.

Manometers measure the pressure of gases either in atmospheres, *i. e.*, in multiples or decimals of 15 pounds to the square inch, or in inches of mercury.

**Map or Chart, Inclination** — —A chart or map on which lines are drawn, showing the lines of equal dip or inclination, or the isoclinic lines.

An *inclination chart* is shown in Fig. 391.

It will be seen that the magnetic equator, or line of no dip, does not correspond with the geographical equator, being generally north of the equator in the Eastern Hemisphere, and south of it in the Western. The figures attached to the lines indicate the value of the angle of dip.

**Map or Chart, Isodynamic** — —A map of the earth on a mercator's projection, on which isodynamic lines are drawn.

An isodynamic chart is shown in Fig. 392. It will be observed that the *isodynamic lines* do not exactly coincide with the *isoclinic lines*, since the line of least magnetic intensity does not correspond with the line of the magnetic equator.

The point of *least magnetic intensity* is found at

about lat. 20 degrees S., and lon. 35 degrees W. The point of *greatest magnetic intensity* is found at about lat. 52 degrees N. and lon. 92 degrees W.

Another, though weaker point of magnetic intensity, is found in Siberia. These are distinguished from the true magnetic poles by the term *Poles of Intensity*.

The *Poles of Verticity*, as determined by the *dipping needle*, and the *Poles of Intensity*, as determined by the *needle of oscillation*, therefore do not coincide in the Northern Hemisphere.

**Map or Chart, Isogonal** — —A term sometimes used for an isogonic map or chart.

**Map or Chart, Isogonic** — —A chart on which the isogonal lines are marked.

An isogonic map or chart is sometimes called a *declination map* or chart.

In the declination or variation chart, shown in Fig. 393, the region of western declination is indicated by the shading. There is a remarkable oval patch in the northeastern part of Asia, in which the declination is west. A similar oval of decreased inclination is seen in the Southern Pacific.

The entire earth acts like a huge magnet with south magnetic polarity in the Northern Hemisphere.

It is not known whether the earth possesses but a single pair of magnetic poles or more than a single pair. The variations in the declination, and in the intensity of its magnetism, due to the position of the sun, as well as the marked magnetic disturbances that accompany the occurrence of sun spots, would appear to connect the earth's magnetism in some manner with the solar radiation. (See *Magnetism, Earth's, Theories as to Cause of.*)

**Marine Galvanometer.**—(See *Galvanometer, Marine.*)

**Mariner's Compass.**—(See *Compass, Azimuth.*)

**Marked Pole of Magnet.**—(See *Magnet, Marked Pole of.*)

**Markers.**—Colored flags, or signal lights, generally green, displayed in systems of block railway signaling at the ends of trains, in order to avoid accidents from trains breaking in two. (See *Railroads, Block System for.*)

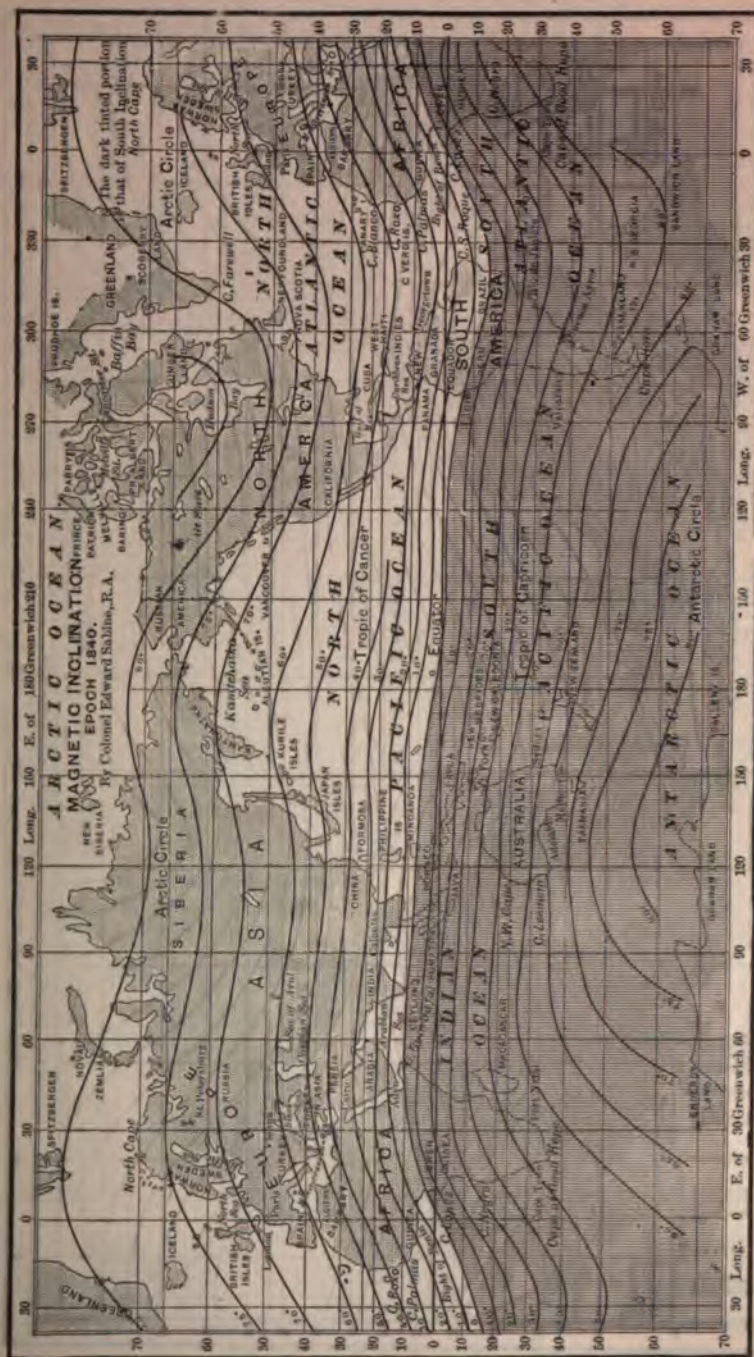


Fig. 591. Inclination Chart.



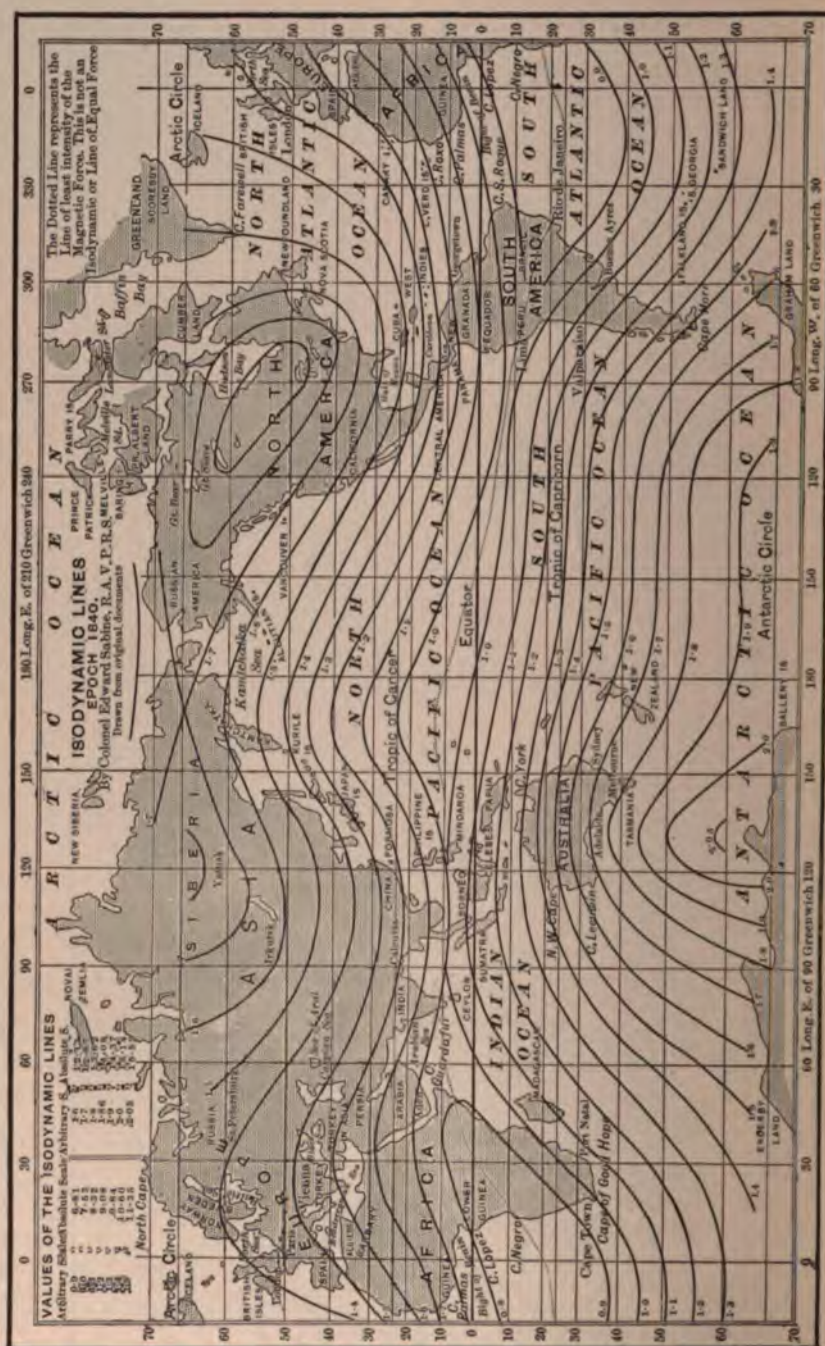


Fig. 392. Aerodynamic Chart.

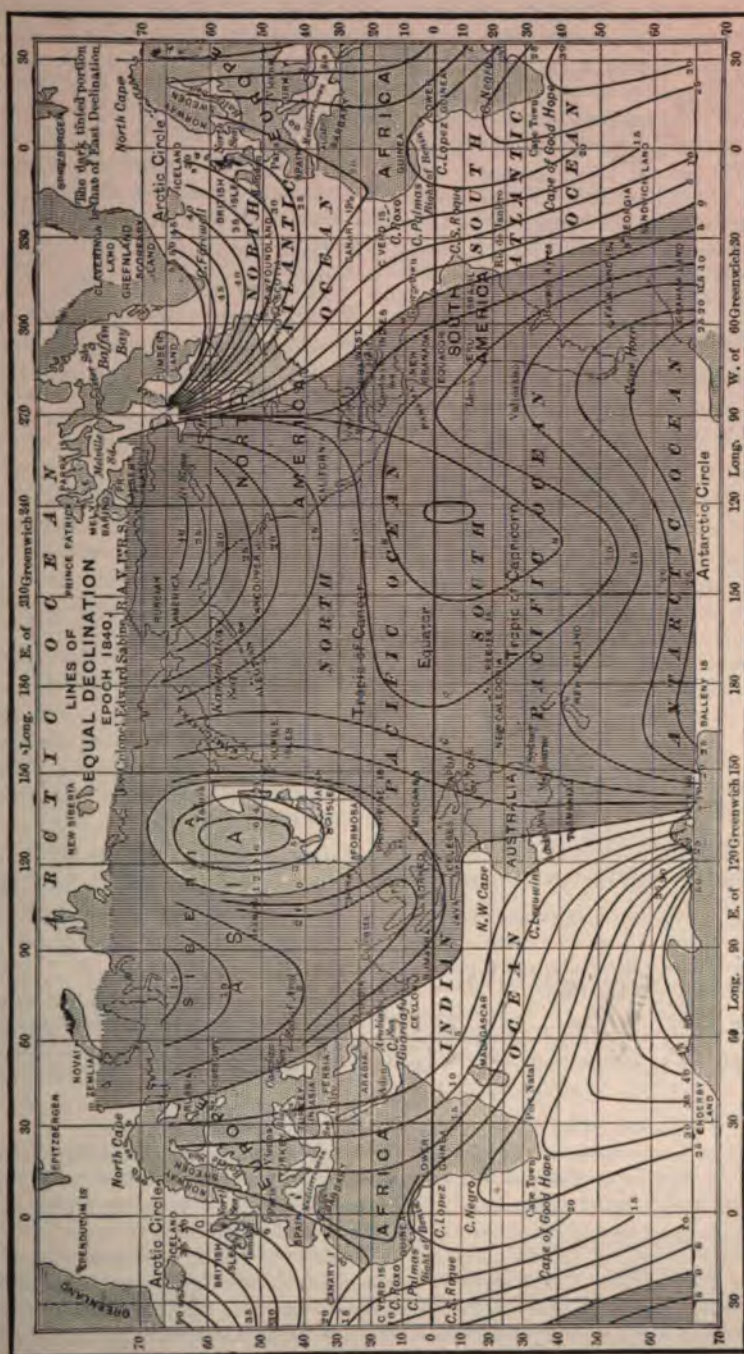


Fig. 393. Isogonic Chart.



**Mass.**—The quantity of matter contained in a body.

*Mass* must be carefully distinguished from *weight*. The weight of a given quantity of matter depends on the attraction which the earth possesses for it, and this, on the earth's surface, varies with the latitude, being greatest at the poles and least at the equator. It also varies with different elevations above the level of the sea. The *mass*, however, is the same under all circumstances, whether for different latitudes or altitudes, on the earth's surface.

**Mass Attraction.**—(See *Attraction, Mass*.)

**Mass, Magnetic** — —A quantity of magnetism which at unit distance produces an action equal to unit force.

**Mass, Unit of** — —The quantity of matter which under certain conditions will balance the weight of a standard gramme or pound.

The gramme is equal to the one-thousandth part of a piece of platinum called the kilogramme, deposited as a standard in the archives of the French Government, and intended to be equal to the mass of 1 cubic centimetre of water at the temperature of its maximum density.

**Massage.**—A treatment for the purpose of effecting changes in general nutrition or action of particular parts of the body, by kneading, rubbing, friction, etc.

**Massage, Electro** — —The application of electricity to the body during its massage.

Connections are established between the patient and a battery by connecting one electrode of a source to the kneading instrument, and the other electrode to the body of the patient.

**Masses, Electric** — —A mathematical conception for such quantities of electricity as at unit distance will produce an attraction or repulsion equal to unit force.

Electrical masses are assumed to be equal when they produce on two identical bodies of small dimensions charges of the same electric force.

**Master Clock.**—(See *Clock, Master*.)

**Materials, Insulating** — —Non-conducting substances which are placed around a conductor, in order that it may either retain an electric charge, or permit the passage of

an electric current through the conductor without sensible leakage.

Various gases, liquids or solids may be employed as insulators. A very high vacuum affords the best known insulation.

**Matter.**—Anything which occupies space in three directions and prevents other matter from simultaneously occupying the same space.

Matter is composed of *atoms*, which unite to form *molecules*. (See *Atom, Molecule*.)

**Matter, Elementary** — —Matter which cannot be decomposed into simpler matter.

Varieties of elementary matter are called *elements*. (See *Element*.)

**Matter, Kinetic Theory of** — —A theory which assumes that the molecules of matter are in a constant state of motion or vibration towards or from one another in paths that lie within the spheres of their mutual attractions or repulsions.

The molecules of gases have great freedom of motion, and are so far removed from one another as to be but little, if any, influenced by their mutual attractions. They are therefore assumed to move in straight lines with very great velocity until they collide against one another, or against the sides of the containing vessel, when they are reflected and again move in straight lines in a new path.

**Matter, Radiant, or Ultra-Gaseous** — —A term proposed by Crookes for the peculiar condition of the gaseous matter which constitutes the residual atmospheres of high vacua.

This is now generally recognized as a fourth state of matter, these four states being:

- (1.) Solid.
- (2.) Liquid.
- (3.) Gaseous.
- (4.) Ultra-gaseous or radiant.

The peculiar properties of radiant matter are seen in the mechanical effects of the localized pressures produced when such residual atmospheres are locally heated or electrified.

In Crookes' *radiometer*, vanes of mica, silvered on one face and covered with lampblack on the opposite face, are supported on a vertical axis so as to be capable of rotation and placed in a glass vessel in which a *high vacuum* is maintained. On

g the instrument to the radiation from a gas flame, a rapid rotation takes place. (diometer, Crookes'.)

Explanation is as follows: The lampblack surfaces absorb the radiant heat, and be- heated, the molecules of gas in the residual here are shot violently from them, and by action drive the vanes around in the direction to that from which they are off. The molecules are also shot off from red surfaces, but, as these are cooler, the not as great as at the blackened surfaces. gas, at ordinary pressure, the heated sur- e also bombarded by other molecules of but in high vacua the mean free path of e- cules is so great that there is no inter- Crookes' layer existing between the vanes e walls of the glass vessel. (See Layer, '.)

a Crookes' tube is furnished with suit- ctrodes, and electric discharges are sent it between these electrodes, a stream of es is thrown off in straight lines from the of the negative electrode.

of the effects of this molecular bombard- e seen by the use of the apparatus shown 394. When the positive and negative



394. Effects of Molecular Bombardment.

Is are arranged as shown, the paths of the ar streams are seen as luminous streams directions are those shown in the figures. figure on the left shows the path taken in vacuum. Streams pass from the negative e to each of the positive electrodes. figure on the right shows the discharge in vacuum. Here the streams pass off at angles to the face of the negative electrode,

and proceed therefrom in straight lines, inde- pendently of the position of the positive electrode. Since, therefore, the negative electrode at a, is in the shape of a concave mirror, the luminous particles converge to a focus near the centre of the glass vessel, and then diverge to the opposite wall.

Refractory substances placed at such a focus of molecular bombardment, as shown in Fig. 395, are rendered incandescent.

In a similar manner, phosphorescent substances exposed to such molecular streams emit a beauti-



Fig. 395. Forces of Molecular Bombardment.

ful phosphorescent light. (See Phosphorescence, Electric.)

#### Matter, Thomson's Hypothesis of —

A hypothesis as to the structure of matter suggested by Sir William Thomson, in order to show how the extremely tenuous ether might possess rigidity.

The fact that the ether, although a fluid sub- stance, possesses the properties of a rigid solid, has given no little trouble to physicists. Thomson explains this rigidity of the ether as being due to a rapid motion in its fluid particles.

A perfectly flexible rubber tube filled with water or other fluid, possesses, when at rest, a very great degree of flexibility. When in motion, however, the tube becomes more and more rigid, as the flow increases in rapidity. Thom-



son imagines the ether to be set in motion in minute vortex rings, and shows that a readily movable fluid body, like ether, once set in such motion should possess the properties of a solid. In a perfect fluid, such as ether, these vortex rings once formed, would be practically imperishable or indestructible.

Thomson regards the atoms of matter as consisting of such vortex rings. Vortex rings can be formed in the air by cutting a circular aperture in the end of a pasteboard box, and tapping sharply against the end of the box. In order to render the rings visible, the box may be previously filled with smoke.

Vortex rings formed in smoky air differ from vortex rings in the ether, in the fact that air is not a perfect fluid, while ether is. Air vortex rings increase in size and decrease in energy. Vortex rings of the ether would not vary in size.

According to Thomson's vortex theory of matter, the atoms of matter are the same as the ether which surrounds them. They cannot be produced in ether by any known way; therefore, they cannot be manufactured, or, as it were, created. Nor, on the other hand, can they be destroyed; in other words, they are indestructible. They are elastic, capable of definite vibrations, possess all the properties of matter save, in the opinion of some, the very important property of gravitation. As Prof. Lodge points out, the fact that this property is not present should cause Sir William Thomson's theory of matter to be accepted with considerable hesitation.

**Matthiessen's Metre-Gramme Standard.**—(See *Metre-Gramme Standard, Matthiessen's*.)

**Matthiessen's Mile Standard.**—(See *Mile Standard, Matthiessen's*.)

**Matting, Invisible Electric Floor** — —A matting or other floor covering, provided with a series of electric contacts, which are closed by the passage of a person walking over them.

This matting is provided as an adjunct to a system of burglar alarms. The electric bell or annunciator, connected with the different contacts, is disconnected during the day-time, or while the rooms are occupied. (See *Alarm, Burglar*.)

**Maximum Magnetization.**—(See *Magnetization, Maximum*.)

**McIntire's Parallel Sleeve Telegraphic Joint.**—(See *Joint, Telegraphic, McIntire's Parallel Sleeve*.)

**Measurements, Electric** — —Determinations of the values of the electromotive force, resistance, current, capacity, energy, etc., in any electric circuit.

Electric measurements may be either qualitative or quantitative.

In qualitative electric measurements the relative values only are obtained; in quantitative measurements the actual values are obtained.

**Mechanical Alarm, Electric** — —(See *Alarm, Electro-Mechanical*.)

**Mechanical Electric Bell.**—(See *Bell, Electro-Mechanical*.)

**Mechanical Equivalent of Heat.**—(See *Heat, Mechanical Equivalent of*.)

**Mechanical Mine.**—(See *Mine, Mechanical*.)

**Mechanical Throwback Indicator.**—(See *Indicator, Mechanical Throwback*.)

**Medical Induction Coil.**—(See *Coil, Induction Medical*.)

**Medical Magneto-Electric Apparatus.**—(See *Apparatus, Magneto-Electric Medical*.)

**Medium, Anisotropic** — —A medium in which equal stresses do not produce equal strains when applied in different directions.

A medium, homogeneous in structure like crystalline bodies, but possessing different powers of specific inductive capacity in different directions.

An eolotropic medium. (See *Medium, Eolotropic*.)

The latter term is used to distinguish it from an isotropic medium. (See *Medium, Isotropic*.)

**Medium, Eolotropic** — —A medium in which equal stresses do not produce the same strains when applied in different directions. (See *Medium, Isotropic*.)

**Medium, Electro-Magnetic** — —Any medium in which electro-magnetic phenomena occur.

The medium through which electro-magnetic waves are propagated is now universally re-

garded as the luminiferous or universal ether. (See *Electricity*, *Hertz's Theory of Electro-Magnetic Radiations or Waves*.)

**Medium, Isotropic** — —A medium in which equal stresses applied in any direction produce equal strains.

A transparent medium which possesses the same optical or electric properties in all directions.

An optically homogeneous, transparent medium.

Such media are called isotropic to distinguish them from anisotropic or eolotropic, or those in which equal stresses produce unequal strains in different directions. (See *Medium, Anisotropic*, *Medium, Eolotropic*.)

**Meg or Mega** (as a prefix).—1,000,000 times; as, megohm, 1,000,000 ohms; megavolt, 1,000,000 volts.

**Megaloscope, Electric** — —An apparatus for the medical exploration of the cavities of the body.

The light necessary for exploration is obtained from a small incandescent lamp placed at the extremity of a tube, suitably shaped for introduction into the special organ for which it is devised. The organ so illumined throws its light on a prism, by means of which the light is caused to pass through a series of lenses by which it is viewed.

**Megavolt**.—1,000,000 volts.

**Megohm**.—1,000,000 ohms.

**Meidinger Voltaic Cell**.—(See *Cell, Voltaic*, *Meidinger*.)

**Memory, Magnetic** — —A term proposed by J. A. Fleming for coercive force.

Soft iron has but a feeble memory of its past magnetization.

**Mercurial Connection**.—(See *Connection, Mercurial*.)

**Mercurial Contact**. — (See *Connection, Mercurial*.)

**Mercurial Temperature Alarm**.—(See *Alarm, Mercurial Temperature*.)

**Mercury Break**.—(See *Break, Mercury*.)

**Mercury Cup**.—(See *Cup, Mercury*.)

**Meridian, Astronomical** — —A great circle passing through any point in the heavens, and the North and South poles of the heavens.

The astronomical meridian corresponds to the geographical meridian. The former is considered as passing around the dome of the heavens; the latter, around the surface of the earth. In order to locate any point in the heavens, a great circle of the heavens is caused to pass through that point and through the astronomical North and South poles.

**Meridian, Geographical** — —The geographical meridian of a place is a great circle passing through that place and the North and South geographical poles of the earth.

**Meridian, Magnetic** — —The magnetic meridian of any place is the meridian which passes through the poles of a magnetic needle at that place when in a position of rest under the free influence of the earth's magnetism.

The plane of the magnetic meridian at any place is a vertical plane passing through the poles of a magnetic needle in a position of rest under the free influence of the earth's magnetism at that place.

The magnetic meridian may be regarded as the vertical plane in which a freely suspended magnetic needle comes to rest in the earth's magnetic field.

**Meridional**.—Pertaining to the meridian.

**Message Wire**.—(See *Wire, Message*.)

**Messenger Call**.—(See *Call, Messenger*.)

**Metallic Arc**.—(See *Arc, Metallic*.)

**Metallic Circuit**.—(See *Circuit, Metallic*.)

**Metallic Coating**.—(See *Coating, Metallic*.)

**Metallic Conducting Joint**.—(See *Joint, Metallic Conducting*.)

**Metallic Contact**.—(See *Contact, Metallic*.)

**Metallic Electric Conduction**. — (See *Conduction, Electric, Metallic*.)

**Metallization**.—The rendering of a non-conducting surface electrically conducting by covering it with a metallic coating, so as to



enable it to readily receive a metallic coating by electro-plating. (See *Plating, Electro.*)

**Metallochromes.**—A name sometimes given to Nobili's rings. (See *Rings, Nobili's.*)

**Metalloid.**—A name formerly applied to a non-metallic body, or to a body having only some of the properties of a metal, as carbon, boron, oxygen, etc.

The term is now but little used.

**Metallurgy, Electro** — —That branch of applied science which relates to the electrical reduction or treatment of metals.

Metallurgical processes effected by the agency of electricity.

Electro-Metallurgy embraces :

(1.) The reduction of metals from their ores, either directly during fusion by the heat of the voltaic arc, or the heat of incandescence, or by the electrolysis of solutions of their ores, or ores in the fused state. (See *Electrolysis, Furnace, Electric.*)

(2.) Electroplating.

(3.) Electrotyping.

The application of electricity to the reduction of metals is carried on in the electric furnace for the reduction of the aluminium ores, for example.

**Metals, Electric Deflagration of** — —The volatilization of metals by electric incandescence.

**Metals, Electric Refining of** — —Purifying metals by means of electricity.

Different methods are employed for the electric refining of metals. They are generally electrolytic in character.

**Metals, Electrical Protection of** — —The protection of a metal from corrosion by placing it in connection with another metal, which, when exposed to the corroding liquid, vapor or gas, will form with the metal to be protected the positive element of a voltaic couple.

The negative element of a voltaic couple is protected by the presence of the positive element, which is alone corroded. This method has been adopted with considerable success to electrically protect metals from corrosion.

The following are examples of this protection :

(1.) Davy proposed to protect the copper

sheathing of ships from corrosion by attaching pieces of zinc to the copper sheathing. This succeeded too well, since the copper salts which were formerly produced, and acted as a poison to the marine plants and animals, being now absent, permitted these organisms to thrive to such an extent as to seriously foul the ship's bottom.

(2.) A ring of zinc attached to a lightning rod, near its points, has, it is claimed, the power of protecting the points from corrosion.

(3.) Iron bars of railings, if sunk or embedded in zinc, are preserved from corrosion near the junction of the two metals, but if sunk in lead are rapidly corroded, because iron is electro-positive to lead, but electro-negative to zinc.

(4.) Tinned iron rapidly corrodes or rusts when the iron is exposed to the atmosphere by a scratch or abrasion, because the iron is electro-positive to tin. Nickel-plated iron, for the same reason, rusts rapidly on the exposure of an abraded surface.

(5.) Zinc or galvanized iron, or iron covered with a deposit of zinc, is protected from corrosion because the zinc, being positive to iron, can alone be corroded, and the zinc is also protected in part by the coating of insoluble oxide that is formed.

**Meteorites.**—Aerolites. (See *Aerolites.*)

**Meter, Ampère** — —(See *Ampère-Meter, Ammeter.*)

**Meter, Current** — —A term now applied to an electric meter or galvanometer which measures the current in ampères, as distinguished from one which measures the energy in watts.

This term is sometimes loosely applied to a galvanometer.

The term galvanometer is preferable. (See *Galvanometer.*)

**Meter, Current, Magneto-Static** — —A current meter in which a small steel magnet, or system of magnets, is suspended at the centre of the uniform magnetic field produced by the combined influence of two coils and two systems of powerful permanent magnets.

**Meter, Electric** — —Any apparatus for measuring commercially the quantity of electricity that passes in a given time through any consumption circuit.

Electric meters are constructed in a great variety of forms; they may, however, be arranged under the following heads:

(1.) *Electro-Magnetic Meters*, or those in which the current passing is measured by the electro-magnetic effects it produces.

In such meters the entire current may pass through the meter.

(2.) *Electro-Chemical Meters*, or those in which the current passing is measured by the electrolytic decomposition it effects.

In these meters, a shunted portion only of the current is usually passed through a solution of a metallic salt, and the current strength calculated from the amount of electrolytic decomposition thus effected.

(3.) *Electro-Thermal Meters*, or those in which the current passing is measured by a movement effected by the increase in temperature of a resistance through which the current is passed, or by the amount of a liquid evaporated by the heat generated by the current.

(4.) *Electric-Time Meters*, or those in which no attempt is made to measure the current that passes, but in which a record is kept of the number of hours that an electric lamp, motor or other electro-receptive device is supplied with current.

Edison's electric meter is of the second class. It consists of two *voltmeters*, or electrolytic cells, containing zinc sulphate, in which two plates of chemically pure zinc are dipped. The current that passes is determined by the amount of the variation in weight of the zinc plates. To determine this, the plates are weighed at stated intervals: one plate every month, the other plate, which is intended to act as a check on the first, only once in three months. Some difficulty has been experienced in the employment of meters of this class, from the variations in the value of the shunt resistance, due to variations in the condition and temperature of the electrolytic cell. The use of a compensating resistance, however, has, it is claimed, removed this objection. (See *Voltmeter*.)

**Meter, Electric-Time** — — — An electric meter in which the current passing is estimated by recording the number of hours that an electric lamp or other electro-receptive device is supplied with a known current. (See *Meter, Electric*.)

**Meter, Electro-Chemical** — — — An electric meter in which the current passing is measured by the electrolytic decomposition it effects. (See *Meter, Electric*.)

**Meter, Electro-Magnetic** — — — An electric meter in which the current passing is measured by the electro-magnetic effects it produces. (See *Meter, Electric*.)

**Meter, Electro-Thermal** — — — An electric meter in which the current passing is measured by means of the heat generated by the passage of the current through a resistance. (See *Meter, Electric*.)

**Meter, Energy** — — — A term sometimes applied to a watt meter. (See *Meter, Watt*.)

**Meter, Milli-Ampère** — — — An ampère meter graduated to read milli-ampères.

**Meter, Watt** — — — An instrument generally consisting of a galvanometer constructed so as to measure directly the product of the current, and the difference of potential.

Since the watt is equal to the product of the

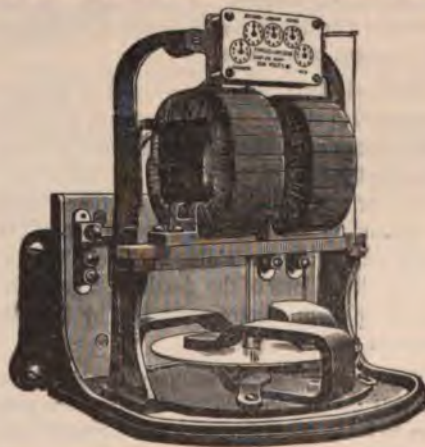


Fig. 996. Watt Meter.

current by the electromotive force, if the current and electromotive force are simultaneously measured, their product gives directly the watts. The scale reading of a watt meter may be graduated so as to give the watts directly.

A watt meter consists essentially of a thick wire coil, placed in series in the circuit whose electric power is to be measured, and a thin wire coil



placed in a shunt around the circuit to be measured. These two coils, instead of acting on a needle, act on each other, and the amount of this deflection will, therefore, be proportional to the watts present.

A form of watt meter is shown in Fig. 396.

**Method, Deflection** — — A method employed in electrical measurements, as distinguished from the zero method, in which a deflection, produced on any instrument by a given current, or by a given charge, is utilized for determining the value of that current or charge.

The conditions remaining the same, the same current or charge will produce the same deflection at any time. Different deflections produced by currents or charges, the values of which are unknown, are determined by certain ratios existing between the deflections and the currents or charges. These ratios are determined experimentally by the *calibration* of the instrument. (See *Calibrate*.)

Deflection methods are opposed to *zero or null methods*, in which latter a balance of opposite electromotive forces, or a proportionally equal fall of electric potential, is ascertained by the failure of a delicately poised needle to be moved by a current or a charge.

**Method, Null or Zero** — — Any method employed in electrical measurements, in which the values of the electromotive force in volts, the resistance in ohms, or the current in amperes, or other similar units, are determined by balancing them against equal values of the same units, and ascertaining such equality, not by the deflections of the needle of a galvanometer, or of an electrometer, but by the absence of such deflections.

The advantage of zero methods is found in the fact that the galvanometer or electrometer may then be made as sensitive as possible, which is not otherwise the case, since great deflections are generally to be avoided, especially in tangent galvanometers. (See *Galvanometer*. *Electrometer*.)

**Method of Magnetization by Touch.** — (See *Magnetization by Touch*.)

**Methven's Screen.** — (See *Screen*, *Methven's*.)

**Metre Bridge.** — (See *Bridge*, *Metre*.)

**Metre Candle.** — (See *Candle*, *Metre*.)

**Metre-Gramme Standard, Matthiessen's**

— — A unit of resistance.

The resistance of a wire one metre in length, and of such a diameter as would cause the wire to weigh one gramme.

One metre-gramme of pure hard drawn copper has a resistance of .1469 B. A. units at zero degrees C. as determined by Matthiessen (*Phil. Mag.*, May, 1865).

**Metre-Millimetre** — — A resistance unit of length of a wire or other conductor of the length of one metre and of the area of cross-section of one square millimetre.

According to the report of the Committee of the American Institute of Electrical Engineers of 1890, on a Standard Wiring Table, a metre-millimetre of pure soft copper wire has a resistance of .02057 B. A. units at zero degrees C. From the corresponding term, milfoot, millimetre-metre would appear to be the preferable term.

**Metric Horse-Power.** — (See *Horse-Power*, *Metric*.)

**Metric System of Weights and Measures.** — (See *Weights and Measures*, *Metric System of*.)

**Mho.** — A term proposed by Sir Wm. Thomson for the practical unit of conductivity.

Such a unit of conductivity as is equal to the reciprocal of 1 ohm.

The conducting power is equal to  $\frac{1}{R}$  or the reciprocal of the resistance.

The word *mho*, as is evident, is obtained by inverting the order of sequence of the letters in the word *ohm*.

**Mica.** — A mineral substance employed as an insulator.

Mica is a silicious mineral. It occurs of varying degrees of transparency, and splits or cleaves readily into transparent laminae. It is a good non-conductor, is fairly fire-proof, and is not hygroscopic.

Mica is used extensively in insulating the metallic segment of commutators of motors and dynamo-electric machines and in various other electric work.

**Mica, Moulded** —An insulating substance consisting of finely divided mica made into a paste, with some fused insulating substance, and moulded into any desired shape.

Finely divided mica mixed with gum-shellac rendered plastic by means of heat, forms a good insulating substance.

**Micro** (as a prefix).—The one-millionth; as, a microfarad, the millionth of a farad; a microvolt, the one-millionth of a volt.

**Micro-Farad.**—(See *Farad, Micro*.)

**Micro-Graphophone.**—A modified form of phonograph in which several independent non-metallic diaphragms are used instead of the single diaphragm of the phonograph. (See *Graphophone, Micro*.)

**Micrometer, Arc** — —An apparatus for the accurate measurement of the length of a voltaic arc by means of a micrometer.

The distance between two carbon electrodes—one movable and the other fixed—placed inside a glass vessel, is accurately determined by means of a micrometer placed on the movable electrode. The operation is similar to that of the *vernier wire gauge*.

**Micrometer, Spark** — —A term sometimes applied to Hertz's electric resonator. (See *Resonator, Electric*.)

**Micron.**—A measure of length.

The one-millionth part of a metre.

The micron is equal to .00004 of an inch, very nearly.

**Microphone.**—An apparatus invented by Prof. Hughes for rendering faint or distant sounds distinctly audible.

The microphone depends for its operation on variations produced in the resistance of the circuit of a battery, or other electric source, by means of a loose contact. These variations in the resistance are caused to produce corresponding movements in the diaphragm of a receiving telephone.

The loose contact may take a variety of forms. Originally it was made in the form shown in Fig. 397, in which a small piece of carbon E, pointed at both ends, is inserted in holes near the ends of cross-pieces of carbon B and C. The thin upright board A, on which these are supported, acts as a

sounding board or diaphragm, and its movements by sound waves are at once audible to a person listening at the receiving telephone. The walking of a fly over the sounding board is heard as a loud sound.

The forms of transmitting telephones invented by Reis, Edison, Blake, Berliner and others, are in reality varieties of microphones.

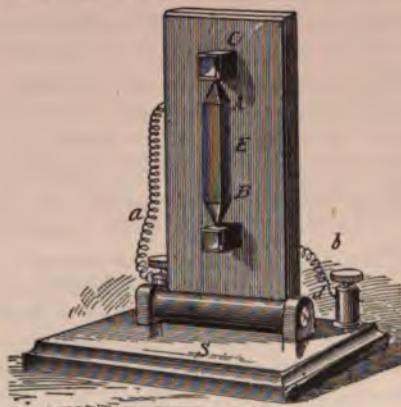


Fig. 397. Microphone.

**Microphone Relay.**—(See *Relay, Microphone*.)

**Micro-Seismograph.**—(See *Seismograph Micro*.)

**Microtasimeter.**—An apparatus invented by Edison to measure minute differences of temperature, or of moisture, by the resulting differences of pressure.

A change of temperature, or moisture, is caused to produce variations in the resistance of a button of compressed lampblack, placed in the circuit of a delicate galvanometer. The apparatus, though of surprising delicacy, is scarcely capable of practical application, from the fact that the resistance of the carbon does not resume its normal value on the removal of the pressure.

**Micro-Volt.**—(See *Volt, Micro*.)

**Mil.**—A unit of length equal to the  $\frac{1}{1000}$  of an inch, or .001 inch, used in measuring the diameter of wires.

**Mil, Circular** — —A unit of area employed in measuring the areas of cross-sections of wires, equal to .78540 square mil.

The area of a circle one mil in diameter.



One circular mil equals .00000785 square inch.

The area of cross-section of a circular wire in circular mils is equal to the square of its diameter expressed in mils. (See *Units, Circular.*)

**Mil-Foot.**—A resistance unit of length of one foot of wire or other conductor of one mil diameter.

The resistance of a mil-foot of soft copper wire or wire 1 foot long and .001 of an inch in diameter is equal to 9.720 B. A. units at 0 degrees C.

**Mil, Square** — —A unit of area employed in measuring the areas of cross-sections of wires, equal to .000001 square inch.

One square mil equals 1.2732 circular mil.

**Mile, Nautical** — —A knot, or a distance of 6,087 feet, or very nearly 1.15 statute miles.

The  $\frac{1}{111,320}$  of the earth's equatorial circumference, or the  $\frac{1}{70}$  of a degree of longitude at the equator, or about 2,029 yards.

A nautical or geographical mile being the  $\frac{1}{111,320}$  of 24,899 miles, has a value somewhat greater than that of the statute mile.

**Mile Standard, Matthiessen's** — —A standard of resistance equal to the resistance of one mile of pure copper wire  $\frac{1}{16}$  inch in diameter at 15.5 degrees C.

Matthiessen's mile standard has a resistance of 13.59 B. A. units at 15.5 degrees C.

**Mile, Statute** — —The ordinary unit of distance on land, equal to 5,280 feet.

**Milli** (as a prefix).—The one-thousandth part.

**Milli-Ampère.**—The thousandth of an ampère.

**Milli-Calorie.**—The smaller calorie. (See *Calorie, Small.*)

**Milli-Oerstedt.**—The one-thousandth of an Oerstedt.

**Mimosa Sensitive.**—A sensitive plant whose leaves fold or shut up when touched.

The fibres of all the sensitive plants, such, for example, as the above, the Venus' Fly-trap, etc., like all muscular fibre, and indeed all protoplasm, suffer contraction when traversed by electric currents.

**Mine, Electro-Contact** — —A submarine mine that is fired automatically on the completion of the current of a battery

placed on the shore through the closing of floating contact points by passing vessels. (See *Mine, Submarine.*)

**Mine Exploder, Electro-Magnetic** — —

A form of electro-magnetic exploder. (See *Exploder, Electro-Magnetic.*)

**Mine, Mechanical** — —A submarine mine that is fired when struck by a passing ship by the action of some contrivance contained within the torpedo itself, and having no connection whatever with the shore.

**Mine, Observation** — —A variety of submarine mine that is fired when the enemy's vessels are observed to be within the destructive area of the mine. (See *Mine, Submarine.*)

Various means are adopted for obtaining the current required for firing such mines. A sufficiently powerful battery is generally used. An electro-magnetic mine exploder may, under certain circumstances, be employed. (See *Mine Exploder, Electro-Magnetic.*)

**Mine, Submarine** — —A mass of gun-cotton or other explosive contained in a water-tight vessel and placed under water so as to be exploded on the passage over it of an enemy's vessel.

A submarine mine is a stationary torpedo arranged for the defense of a harbor. A harbor is protected by a number of mines which are so arranged as to be readily exploded by the passage of an enemy's ship, but safely crossed by other vessels.

Submarine mines consist essentially of gun-cotton or other explosives contained in water-tight vessels anchored in very carefully located positions, and connected with the shore by means of cables.

An operating-room at the shore end of the cable is furnished with batteries, measuring instruments, contact keys, etc., etc., by means of which the mines can be exploded by the transmission of an electric current through the cables; or, the mines are furnished with automatic circuit closers in which two central points are closed by the passage of the vessel. In ordinary times this current is too weak to ignite the fuse, and merely closes a relay in the operating-room, which in turn directs a current through a bell or indicator, but, of course, too weak to fire the fuse.

nes of war, however, the relay sends a through the cable sufficiently strong to platinum iridium fuse, ignite a fulminate of cap, and thus, by the detonation of the of dry gun-cotton, explode the full charge of gun-cotton in the torpedo or mine.

**Subterranean** — — A mass of powder, gun-cotton or other explosive, under ground in vessels suitable for ion against moisture, and fitted with ally connected electric fuses, which are exploded automatically by the move- of an enemy over them, or by an oper- ated at a safe distance within an en- nent.

**ate, Ampère** — — One ampère flow- one minute. (See *Hour, Ampère.*)

**ate, Watt** — — A unit of electrical

expenditure of an electrical power of att for one minute.

watt-minute is equal to 60 joules. This electrical work is seldom used.

**phone**.—An apparatus invented by based on the use of the microphone, signed for the medical examination of scles.

**por Galvanometer**.—(See *Galvanom- firror.*)

**st Electrode**.—(See *Electrode, Moist.*)

**sture, Effect of, on Electrical Phe- a** — — The influence of moisture surfaces of insulators in causing the dissipation of an electric charge.

loss is more rapid with *negatively charged* han with those positively charged.

**ar Attraction**. — (See *Attraction,* .)

**ecular**.—Pertaining to the molecule. (*molecule.*)

**ecular Attraction**.—(See *Attraction,* ular.)

**ecular Bombardment**.—(See *Bom- ent, Molecular.*)

**ecular Chain**.—(See *Chain, Molecu-*

**Molecular Currents**.—(See *Currents, Molecular or Atomic.*)

**Molecular Currents, Induced** — — (See *Currents, Induced Molecular or Atomic.*)

**Molecular Range**.—(See *Range, Molecu- lar.*)

**Molecular Repulsion**.—(See *Repulsion Molecular.*)

**Molecular Rigidity**. — (See *Rigidity, Molecular.*)

**Molecular Theory of Muscle and Nerve Currents**.—(See *Theory, Molecular, of Mus- cle and Nerve Currents.*)

**Molecule**.—A group of atoms whose chemical bonds or affinities are mutually satisfied.

The smallest quantity of a compound sub- stance that can exist as such.

Water is a compound substance formed of two atoms of hydrogen combined with one atom of oxygen. The molecule of water, therefore, or the smallest quantity of water that can exist, must contain two atoms of hydrogen and one of oxygen.

The molecule of hydrogen consists of two atoms of hydrogen. Since hydrogen is a monad, or an element whose atomicity is one, it can combine with one atom of hydrogen and form a molecule, since then its bonds will be fully satisfied. (See *Atomicity.*)

**Molecule, Closed-Magnetic Circuit of** — — (See *Circuit, Closed-Magnetic, of Molecule.*)

**Molecule, Gramme** — — The weight of any substance taken in grammes numerically equal to the molecular weight.

**Moment, Magnetic** — — The sum of the two forces of the directive couple multiplied by half the perpendicular distance between the directions of these forces; or, in other words, the moment of a magnet is equal to its length multiplied by the intensity of the magnetism of one of its poles. (See *Couple, Magnetic.*)

**Moment of Couples**.—(See *Couple, Mo- ment of.*)

**Momentary Current**.—(See *Current, Mo- mentary.*)

**Momentum, Electro-Magnetic, of Sec- ondary Circuit** — — A quantity equal to



the co-efficient of mutual induction, multiplied by the current strength in the primary, when the primary current is fully established.

When the primary current is fully established, the number of lines of force which pass through the secondary circuit is equal to the co-efficient of mutual induction, multiplied by the strength of the primary current.

**Monophotal Arc-Light Regulator.**—(See *Regulator, Monophotal Arc-Light*.)

**Morley Effect.**—(See *Effect, Morley*.)

**Morse Alphabet.**—(See *Alphabet, Telegraphic: Morse's*.)

**Morse Inker.**—(See *Inker, Morse*.)

**Morse Recorder.**—(See *Recorder, Morse*.)

**Morse Register.**—(See *Register, Morse*.)

**Morse System of Telegraphy.**—(See *Telegraphy, Morse System of*.)

**Morse's Telegraphic Alphabet.**—(See *Alphabet, Telegraphic: Morse's*.)

**Morse's Telegraphic Sounder.**—(See *Sounder, Morse's Telegraphic*.)

**Motion, Energy of** — — A term sometimes applied to actual or kinetic energy in contradistinction to potential energy. (See *Energy, Actual*.)

**Motion, Simple-Harmonic** — — Motion which repeats itself at regular intervals, taking place backwards or forwards, and which may be studied by comparison with uniform motion round a circle of reference.—(*Daniell*.)




Fig. 398. Simple-Harmonic Motion.

Motion which is a simple periodic function of the time.

Suppose a pendulum be set swinging in a certain path. If the path of such a pendulum, or, as it is generally called, a conical pendulum, be

looked at from above or from below, it will appear to be circular; if observed from one side it will appear elliptical, and this elliptical path will appear longer and narrower as the eye of the observer approaches the level of the plane in which the bob moves, when the bob will appear to travel backwards and forwards in a straight line. The bob will appear to be moving faster, when it is moving right across the field of view.

Let the circle Q C R (Fig. 398) be the path in which the bob moves, and let Q A, A B, B C, C o, etc., be equal distances in such path. Let the lines A a, B b, C c, o O, etc., be drawn perpendicular to the line Q R. Then when looked at, with the eye on the level of the plane in which the bob travels, the line Q R, will be the path in which the bob appears to move backwards and forwards, and the lines, Q a, a b, b c, c O, etc., will represent the spaces apparently traversed in equal intervals of time.

The circle Q o R, is called the circle of reference.

**Motion, Simple-Harmonic, Amplitude of** — — The length of the swing from the median position to its extreme position, in either direction.

The line O Q, or O R, in the circle of reference Q O R (Fig. 398).

**Motion, Simple-Harmonic, Negative Direction of** — — The motion which a body, with a simple-harmonic motion, has when it appears to move from left to right.

**Motion, Simple-Harmonic, Period of** — — The interval of time which elapses between two successive passages of a moving particle, over the same point, in the same direction.

The period of simple-harmonic motion represents the time of one complete motion around a circle called the circle of reference. (See *Motion, Simple-Harmonic*.)

**Motion, Simple-Harmonic, Phase of** — — The position of a point executing a simple harmonic motion, expressed in terms of the interval of time which has elapsed since such point last passed through the middle of its path in the positive direction.—(*Anthony & Brackett*.)

The exact position of a particle executing a simple-harmonic motion for any instant of time can be readily expressed in terms of the phase.

**tion, Simple-Harmonic, Positive** — The motion which a moving in simple-harmonic motion has, it appears to move from right to left.

**tion, Simple-Periodic** — A term employed in the sense of simple-harmonic motion. (See *Motion, Simple-Harmonic*.)

**tion, Simple-Sine** — A term sometimes employed in the sense of simple-harmonic motion. (See *Motion, Simple-Harmonic*.)

**tograph, Electro** — An apparatus devised by Edison whereby the friction of a gum point against a rotating cylinder of chalk, is reduced by the passage of electric current.

The result is due to electrolytic action at the point of contact, varying the friction.

The electro-motograph, though less certain in operation than an electro-magnet, may replace it as a certain electric apparatus.

The detailed construction of the electro-motograph will be understood from an inspection of Fig. 399.

The lever A, pivoted with a universal joint at its base, has a metallic point at its free extremity F, which rests on a strip of moistened paper N, and is held in position by some pressure by the action of the spring S. The paper N, rests on the metallic drum G, over which it is moved on the rotation of the drum by clockwork. A spring R, acts on the lever A, in a direction opposite to that in which it tends to move by the rotation of the drum G.

The main battery L, is connected at its negative pole to the point F, and at its positive pole, through the key K, to the metallic drum G. The local battery B, is connected through the sounder X, to the contacts D and X.

When the key K, is open, the friction of F, on the paper N, is sufficient to move the lever A, to the right so as to close the circuit of the local battery B, but when the key K, is depressed, the current from L, passing through the paper, decomposes the chemicals with which it is moistened, and reduces the friction of the point F, and permits the lever A, to draw the lever A, to the left, thus closing the circuit of the local battery L B.

The movements of the key are therefore reproduced by the armature of the electro-magnet X.

An excellent loud speaking telephone has been devised by Edison on the principle of the electro-motograph.




Fig. 399. Electro-Motograph.

**Motor, Compound-Wound** — An electric motor whose field magnets are excited by a series and a shunt wire. (See *Machines, Dynamo-Electric, Compound-Wound*.)

**Motor, Differentially Wound** — A compound-wound motor, in which the current in the shunt coils opposes in its magnetizing effects the current in a series coil, so that the efficient magnetizing effect produced is the difference in the magnetizing effect of the two coils.

**Motor, Electric** — A device for transforming electric power into mechanical power.

All practical electric motors depend for their operation on the tendency to motion in a magnetic field of a conductor carrying a current or on magnetic attraction or repulsion. The entire magnetism may be produced by the current, or part may be obtained from permanent magnets, and the rest from electro-magnets.

A dynamo-electric machine will act as a motor if a current is sent through it. Such a motor is sometimes called an *electro-motor*. The term electric motor would, however, appear to be the preferable one.

In all cases the rotation is in such a direction as to induce in the armature an electromotive force opposed to that of the driving current; this is therefore called the counter electromotive force.

A *magneto-dynamo*, or a dynamo the field of which is obtained from permanent magnets, or a *separately excited dynamo*, will operate as a motor when a current is sent through its armature, and will turn it in the *opposite direction* to that required to drive it in order to produce a current in the same direction.

A *series dynamo* will operate as a motor when



a current is sent through it. If the current is sent through it in the opposite direction to that which it produces when in operation as a generator, the polarity of the field is reversed and the dynamo will turn as a motor in the opposite direction to that required to produce the current. If the current is reversed, the polarity of both the field and the armature is again reversed, and the dynamo still rotates as a motor in the opposite direction to that in which it is rotated as a generator.

*A series dynamo, therefore, always rotates as a motor in a direction opposite to that of its rotation as a generator.*

When, however, the polarity of the field only is reversed by changing the connection between the armature and the field, the rotation is in the same direction.

*A shunt dynamo operated as a motor will also turn in but one direction, but this direction is the same as that in which it turns when operating as a generator; for if the direction of the current in the armature is the same as in a generator, that in the shunt is reversed.*

*A compound wound dynamo will move in a direction opposite to that of its motion as a generator if the series part is more powerful than the shunt, and in the same direction if the shunt part is more powerful than the series. To use a compound-wound dynamo as a differential motor the connections need not be changed. For a cumulative motor it is necessary to reverse the connections of the series coils.*

**Alternating-Current Dynamo.**—The current from an alternating-current dynamo, if sent through another similar alternating-current dynamo running at the same speed, will drive it as a motor. Such a machine possesses the disadvantage of requiring to be maintained at a speed depending on that of the driving dynamo, and also that it requires to be brought to nearly this speed before the driving current is supplied to it. As a result of this last requirement, variations in the load are apt to stop the motor. Considerable improvements, however, are being introduced into alternate-current motors, by which these difficulties are almost entirely removed.

An alternating current sent through any self-exciting dynamo-electric machine, such as a shunt or series machine, will drive it continuously as a motor. The sudden reversals in the magnetization of its cores will, however, unless the cores are thoroughly laminated, set up power-

ful eddy currents that will injuriously heat the machine, and there is also excessive sparking at the brushes.

The reversibility of any dynamo-electric machine, or its ability to operate as a motor if supplied with a current, leads to a fact of great importance in the efficiency of electric motors, viz.: that during rotation there is induced in the armature during its passage through the field of the machine, an electromotive force opposed to that produced in the armature by the driving current, or a counter electromotive force. (See *Resistance, Spurious. Force, Counter Electromotive.*) This counter electromotive force acts as a spurious resistance, and opposes the passage of the driving current, so that, as the speed of the electric motor increases, the strength of the driving current becomes less, until, when a certain maximum speed is reached, very little current passes. In actual practice, this maximum speed is not attained, or is only momentarily attained, and a small, nearly constant, current is expended in overcoming friction at the bearings, air friction, etc.

When, however, the load is placed on the motor, that is, when it is caused to do work, the speed is reduced and the counter electromotive force is decreased, thus permitting a greater current to pass. The fact that the load thus automatically regulates the current required to drive the motor, renders electric motors very economical in operation.

The relations between the power required to drive the generating dynamo, and that produced by the electric motor, are such that *the maximum work per second is done by the motor when it runs at such a rate that the counter electromotive force it produces is half that of the current supplied to it.* The maximum work or activity of an electric motor is therefore done when its theoretical efficiency is only 50 per cent. This, however, must be carefully distinguished from the maximum efficiency of an electric motor. A maximum efficiency of 100 per cent. can be attained theoretically; and, in actual practice, considerably over 90 per cent. is obtained. In such cases, however, the motor is doing work at less than its maximum power.

This is Jacobi's law of maximum effect, but does not apply to actual motors on account of the limitations of current carrying capacity. For example, a motor of 9 horse-power and 90 per cent. efficiency loses 1 horse-power in heat within



itself. Hence, if run according to Jacobi's law, it would only produce the same amount, *i. e.*, 1 horse-power in useful work instead of 9. More than this would overheat it.

An efficiency of 100 per cent. is reached when the counter electromotive force of the motor is equal to that of the source supplying the driving current. Supposing now the driving machine to be of the same type as the motor, and the two machines *are running at the same speed*. If now a load is put on the motor so as to reduce its speed, and thus permit it to produce a counter electromotive force of but 90 per cent., its efficiency will be but 90 per cent. In such a case, therefore, the efficiency is represented by the relative speeds of the generator and the motor.

**Motor, Electric, Alternating-Current** — —An electric motor driven or operated by means of alternating currents. (See *Motor, Electric*.)

Dr. Louis Duncan divides alternating motors into two classes, *viz.*:

(1.) Those in which there is but one transformation in the machine, *viz.*, that of the electric energy of the armature current into the mechanical energy of the armature's rotation.

(2.) Those in which there are two transformations, *viz.*:

(a.) The transformation of electrical energy from the main current to electrical energy in the armature current.

(b.) The transformation of the electric energy of the armature current into mechanical energy.

Alternating motors of the first type are found in the ordinary alternating-current dynamo reversed. Those of the second type in Tesla's or Thomson's motors.

**Motor, Electric, Direct-Current** — —An electric motor driven or operated by means of direct or continuous electric currents, as distinguished from a motor driven or operated by alternating currents. (See *Motor, Electric*.)

**Motor, Electric, High-Speed** — —The ordinary electric motor.

The term high-speed electric motor is used in contradistinction to low-speed electric motor. (See *Motor, Electric, Low-Speed*.)

**Motor, Electric, Low-Speed** — —A

slow-speed motor. (See *Motor, Electric, Low-Speed*.)

**Motor, Electric, Overload of** — —A load greater than that which an electric motor can carry while at its greatest efficiency of operation, or a load which causes injurious heating of a motor.

**Motor, Electric, Reversing Gear of** — —Apparatus for so reversing the direction of the current through an electric motor as to reverse the direction of its rotation. (See *Railroad, Electric*.)

**Motor, Electric, Slow-Speed** — —An electric motor so constructed as to run with fair efficiency at slow speed.

The electric motor develops a counter electromotive force when in motion, which, of course, increases with the increase of motion. The electric motor has, as generally constructed, its greatest efficiency at high speed. When used on street railroads, the high speed requires to be decreased by various forms of reduction gear. The loss of power which all such gear involve, together with the noise attending their use, render any decrease in speed that can be obtained on the part of the motor, without serious loss of efficiency, desirable.

**Motor-Electromotive Force.** — (See *Force, Motor Electromotive*.)

**Motor, Pyromagnetic** — —A motor driven by the attraction of magnet poles on a movable core of iron or nickel unequally heated.

The intensity of magnetization of iron decreases with an increase of temperature, iron losing most of its magnetization at a red heat. A disc of iron placed between the poles of a magnet, so as to be capable of rotation, will rotate, if heated at a part nearer one pole than the other, since it becomes less powerfully magnetized at the heated part.

In the form of pyromagnetic motor devised by Edison, and shown in Fig. 400, in elevation, and in Fig. 401, in vertical section, the disc of iron is replaced by a series of small iron tubes, or divided annular spaces, heated by the products of combustion from a fire placed beneath them. In order to render this heating local, a flat screen is placed dissymmetrically across the top to prevent



the passage of air through the portion of the iron tubes so screened. The air is supplied to the furnace by passing down from above through the

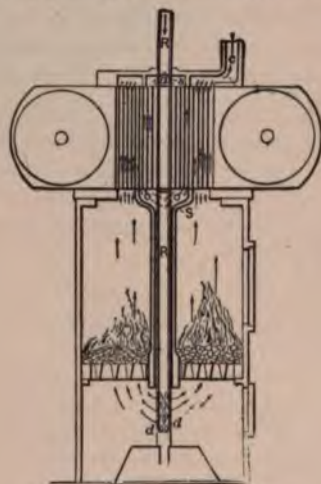


Fig. 400. Pyromagnetic Motor.

tubes so screened. This is shown in the drawings, the direction of the heating and the cooling air currents being indicated by the arrows. The



Fig. 401. Pyromagnetic Motor.

supply of air from above thus insures the more rapid cooling of the screened portion of the tubes.

**Motor, Rotating-Current** — — An electric motor designed for use with a rotating electric current.

Unlike alternating current motors, rotary-current motors will, like continuous-current motors, readily start with a load. (See *Current, Rotating*.)

**Motor, Series-Wound** — — An electric motor in which the field and armature are connected in series with the external circuit as in a series dynamo. (See *Machine, Dynamo-Electric, Series-Wound*.)

**Motor, Shunt-Wound** — — An electric motor in which the field magnet coils are placed in a shunt to the armature circuit. (See *Machine, Dynamo-Electric, Shunt-Wound*.)

**Motor Standards.** — (See *Standards, Motor*.)

**Moulded Mica.** — (See *Mica, Moulded*.)

**Moulding, Electric Wood** — — Moulding of dried, non-conducting wood, provided with longitudinal grooves for the reception and support of electric wires or conductors.

Wood mouldings are employed for the protection and concealment of electric conductors.

**Moulding Wiring.** — (See *Wiring, Moulding*.)

**Mouse-Mill Dynamo.** — (See *Dynamo, Mouse-Mill*.)

**Mouse-Mill Machine.** — (See *Machine, Mouse-Mill*.)

**Mouth Pieces.** — (See *Pieces, Mouth*.)

**Movable Secondary.** — (See *Secondary, Movable*.)

**Mover, Prime** — — In a system of distribution of power the motor by which secondary motors or movers are driven.

In a steam plant, the steam engine is the prime mover; the shafts or machines driven by the main shaft are sometimes called the secondary movers. The main shaft is called the driving shaft. Its motion is carried by means of belts to other shafts, called driven shafts. The pulleys on the driving or driven shafts are called respectively the driving and driven pulleys.

**Movers, Secondary** — — The shafts or machines driven by the main shafts in order to distinguish them from the steam engine or other mover which drives it. (See *Mover, Prime*.)

**Multi-Cellular Electrostatic Voltmeter.**—*Voltmeter, Multi-Cellular Electro-*

**Three-Phase Current.**—(See *Current, Multi-*  
(.))

**Three-Phase Dynamo.**—(See *Dynamo, Three-Phase*.)

**Three-Phase System.**—(See *System, Multi-*

**Three-Phase Arc Circuit.**—(See *Circuit, Three-Phase Arc*.)

**Three-Phase Arc-Connected Electro-Receptive Devices.**—(See *Devices, Electro-Receptive, Three-Phase Arc-Connected*.)

**Three-Phase Arc-Connected Sources.**—(See *Sources, Three-Phase Arc-Connected*.)

**Three-Phase Arc-Connected Translating Devices.**—(See *Devices, Translating, Three-Phase Arc-Connected*.)

**Three-Phase Brush Rocker.**—(See *Rocker, Three-Phase Brush*.)

**Three-Phase Brush Yoke.**—(See *Yoke, Multi-Phase Brush*.)

**Three-Phase Cable Core.**—(See *Cable, Multi-Phase*.)

**Three-Phase Circuit.**—(See *Circuit, Multi-Phase*.)

**Three-Phase Conduit.**—(See *Conduit, Multi-Phase*.)

**Three-Phase Connected Battery.**—(See *Battery, Three-Phase Connected*.)

**Three-Phase Connected Electro-Receptive Devices.**—(See *Devices, Electro-Receptive, Three-Phase Connected*.)

**Three-Phase Connected Electro-Receptive Devices, Automatic Cut-Out for** — — (See *Cut-Out, Automatic, for Multi-Phase Connected Electro-Receptive Devices*.)

**Three-Phase Connected Translating Devices.**—(See *Devices, Translating, Multi-Phase Connected*.)

**Three-Phase Connection.**—(See *Connection, Three-Phase*.)

**Multiple Distribution of Electricity by Constant Potential Circuits.**—(See *Electricity, Multiple Distribution of, by Constant Potential Circuits*.)

**Multiple Electric-Gaslighting.**—(See *Gaslighting, Multiple Electric*.)

**Multiple-Series.**—A multiple connection of series groups. (See *Connection, Series Multiple*.)

Usage in regard to this term is divided. By some the term multiple-series is applied to a series connection of parallel groups. This is done on account of the order of the words, multiple-series indicating, it is claimed, a series connection of multiple groups.

**Multiple-Series Circuit.**—(See *Circuit, Multiple-Series*.)

**Multiple-Series-Connected Electro-Receptive Devices.**—(See *Devices, Electro-Receptive, Multiple-Series-Connected*.)

**Multiple-Series-Connected Sources.**—(See *Sources, Multiple-Series-Connected*.)

**Multiple-Series-Connected Translating Devices.**—(See *Devices, Translating, Multiple-Series-Connected*.)

**Multiple-Series Connection.**—(See *Connection, Multiple-Series*.)

**Multiple-Switch Board.**—(See *Board, Multiple-Switch*.)

**Multiple Transformer.**—(See *Transformer, Multiple*.)

**Multiple Transmission.**—(See *Transmission, Multiple*.)

**Multiple Working of Dynamo-Electric Machines.**—(See *Working, Multiple, of Dynamo-Electric Machines*.)

**Multiplex Telegraphy.**—(See *Telegraphy, Multiplex*.)

**Multiplicator.**—A word sometimes used for multiplier.

**Multiplier, Galvanic** — — A term formerly applied to a galvanometer. (See *Galvanometer*.)

**Multiplier, Schweigger's** — — The name first given to a coil consisting of a



number of turns of insulated wire, provided for the purpose of increasing the strength of the magnetic field produced by an electric current, and consequently the amount of its deflecting power on a magnetic needle.

Schweigger's multiplier was in fact an early form of galvanometer. (See *Galvanometer*.)

**Multiplying Power of Shunt.**—(See *Shunt, Multiplying Power of*.)

**Multipolar Armature.**—(See *Armature, Multipolar*.)

**Multipolar Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Multipolar*.)

**Multipolar-Electric Bath.**—(See *Bath, Multipolar Electric*.)

**Muscle Current.**—(See *Current, Muscle*.)

**Muscles, Electrical Excitation of** — — (See *Excitation, Electro-Muscular*.)

**Muscular, Electro** — — Pertaining to the influence of electricity on the muscles.

**Muscular or Nerve Fibre, Excitability of** — — (See *Excitability, Electric, of Nerve or Muscular Fibre*.)

**Muscular Pile, Matteucci's** — — (See *Pile, Muscular, Matteucci's*.)

**Musket, Electric** — — A gun in which the charge is ignited by a platinum wire rendered incandescent by the action of a battery placed in the stock of the gun.

**Mutual Inductance.**—(See *Inductance*.)

**Mutual Induction.**—(See *Induction, Mutual*.)

**Mutual Induction, Co-efficient of** — — (See *Induction, Mutual, Co-efficient of*.)

**Myria** (as a prefix).—A million times.

## N

**N.**—A contraction employed in mathematical writings for the whole number of lines of magnetic force in any magnetic circuit.

**N.**—A contraction for North Pole.

This N, may be distinguished from the N, used for expressing the whole number of lines of magnetic force, by making the former light and the latter heavy.

**N. H. P.**—A contraction for Nominal Horse-Power.

Nominal horse-power is a somewhat indefinite term for a quantity dependent on the length of stroke and the dimensions of the cylinder. This quantity is a dependent one, because it varies necessarily with the type of engine.

**Nascent State.**—(See *State, Nascent*.)

**Natural Currents.**—(See *Currents, Natural*.)

**Natural Law.**—(See *Law, Natural*.)

**Natural Magnet.**—(See *Magnet, Natural*.)

**Natural Unit of Electricity.**—(See *Electricity, Natural Unit of*.)

**Natural Unit of Quantity of Electricity.**—(See *Electricity, Unit Quantity of, Natural*.)

**Nautical Mile.**—(See *Mile, Nautical*.)

**Needle Annunciator.**—(See *Annunciator, Needle*.)

**Needle, Astatic** — — A compound magnetic needle of great sensibility, possessing little or no directive power.

An astatic needle consisting of two separate magnetic needles, rigidly connected together and placed parallel and directly over each other, with opposite poles opposed.

An astatic needle is shown in Fig. 402. The two magnets N S, and S' N', are directly opposed in their polarities, and are rigidly connected together by means of the axis a, a. So disposed, the two magnets act as a very weak single needle when placed in a magnetic field.

Were the two magnets N S, and S' N', of exactly equal strength, with their poles placed in exactly the same vertical plane, they would completely neutralize each other, and the needle

would have no directive tendency. Such a system would form an *Astatic Pair* or *Couple*.

In practice it is impossible to do this, so that the




Fig. 402. Astatic Needle.

needle has a directive tendency, which is often east and west.

The cause of the east and west directive tendency of an unequally balanced astatic system will be understood from an inspection of Fig. 403. Unless the two needles, N S, and S' N', are exactly opposed, they will form a single short magnet, N N N N, S S S S, the poles of which are on the sides of the needle. The system pointing with its sides due north and south will appear to have an east and west direction.




Fig. 403. Astatic Pair.

The principal use of the astatic needle is in the *astatic galvanometer*, in which the needle is deflected by the passage of an electric current through a conductor placed near the needle. Therefore it is evident that one of the needles must be outside and the other inside the coil. In the most sensitive form of galvanometer there is also a coil surrounding the upper needle, the two coils being oppositely connected, so that the deflection on both needles is in the same direction, and the deflecting power is equal to the sum of the two coils, while the directive power of the needles is the difference of their magnetic intensities.




Fig. 404. Astatic System.

In the astatic system, as shown in Fig. 404, the current, which flows above one needle, flows below the other, and therefore deflects both needles

in the same direction, since their poles point in opposite directions.

In some galvanometers a varying degree of sensitiveness is obtained by means of a magnet, called a *compensating magnet*, placed on an axis above the magnetic needle. As the compensating magnet is moved towards or away from the needle the effect of the earth's field is varied, and with it the sensitiveness of the galvanometer. Such a magnet may form with the needle an astatic system. (See *Magnet, Compensating Galvanometer, Astatic Galvanometer, Mirror Multiplier, Schweigger's*).

**Needle Electrode.**—(See *Electrode, Needle*.)

**Needle, Elongation of** — — A phrase sometimes used for the angular deflection of a needle.

**Needle, Magnetic** — — A straight bar-shaped needle of magnetized steel, poised near or above its centre of gravity, and free to move either in a horizontal plane only, or in a vertical plane only, or in both.

A magnetic needle free to move in a vertical plane only is called a dipping needle. A magnetic needle free to move in a horizontal plane only, as shown in Fig. 405, is the form employed

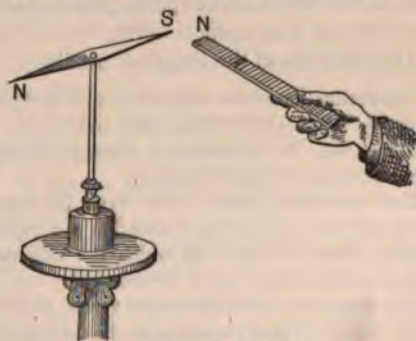


Fig. 405. Magnetic Needle.

in the mariner's compass. This form of magnetic needle is the one most commonly employed.

For use as a mariner's compass the needle is supported on gimbals and placed in a box provided with a card on which are marked the points of the compass. (See *Compass, Azimuth, Compass, Points of*.)

**Needle, Magnetic, Annual Variations of** — — Variations in the value of the mag-



netic declination that take place at regular periods of the year.

The annual variations of the magnetic field were discovered by Cassini in 1786.

**Needle, Magnetic, Daily Variation of** — — Variations in the value of the magnetic declination that take place at different periods of the day.

It was noticed, for example, in London that the north pole of the magnetic needle begins to move westward between 7 and 8 A. M. and continues this movement until 1 P. M., when it begins to move towards the east until near 10 P. M., when it again begins its westward course.

**Needle, Magnetic, Damped** — — A magnetic needle so placed as to quickly come to rest after it has been set in motion. (See *Damping*.)

Magnetic damping is readily effected by causing the needle to move near a metallic plate. On the motion of the needle the currents set up in the plate by dynamo-electric induction tend, according to Lenz's law, to oppose the motions producing them. (See *Induction, Electro-Dynamic. Laws, Lenz's*.)

**Needle, Magnetic, Declination of** — — The angular deviation of the magnetic needle from the true geographical north.

The variation of the magnetic needle.

The declination of the magnetic needle is either E. or W. (See *Declination, Angle of*.)

Declination, or variation, is different at different parts of the earth's surface.

Lines connecting places which have the same value and direction for the declination are called isogonal lines. A chart on which the isogonal lines are marked is called a variation chart.

The value of the declination varies at different times. These variations of the declination are:

(1.) *Secular*, or those occurring during great intervals of time. Thus, in London, in 1580 the magnetic needle had a variation of about 11 degrees east. This eastern declination decreased in 1622 to 6 degrees E., and in 1680 the needle pointed to the true north. In 1692 the declination was 6 degrees W.; in 1730, 13 degrees W.; in 1765, 20 degrees W.; and in 1818 the needle reached its greatest western declination and is

now moving eastwards. The declination, however, is still west.

(2.) *Annual*, the needle varying slightly in its declination during different seasons of the year.

(3.) *Diurnal*, the needle varying slightly in its declination during different hours of the day.

(4.) *Irregular*, or those which occur during the prevalence of a magnetic storm.

It has been discovered that the occurrence of a magnetic storm is simultaneous with the occurrence of an unusual number of sun spots. (See *Spots, Sun*.)

**Needle, Magnetic, Deflection of** — — The movement of a needle out of a position of rest in the earth's magnetic field or in the field of another magnet, by the action of an electric current or another magnet.

The deflection of the needle is sometimes called its elongation. This latter term is, however, but little used, and is unnecessary.

**Needle, Magnetic, Dipping** — — A magnetic needle suspended so as to be free to move in a vertical plane, employed to determine the angle of dip or the magnetic inclination. (See *Dip, Magnetic. Inclination, Magnetic. Inclinator. Chart, Inclination*.)

A dipping needle is shown in Fig. 406. The

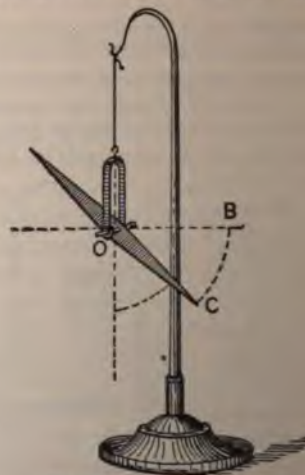


Fig. 406. Dipping Needle.

angle B O C, which marks the deviation of the needle from the horizontal position, is called the angle of dip.

**Needle, Magnetic, Directive Tendency of**

—The tendency of a magnetic needle to come to rest in the direction of the earth's magnetic field.

The directive power of the magnetic needle is due to the attraction of the earth's magnetic poles on the poles of the needle, or to the action of the earth's magnetic field. Since the force of the earth's magnetism forms a couple, there is no tendency for the needle to move bodily forward or backward, either of the earth's poles. Its tendency is solely to rotate until it comes to rest within the plane of the earth's magnetic field, entering at the south pole, passing through its mass and coming out at its north pole.

Of course this would be true in the case of a freely suspended magnet only when it is at a great distance from the needle. Otherwise, there would be a deviation towards the poles as well as rotation.

**Needle, Magnetic, Inclination or Dip of**

—The deviation of a mechanically balanced magnetic needle from a horizontal position.

The direction of a magnetic needle in all parts of the earth, except at the magnetic equator, is inclined from a level or horizontal position. One end inclines or dips towards the ground. (*See Dip, Magnetic. Needle, Magnetic, Dipping.*)

**Needle, Magnetic, Orientation of**

—The coming to rest of a magnetic needle in the plane of the earth's magnetic field.

**Needle, Magnetic, Variation of**

—The angular deviation of a magnetic needle from the true geographic north.

The declination of the magnetic needle. (*See Declination.*)

**Needle of Oscillation.**

—A small magnetic needle employed for measuring the intensity of the earth's magnetic field by counting the number of oscillations the needle makes in a given time, when it is disturbed from its position of rest in the magnetic field. (*See Magnetization, Intensity of. Isodynamic.*)

The use of a magnetic needle in determining the magnetic intensity of any place is analogous to the use of the pendulum in determining the intensity of gravity at any place.

For example, that at a certain place the needle made 245 oscillations in ten minutes, and at another place it made 211 in the same time. Then the relative intensities at these two places would be as the square of these two numbers, or as 1 : 1.3482.

**Needle, Telegraphic** — —A needle employed in telegraphy to represent by its movements to the left or right respectively the dots and dashes of the Morse alphabet. (*See Telegraphy, Needle System of.*)

**Needle, Throw of** — —A phrase sometimes used for the angular deflection of a needle, particularly when the needle is swinging.

The displacement of the magnetic needle is called the deflection, the elongation, or the throw. The first will appear to be the preferable term when the needle comes to rest in a displaced position.

**Negative Charge.**—(*See Charge, Negative.*)

**Negative Direction of Electrical Convection of Heat.**—(*See Direction, Negative, of Electrical Convection of Heat.*)

**Negative Direction of Simple-Harmonic Motion.**—(*See Motion, Simple-Harmonic, Negative Direction of.*)

**Negative Electricity.**—(*See Electricity, Negative.*)

**Negative Electrode.**—(*See Electrode, Negative.*)

**Negative Element of a Voltaic Cell.**—(*See Element, Negative, of a Voltaic Cell.*)

**Negative Feeders.**—(*See Feeders, Negative.*)

**Negative Omnibus Bars.**—(*See Bars, Negative Omnibus.*)

**Negative Phase of Electrotonus.**—(*See Electrotonus, Negative Phase of.*)

**Negative Plate of Storage Battery.**—(*See Plate, Negative, of Storage Cell.*)

**Negative Plate of Voltaic Cell.**—(*See Plate, Negative, of Voltaic Cell.*)

**Negative Pole.**—(*See Pole, Negative.*)

**Negative Potential.**—(*See Potential, Negative.*)

**Negative Side of Circuit.**—(*See Circuit, Negative Side of.*)



**Negative Wire.**—(See *Wire, Negative*.)

**Negatively.**—In a negative manner.

**Negatively Excited.**—Charged with negative electricity. (See *Electricity, Negative*.)

**Nerve or Muscular Fibre, Excitability of** — (See *Excitability, Electric, of Nerve or Muscular Fibre*.)

**Nerves, Action of Electricity on** — — Stimulating and other actions produced in nerves by the passage of electricity through them, dependent on the direction and character of the current. (See *Electrotonus, Galvanization, Faradization, Galvano-Faradization*.)

**Net, Faraday's** — — An insulated net of cotton gauze, or other similar material, capable of being turned inside out without being thereby discharged, employed for demonstrating that in a charged, insulated conductor the entire charge is accumulated on the outer surface of the conductor.



Fig. 407. Faraday's Net.

Faraday's net, as shown in Fig. 407, consists of a bag N, of cotton gauze, or mosquito netting, supported on an insulating stand L. When tested by a proof plane, no free electric charge is found on the inside, though such a charge is readily detected by the same means on the outside. By the aid of the silk strings S, S', the bag can be turned inside out, when the charge will then all be found on the then inside, or the now outside.

Faraday was in the habit of protecting his delicate electroscopes against outside electrification by covering them with gauze. To properly act as an electric screen, the gauze should be connected with the earth.

Faraday constructed a small insulated room,

twelve feet in height, breadth and depth, covered on the inside with tin-foil, and, on charging this room from the outside, he was unable to detect the presence of any charge on the inside, even by the aid of his most delicate instruments. This room is often referred to as Faraday's Cube.

**Nets, Torpedo** — — Steel wire netting suspended from or attached to a ship's side for the purpose of ensuring protection against moving torpedoes.

**Network of Currents.**—(See *Currents, Network of, Laws, Kirchhoff's*.)

**Neutral Armature.**—(See *Armature, Neutral*.)

**Neutral Feeder.**—The feeder that is connected with the neutral or intermediate terminal of the dynamos in a three-wire system of distribution. (See *Feeders*.)

**Neutral Line of Commutator Cylinder.**—(See *Line, Neutral, of Commutator Cylinder*.)

**Neutral-Omnibus Bars.**—(See *Bars, Neutral-Omnibus*.)

**Neutral Point.**—(See *Point, Neutral*.)

**Neutral Points of a Dynamo-Electric Machine.**—(See *Points, Neutral, of Dynamo-Electric Machine*.)

**Neutral Points of Magnet.**—(See *Points, Neutral, of Magnet*.)

**Neutral Points of Thermo-Electric Diagram.**—(See *Points, Neutral, of Thermo-Electric Diagram*.)

**Neutral-Relay Armature.**—(See *Armature, Neutral-Relay*.)

**Neutral Section of Magnet.**—(See *Section, Neutral, of Magnet*.)

**Neutral Wire.**—(See *Wire, Neutral*.)

**Neutral Wire Ampère-Meter.**—(See *Ampère-Meter, Balance or Neutral Wire*.)

**New Ohm.**—(See *Ohm, New*.)

**Nickel Bath.**—(See *Bath, Nickel*.)

**Nickeling, Electro** — — Electroplating with nickel. (See *Plating, Electro*.)

**Nickel-Plating.**—(See *Plating, Nickel*.)

**Night Bell.**—(See *Bell, Night*.)

**Nodal Point.**—(See *Point, Nodal*.)

**Nodes, Electrical** — — Points in an open circuited conductor, through which electrical oscillations are passing, which possess a constant mean value of potential, while the potential at its ends alternates between two fixed limits.

Points on a conductor where the strength of the induced oscillatory current is equal to zero.

The nodal points on a conductor through which electrical oscillations are passing therefore correspond closely to the nodes on a vibrating wire or cord.

Dr. Hertz employed the following apparatus in order to show the position of two nodes in a conductor: An induction coil, A, had its secondary terminals connected as shown in Fig. 408,




Fig. 408. Nodes in Conductor.

to two metallic spheres, C and C'. The spark micrometer circuit, a c d b, was placed near it, as shown, and the sparking distance of the secondary circuit of the induction coil adjusted, so that the spark micrometer circuit was in unison with it. When sparks were passed between the terminals of the induction coil A, sparks passed between the terminals 1 and 2, at M, under the influence of resonant action.

If, now, a second micrometer circuit, e g h f, exactly similar to a c d b, was added, as shown in the figure, and the two joined near the terminals 1 2 3 4, by conducting wires, as shown, the entire system of the micrometer circuit formed a closed metallic circuit, the fundamental vibration of which would have two nodes, one at the middle point of c d, and the other at g h. The internodes would be at the junctions 1 3, and 2 4, and under these circumstances a true resonant action existed between the secondary circuit and the micrometer circuit, as was shown by the fact that any alteration in the circuit e g h f, whether by

increasing or decreasing its length, diminished the sparking distance. Since the conductor connecting points 2, and 4, was in the position of the node, where the strength of the excited oscillatory current was zero, its removal from between these points should have no influence on the intensity of the vibration. This was found on trial to be the case. Electrical vibrations may therefore be excited by electrical resonance in conductors corresponding not only to the simple fundamental note or vibration, but also to the higher electrical overtones.

The apparatus shown in Fig. 409, from Tesla, illustrates the phenomena of alternative path, as well as electric nodes. The terminals of an induction coil are connected, as shown, to a condenser and to a thick copper conductor. Though the two incandescent lamps are placed as shown, yet they are raised to luminosity by a species of brush discharge that passes through them, although they would be short circuited to any current but an oscillatory discharge.



Fig. 409. Nodes in a Conductor.

**Nodular Deposit, Electro-Metallurgical**

— (See *Deposit, Electro-Metallurgical Nodular*.)

**Noisy Arc.**—(See *Arc, Noisy*.)



**Nominal Candle-Power.**—(See *Power, Candle, Nominal*.)

**Non-Automatic Variable Resistance.**—(See *Resistance, Variable, Non-Automatic*.)

**Non-Conductors.**—Substances that offer so great resistance to the passage of an electric current through their mass as to practically exclude a discharge passing through them.

Non conductors are called insulators, because they electrically insulate substances placed on or surrounded by them.

The terms non-conductors or insulators are ordinarily used in a relative sense to mean bodies which allow no practical or appreciable current to pass through them, since there are no substances known, apart, perhaps, from the universal ether, that absolutely prevent the flow of an electric current, the difference of potential of which is sufficiently great.

The entire absence of ordinary matter, as in the case of a high vacuum, appears to render a high vacuum very nearly, if not entirely, an absolute insulator.

**Non-Electrics.**—A term formerly applied to substances like metals or other conductors which appeared not to become electrified by friction.

The term non-electric, was used in contradistinction to electrics, or substances readily electrified by friction. The distinction no longer holds, since non-electrics, if insulated, are readily electrified by friction.

**Non-Homogeneous Current-Distribution.**—(See *Current, Non-Homogeneous, Distribution of*.)

**Non-Illumined Electrode.**—(See *Electrode, Non-Illumined*.)

**Non-Inductive Resistance.**—(See *Resistance, Non-Inductive*.)

**Non-Oscillatory Discharge.**—(See *Discharge, Non-Oscillatory*.)

**Non-Polarized Armature.**—(See *Armature, Non-Polarized*.)

**Non-Polarizable Electrodes.**—(See *Electrodes, Non-Polarizable*.)

**Non-Wasting Electrode.**—(See *Electrode, Non-Wasting*.)

**Normal Day, Magnetic** — — (See *Day, Normal Magnetic*.)

**Northern Light.**—The Aurora Borealis (See *Aurora Borealis*.)

**Notation, Algebraic** — — A system of arbitrary symbols employed in algebra.

The following brief description of the notation employed in algebra is for the use of the non-mathematical reader.

*Quantities* are represented in algebra by letters, such as a, and b, x, and y, etc.

*Addition* is represented thus:  $a + b$ .

*Subtraction* is represented thus:  $a - b$ .

*Multiplication* is represented thus:  $a \times b$ , or simply by writing the letters next to each other ab.

*Division* is represented thus:  $a \div b$ , or  $\frac{a}{b}$ .

*An Exponent*, or figure placed to the right of a letter, above it as  $a^3$ , indicates that the quantity represented by a, is to be multiplied by itself three times, as  $a \times a \times a$ , or  $a a a$ .

*A Co-efficient*, or figure placed to the left of a quantity, indicates the number of times that quantity is to be taken; thus, 3 a, indicates that a is to be added three times, thus:  $a + a + a$ , or  $3 \times a$ .

*A Radical Sign or Root*, thus  $\sqrt{a}$ , or  $^2\sqrt{a}$ , indicates that the square root of the quantity a, is to be taken. In the same manner  $^3\sqrt{a}$ , indicates that the cube root of a is to be taken.

These expressions are sometimes written  $a^{\frac{1}{2}}$ , or  $a^{\frac{1}{3}}$ .

*Equality* is indicated thus:  $a^3 = a \times a \times a$ , or  $a^{\frac{1}{2}} = \sqrt{a}$ .

A negative exponent  $a^{-2}$  indicates  $\frac{1}{a^2}$ , or is the exponent of the reciprocal of the quantity indicated.

**Null or Zero Method.**—(See *Method, Null or Zero*.)

**Null Point.**—(See *Point, Null*.)

**Number, Diaeritical** — — Such a number of ampère-turns at which a given core would receive a magnetization equal to half saturation.

## O

**Ω.**—A contraction for megohm. (See *Ohm, Meg.*)

**ω.**—A contraction for ohm. (See *Ohm.*)

**Obscure Heat.**—(See *Heat, Obscure.*)

**Observation Mine.**—(See *Mine, Observation.*)

**Observatory, Magnetic** — —An observatory in which observations of the variations in the direction and intensity of the earth's magnetic field are made.

Magnetic observatories are generally furnished with self-registering magnetic apparatus, such as *magnetographs, magnetometers, inclinometers.* (See *Magnetometer, Magnetograph, Inclinometer.*)

Magnetic observatories are generally constructed entirely of non-magnetic materials; that is, of such materials as are destitute of *paramagnetic properties.*

**Obtuse Angle.**—(See *Angle, Obtuse.*)

**Occlusion of Gas.**—(See *Gas, Occlusion of.*)

**Odorscope.**—An apparatus in which the determination of an odor was attempted by the measurement of the effect the odorous vapor, or effluvia, produced on a variable contact resistance.

The *microtasmeter* was used in connection with the odorscope. (See *Diagometer, Roussau's. Microtasmeter.*)

**Oerstedt, An** — —A proposed term for the unit of electric current, in place of an ampère.

The term has not been adopted.

**Ohm.**—The unit of electric resistance.

Such a resistance as would limit the flow of electricity under an electromotive force of one volt to a current of one ampère, or to one coulomb per second. (See *Unit, B.A. Ohm, Legal. Ohm, Standard.*)

A value equal to  $10^9$  absolute electro-magnetic units.

A value which is represented by a velocity of  $10^9$ , or 1,000,000,000 centimetres per second.

It may be difficult at first to see how resistance can be correctly represented by a velocity. The following consideration may render this clear: The formula for calculating the velocity is

$V = \frac{D}{T}$ , or the velocity equals the distance passed through in unit time. Now, by examining the formula for the value of the resistance, expressed in terms of the electro-magnetic units (see *Units, Electro-Magnetic, Dimensions of*), it may be seen to be that resistance =

$$\frac{\text{Electromotive force}}{\text{Current}} = \frac{L}{T}$$

But this value is of the nature of a velocity, being equal to the length, divided by the time. Resistance, therefore, has the dimensions of a velocity.

This is clearly expressed by Silvanus P. Thompson in his "Elementary Lessons in Electricity and Magnetism," as follows, viz.: "Suppose we have a circuit composed of two horizontal coils, C S, and D T (Fig. 410), 1 centimetre apart, joined at C D, and completed by means of a sliding piece, A B. Let this variable circuit be placed in a uniform magnetic field of unit intensity, the lines of force being directed vertically downwards through the circuit.

"If, now, the slider be moved along towards S T, with a velocity of  $n$ , centimetres per second, the number of additional lines of force embraced by the circuit will increase at the rate of  $n$ , per second; or, in other words, there will be an in-




Fig. 410. Resistance as a Velocity.

duced electromotive force impressed upon the circuit, which will cause a current to flow through the slider from A to B. Let the rails have no resistance, then the strength of the current will depend on the resistance of A B. Now, let A B, move at such a rate that the current shall be of unit strength. If its resistance be one absolute (electro-magnetic) unit, it need only move at the rate of 1 centimetre per second. If its resistance be greater, it must move with a proportionately



greater velocity; the velocity at which it must move to keep up a current of unit strength being numerically equal to its resistance. The resistance known as "*1 ohm*" is intended to be  $10^9$  absolute electro-magnetic units, and, therefore, is represented by a velocity of  $10^9$  centimetres, or 10,000,000 metres (1 earth-quadrant) per second."

**Ohm, B. A.** — A contraction for British Association ohm.

**Ohm, Board of Trade** — A unit of resistance as determined by a committee of the English Board of Trade.

A committee consisting of Sir W. Thomson, Lord Rayleigh, Dr. J. Hopkinson and other authorities appointed by the Board of Trade (England) has recently recommended that the ohm be taken as the resistance of a column of mercury 106.3 centimetres in length and one square millimetre area of cross-section at 0 degrees C. and since this value agrees with the best experimental results, it will probably be generally and finally adopted.

**Ohm, British Association** — The British Association unit of resistance, adopted prior to 1884.

The value of the unit of electric resistance, or the ohm, was determined by a Committee of the British Association as being equal to the resistance at 0 degree C. of a column of mercury 1 square millimetre in area of cross-section and 104.9 centimetres in length. This length was taken as coming nearest the value of the true ohm deduced experimentally from certain theoretical considerations. Subsequent re-determinations showed the value so obtained to be erroneous.

The value of the ohm is now taken internationally, as adopted by the International Electric Congress in 1884, as the resistance of a column of mercury 106 centimetres in length, and 1 square millimetre in area of cross-section. This last value is called the *legal ohm*, to distinguish it from the B. A. ohm, which, as above stated, is equal to a mercury column 104.9 centimetres in length. Usage now sanctions the use of the word *ohm* to mean the legal ohm.

This value of the legal ohm is provisional until the exact length of the mercury column can be finally determined. (See *Ohm, Board of Trade*.)

The following are the relative values of these units, viz.:

1 legal ohm.....	= 1.0112 B. A. ohm.
" " .....	= 1.0600 Siemens unit.
1 B. A. ohm.....	= .9889 legal ohm.
1 " " .....	= 1.0483 Siemens unit.
1 Siemens unit.....	= .9540 B. A. ohm.
" " .....	= .9434 legal ohm.

**Ohm, Legal** — The resistance of a column of mercury 1 square millimetre in area of cross-section, and 106 centimetres in length, at the temperature of 0 degree C. or 32 degrees F. (See *Unit, B. A.*)

1 ohm = 1.00112 B. A. units. This value of the ohm was adopted by the International Electric Congress, in 1884, as a value that should be accepted internationally as the true value of the ohm. This value, however, was provisional, and was never actually legalized. It will probably be replaced by the new (106.3 cm.) ohm. (See *Ohm, Board of Trade*.)

**Ohm, Meg** — One million ohms.

**Ohm, New** — A term sometimes used for the Board of Trade ohm. (See *Ohm, Board of Trade*.)

**Ohm, Standard** — A length of wire having a resistance of the value of the true or legal ohm, employed in standardizing resistance coils.

The standard ohm, as issued by the Electric Standards Committee of England, has the form



Fig. 411. Standard Ohm.

shown in Fig. 411. The coil of wire is formed of an alloy of platinum and silver, insulated by silk covering and melted paraffine. Its ends are soldered to thick copper rods *r, r'*, for ready connection with mercury cups. The coil is at *B*. The space above it at *A*, is filled with paraffine, except at the opening *t*, which is provided for the insertion of a thermometer.

**Ohm, True** — An ohm having the true theoretical value of the ohm. (See *Ohm*.)

**Ohmage**.—The value of the resistance of a circuit expressed in ohms.

**Ohmic Resistance**.—(See *Resistance, Ohmic or True*.)

**Ohmmeter**.—A commercial galvanometer, devised by Ayrton, for directly measuring by the deflection of a magnetic needle, the resistance of any part of a circuit through which a strong current of electricity is flowing.

Ayrton's ohmmeter is represented diagrammatically in Fig. 412. Two coils C C, and c c,

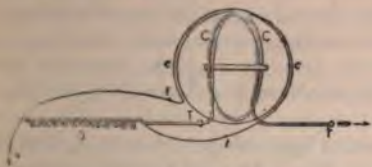


Fig. 412. Ayrton's Ohmmeter.

consisting of a short thick wire, and a long thin wire, respectively, are placed at right angles to each other, and act on a soft iron needle situated as shown. The short, thick wire coil C C, is connected in series with the resistance O, to be measured. The long, fine wire coil, of known high resistance, is placed as a shunt to the unknown resistance.

Under these circumstances, it can be shown that the action on the needle is that due to the ratio of the difference of potential at the terminals of the unknown resistance and the current strength in the thick wire coil, or  $R = \frac{E}{C}$ , as may be deduced from Ohm's law.

The coils are so proportioned that the current when flowing through the short thick wire moves the needle to the zero of the scale, while the long thin wire produces a deflection directly proportional to the resistance.

**Ohm's Law**.—(See *Law of Ohm*.)

**Oil, Colza** — An oil obtained from the seed of the *Brassica oleracea*, a species of cabbage.

Colza oil is extensively used for purposes of illumination and in the carcel standard lamp. (See *Lamp, Carcel*.)

**Oil Cup**.—A cup containing oil for lubricating machinery.

**Oil Insulator**.—(See *Insulator, Oil*.)

**Oil Transformer**.—(See *Transformer, Oil*.)

**Oiler, Automatic** — An oil cup or reservoir that automatically spreads oil over the bearings of machinery in motion.

**Okonite**.—A variety of insulating material.

**Omnibus Bars**.—(See *Bars, Omnibus*.)

**Omnibus Wires**.—(See *Wires, Omnibus*.)

**Opacity, Selective** — Opaque in a certain direction or directions only.

Certain substances are opaque to polarized light in certain planes only. Thus, a plate of tourmaline permits light polarized in a certain plane freely to pass through it, but is entirely opaque in a plane at right angles thereto.

S. P. Thompson and Lodge have shown that such crystals of tourmaline possess curious properties in regard to the conduction of heat. While warming, the crystal conducts heat better in a certain direction than in the opposite direction. While cooling, exactly the opposite effects are observed. In the same manner, while the crystal is rising in temperature, there is an accumulation of positive electricity at one end, and negative at the other. While the crystal is cooling, the reverse is true.

**Open-Box Conduit**.—(See *Conduit, Open-Box*.)

**Open Circuit**.—(See *Circuit, Open*.)

**Open-Circuit Electric Oscillations**.—(See *Oscillations, Open-Circuit, Electric*.)

**Open-Circuit Induction**.—(See *Induction, Open-Circuit*.)

**Open-Circuit Oscillation, Period of** — The time in which the oscillations set up in a circuit by electrical resonance require to make a complete one to-and-fro motion.

The period of an open-circuit electric oscillation is determined by the product of the co-efficients of self-induction of the conductor, and does not depend on the composition of the terminals. It is practically independent of their resistances.

**Open-Circuit Single-Current Signaling**.—(See *Signaling, Single-Current, Open-Circuit*.)



**Open-Circuit Voltaic Cell.**—(See *Cell, Voltaic, Open-Circuit*.)

**Open-Circuit Voltmeter.**—(See *Voltmeter, Open-Circuit*.)

**Open-Circuited.**—Put on an open circuit.

**Open-Circuited Conductor.**—(See *Conductor, Open-Circuited*.)

**Open-Circuited Thermostat.**—(See *Thermostat, Open-Circuit*.)

**Open-Coil Drum Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Open-Coil Drum*.)

**Open-Coil Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Open-Coil*.)

**Open-Coil Ring Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Open-Coil Ring*.)

**Open-Iron-Circuit Transformer.**—(See *Transformer, Open-Iron-Circuit*.)

**Open-Iron Magnetic Circuit.**—(See *Circuit, Open-Iron Magnetic*.)

**Open Magnetic Core.**—(See *Core, Open Magnetic*.)

**Opening Shock.**—(See *Shock, Opening*.)

**Operation, Magnet** — — The use of a magnet for the purpose of removing particles of iron from the human eye.

**Optical Strain.**—(See *Strain, Optical*.)

**Optical Strain, Electro-Magnetic** — — (See *Strain, Optical Electro-Magnetic*.)

**Optical Strain, Electrostatic** — — (See *Strain, Electrostatic, Optical*.)

**Optics, Electro** — — That branch of electricity which treats of the general relations that exist between light and electricity.

The phenomena of electro-optics may be arranged under the following heads, viz.:

(1.) Electrostatic stress, produced by an electrostatic field causing an optical strain in a transparent medium, whereby such medium acquires the property of either rotating the plane of polarization of a beam of plane polarized light, or of doubly refracting light.

(2.) Electro magnetic stress produced by a

magnetic field causing an optical strain in a transparent medium, whereby such medium acquires the property of either rotating the plane of polarization, or of doubly refracting light. (See *Refraction, Double, Electric*.)

(3.) Changes in the electric resistance of bodies caused by the action of light. (See *Cell, Selenium*.)

(4.) The relation existing between the values of the index of refraction of a transparent medium and its specific inductive capacity. (See *Refraction, Capacity, Specific Inductive*.)

This relation has been shown to be as follows:

The specific inductive capacity is approximately equal to the square of the index of refraction.

(5.) The relation existing between the velocity of light and the value of the ratio of electrostatic and the electro-magnetic units, thus giving a basis for an electro-magnetic theory of light. (See *Light, Maxwell's Electro-Magnetic Theory of*.)

Polarized light reflected from the surface of a magnet, although it penetrates the substance to but a trifling extent, yet has its plane of polarization distinctly rotated by the magnetic whirls in the iron.


**Oral or Speaking-Tube Annunciator.**—(See *Annunciator, Oral or Speaking-Tube*.)

**Ordinate.**—A distance taken on a perpendicular line called the axis of ordinates, in contradistinction to the axis of abscissas. (See *Ordinates, Axis of*.)

Thus in Fig. 413, D 1, is the ordinate of the point D, in the curve O D R.

**Ordinates, Axis of** — — One of the axes of co-ordinates used for determining the position of the points in a curved line.

Thus in Fig. 413 the line A B, is called the axis of ordinates because it is the line on which the ordinate 2 D, is measured.



**Ores, Electric**

**Treatment of** — — Processes for the extraction of metals from their ores.

These processes are referable to three distinct classes, viz.:

(1.) Those in which the reduction is effected by means of heat of electric origin.

(2.) Those in which the reduction is effected by the combined action of heat and electrolysis.

(3.) Those in which the reduction is effected by means of electrolysis only.

**Organ, Electric** — —A wind organ, in which the escape of air into the different pipes is electrically controlled.

In an electric organ, the keys, instead of operating levers, as usual, to admit the passage of air into the pipes, merely complete the circuit of a battery through a series of controlling electro-magnets. With such an arrangement, the keyboard can be placed at any desired distance.

Electric organs have been constructed, in which a chemical or mechanical record is made of the notes struck by the performer, as well as the musical value of such notes. By such a device the musical creations of a composer are permanently recorded in characters that are capable of interpretation by a compositor skilled in musical notation.

**Orientation of Magnetic Needle.**—(See *Needle, Magnetic, Orientation of.*)

**Origin, Point of** — —The point where the axes of co-ordinates start or originate. (See *Co-ordinates, Axes of.*)

**Orthogonal.**—Rectangular, or right-angled.

**Oscillating Discharge.**—(See *Discharge, Oscillating.*)

**Oscillating Needle.**—(See *Needle of Oscillation.*)

**Oscillation, Centre of** — —A point in a body swinging like a pendulum, which is neither accelerated nor retarded, during its oscillations, by the portions of the pendulum that are situated respectively above or below it.

If all the mass were concentrated at the centre of oscillation the time of oscillation would be the same.

The centre of oscillation is always below the centre of gravity. The vertical distance between the centre of oscillation and the point of support of a pendulum, determines the *virtual length* of the pendulum, and hence its number of vibrations per second. (See *Pendulum, Laws of.*)

**Oscillations, Electric** — —The series of partial, intermittent discharges of which the apparent instantaneous discharge of a Leyden jar through a small resistance actually consists.

These partial discharges produce a series of electric oscillations of the current in the circuit of the discharge, which consist of true to-and-fro or backward-and-forward motions of the electricity. This phenomenon was discovered by Joseph Henry.

**Oscillations, Open-Circuit, Electric** — —Electric oscillations produced in open circuits by the presence of electric pulses in neighboring circuits.

**Oscillatory Discharge.**—(See *Discharge, Oscillatory.*)

**Oscillatory Electric Displacement.**—(See *Displacement, Electric, Oscillatory.*)

**Oscillatory Electromotive Force.**—An electromotive force which is rapidly periodic.

**Oscillatory Inductance.**—(See *Inductance, Oscillatory, Electric.*)

**Oscillatory Induction.**—(See *Induction, Oscillatory.*)

**Osmose.**—The unequal mixing of liquids of different densities through the pores of a separating medium.

If a solution of sugar and water be placed in a bladder, the neck of which is tied to a straight glass tube, and the bladder is then immersed in a vessel of pure water with the tube in a vertical position, the two liquids will begin to mix, the sugar and the water passing through the bladder into the pure water, and the pure water passing into the sugar and water in the bladder. This latter current is the stronger of the two, as will be shown by the water *rising* in the vertical glass tube.

The stronger of the two currents, that is, the one directed towards the higher level, or the one which produces the higher level, is called the *endosmotic current*, and the weaker current the *exosmotic current*.

**Osmose, Electric** — —A difference of liquid level between two liquids placed on opposite sides of a diaphragm produced by the passage of a strong electric current.



through the liquids between two electrodes placed therein.

*The higher level is on the side towards which the current flows through the diaphragm, thus apparently indicating an onward motion of the liquid with the current, or, in other words, the liquid is higher around the cathode than around the anode. The difference of level is most marked when poorly conducting liquids are employed.*

As a converse of this, Quincke has shown that electric currents are set up when a liquid is forced by pressure through a porous diaphragm. The term *diaphragm currents* has been proposed for these currents. Their electromotive force depends on the nature of the liquid, on the material of the diaphragm, and on the pressure that forces the liquid through the diaphragm. (See *Phenomena, Electro-Capillary. Currents, Diaphragm.*)

**Osmotic.**—Of or pertaining to osmose. (See *Osmose.*)

**Osteotome, Electric** — —A revolving electrically propelled saw, employed in the surgical cutting of bones.

An electric osteotome consists essentially of a form of revolving engine known as a dental engine, furnished with a circular saw, or other rotary cutter, driven or propelled by electricity.

**Outgoing Current.**—(See *Current, Outgoing.*)

**Outlet.**—In a system of incandescent lamp distribution the places in a building where the fixtures or lamps are attached.

The outlets are left in a building by the wireman for the electric fixtureman to attach the device intended to be used on the circuits so provided.

**Output, Magnetic** — —The product of the magnetic flux by the magneto-motive force.

**Output of Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Output of.*)

**Outrigger for Electric Lamp.**—A device for suspending an electric arc lamp so as to cause it to stand out from the wall of a building.

An outrigger and hood with lamp attached are shown in Fig. 414.

**Outrigger Torpedo.**—(See *Torpedo, Outrigger.*)

**Over-Compounded.**—The compounding of a dynamo-electric machine so as to produce



Fig. 414. Outrigger and Hood.

an increase of voltage under increase of load.

Over-compounding is generally employed for compensating for drop or loss of potential in the line or conductor, and is adjusted to a definite percentage of increase from light to full load in accordance with the amount of drop, or loss, for which such compensation was designed.

**Overhead Lines.**—(See *Lines, Overhead.*)

**Overhead System, Continuous, of Motive Power for Electric Railroads** — —(See *Railroads, Electric, Continuous Overhead System of Motive Power for.*)

**Overload of Electric Motor.**—(See *Motor, Electric, Overload of.*)

**Overtone.**—Additional, faint tones, accompanying nearly every distinct musical tone, by the presence of which the peculiarity or quality of such tone is produced. (See *Sound, Characteristics of.*)

**Overtone, Electric** — —Electric vibrations produced in open-circuited conductors by electric resonance, of higher rates than the fundamental vibrations.

The existence of electrical overtones necessitates the existence of electric nodes. (See *Nodes, Electrical.*)

**Overtone Dynamo.**—(See *Dynamo, Overtone type.*)

**Ozite.**—An insulating substance.

**Ozokerite.**—An insulating substance.

**Ozone.**—A peculiar modification of oxygen which possesses more powerful oxidizing properties than ordinary oxygen.

Ozone is now generally believed to be tri-atomic oxygen, or oxygen in which the bonds are closed, thus:



The peculiar smell observed when a torrent of electric sparks passes between the terminals of a Holtz machine, or a Ruhmkorff coil, is caused by the ozone thus formed.

In a similar manner ozone is formed in the at-

mosphere during the passage through the air of a flash of lightning.

During the so-called electrolysis of water, a compound formed by the union of two volumes of hydrogen with one volume of oxygen, some of the oxygen is given off in the form of ozone. Since ozone has a somewhat smaller volume than that of the oxygen forming it, the volume of the oxygen liberated is somewhat less than half the volume of the hydrogen.

There are a number of different forms of apparatus designed for the production of ozone. They consist essentially either of means for passing a torrent of electric sparks through air or for producing a species of polarization in the air.

## P

**P. D. or p. d.**—A contraction frequently employed for difference of potential. (See *Potential, Difference of*.)

**Pacinotti Projections.**—(See *Projections, Pacinotti*.)

**Pacinotti Ring.**—(See *Ring, Pacinotti*.)

**Pair, Astatic** — —A term sometimes applied to an astatic couple. (See *Couple, Astatic*.)

**Palladium.**—A metal of the platinum group.

Metallic palladium has a tin-white color, and, when polished, a high metallic lustre. It is tenacious and ductile, and, like iron, can be welded at a white heat. It is very refractory and possesses in a marked degree the power of absorbing or occluding hydrogen and other gases. It is not affected by oxygen at any temperature, nor readily affected by ordinary corrosive agents.

**Palladium Alloy.**—(See *Alloy, Palladium*.)

**Pane, Magic** — —A condenser formed of a sheet of glass covered on one side with pieces of tin-foil with small spaces between them pasted in some design on the glass.

On the discharge of a Leyden jar through these metallic pieces, the design is seen as a series of minute sparks, which bridge the spaces between the adjacent pieces of foil.

**Pantelegraphy.**—A system for the telegraphic transmission of charts, diagrams, sketches or written characters.

Pantelegraphy is more frequently called facsimile telegraphy. (See *Telegraphy, Fac-Simile*.)

**Paper Carbons.**—(See *Carbons, Paper*.)

**Paper Cut-Out.**—(See *Cut-Out, Paper*.)

**Paper Perforator.**—(See *Perforator, Paper*.)

**Paper Winder, Automatic** — —A device, driven by clockwork, for automatically delivering the paper fillet on which a telegraphic message is received.

**Parabolic Reflector.**—(See *Reflector, Parabolic*.)

**Paraffine.**—A name given to various solid hydrocarbons of the marsh gas series, that are derived from coal oil or petroleum by the action of nitric acid.

Paraffine possesses excellent powers of insulation, and forms a good dielectric medium. Dried wood, boiled in melted paraffine, forms a fair insulating material.

**Paraffine Wire.**—(See *Wire, Paraffine*.)

**Paraffining.**—Covering or coating with paraffine.

The paraffine is applied, while melted by heat, either by means of a brush, or by dipping the article in the fused mass.



Care must be taken in paraffining wooden or other absorbent articles, to dry them before immersing in the melted paraffine, since, if water be present, steam is formed explosively, and the melted paraffine scattered in all directions.

**Paragrèles.**—Lightning rods, intended to protect fields against the destructive action of hail. (See *Hail, Assumed Electrical Origin of.*)

It was formerly believed that hail is caused by electricity. It is now generally believed that the electricity in hail storms is caused by the hail. It will, therefore, readily be understood that paragrèles can afford no real protection.

**Parallax.**—The apparent angular displacement of an object when seen from two different points of view.

In reading the exact division on a scale to which a needle points, care must be taken to look directly down on the needle, and not sideways, so as to avoid the error of displacement due to *parallax*.

**Parallel Circuit.**—(See *Circuit, Parallel.*)

**Parallel Series.**—(See *Series, Parallel.*)

**Parallelogram of Forces.**—(See *Forces, Parallelogram of.*)

**Parallels, Magnetic** — — Lines connecting places on the earth's surface at right angles to the isogonal lines, or lines of equal declination or variation.

The magnetic parallels are at right angles to the magnetic meridians. The magnetic parallels lie in planes parallel to the magnetic equator. (See *Needle, Magnetic, Declination of. Meridian, Magnetic.*)

**Paramagnetic.**—Possessing properties ordinarily recognized as magnetic.

Possessing the power of concentrating the lines of magnetic force.

Paramagnetic is a term employed in contradistinction to *diamagnetic*. (See *Diamagnetic.*) A paramagnetic substance, cut in the form of a bar whose length is much greater than its breadth and thickness, will, when suspended in a magnetic field in the manner shown in Fig. 415, take up a position of rest with its *greatest length* in the direction of the lines of force, *i. e.*, will point *axially*.

In other words, the lines of force will so pass through the paramagnetic substance as to reduce the *magnetic resistance* of the circuit as much as possible.

Paramagnetic substances, therefore, concentrate the lines of force on them. (See *Resistance, Magnetic.*)

Diamagnetic substances, on the contrary, when placed as shown in Fig. 415, assume a position of rest with their *least dimensions* in the direction of the lines of force, *i. e.*, they point *equatorially*. This is the position in which they are placed by the lines of force, in order to insure the *least magnetic resistance* in the circuit of these lines.

The magnetic resistance of diamagnetic substances is great as compared with that of paramagnetic substances.

The term *ferro-magnetic* has been proposed for paramagnetic. If another term be required, which is doubtful, *sidero-magnetic*, proposed by S. P. Thompson, would appear to be preferable. (See *Magnetic, Ferro. Magnetic, Sidero.*)

Tyndall believes that the magnetic polarity possessed by diamagnetic substances is the result of a distinct polar force, different in its nature from ordinary magnetism. His views, in this respect, are not generally accepted. (See *Polarity, Diamagnetic.*)

**Paramagnetically.**—In a paramagnetic manner. (See *Paramagnetism.*)

**Paramagnetism.**—The magnetism of a paramagnetic substance.

**Parasitical Currents.**—(See *Currents, Parasitical.*)

**Paratonnère.**—A French term for lightning rod, sometimes employed in English technical works.

Lightning rod would appear to be the preferable term.

**Partial Contact.**—(See *Contact, Partial.*)

**Partial Disconnection.**—(See *Disconnection, Partial.*)



Fig. 415. Diamagnetic Polarity

**Partial Earth.**—(See *Earth, Partial*.)

**Partial Reaction of Degeneration.**—(See *Degeneration, Partial Reaction of*.)

**Passive State.**—(See *State, Passive*.)

**Path, Alternative** — —The path or circuit taken by an impulsive discharge, in preference to another path or circuit, open to the discharge, although of enormously smaller ohmic resistance.

The alternative path is the path taken by the discharge produced by what was formerly called lateral induction.

The explanation of the reason the discharge takes the alternative path is that the counter-electromotive force of self-induction of the circuit, produced by the impulsive discharge, is so great as to make the path of the circuit itself, although formed of conducting materials, practically non-conducting.

If a Leyden jar is provided with discharge wires or conductors, as shown is Fig. 416, a discharge




Fig. 416. Phenomena of Alternative Path.

taking place at A, is accompanied simultaneously by an even longer spark at B, between the ends of two long open-circuit leads.

To explain in a general manner the phenomena of the alternative path, we may say that the discharge at A, gives rise to electric oscillations in the leads connected with B, and that there are sent out into the surrounding medium radiations of precisely the same nature as those which produce light, only of a wave length so long as to be unable to produce on the eye the effects of light.

If the space between the bells at B, is too great for the discharge to take place, the wires glow and throw out minute sparks or brushes of light.

The action of the ordinary lightning arrester depends on the principle of the alternative path. The resistance of the metallic circuit, composed of the line and the instruments, is so great in the case of the impulsive discharge of a lightning flash, that the discharge takes place between a series of points connected with the line plate and another series of points connected with the ground plate. (See *Arrester, Lightning*.)

Dr. Lodge, who has studied the principle of alternative path in the case of lightning rods, finds that the distance at which the discharge

would pass across an air space in preference to a metallic circuit, was greater for a thick copper



Fig. 417. Edison Electric Pen.

rod, 40 feet long, than for an iron rod of No. 27 B. W. G. of 33.03 ohmic resistance.

**Patrol Alarm Box.**

—(See *Box, Patrol Alarm*.)

**Peltier Effect.** —

(See *Effect, Peltier*.)

**Pen Carriage.** —

(See *Carriage, Pen*.)

**Pen, Electric** —

—A device for manifold copying, in which a sheet of paper is made into a stencil by minute perforations obtained by a needle driven by a small electric motor and the stencil afterwards employed in connection with an inked roller for the production of any required number of copies.

Mechanical pens are constructed on the same principle, the perforations being obtained by mechanical instead of by electric power.

In the Edison electric pen, Fig. 417, the perforations are made by an electric motor driven by a voltaic battery. The manifold press with its inked pad is shown to the left of the figure.

**Pendant Cord.**—(See *Cord, Pendant*.)

**Pendant, Electric** — —A hanging fix-





ture provided with a socket for the support of an incandescent lamp.

A form of electric pendant is shown in Fig. 418.

#### Pendant, Flexible Electric Light —

—A pendant for an incandescent lamp formed by the flexible conductors which support the lamp.

The advantages procured by a flexible pendant are evident in that both the length of the flexible conductor from which the lamp is hanging and position of the lamp can be changed considerably.

**Pendulum Annunciator.**—(See *Annunciator, Pendulum or Swinging.*)

#### Pendulum, Electric —

—A pendulum so arranged that its to-and-fro motions send electric impulses over a line, either by making or breaking contacts.

An electrical tuning fork whose to-and-fro movements are maintained by electric impulses.

Electric pendulums are employed in systems for the electrical distribution of time.

Sometimes instead of using true pendulums for such purposes, coils, mounted on tuning forks, or on the ends of flexible bars of steel, called reeds, are used for the purpose of establishing currents, or modifying the currents that are already passing in a circuit. The movement of a magnetic diaphragm, as in the case of a telephone diaphragm, towards and from a coil of wire, is another illustration of an electric pendulum.

Electric tuning-fork pendulums are employed in Delany's system of synchronous-multiplex telegraphy, and in Gray's harmonic-multiple telegraphy. (See *Telegraphy, Synchronous-Multiplex, Delany's System. Telegraphy, Gray's Harmonic-Multiple.*)

#### Pendulum, Laws of —

—The laws which express the peculiarities of the motion of a simple pendulum.

A simple pendulum is one in which the entire weight is considered as concentrated at a single point, suspended at the end of a weightless, inflexible and inextensible line.

The following are the laws of the simple pendulum :

(1.) Oscillations of small amplitude are approximately *isochronous*; that is, are made in times that are sensibly equal. (See *Vibration or Wave, Amplitude of. Isochronism.*)

(2.) In pendulums of different lengths, the duration of the oscillations is proportional to the square root of the length of the pendulum.

(3.) In the same pendulum, the length being preserved invariable, the duration of the oscillation is inversely proportional to the square root of the intensity of gravity.

The *intensity of gravity*, at any latitude, may be determined by the number of oscillations of a pendulum of a given length. In the same manner the *intensity of a magnetic field*, or the *intensity of magnetization* of a magnet, may be determined by the *needle of oscillation*, by observing the number of oscillations a needle makes in a given time when disturbed from its position of rest. (See *Needle of Oscillation.*)

Since a simple physical pendulum is a physical impossibility, the *virtual length* of a pendulum, that is, the vertical distance between its point of support and the *centre of oscillation*, is taken as the true length of the pendulum.

If the irregularly shaped body, shown in Fig. 419, whose centre of gravity is at G, is made to swing like a pendulum, either on S, or O, its oscillations will be performed in equal times, and the body will act as a simple pendulum, whose virtual length is S O.

If, while suspended at S, it be struck at O, it will oscillate around S, without producing any pressure on the supporting axis at S, on which it turns. If floating entirely submerged in a liquid, a blow at O, would cause it to move in a straight line in the direction of the blow, without rotation.

The point O, is called the *centre of percussion*, or the *centre of oscillation*. The centre of oscillation is always below the *centre of gravity*.

**Pentane Standard.**—(See *Standard, Pentane.*)

**Percussion, Centre of —**—That point in a body suspended so as to move as a pendulum at which a blow would produce rotation, but no forward motion, or motion of translation.

**Perforator, Paper —**—An apparatus employed in systems of automatic telegraphy for punching in a fillet of paper the circular or elongated spaces that produce the dots and




Fig. 419. Centre of Oscillation.

dashes of the Morse alphabet, when the fillet is drawn between metal terminals that form the electrodes of a battery. (See *Telegraphy, Automatic.*)

**Perforator, Pneumatic** — —A paper perforator operated by means of compressed air. (See *Perforator, Paper.*)

**Period of Open-Circuit Oscillation.**—(See *Open-Circuit Oscillation, Period of.*)

**Period of Simple-Harmonic Motion.**—(See *Motion, Simple-Harmonic, Period of.*)

**Period of Vibration.**—(See *Vibration, Period of.*)

**Period, Vibration** — —The period of a single or a whole vibration in a conductor, in which an oscillatory vibration is being produced by electrical resonance when responding to its fundamental vibration.

Hertz gives the following value for the vibration period: Calling  $T$ , the single or half vibration period;  $L$ , the co-efficient of self-induction in absolute magnetic measure, and therefore expressed in centimetres;  $C$ , the capacity of the terminals, in electrostatic measure, and therefore also expressed in centimetres;  $v$ , the velocity of light in centimetre-seconds, then, when the resistance of the conductor is small,  $T = \pi \frac{\sqrt{LC}}{v}$ .

**Periodic and Alternate Discharge.**—(See *Discharge, Periodic. Discharge, Alternating.*)

**Periodic Current, Power of** — —The rate of transformation of the energy of a circuit traversed by a simple periodic current.

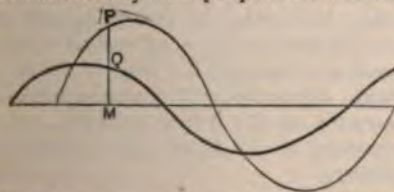


Fig. 420. Power of Periodic Current.—(Fleming.)

If the thin line in the curve, Fig. 420, represents the impressed electromotive force in an inductive circuit, and the thick line the corresponding current, then, at any instant, say at the point  $M$ , the rate at which energy is being expended on the circuit, is equal to the ordinate  $PM$ , multiplied by the ordinate  $QM$ . The mean power is

the mean of all such products taken at points of time very near together.

The power of a periodic current, or the work expended per second on such a circuit, is equal to half the product of the maximum values of the current, at any instant, and the maximum value of the impressed electromotive force, multiplied by the cosine of the angle of lag.

**Periodic Governor.**—(See *Governor, Periodic.*)

**Periodically Decreasing Discharge.**—(See *Discharge, Periodically Decreasing.*)

**Periodicity.**—The rate of change in the alternations or pulsations of an electric current.

**Periodicity of Auroras and Magnetic Storms.**—(See *Auroras and Magnetic Storms, Periodicity of.*)

**Permanency, Electric** — —The property possessed by most metallic substances, while in the solid state, of retaining a constant electric conducting power at the same temperature.

The electric permanency of hard drawn wire is small, since such wire becomes gradually annealed, and thus changed in its electric resistance.

Matthiessen showed that some specimens of annealed German silver wire increased in their conducting power at the rate of about .02 per cent. yearly.

**Permanent Intensity of Magnetization.**—(See *Magnetization, Permanent, Intensity of.*)

**Permanent Magnet Voltmeter.**—(See *Voltmeter, Permanent Magnet.*)

**Permanent State of Charge on Telegraph Line.**—(See *State, Permanent, of Charge on Telegraph Line.*)

**Permeability Curve.**—(See *Curve, Permeability.*)

**Permeability, Magnetic** — —Conductibility for lines of magnetic forces.

The ratio existing between the magnetization produced, and the magnetizing force producing such magnetization.

If  $\mu$  equals the permeability,  $B$ , the magnetiza-



tion produced, or the intensity of magnetic induction, and  $H$ , the magnetizing force; then,

$$\mu = \frac{B}{H}$$

The permeability of non-magnetic materials, such as insulators, or non-magnetic metals, such as copper, etc., is assumed to be practically equal to that of air, or to unity.

The magnetic permeability decreases as the magnetization increases. When a piece of iron has been magnetized up to a certain intensity, its permeability becomes less for any further magnetization; or, the substance shows a tendency to reach magnetic saturation. In good iron, this limit is reached at about 125,000 lines of force to the square inch of area of cross-section.

The magnetic permeability varies greatly, not only with different specimens of iron, but also with the previous history of the iron, as to whether or not it has before been subjected to magnetization or demagnetization, and also as to whether the value of the permeability is taken while the magnetization is increasing or decreasing:

**Permeameter.**—An apparatus devised by S. P. Thompson, for roughly measuring the magnetic permeability.

Thompson's permeameter consists essentially of a rectangular piece of soft iron, provided with a slot, for the reception of the magnetizing coil. A hole bored in one end of the block serves to receive the bar or rod of iron whose permeability is to be determined. On the magnetization of the bar to be tested, the square root of the force required to detach the rod from the lower surface of the iron block, is a measure of the permeation of the lines of magnetic forces through its end faces.

**Permeance, Magnetic** — —Magnetic permeability. (See *Permeability, Magnetic*.)

**Permeating, as of Lines of Force.**—The passing of lines of force through a magnetic substance. (See *Permeability, Magnetic*.)

**Permeation, Magnetic** — —The passage of lines of magnetic force through any permeable substance.

**Permissive Block System for Railroads.**—(See *Railroads, Permissive Block System for*.)

**Pflüger's Law.**—(See *Law, Pflüger's*.)

**Phantom Wires.**—(See *Wires, Phantom*.)

**Phase, Angle of Difference of, between Alternating Currents of Same Period** — — The angle which measures the shifting of phase of a simple periodic current with respect to another due to lag or other cause.

**Phase, Shifting of, of Alternating Current** — —A change in phase of current due to magnetic lag or other causes.

**Phase of Vibration.**—(See *Vibration, Phase of*.)

**Phelps' Stock Printer.**—(See *Printer, Stock, Phelps'*.)

**Phenomena, Electro-Capillary** — — Phenomena observed in capillary tubes at the contact surfaces of two liquids.

Where acidulated water is in contact with mercury, each liquid possesses a definite surface tension, and each a definite shape of surface. The two liquids, however, do not actually touch, there being a small interval or space between them. This space acts as a minute accumulator. But the liquid and water, being different substances in contact, possess different potentials. Any cause which alters the shape of these contact surfaces, and consequently the extent of the spaces between them, necessarily alters the capacity of the condenser, and consequently the difference of potential. Therefore the mere shaking of the tube, or heating it, will produce electric currents from the resulting differences of potential. Conversely, an electric current sent across the contact-surfaces will produce motion as a result of a change in the value of the surface tension. An electro-capillary telephone has been constructed on the former principle, and an electrometer on the latter. (See *Electrometer, Capillary*.)

**Phenomena, Porret** — —An increase in the diameter of a nerve fibre in the neighborhood of the positive pole when traversed by a voltaic current.

When a voltaic current passes through fresh living substance the contents of the muscular fibre exhibit a streaming movement in the direction the current is flowing, viz., from the positive to the

negative. This causes the fibre to swell up or increase in diameter at the negative electrode.

**Pherope.**—A name sometimes applied to a telephote. (See *Telephote*.)

**Phial, Leyden** — A name sometimes applied to a Leyden jar. (See *Jar, Leyden*.)

**Philosopher's Egg.**—(See *Egg, Philosopher's*.)

**Phonautograph.**—An apparatus for the automatic production of a visible tracing of the vibrations produced by any sound.

Phonautographic apparatus consists essentially of devices by which the sound waves are caused to impart their to-and fro movements to a diaphragm, at the centre of which a pencil or tracing point is attached. The record is received on a sheet of paper, or wax, or on a smoked glass or other suitable surface.

Leon Scott's Phonautograph, which is among the forms best known, consists of a hollow conical



Fig. 421. Scott's Phonautograph.

vessel A, Fig. 421, with a diaphragm of parchment stretched tightly like a drumhead over its smaller aperture B. A tracing point attached to the centre of the diaphragm, traces a sinuous line on the surface of a soot-covered cylinder C, that is uniformly rotated under the tracing point. As the cylinder is advanced a short distance with every rotation, a sinuous spiral line is traced on the surface.

**Phone.**—A term frequently used for telephote.

**Phonic Wheel.**—(See *Wheel, Phonic*.)

**Phonogram.**—A record produced by the phonograph. (See *Phonograph*.)

**Phonograph.**—An apparatus for the reproduction of articulate speech, or of sounds

of any character, at any indefinite time after their occurrence, and for any number of times.

In Edison's phonograph the voice of the speaker, received by an elastic diaphragm of thin sheet iron or other similar material, is caused to indent a sheet of tin-foil placed on the surface of a cylinder C, Fig. 422, that is maintained at a uniform rate of rotation by the crank at W. In



Fig. 422.

the form shown in Fig. 422, the motion is by hand. In a later improved form the cylinder is driven by means of an electric motor or by clockwork.

In order to reproduce the speech or other sounds the *phonogram record* is placed on the surface of a cylinder similar to that on which it was received (or is kept on the same surface), and the tracing point, placed at the beginning of the record and being maintained against it by gentle pressure, is caused, by the rotation of cylinder, to follow the indentations of the phonogram record. As the point is thus moved up and down the hills and hollows of the record surface,



Fig. 423. Edison's Improved Phonograph.

the diaphragm, to which it is attached, is given to-and-fro motions that exactly correspond to the to-and-fro motions it had when impressed originally by the sounds it recorded on the phonogram record. A person listening at this dia-



phragm will therefore hear an exact reproduction of the sounds originally uttered.

In this manner the voices of relatives, distinguished singers or statesmen can be preserved for future generations.

In Edison's improved phonograph the record surface consists of a cylinder of hardened wax. The rotary motion of the cylinder is obtained by means of an electric motor. Two diaphragms are used, one for recording, and one for reproducing the sound waves. As shown in Fig. 423, the recording diaphragm is in position against the cylinder. The recording diaphragm is made of malleable glass. The reproducing diaphragm is formed of bolting silk covered with a thin layer of shellac.

In the *Graphophone* of Bell and Tainter the point attached to the diaphragm is caused to cut

or grease, receives the record in a sinuous, spiral line. This record is subsequently etched into the metal by any suitable means, or is photographically reproduced on another sheet of metal.

Glass covered with a deposit of soot is sometimes employed for the latter process. The apparatus is shown in Fig. 425, as arranged for the reproduction of speech.

In Mr. Berliner's apparatus, the record surface is impressed by a point attached to the transmitting diaphragm, in a direction parallel to the record surface, and not, as in the instrument of Mr. Edison, in a direction at right angles to the same. This method would appear to be the best calculated for a more exact reproduction of articulate speech, since it permits comparatively loud speaking or singing, without interfering



Fig. 424. Bell and Tainter's Graphophone.

or engrave a cylinder of hardened wax. Two separate diaphragms are employed, one for speaking, and the other for hearing.

The recording surface is made of a mixture of beeswax and paraffine. A uniformity of rotation of the cylinder is obtained by means of a motor provided with a suitable governor. An ordinary conversation of some five minutes, it is claimed, can be recorded on the surface of a cylinder 6 inches long and 1½ inch in diameter.

In the *Gramophone* of Berliner, a circular plate of metal, covered with a film of finely divided oil



Fig. 425. Berliner's Gramophone.

with the quality of the reproduced sounds. Since the resistance to indentation, or vertical cutting, increases more rapidly than the increase in the amplitude of vibration of the cutting point, it follows that the louder the sounds recorded by the phonograph or graphophone, the less complete would be the quality of the reproduced sounds, or the less the probability of the peculiarities of the speaker's voice being recognized. In order to avoid this, the speaker in the phonograph and the graphophone speaks in an ordinary conversational tone only. (See *Vibration or Wave, Amplitude of.*)

For purposes of dictation, and, indeed, most commercial purposes, this is rather an advantage than otherwise.

**Phonograph Record.** — (See *Record Phonograph.*)

**Phonoplex.** — Literally sound folds.

A system of telegraphy. (See *Telegraphy, Phonoplex.*)

**Phonoplex Telegraphy.**—(See *Telegraphy, Phonoplex*.)

**Phonopore.**—A modified form of harmonic telegraph.

**Phonozenograph.**—An instrument devised by De Feltre to indicate the direction of a distant sound.

A Deprez-D'Arsonval galvanometer, a Wheatstone's bridge, and a microphone of peculiar construction, are placed in the circuit of a voltaic battery and a receiving telephone. The observer determines the direction of the distant sound by means of the sounds heard under different conditions in the telephone.

**Phosphoresce.**—To emit phosphorescent light.

**Phosphorescence.**—The power of emitting light, or becoming luminous by simple exposure to light.

Bodies that possess the property of phosphorescence, when exposed to a bright light acquire the power, when subsequently carried into the dark, of continuing to emit light, for periods varying from a few seconds to several hours. The diamond, barium and calcium sulphides, dry paper, silk, sugar, and compounds of uranium, are examples of phosphorescent substances.

The effects of phosphorescence appear to be due, in some cases, to sympathetic vibrations set up in the molecules of the phosphorescent body by the exciting light. (See *Vibrations, Sympathetic*.)

In other cases, however, that are not exactly understood, the wave length of the emitted light is more rapid than that of the exciting light.

The fire-fly, the glow-worm, and decaying animal or vegetable matter, exhibit a species of phosphorescence that appears to be due to the actual oxidation or gradual burning of a peculiar, specific, chemical substance.

Phosphorescence may therefore be divided into two classes, viz.:

(1.) *Physical phosphorescence*, or that produced by the actual impact of light, and,

(2.) *Chemical phosphorescence*, or that caused by actual chemical combination or combustion of a specific substance. This is sometimes called spontaneous phosphorescence.

Physical phosphorescence may be produced in a variety of ways, viz.:

(1.) By an Elevation of Temperature:

A variety of fluorspar, called chlorophane, shines with a beautiful greenish blue light when heated to less than a red heat. Here the non-luminous rays are apparently transformed into luminous rays.

A phosphorescent substance like fluorspar eventually loses its ability to phosphoresce. It regains it, however, on exposure to the light, *i. e.*, if such an exhausted body be exposed to sunlight it again phosphoresces on exposure to non-luminous heat. The light emitted, during phosphorescence by heat, is, probably, wholly due to potential energy acquired during exposure to the light. (See *Luminescence*.) The phosphorescence by heat exhibited by fluorspar is sometimes called *fluorescence*. It is preferable, however, to call the phenomena phosphorescence. (See *Fluorescence*.)

(2.) By Mechanical Effects:

The flashes of light emitted during the attrition or friction of some bodies, when not traceable directly to electricity, are, most probably, to be ascribed to phosphorescence.

(3.) By Molecular Bombardment.

The molecular bombardment due to the molecules of residual gas shot off from the negative electrode of an exhausted receiver through which an electric discharge is passing, produces many brilliant effects of phosphorescence.

(4.) By Electricity.

An electric spark produces phosphorescence in such substances as canary glass, solution of sulphate of quinine, etc., etc.

(5.) Exposure to Sunlight, or, in fact, to any light.

The different rays of the sun are not equally able to excite phosphorescence. As a rule the violet or ultra violet rays excite the greatest phosphorescence. The light excited is often, though not always, of a greater wave length than the exciting light.

Phosphorescent paints for rendering the position of a push button, electric call, match safe, gas pendant or some other similar object visible at night, consist essentially of sulphides of calcium or barium, or of mixtures of the same.

**Phosphorescence, Chemical** — — A variety of phosphorescence, in which the emitted light is produced by the actual combustion



of a specific chemical substance by the oxygen of the air.

Chemical phosphorescence is seen in the fire-fly and the glow-worm. (See *Phosphorescence*.)

**Phosphorescence, Electric** — — Phosphorescence caused in a substance by the passage of an electric discharge.

The phosphorescent material is placed in an exhausted glass tube, as shown in Fig. 426, and submitted to the action of a series of discharges, as from a Ruhmkorff coil, or Holtz machine. The violet-blue light of such discharge is very efficient in producing phosphorescence. Phosphorescence is thus effected by subjecting the phosphorescent material to the molecular bombardment which is produced by such discharges in a high vacuum. (See *Bombardment, Molecular*.)



Fig. 426. *Electric Phosphorescence.*

**Phosphorescence, Physical** — — Phosphorescence produced in matter by the actual impact of light waves resulting in a vibratory motion of the molecules of sufficient rapidity to cause them to emit light.

Physical phosphorescence is distinguished from chemical phosphorescence in that in the former the energy required to produce molecular vibrations is imparted by the light to which the phosphorescent body is exposed, while in chemical phosphorescence the energy producing the light is derived from the chemical potential energy of the specific substance burned. (See *Phosphorescence*.)

**Phosphorescent**.—Possessing the properties or qualities of phosphorescence.

**Phosphorescing**.—Emitting phosphorescent light. (See *Phosphorescence*.)

**Phosphorescope**.—An apparatus for measuring the phosphorescent power of any substance. (See *Phosphorescence*.)

**Phosphorus, Electric Smelting of** — — An electric process for the direct production of phosphorus.

In the electric smelting of phosphorus, the crude material, consisting of a mixture of bones or animal phosphates and carbon, is fed into a space between two electrodes connected to the poles of a source of powerful alternating currents. The apparatus is similar in general to the Cowles furnace for the reduction of aluminium. The heat produced by the alternating currents decomposes the phosphates, and the volatilized phosphorus is condensed in suitable chambers.

**Photochronograph**.—An electric instrument for automatically recording the transit of a star across the meridian.

In a small camera connected with the eye-piece of the transit instrument is placed a sensitized plate.

A sidereal clock has an electric attachment to its pendulum, so made that a shutter alternately exposes and conceals the photographic plate, and thus permits the image of a star to be formed on the plate at intervals during its passage across the field of the telescope. An image of the spider lines is afterwards fixed on the plate by the light of a lamp, held for a few moments before the object glass of a telescope. A shutter is provided, by means of which this light is prevented from falling on the trail of the star across the field of the glass. In this manner the time of passage of the star across the meridian is automatically recorded on the photographic plate.

The photochronograph is also adapted for similarly automatically recording the transit or passage of any heavenly body across any imaginary line in the heavens.

**Photo-Electric Cell**.—(See *Cell, Photo-Electric*.)

**Photo-Electricity**.—(See *Electricity, Photo*.)

**Photo-Electromotive Force**.—(See *Force, Electromotive, Photo*.)

**Photometer**.—An apparatus for measuring the intensity of the light emitted by any luminous source.

There are various methods for measuring the intensity of a beam of light passing through any given space, or emitted from any luminous

source; these methods are embraced in the use of the following apparatus:

(1.) *Calorimetric Photometer*, in which the light to be measured is absorbed by the face of a thermo-electric pile, and the electric current thereby produced is carefully measured. Since *obscure radiation* or heat will also thus produce an electric current, it is necessary first to absorb all the heat by passing the beam of light through an alum cell.

(2.) *Actinic, or Chemical Photometers*, in which the intensity of the light is estimated by a comparison of the depth of coloration produced on a fillet of photographic paper under similar conditions of exposure to a standard light, and the light to be measured.

The combination of pure hydrogen and chlorine, or the decomposition of pure mercurous chloride, have been employed for the purpose of determining the intensities of two lights by measuring the amount of chemical action effected.

(3.) *Shadow Photometers*, in which a shadow produced by the light to be measured is compared with a shadow produced by a standard candle. (See *Candle, Standard.*)



Fig. 427. The Shadow Photometer.

Rumford's photometer, shown in Fig. 427, is an example of this form of instrument. The standard candle, shown at L, casts a shadow C', of an opaque rod C, on the screen at B.

The light to be measured L', is moved away from the screen until its shadow C', on the screen at A, is judged by the eye to be of the same depth. The distance between the screen and the lights is then measured in straight lines. *The relative intensities of the two lights are then proportional to the squares of their distances.* If, for example, the candle be at 10 inches from the screen, and the lamp at 40 inches, then the intensities are as  $10^2 : 40^2$  or as 100 : 1,600, or the lamp is a 16 candle-power lamp.

This photometer is based on the fact that the shadow of each source is illumined by the light of the other source.

These results are more accurate if the two shadows are adjoining or nearly adjoining.

(4.) *Translucent-Disc Photometers*.—The light to be measured and a standard candle are placed on opposite sides of a sheet of paper the centre of which contains a grease spot. The standard candle is kept at a fixed distance from the paper and both it and the paper are moved towards or from the light to be measured until both sides of the paper are adjudged to be equally illumined.

In Bunsen's photometer a vertical sheet of paper with a grease spot at its centre, is exposed to the illumination of a standard candle on one side, and the light to be measured on the other.

The sheet of paper is placed inside a dark box provided with two plane mirrors placed at such an angle to the paper that an observer can readily see both sides of the paper at the same time.

This box can be slid along a graduated, horizontal scale towards, or from, the light to be measured, and carries with it the standard candle mounted on it at a constant distance of 10 inches. If the box is too near the light to be measured, the grease spot appears brighter on the side of the sheet of paper nearest the candle. If too near the candle, it appears brighter on the side of the sheet of paper nearest the light to be measured. The position in which the spot appears equally bright on both sides, is the position in which both sides of the paper are equally illumined, and the relative intensities of the two lights are then directly as the squares of their distances from the sheet of paper.

Shadow, and translucent-disc photometers being dependent on equal illumination, are reliable only when the color of the lights compared is the same. For the determination of the photometric intensity of very bright lights, the standard candle is replaced by a carcel lamp, a standard gas jet, or by the light emitted by a given mass of platinum, heated to incandescence by a given current of electricity. (See *Lamp, Carcel. Gas-Jet, Carcel Standard, Light, Platinum Standard.*)

Preece's photometer belongs to the class of translucent-disc photometers. A tiny incandescent lamp is placed in a box, the top of which has a white paper screen on which is a grease spot. The box is placed in the street where the intensity of illumination is to be measured, and the inten-



sity of the light of the incandescent lamp is varied until the grease spot disappears. The current of electricity then passing through the incandescent lamp acts as the measure of the illumination.

In the case of the shadow photometer, or of Bunsen's photometer, if the intensity of illumination is the same, the relative intensities of the two lights may be determined as follows:

Calling  $I$ , and  $i$ , respectively the relative intensities of the standard light, and the light to be measured, and  $D$ , and  $d$ , their respective distances from the screen, then

$$I : i :: D^2 : d^2, \text{ or } I \times d^2 = i \times D^2;$$

$$\text{that is, } i = I \left( \frac{d^2}{D^2} \right).$$

Or, the intensity of the light to be measured is  $\left( \frac{d^2}{D^2} \right)$  times the intensity of the standard light.

If, for example,  $D$  and  $d$ , represent 10 and 100 inches, respectively, the intensity of  $i$ , is 100 times the intensity  $I$ , the standard light.

(5.) *Dispersion Photometers.*—A class of photometers in which, in order to more readily compare or measure a very bright or intense light, like that of an arc lamp, the intensity of the light is decreased by dispersion a readily measurable amount.

*Ayrton & Perry's Dispersion Photometer.*—A photometer in which, in order to bring an intensely bright light, like an electric arc light, to

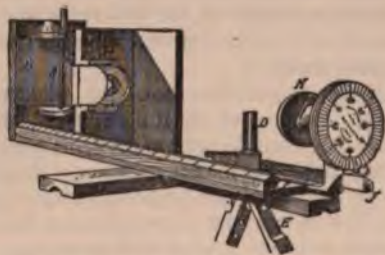


Fig. 428. Ayrton & Perry's Dispersion Photometer.

such an intensity as will permit it to be readily compared with a standard candle, its intensity is weakened by its passage through a diverging (concave) lens.

Ayrton & Perry's dispersion photometer is shown in two different positions, Figs. 428 and 429. The apparatus is supported on a tripod stand  $E$ , arranged so as to obtain exact leveling.

A plane mirror  $H$ , movable around a pin placed directly under its centre, can be rotated and thus reflect the light after its passage through the diverging lens, while still maintaining its distance from the electric light.

The horizontal axis of this mirror is inclined 45 degrees to its reflecting surface in order to avoid errors arising from varying absorption at different angles of reflection.

The inclination of the beam to the horizontal is indicated by means of an index attached to the mirror and moving over the graduated circle  $G$ .

A black rod  $A$ , casts its shadow on a screen of white blotting paper  $B$ . A standard candle, placed in the holder  $D$ , casts its shadow alongside the shadow cast by the electric light. The lens is now displaced until the shadow of the electric light is of the same intensity as that of the candle, when viewed successively through sheets of red and green glass.

A graduated scale serves to mark the distances of the candle and the lens, respectively, from the screen, from which data the intensity of the electric light may be calculated.




Fig. 429. Ayrton and Perry's Dispersion Photometer.

(6.) *Selenium Photometers.*—Instruments in which the relative intensities of two lights are determined by the variations produced in a selenium resistance.

In Siemens' Selenium photometer a selenium cell is employed in connection with an electric circuit for determining the intensity of light.

The tube  $A B$ , Fig. 430, is furnished at  $A$ , with a diaphragm, and at  $B$ , with a selenium plate, connected by wires  $G G$ , with the circuit of a battery and a galvanometer.

A graduated scale  $L M$ , bears the standard candle  $N$ . The tube  $A B$ , is capable of rotation on the vertical axis  $F$ . A reflecting mirror galvanometer is used in connection with the selenium photometer. The light to be measured is placed

at right angles to the scale *L M*, and the tube *A B*, directed towards it, and the galvanometer deflection compared with the deflection obtained when turned towards the standard candle.

(7.) *Gas-Jet Photometers*.—Instruments in which the candle-power of a gas-jet is determined by measuring the height at which the jet burns when under unit conditions of volume and pressure of gas consumed.

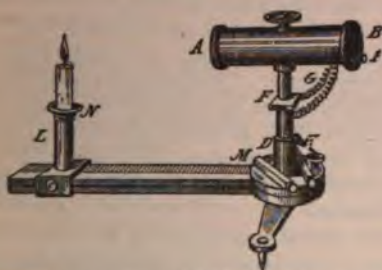


Fig. 430. Siemens' Selenium Photometer.

In determining the candle-power of an intense light like the electric arc light, a large gaslight is used instead of a standard candle, and the photometric power of this gaslight is carefully determined by comparison with a gas-jet photometer. (See *Jet, Gas, Carcel Standard*.)

**Photometer, Actinic** —A photometer in which the intensity of any light is measured by the amount of chemical decomposition it effects. (See *Photometer*.)

In some actinic photometers the intensity of the light to be measured is determined by the comparison of the depth of coloration of a sensitized film under similar conditions of exposure to a standard light and the light to be measured.

**Photometer, Calorimetric** —A photometer in which the light to be measured is absorbed by the face of a thermo-electric pile, and the intensity of the light estimated from the strength of the electric current thereby produced.

In order to avoid the error arising from the current produced from the absorption of the obscure radiation from the light, all the heat is first absorbed by passing the light through an alum cell. (See *Photometer*.)

**Photometer, Chemical** —A photometer in which the intensity of the light to be

measured is determined from the amount of chemical action effected in a given time.

**Photometer, Dispersion** —A photometer in which the light to be measured is decreased in intensity a known amount so as to more readily permit it to be compared with a standard light of much smaller intensity. (See *Photometer*.)

**Photometer, Electric** —An electrical instrument for measuring the intensity of illumination.

A form of electric photometer invented by C. R. Richards depends for its indications on the variations that occur in the resistance of a wire on change of temperature. An iron wire, whose change of temperature is utilized for measuring the intensity of any light to whose radiations it is opposed, is covered by a deposit of lampblack. On exposure to the light whose intensity is to be measured, the light is absorbed by the lampblack and an increase in temperature occurs.

In order to get rid of the heat rays that are associated with the light rays, the rays before falling on the soot-covered wire are caused to pass through a solution of alum; the intensity of the light is then calculated by reference to the change in the resistance of the soot-covered wire, which is made one of the arms of a Wheatstone bridge.

**Photometer, Gas-Jet** —A photometer in which the candle-power of a gas-jet is estimated from a measurement of the height at which the jet burns under unit conditions of volume and pressure. (See *Photometer*.)

**Photometer, Jet** —An apparatus for determining the candle power of a luminous source by means of the height of a jet of the gas, whose candle-power is being determined, when burning under constant conditions as to pressure, etc. (See *Jet, Gas, Carcel Standard*.)

**Photometer, Selenium** —A photometer in which the intensity of a light is estimated by the comparison of the changes in the resistance of a selenium resistance successively exposed under similar conditions to this light and to a standard light. (See *Photometer*.)

**Photometer, Shadow** —A photometer in which the intensity of the light to be



measured is estimated by a comparison of the distances at which it and a standard light produce a shadow of the same intensity. (See *Photometer*.)

**Photometer, Translucent Disc** — — A photometer in which the light to be measured is placed on one side of a partly translucent and partly opaque disc, and a standard candle is placed on the opposite side, and the intensity of the light estimated by the distances of the light from the disc when an equal illumination of all parts of the disc is obtained. (See *Photometer*.)

When the illumination of the opposite sides of such a disc is equal, the relative positions of the transparent and opaque portions of the disc are indistinguishable.

**Photometer, Varley's** — — A form of photometer in which the intensity of the light to be measured is determined from the relative openings of two concentric circular diaphragms placed in two rotating discs, and through which the standard light and the light to be measured respectively pass.

The general arrangement of Varley's photometer is shown in Fig. 431. The concentric cir-

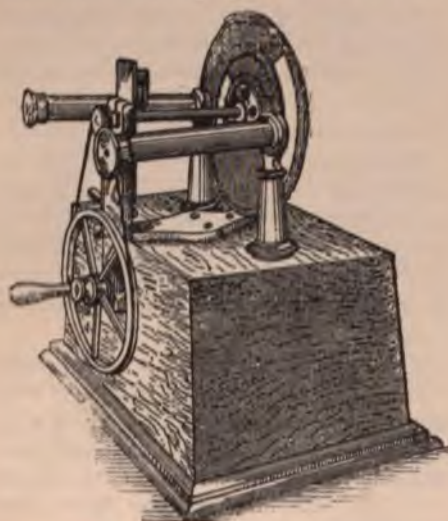


Fig. 431. Varley's Photometer.

cular apertures extend circumferentially 180 degrees, and are reversed so that when one half

ring is fully open, the other is completely closed, or, if one ring, say the outer, is opened 160 degrees, the inner is opened 20 degrees. The quantity of light then which passes through the outer ring from the light to be measured is eight times that passed through the inner ring. The circle is divided into 2,000 parts, instead of into 360 degrees, and, by means of a vernier, these parts are further divided into 10 parts, permitting a reading of the 20,000 divisions.

Two collimeters placed in front of the disc, project a disc with a black centre, and a luminous spot respectively. The discs are regulated until the light projected on the screen produces a uniform disc. This is readily ascertained, since if one or the other predominate, a disc with gray spot, or a gray marginal ring with a bright spot, will appear.

The general appearance of the circular diaphragm, corresponding to different relative positions of the two discs, is shown in Fig. 432.



Fig. 432. Circular Diaphragm of Varley's Photometer.

**Photometric.**—Of or pertaining to the photometer. (See *Photometer*.)

**Photometrically.**—In a photometric manner.

**Photophone.**—An instrument invented by Bell for the telephonic transmission of articulate speech along a ray of light instead of along a conducting wire.

A beam of light, reflected from a diaphragm against which the speaker's voice is directed, is caused to fall on a selenium resistance inserted in the circuit of a voltaic battery, and a telephone. The changes thus effected in the resistance of the circuit by the varying amounts of light reflected on the selenium resistance from the diaphragm, while moving to-and-fro under the influence of the speaker's voice, produce in the receiving telephone a series of to-and-fro movements similar to those impressed on the transmitting diaphragm. One listening at the telephone can hear whatever has been spoken in the neighborhood of the transmitting diaphragm. Telephonic communication can, therefore, by such means be carried on along

ray or beam of light, theoretically through any distance. (See *Resistance, Selenium.*)

A block of vulcanite or of certain other substances may be used as the receiver, since it has been discovered that a rapid succession of flashes of light produces an audible sound in small masses of these substances.

The term *sonorescence* has been proposed for the property possessed by such substances of emitting sounds when subjected to such intermittent flashes of light. (See *Sonorescence.*)

**Photophore, Trouve's** — —An apparatus in which the light of a small incandescent electric lamp is employed for purposes of medical exploration.

A small incandescent lamp is placed in a tube containing a concave mirror and a converging lens.

**Photo-Telegraphy.**—The electric production of pictures, writing, charts or diagrams at a distance.

Photo-Telegraphy is sometimes called telephotography; it is a species of fac-simile telegraphy. (See *Telegraphy, Fac-Simile, Telephotography.*)

**Photo-Voltaic Effect.**—(See *Effect, Photo-Voltaic.*)

**Physical Change.**—(See *Change, Physical.*)

**Physical Phosphorescence.**—(See *Phosphorescence, Physical.*)

**Physiological.**—Pertaining to physiology.

**Physiological Rheoscope.**—(See *Rheoscope, Physiological.*)

**Physiologically.**—In a physiological manner.

**Physiology, Electro** — —The study of electric phenomena of living animals and plants.

Living animals and plants present electric phenomena, due to the electricity naturally produced by them. It is the province of electrophysiology to ascertain the causes and effects of these phenomena.

**Piano, Electric** — —A piano in which the strings are struck by hammers actuated by means of electro-magnets, instead of by the usual mechanical action of levers.

An electric piano-action is mainly useful in permitting the instrument to be played at any distance from the key-board. It is also of value from the ease it affords in recording the pieces played.

It fails, however, to properly preserve the various modulations of force so requisite for brilliant instrumentation.

**Pickle.**—An acid solution in which metallic objects are dipped before being galvanized, or electroplated, in order to thoroughly cleanse their surfaces.

The pickle used for the preparation of iron for galvanization is a weak solution of sulphuric acid in water. Various acids, or acid liquids, are employed for insuring the thorough cleansing of metallic surfaces so necessary in order to ensure an even, uniform, adherent coating of metal by the process of electroplating. (See *Plating, Electro.*)

**Piece, Magnetic Proof** — —A paramagnetic rod, ellipsoid or sphere employed for ascertaining the distribution of magnetism over a magnet by the force required to detach the same. (See *Paramagnetic.*)

Prof. S. P. Thompson points out the fact that the presence of the proof-piece so alters the distribution of magnetism on the magnet to be measured as to render this method unreliable. He also shows that the force required for detachment depends on the magnetic permeability of the proof-piece, as well as on its shape and its position in the magnetic circuit.

**Pieces, Mouth** — —Openings into air chambers, generally circular in shape, placed over the diaphragms of telephones, phonographs, gramophones or graphophones to permit the ready application of the mouth in speaking, so as to set the diaphragm into vibration.

The mouth-piece may be also utilized by the ear of an observer listening so as to be affected by its vibrations.

**Pieces, Pole, of Dynamo-Electric Machine** — —Masses of iron connected with the poles of the field magnet frames of dynamo-electric machines, and shaped to conform to the outline or contour of the armature.



The pole pieces are made in a variety of forms, but in all cases are so shaped as to conform to the outline of the space in which the armature rotates.

The pole pieces are brought as near as possible to the armature, so as to increase the intensity of the magnetic induction. The intervening air space should be as thin as possible, but of as large an area as convenient.

The opposite pole pieces should not have their extensions brought too near together, as this will permit of serious loss through *magnetic leakage*. The distance between them should be as many times the depth of the armature windings as possible. (See *Leakage, Magnetic*.)

Rounded edges are preferable to sharp edges for the same reason.

**Pile, Dry** — A voltaic pile or battery consisting of numerous cells, the voltaic couple in each of which consists of sheets of paper covered with zinc-foil on one side and black oxide of manganese on the other.

Various modifications of the above form have been made.

The term dry-pile is a misnomer, since all such piles contain substances moistened by liquid electrolytes.

**Pile, Muscular, Matteucci's** — A voltaic battery or pile, the elements of which are formed of longitudinal and transverse sections of muscle alternately connected.

Matteucci's experiments appear to show that the lower the animal is in the scale of creation, the stronger is the current produced, and the longer its duration. Du Bois-Reymond has shown that the muscular current is not due to contact, but to the differences of electric potential naturally possessed by the muscles themselves.

The nerves also possess the power of producing differences of electromotive force, and hence currents. (See *Electrotonus*.)

**Pile, Thermo, Differential** — A thermopile in which the two opposite faces are exposed to the action of two nearly equal sources of heat in order to determine accurately the differences in the thermal intensities of such sources of heat.

**Pile, Thermo-Electric** — A number of separate thermo-electric couples, united in

series, so as to form a single thermo-electric source. (See *Couple, Thermo-Electric*.)

A thermo-electric pile is sometimes called a thermo-electric battery.

Fig. 433 shows Nobili's thermopile, in which a number of bismuth-antimony thermo-electric couples connected in a continuous series, as shown partly in Fig. 434, are insulated from one another, except at their junctions, and packed in a metallic box, supported as shown in Fig. 433.

The free terminals of the series are connected to binding posts. Differences of temperature between the two faces of the pile, where the junctions are exposed, result in a difference of potential equal to the sum of the differences of potential of all the thermo-electric couples.

A careful inspection will show that the junctions are formed successively at opposite faces of the pile, so that if the junctions be numbered successively, the even junctions will come at one face, and the odd junctions at the other. This is necessary in order to permit all the thermo-electric couples to add their differences of potential; for, if, as in Fig. 435, a thermo-electric chain be formed,




Fig. 433. Thermo-Electric Pile.




Fig. 434. Series-Connected Thermo-Electric Couples.




Fig. 435. Thermo-Electric Circuit.

no currents will result from equally heating any two consecutive junctions J, J, of the metals A and B, since the electromotive forces so produced oppose each other.

Thermopiles have been constructed by Clamond, of couples of iron and an alloy of zinc and antimony, of sufficient power to produce a voltaic arc whose illuminating power equaled 40

cel burners. Many practical difficulties exist which will have to be surmounted, however, before piles can be employed as commercial electric sources.

**Pile, Voltaic** — — A battery consisting of a number of voltaic couples connected so as to form a single electric source.

A form similar to Volta's original pile, consisting of alternate discs of copper and zinc, separated from each other by discs of wet cloth, and piled one on another, so as to form a number of separate voltaic couples connected in series, is shown in Fig. 436. The thick plates marked Zn, are of zinc; the copper plates, marked Cu, are much

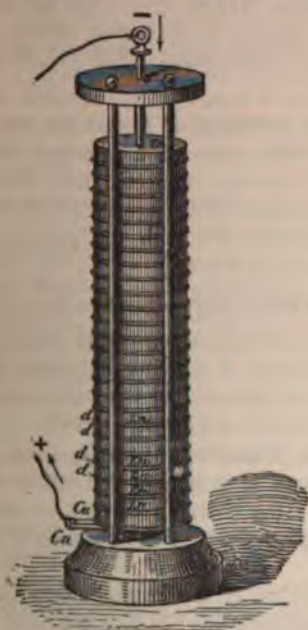


Fig. 436. Voltaic Pile.

thinner. The discs of moistened cloth are shown in Fig. 436. One end of such a pile would then be terminated by a plate of copper, and the other by a plate of zinc. The copper end forms the positive electrode, and the zinc end the negative electrode. (See *Cell, Voltaic*.)

**Pilot Lamp.**—(See *Lamp, Pilot*.)

**Pilot Transformer.**—(See *Transformer, Pilot*.)

**Pilot Wires.**—(See *Wires, Pilot*.)

**Pin, Insulator** — — A bolt by means of which an insulator is attached to the telegraphic support or arm.

The insulator pins or bolts are generally fixed to the insulator by means of screw threads turned on their ends. They are then cemented to the insulators by any suitable moisture-proof cement.

The pin and insulator connected to one another by means of a screw thread are shown in Fig. 437.



Fig. 437. Insulator Pin.

**Pin, Switch** — — A metallic pin or plug provided for insertion in a telegraphic switch board.

A form of switch pin is shown in Fig. 438. The metallic end is conical in form, and is provided with two longitudinal slots at right angles to each other in order to insure a light spring connection with the metallic contact plate in which the pin is inserted.



Fig. 438. Switch Pin.

**Pith.**—A light, cellular material, forming the central portions of most exogenous plants.

An excellent pith, suitable for electrical purposes, is furnished by the dried interior of the elder-berry stick.

**Pith Ball.**—(See *Balls, Pith*.)

**Pith - Ball Electroscope.** — (See *Electroscope, Pith-Ball*.)

**Pivot Suspension.**—(See *Suspension, Pivot*.)

**Plain-Pendant Argand Electric Burner.** — (See *Burner, Plain-Pendant Electric*.)

**Plain-Pendant Electric Burner.** — (See *Burner, Plain-Pendant Electric*.)

**Plane Angle.**—(See *Angle, Plane*.)

**Plane, Proof** — — A small insulated conductor employed to take test charges from the surfaces of insulated, charged conductors.



The proof-plane is used in connection with some form of electrometer. (See *Balance, Coulomb's Torsion*.)

**Plane, Proof, Magnetic** — — A small coil of wire placed in the circuit of a delicate galvanometer, and used for the purpose of exploring a magnetic field.

When the coil is suddenly inverted in a magnetic field, if a long-coil galvanometer provided with a heavy needle is used, the number of lines of force which pass through the area of cross-section of the coil will be proportional to the sine of half the angle of the first swing of the needle.

**Plant.** — A word sometimes used for installation, or for the apparatus required to carry on any manufacturing operation.

An electric plant includes the steam engines or other prime motors, the generating dynamo or dynamos, the lamps and other electro-receptive devices, and the circuits connected therewith.

**Plant Electricity.** — (See *Electricity, Plant, Plants, Electricity of*.)

**Plants, Electricity of** — — Electricity produced naturally by plants during their vigorous growth.

DuBois-Reymond and others have shown that plants while in a vigorous vital state are active sources of electricity.

If one of the terminals of a galvanometer be inserted into a fruit near its stem, and the other terminal into the opposite part of the fruit, the galvanometer at once shows the presence of an electric current.

Buff has shown that the roots and interior portions of plants are always negatively charged, while the flowers, fruits and green twigs are positively charged.

Plant tissue or fibre, like the muscular fibre of animals, exhibits in many cases a true contraction on the passage through it of an electric current. This is seen in the *Mimosa sensitiva*, or Sensitive Fern, in the Venus' Fly-Trap, and in several other species of plants.

Pouillet concludes from numerous observations that the free positive electricity of the atmosphere is partly due to the vapors disengaged by growing plants.

The peculiar geographical distribution of thunder storms, however, does not favor this assumption.

(See *Storm, Thunder, Geographical Distribution of*.)

**Plastics, Galvano** — — A term sometimes employed for electrotyping, that is where the deposits are sufficiently thick to permit of ready separation from the object which forms the mould.

Literally, the cold moulding or shaping of metals by electrotyping. (See *Plating, Electro. Metallurgy, Electro*.)

The word galvano-plastics is sometimes used as synonymous with electrotyping, electro-plating, or electro-metallurgy generally.

**Plastics, Hydro** — — The art of electrically shaping or depositing metals in the wet by electrotyping. (See *Plastics, Galvano*.)

**Plate, Arrestor, of Lightning Protector** — — That plate of a lightning protector which is directly connected with the circuit to be protected, as distinguished from the plate that is connected with the ground. (See *Arrestor, Lightning*.)

**Plate Condenser.** — (See *Condenser, Plate*.)

**Plate, Ground, of Lightning Arrestor** — — That plate of a comb lightning arrestor which is connected to the earth or ground. (See *Arrestor, Lightning, Comb*.)

**Plate, Negative, of Storage Cell** — — That plate of a storage cell which, by the action of the charging current, is converted into or partly covered with a coating of spongy lead.

That plate of a storage battery which is connected with the negative terminal of the charging source, and which is therefore the negative pole of the battery on discharging.

The usage is the reverse of that in the case of the primary battery.

**Plate, Negative, of Voltaic Cell** — — The electro-negative element of a voltaic couple. (See *Couple, Voltaic*.)

That element of a voltaic couple which is negative in the electrolyte of the cell. (See *Electrolyte*.)

The negative plate of a voltaic cell is the plate not acted on by the electrolyte. In a zinc-carbon



couple in dilute sulphuric acid, the carbon plate is the negative plate. (See *Cell, Voltaic*.)

The negative plate is to be carefully distinguished from the negative pole, which is the terminal connected to the positive plate. The terminal connected to the negative plate is the positive pole. (See *Cell, Voltaic*.)

**Plate, Positive, of Storage Battery** — — That plate of a storage battery which is converted into, or covered by, a layer of lead peroxide, by the action of the charging current.

That plate of a storage battery which is connected with the positive terminal of the charging source and which is, therefore, the positive pole of the battery on discharging.

It will be noticed that the usage in this respect is the reverse of that in the case of primary batteries, in which the positive plate is positive in the liquid only; the end which projects from the liquid, or the terminal connected with it being negative.

In storage batteries, the positive plate is connected with the positive pole. (See *Battery, Storage. Cell, Voltaic*.)

**Plate, Positive, of Voltaic Cell** — — The electro-positive element of a voltaic couple. (See *Couple, Voltaic*.)

That element of a voltaic couple which is positive in the electrolyte of the cell. (See *Electrolysis*.)

The positive plate of a voltaic cell is the plate out from which the current flows through the electrolyte.

The zinc plate of a zinc-carbon couple is the positive plate. (See *Cell, Voltaic*.)

The current leaves the cell, however, to flow or pass through the external circuit at the wire or terminal connected with the negative plate. (See *Cell, Voltaic*.)

**Plate, Primary, of Condenser** — — That plate of a condensing transformer in which the inducing charge is placed in order to induce a charge of different potential in the secondary plate.

**Plate, Secondary, of Condenser** — — That plate of a condensing transformer in which the induced charge is produced by the induction of a charge on the primary plate.

**Plate, Zinc, of Voltaic Cell, Amalgama-**

**tion of** — — Covering the surface of the zinc plate of a voltaic cell with a thin layer of amalgam in order to avoid local action. (See *Action, Local, of Voltaic Cell. Zinc, Amalgamation of*.)

**Plates, Arrestor** — — A term sometimes applied to the two plates of an ordinary comb lightning arrester. (See *Arrester, Lightning, Comb*.)

The plate that is connected to the line to be protected, is more correctly called the arrester plate, and that connected to the ground the ground plate.

**Plates of Secondary or Storage Cell, Forming of** — — Obtaining a thick coating of lead peroxide on the lead plates of a storage battery, by repeatedly sending the charging current through the cell alternately in opposite directions.

The effect of sending a current between two lead plates immersed in dilute sulphuric acid, is to coat one of the plates with lead peroxide. On the sending of the current in the opposite direction, the other plate is coated with lead peroxide. If now the current is sent in the opposite direction, more peroxide is deposited on one of the plates, and the peroxide at the other plate is converted into spongy lead.

At the end of charging, the battery will form an independent source of current. (See *Cell, Storage*.)

**Platform, Pole** — — A platform, capable of supporting several men, placed on a terminal pole provided with a cable box, for the purpose of affording a ready means of inspecting and arranging the conductors in the box.

**Plating Balance** — (See *Balance, Plating*.)

**Plating Bath, Electro** — — (See *Bath, Electro-Plating*.)

**Plating, Copper** — — Electro-plating with copper. (See *Plating, Electro. Bath, Copper*.)

**Plating, Electro** — — The process of covering any electrically conducting surface with a metal by the aid of the electric current.

By the aid of electro-plating, the baser metals are covered with silver, gold or platinum, or with any other metal, such as nickel or copper.



The process of electro-plating is carried on as follows:

The object to be plated is connected with the negative terminal of a battery and placed in a solution of the metal with which it is to be plated, opposite a plate of that metal connected to the positive terminal of the battery. If, for example, the object is to be plated with copper, it is placed in a solution of copper sulphate or blue vitriol, opposite a plate of copper. By this arrangement the object to be plated forms the kathode of the plating bath, and the plate of copper forms the anode.

On the passage of the current the copper sulphate ( $\text{Cu SO}_4$ ) is decomposed, metallic copper being deposited in an adherent layer on the articles attached to the kathode, and the acid radical ( $\text{SO}_4$ ) appearing at the anode, where it combines with one of the atoms of the copper plate. Since for every molecule of copper sulphate decomposed, in the electrolyte, a new molecule of copper sulphate is thus formed, by the gradual solution of the copper anode, the strength of the solution in the bath is maintained as long as any of the copper plate remains at the anode, and the ordinary activity of the cell is not otherwise interfered with.

When any other metals, such as gold, silver or nickel, for example, are to be deposited, suitable solutions of their salts are placed in the bath, and plates of the same metal hung at the anode.

The character and coherence of the metallic coatings thus obtained depend on the nature and strength of the plating bath, and on the density of the current employed. The size and position of the anode, as compared with the size and position of the objects to be plated, must therefore be carefully attended to, as well as the strength of

spoons, forks, etc., to be plated are immersed in a suitable silver solution and connected with the kathode.

The electro-plating process when employed for the production of electrotypes is called electrotyping. Here the object is to obtain a reproduction in metal of any particular form, such as of type or of some natural object. It was called by Jacobi the *galvanoplastic* process. The term *electrotyping* is, however, more generally adopted. (See *Electrotyping, or the Electrotyping Process*.)

**Plating, Gold** — — Electro-plating with gold. (See *Plating, Electro. Bath, Gold*.)

**Plating, Nickel** — — Electro-plating with nickel. (See *Plating, Electro. Bath, Nickel*.)

**Plating, Sectional** — — Plating an article with a greater thickness of metal at certain points than at the rest of the surface.

Sectional plating is employed for such objects as spoons, etc., which are, by this method, given a greater thickness of deposit at the under portions of the bowl and handle, where the spoon usually rests, and is, therefore, exposed to the greatest wear.

Sectional plating is effected by means of sectional plating frames. (See *Plating, Electro. Frames, Sectional Plating*.)

**Plating, Silver** — — Electro-plating with silver. (See *Plating, Electro. Bath, Silver*.)

**Platinoid.**—An alloy consisting of German silver containing 1 or 2 per cent. of metallic tungsten.

Platinoid is suitable for use in resistance coils on account of the comparatively small influence produced on its electric resistance by changes of temperature.

Its resistance is 60 per cent. higher than that of German silver.

**Platinum.**—A refractory and not readily oxidizable metal, of a tin-white color.

The co-efficient of expansion of platinum by heat is very nearly that of ordinary glass. Platinum is, therefore, generally employed for the leading-in conductors of an incandescent lamp. These conductors are fused into the glass of the lamp chamber. On the heating of the wires by



Fig. 439. Electro-Plating.

the metallic solution and the current strength passing. (See *Current Density*.)

Fig. 439, shows a bath arranged for silver-plating.

The anode consists of a plate of silver. The

the current, the glass expands equally with the wires, and the vacuum in the lamp chamber is not, therefore, injured.

**Platinum Alloy.**—(See *Alloy, Platinum-Silver*.)

**Platinum Black.**—Finely divided platinum that possesses, in a marked degree, the power of absorbing or occluding gases.

Platinum black is obtained by the action of potassium hydrate on platinum chloride. Unlike metallic platinum it is of a black color.

**Platinum Fuse.**—(See *Fuse, Platinum*.)

**Platinum-Silver Alloy.**—(See *Alloy, Platinum-Silver*.)

**Platinum Standard Light.**—(See *Light, Platinum Standard*.)

**Platymeter.**—An instrument invented by Sir William Thomson for comparing the capacities of two condensers.

**Plow.**—The sliding contacts connected to the motor of an electric street car, and placed within the slotted underground conduit, and provided for the purpose of taking off the current from the electric mains placed therein, as the contacts are pushed forward over them by the motion of the car.

Similar contacts, placed in the rear of the motor car and drawn after the train, form what is technically known as the *sled*, or when rolling on overhead wires as *trolleys*. (See *Railroad, Electric*.)

**Plow, Electric** — —A plow driven by an electric motor placed either on a wagon to which the plow is attached, or by a stationary electro-motor, by the aid of cords or other flexible belts.

One of the first practical applications of the electric transmission of energy was for the operation of a plow, driven electrically, by an electric current generated at some distance, and transmitted to the electric motor by suitable conductors.

**Plücker Tube.**—(See *Tube, Plücker*.)

**Plug.**—A piece of metal in the shape of a plug, provided for making or breaking a circuit by placing in, or removing from, a conical opening formed in the ends of two closely approached pieces of metal which are

connected with the circuits to be made or broken.

As the plug is inserted in the opening it bridges over the opening and thus closes the circuit connected with the separate pieces of metals. On removing the plug the circuit is opened or broken.

**Plug.**—In telegraphy, an inexperienced operator.

**Plug, Double** — —A plug so constructed that when inserted in a spring-jack it makes two connections, one at its point and one at its shank. (See *Spring-jack*.)

**Plug, Fusible** — —A term sometimes applied to a safety fuse. (See *Plug, Safety*.)

**Plug, Infinity** — —A plug hole in a box of resistance coils, in which the two pieces of brass it connects are not connected by any resistance coil, and which, therefore, leaves, when withdrawn, an open circuit of an infinite resistance.

**Plug, Safety** — —A wire, bar, plate or strip of readily fusible metal, capable of conducting, without fusing, the current ordinarily employed on the circuit, but which fuses, and thus breaks the circuit, on the passage of an abnormal current. (See *Fuse, Safety*.)

A safety plug is only used on circuits in which the electro-receptive devices are connected with the leads in multiple. In this case the fusing of the safety plug, and the consequent opening of the circuit with which it is connected, does not affect the rest of the circuit. On series-connected circuits a different form of safety device is used. (See *Cut-Out, Automatic, for Series-Connected Electro-Receptive Devices*.)

**Plug, Short-Circuiting** — —A plug by means of which one part of a circuit is cut out by being short-circuited.

**Plug Switch.**—(See *Switch, Plug*.)

**Plug, Wall** — —A plug provided for the insertion of a lamp or other electro-receptive device in a wall socket, and thus connecting it with a lead.

**Plugging.**—Completing a circuit by means of plugs.

**Plugs, Grid** — —Plugs of active material that fill the spaces or apertures in the lead grid or plate of a storage battery.



The active material forming the plugs is placed in the spaces in the grid while in the plastic condition. On the subsequent hardening of this material, these grid plugs cannot readily fall out, since the spaces are so shaped that their interior portions are of greater diameter than at the surface of the plates.

**Plumbago.**—An allotropic modification of carbon.

Plumbago, the material commonly known as *black lead*, is the same as graphite. Powdered plumbago is employed in *electrotyping processes* for rendering non-conducting surfaces electrically conducting. For this purpose powdered plumbago is dusted on the surfaces, which thus acquire the power of receiving a metallic lustre by friction. Stove polishes are formed of mixtures of plumbago and other cheap materials. (See *Graphite*.)

Strictly speaking, the term graphite is properly applied to such varieties of plumbago as are suitable for direct use for writing purposes, as in lead pencils.

**Plumbago, Coppered** — Powdered plumbago coated with copper, for use in the metallization of objects to be electro-plated. (See *Metallization*.)

**Plumbago, Gilt** — Powdered plumbago whose conducting power for electricity has been increased by coating it with metallic gold.

Gilt plumbago is used for rendering non-conducting surfaces electrically conducting and thus preparing them for electro-plating.

To prepare gilt plumbago, dissolve in 100 parts of sulphuric ether 1 part of chloride of gold, mix in this 60 parts of powdered plumbago, and expose to air and light until all ether has volatilized. Then dry in an oven.

**Plumbago, Silvered** — Powdered plumbago coated with metallic silver for use in the metallization of objects to be electro-plated.

**Plunge Battery.**—(See *Battery, Plunge*.)

**Pneumatic Perforator.**—(See *Perforator, Pneumatic*.)

**Pneumatic Signals, Electro** — (See *Signals, Electro-Pneumatic*.)

**Pockets, Armature** — Spaces provided in an armature for the reception of the

armature coils. (See *Coils, Armature, of Dynamo-Electric Machine*.)

**Poggendorff's Voltaic Cell.**—(See *Cell, Voltaic, Poggendorff's*.)

**Point, Carbon** — A term formerly applied to the carbon electrodes used in the production of the voltaic arc.

**Point, Indifferent** — A point in the intra-polar regions of a nerve where the anelectrotonic and katelectrotonic regions meet, and where the excitability is therefore unchanged.

This is sometimes called the neutral point.

**Point of Lightning Rod.**—(See *Rod, Lightning, Points on*.)

**Point of Origin.**—(See *Origin, Point of*.)

**Point, Neutral** — In electro-therapeutics, a term sometimes used instead of indifferent point. (See *Point, Indifferent*.)

**Point, Nodal** — The null point in a circuit traversed by electric oscillations. (See *Point, Null*.)

**Point, Null** — Such a point on a micrometer circuit, that when joined or connected with the secondary circuit of an induction coil, the sparks in the micrometer circuit are either very greatly decreased or are entirely absent.

The null point on the micrometer circuit is situated symmetrically with respect to the micrometer knobs.

If the induction coil A, Fig. 440, has its secondary circuit connected as shown with the micrometer circuit at the point e, situated at the centre of the micrometer circuit, the point will be a null point, and the effects of sparks at the micrometer knobs, at M, will be greatly decreased. Under the conditions shown in the figure, the electrical oscillations in the micrometer circuit must be regarded as in the condition of stationary waves or vibrations. It would seem, therefore, that definite waves or vibrations are set up in the microm-

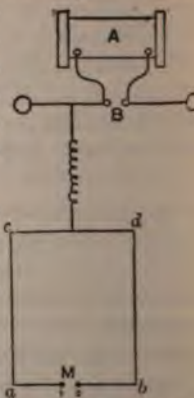


Fig. 440. Null Point.



eter circuit, in the same way as are the vibrations produced in an elastic bar set in vibration by a violin bow, or by a blow from a hammer.

**Points, Consequent** — —The points or places in an anomalous magnet where the consequent poles are situated. (See *Magnet, Anomalous. Pole, Anomalous.*)

**Points, Corresponding** — —Points where the lines of electrostatic force surrounding an insulated charged conductor enter the surfaces of neighboring conductors.

Points on the surface of a body placed in an electrostatic field where the lines of electrostatic force enter its surface, and thus produce a charge equal and opposite to that of the surface of the body at the points from which they came.

Corresponding points receive, in accordance with the laws of electrostatic induction, charges equal and opposite to those of the surfaces from which the lines of electrostatic force originate.

**Points, Electric Action of** — —The effect of points placed on an insulated, charged conductor, in slowly discharging the conductor by electric convection. (See *Convection, Electric.*)

The cause of this action of points is to be attributed to the increased density of a charge on the surface of a conductor at the points and the consequent production of convection streams of air, which thus gradually carry off the charge. (See *Charge, Distribution of.*)

**Points, Iso-Electric** — —A term sometimes used in electro-therapeutics for points of equal potential.

**Points, Neutral, of Dynamo-Electric Machine** — —Two points of greatest difference of potential, situated on the commutator cylinder, at the opposite ends of a diameter thereof, at which the collecting brushes must rest in order to carry off the current quietly.

These are called the neutral points because the coils that are short-circuited by the brushes lie in the magnetically neutral points of the armature. (See *Line, Neutral, of Commutator Cylinder.*)

**Points, Neutral, of Magnet** — —Points approximately midway between the poles of

a magnet. (See *Line, Neutral, of a Magnet. Magnet, Equator of.*)

**Points, Neutral, of Thermo-Electric Diagram** — —The points on a thermo-electric diagram where the lines representing the thermo-electric powers of any two metals cross one another.

A mean temperature for any two metals in a thermo-electric series, at which, if their two junctions are slightly over and slightly under the mean temperature (the one as much above as the other is below), no effective electromotive force is developed. (See *Diagram, Thermo-Electric. Couple, Thermo-Electric.*)

**Points or Rhumbs of Compass.** — (See *Compass, Points of.*)

**Polar Region.** — (See *Region, Polar.*)

**Polar Tips.** — (See *Tips, Polar.*)

**Polarity, Diamagnetic** — —A polarity the reverse of ordinary magnetic polarity, the existence of which was assumed by Faraday to explain the phenomena of diamagnetism. (See *Diamagnetism.*)

Faraday assumed that diamagnetic substances, when brought into a magnetic field, acquired *north magnetism* in those parts that were nearest the north pole, instead of *south magnetism*, as with ordinary magnetic substances. The north pole thus obtained would, he thought, explain the apparent repulsion of a slender rod of any diamagnetic material delicately suspended in a strong magnetic field, and cause it to point equatorially, or with the lines of force passing through its least dimensions. This supposition was subsequently abandoned by Faraday. It has recently been revived by Tyndall. (See *Diamagnetism.*)

The action of a diamagnetic body, when placed in a magnetic field, is now generally ascribed to the fact that the atmosphere, by which such body is surrounded, is more powerfully paramagnetic than the diamagnetic substance. The diamagnetic substance comes to rest in an equatorial position, because in that position there is the greatest length of air in the path of the magnetic lines, which has a smaller magnetic resistance than the diamagnetic substance.

**Polarity, Magnetic** — —The polarity acquired by a magnetizable substance when brought into a magnetic field.



The direction of magnetic polarity, acquired by a substance when brought into a magnetic field, depends on the direction in which the lines of magnetic force pass through it. Where these lines enter the substance a south pole is produced, and where they pass out, a north pole is produced. *The axis of magnetization lies in the direction of the lines of force as they pass through the body, and the intensity of magnetization depends on the number of these lines of force which pass through the body.*

*The cause of magnetic polarity is not definitely known. Hughes' hypothesis attributes it to a property inherent in all matter. Ampère attributes it to closed electric circuits in the ultimate particles. Whatever its cause, it is invariably manifested by a magnetic field, the lines of force of which are assumed to have the direction already mentioned. (See Magnetism, Hughes' Theory of. Magnetism, Ampère's Theory of. Magnetism, Ewing's Theory of.)*

**Polarization, Galvanic** — —A term sometimes applied to the polarization of a voltaic cell. (See *Cell, Voltaic, Polarization of.*)

**Polarization, Internal, of Moist Bodies** — —A polarization exhibited by such moist bodies as the nerves, muscular fibres, the juicy parts of vegetables and animals, or in general by all bodies possessing a firm structure filled with a liquid, on the passage through them of a strong electric current.

**Polarization, Magnetic Rotary** — —The rotation of the plane of polarization of a beam of plane-polarized light consequent on its passage through a plate of glass subjected to the stress of a magnetic field. (See *Rotation, Magneto-Optic.*)

**Polarization of Dielectric.**—(See *Dielectric, Polarization of.*)

**Polarization of Electrolyte.**—(See *Electrolyte, Polarization of.*)

**Polarization of Voltaic Cell.**—(See *Cell, Voltaic, Polarization of.*)

**Polarized Armature.**—(See *Armature, Polarized.*)

**Polarized Relay.**—(See *Relay, Polarized.*)

**Polarizing Current.**—(See *Current, Polarization.*)

**Polarizing Electro-Therapeutic Current.**—(See *Current, Electro-Therapeutic Polarizing.*)

**Pole, Analogous** — —That pole of a pyro-electric substance, like tourmaline, which acquires a positive electrification while the temperature of the crystal is rising. (See *Electricity, Pyro.*)

**Pole, Anomalous** — —A name sometimes given to those parts or poles in an anomalous magnet which consist of two similar free poles placed together. (See *Magnet, Anomalous.*)

**Pole, Antilogous** — —That pole of a pyro-electric substance, like tourmaline, which acquires a negative electrification when the temperature of the crystal is rising, and a positive electrification when it is falling. (See *Electricity, Pyro.*)

**Pole, Armature** — —(See *Armature, Pole.*)

**Pole Changer.**—A switch or key for changing or reversing the direction of current produced by any electric source, such as a battery.

*The commutator of a Ruhmkorff coil is a simple form of pole changer. It is, however, usually called a commutator. (See Coil, Induction.)*

**Pole-Changing and Interrupting Electrode Handle.**—(See *Electrode-Handle, Pole-Changing and Interrupting.*)

**Pole-Changing Switch.**—(See *Switch, Pole-Changing.*)

**Pole Climbers.**—(See *Climbers, Pole.*)

**Pole, Consequent** — —A magnet pole formed by two free north or two free south poles placed together. (See *Magnet, Anomalous.*)

**Pole, Magnetic, Austral** — —A name formerly employed in France for the north-seeking pole of a magnet.

That pole of a magnet which points to the earth's geographical north.

It will be observed that the French regarded the magnetism of the earth's Northern Hemisphere

as north, and so named the north-seeking pole of the needle the austral or south pole.

The north-seeking pole of the magnet is sometimes called the boreal or north pole. (See *Pole, Magnetic, Boreal*.)

**Pole, Magnetic, Boreal** — —A name formerly employed in France for the south-seeking pole of a magnet, as distinguished from the austral or north-seeking pole.

That pole of a magnet which points toward the geographical south.

If the earth's magnetic pole in the Northern Hemisphere be of north magnetism, then the pole of a needle that points to it must be of the opposite polarity, or of south magnetism. In this country we call the end which points to the north, the north-seeking pole or marked pole. In France the end which points to the north was formerly called the austral pole. Austral means south pole. (See *Pole, Magnetic, Austral*.)

**Pole, Magnetic, False** — —A term proposed by Mascart and Joubert to designate the place or places on the earth which apparently act as magnetic poles, in addition to the two true magnetic poles, near the earth's geographical poles.

According to these authorities, the earth possesses two magnetic poles only, viz., a negative pole in the Northern Hemisphere and a positive pole in the Southern Hemisphere. The additional poles are called by them the false magnetic poles.

**Pole, Magnetic, Free** — —A pole in a piece of iron, or other paramagnetic substance, which acts as if it existed as one magnetic pole only.

A free magnetic pole has in reality no physical existence. The conception, however, is of use in describing certain magnetic phenomena. If the bar of iron be so long as to practically place one pole beyond the sensible action of the other, either pole may be regarded as a free pole.

**Pole, Magnetic, Marked** — —That pole of a magnetic needle which points approximately to the earth's geographical north. (Obsolete.)

The north-seeking pole of a magnetic needle.

**Pole, Magnetic, North** — —That pole of a magnetic needle which points approximately to the earth's geographical north.

The north-seeking pole of a magnetic needle.

**Pole, Magnetic, North-Seeking** — — That pole of a magnetic needle which points approximately towards the earth's geographical north.

**Pole, Magnetic, Salient** — —A term sometimes applied to the single poles at the extremities of an anomalous magnet, in order to distinguish them from the double or consequent pole formed by the juxtaposition of two similar magnetic poles. (See *Magnet, Anomalous*.)

**Pole, Magnetic, South** — —That pole of a magnetic needle which points approximately towards the earth's geographical south.

The south-seeking pole of a magnetic needle.

**Pole, Magnetic, South-Seeking** — — That pole of a magnetic needle which points approximately toward the geographical south.

**Pole, Negative** — —That pole of an electric source through which the current is assumed to enter or flow back into the source after having passed through the circuit external to the source.

**Pole-Pieces of Dynamo-Electric Machine.** —(See *Pieces, Pole, of Dynamo-Electric Machine*.)

**Pole Platform.**—(See *Platform, Pole*.)

**Pole, Positive** — —That pole of an electric source out of which the electric current is assumed to flow.

**Pole Steps.**—Short rods or bars shaped so as to be readily inserted in holes near the base of telegraph or electric light poles, so as to serve as steps to enable a lineman to reach the permanently placed steps.

Permanent steps are placed only at some distance from the ground, in order to prevent the ready climbing of the poles by unauthorized persons.

**Pole, Telegraphic** — —A wooden or iron upright on which telegraphic or other wires are hung.

Wooden poles are generally round.



The *terminal pole*, or the last pole at each end of the line, or where the wires bend at an angle of nearly 90 degrees, is made larger than usual and is often cut square.

The holes for the poles must be dug in the true line of the wires, and not at an angle to such line. As little ground should be disturbed in the digging as possible. *Earth borers*, or modifications of the ordinary ship auger, are generally employed for this purpose. When the pole is placed in position the ground should be *rammed* or *punned* around the pole.

In *setting the pole*, it is generally buried at least 5 feet in the ground. In England the poles are planted to a depth of about one-fifth of their length. In embankments and loose ground, they are planted deeper than in more solid earth. On curves, the poles should be inclined a little so as to lean back against the lateral strain of the wire, since by the time the ground has completely set, the strain of the wire will have pulled them into an erect position.

Care must be taken to so plant the poles on that side of a road or railway that the prevailing winds will blow them off the roadbed, should it overturn them. As to location, the top of steep cuttings is preferable to the slope. In all exposed positions, it is preferable to strengthen the poles by *stays* attached to both sides.

Where the number of wires is unusually large, heavy timber, or in case of its absence, double



Fig. 441. Telegraphic Brackets.



Fig. 442. Telegraphic Arms.

poles suitably braced together, must be employed. In long lines the poles should all be numbered in order to afford ease of reference in case of repair.

When, even with the best *punning*, and other precautions, the pole is judged to be unable to resist the strain on it, *stays* and *struts* are employed. A *stay* is used when it is desired to remove the *pull* or *tension* from the pole; a *strut*, when it is desired to remove the *thrust* or *pressure*.

The *arms* or *brackets*, or the cross-pieces that

support the *insulators*, should all be placed on the same side of the poles. Some common forms of brackets are shown in Fig. 441, and of telegraphic arms in Fig. 442.

*Saddle brackets* should be placed on alternate sides of the poles. When the strain on an insulator is too great, on account of the wire going off at a sharp angle, a *shackle* is used. This is a special form of insulator which confines the strain to one spot.



Fig. 443. Double Shackles.

A form of *double shackle* is shown in Fig. 443. The wire passes around the recess at B, between the two insulators.

On curves, or in any situation where there is a probability, in case of the breaking of an insula-

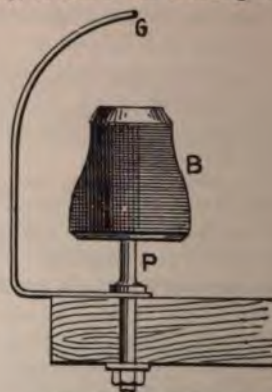


Fig. 444. Hook Guard.

tor, of a wire getting into a dangerous position, *guards* should be employed.

Guards are of two kinds, viz.: *hoop guards* and *hook guards*. A form of *hook guard* is shown in Fig. 444.

When wooden poles are employed various preservative methods are adopted to protect the wood from decay, which is very apt to occur, especially where the pole enters the ground. Some of these forms are as follows, viz.:

(1.) *Charring* and *tarring* the butt end of the pole where it enters the ground, so as to expel the sap and destroy injurious plant or animal germs.

charred end is then cleansed and dipped in a mixture of tar and slaked lime.

**Burntising**, or the introduction of zinc into the pores of the wood, by dipping the poles in an open tank filled with a solution of this salt.

**Cyanising**, or the similar introduction of cyanogen into the pores of the wood, by dipping the poles in a solution of cyanogen chloride.

**Boucherising**, or the injection of a solution of boric acid into the pores of the wood.

**Creosoting**, or the application of creosote to the poles.

**Telegraphic, Punning of** — — The process of packing the earth around the poles of a telegraph pole for the purpose of securing it in the ground.

**Telegraphic, Terminal** — — The poles at either end of a telegraphic line.

**First or last pole** in a telegraphic line is supported on opposite sides by the line wires, and is usually made stouter than the intermediate poles, and greater care is taken to fix it securely in the ground.

**Testing** — — A term sometimes used in electro-therapeutics for the intensity of the pole or electrode. (See *Electrode, Intensity*.)

**Trolley** — — The pole which supports the trolley bearing and rests on the rails in the trolley base frame in an overhead electric railway system.

**Unit, Magnetic** — — A magnetic pole of such a strength that it would act with a unit dyne of force on another unit pole at a distance of one centimetre.

**Consequent** — — The name given to the magnetic poles formed by two free N. or two free S. poles placed together. (See *Magnet, Anomalous*.)

**Idle** — — Poles or electrodes in which the tubes, between which discharges are made, are in place.

**Isolated poles** have no connection with the line coils or other sources from which the electrical charges are obtained. These poles are provided with galvanometer wires, etc., in the case of the Edison effect, or for the study of the

electrical condition of the dark space and other regions of the atmosphere of the tube.

**Poles, Magnetic** — — The two points where the lines of magnetic force pass from the iron into the air, and from the air into the iron.

The two points in a magnet where the magnetic force appears to be concentrated.

In reality the magnetic force is most concentrated at the neutral points of a magnet, through which all the lines of force pass.

All magnets possess at least two poles, one positive or north, and the other negative or south.

The lines of magnetic force are assumed to come out of a magnet at its north pole, and to enter it at its south pole.

**Poles, Magnetic, of Verticity** — — (See *Verticity, Poles of, Magnetic*.)

**Poles of Condenser**. — The terminals of a condenser. (See *Condenser*.)

**Poles of Magnetic Intensity**. — (See *Intensity, Magnetic, Pole of*.)

**Polyphase Current**. — (See *Current, Multi-Phase*.)

**Polyphotal Arc Light Regulators**. — (See *Regulator, Polyphotal Arc-Light*.)

**Popgun, Electro-Magnetic** — — A magnetizing coil, provided with a tubular space for the insertion of a core, much shorter than the length of the coil, which, when the energizing current is passed through the coil, is thrown violently out from the coil.

The movement and consequent expulsion of the core is due to the action of the lines of magnetic force which complete their circuit through the core.

**Porcelain**. — A variety of insulating material.

A translucent variety of earthenware.

**Porous Cell**. — (See *Cell, Porous*.)

**Porous Cup**. — (See *Cup, Porous*.)

**Porous Insulation**. — (See *Insulation, Porous*.)

**Porous Jar**. — (See *Jar, Porous*.)

**Porret's Phenomena**. — (See *Phenomena, Porret*.)



**Portative Power.**—(See *Power, Portative*.)

**Porteelectric.**—An electric carrier.

A system of electric transportation by means of the successive attractions of a number of hollow helices of insulated wire on a hollow solenoidal iron car.

The solenoidal car forms the movable core of the helical coils. As it moves through these coils it automatically closes the circuit of an electric current through the coils in advance of it and opens the circuit of the coils in its rear. In this way the solenoidal car advances in a line coincident with the axis of the helical coils, being virtually sucked through them by their magnetic attractions. This system of electric propulsion is unique in systems of electric traction. The motor becomes a mere mass of iron or other paramagnetic material. The system is suitable for the carriage of mail or other comparatively light articles at a high speed.

In an experimental plant at Dorchester, Mass., a track of 2,784 feet in length was laid in the approximate form of an oval. The track was formed by an upper and lower rail of steel, suitably supported by stringers.

The car, which forms the movable core of the solenoidal coils, was of wrought iron, and was cylindrical in shape, with conical ends. It was



Fig. 445. *Portelectric Track.*

12 feet in length and 10 inches in diameter, and weighed about 500 pounds. It would carry about 10,000 letters. It had two flanged wheels above and two below.

The solenoidal coils, by the attractive power of which the core was moved, embraced the track and the movable core or carrier. They were fixed along the track at intervals of 6 feet from centre to centre. Each coil was formed of 630 turns of No. 14 copper wire. The upper track rail is divided into sections which form conductors for the driving current. A central wheel was

placed on the top of the carrier and connected the several helices successively with the electric



Fig. 446. *Portelectric Car.*

source as the carrier was drawn forward. A speed of about 34 miles an hour was reached.

A section of the track is shown in Fig. 445, and the shape and general structure of the carrier in Fig. 446.

**Portrait, Electric** — — A portrait formed on paper by the electric volatilization of gold or other metal.

An electric portrait is obtained by cutting on a thin card a portrait in the form of a stencil. A sheet of gold leaf is then placed on one side of the



Fig. 447. *Electric Portrait.*

paper stencil, and a sheet of paper on the other side; sheets of tin-foil are then placed on the outside, as shown in Fig. 447, and the whole firmly pressed together. If, now, a disruptive discharge is passed through from one sheet of tin-foil to the other, the gold leaf is volatilized, and a purplish stain is left on the paper of the outlines of the stenciled card, thus forming an electric portrait.

**Position, Energy of** — — A term used for stored energy, or potential energy. (See *Energy, Potential*.)

**Positive Direction of a Simple-Harmonic Motion.**—(See *Motion, Simple-Harmonic, Positive Direction of*.)

**ive Direction of Lines of Magnetic** — (See *Force, Magnetic, Lines of, Direction of*.)

**ive Direction of the Electrical Con- of Heat.** — (See *Direction, Positive, rical Convection of Heat*.)

**ive Direction Round a Circuit.** — *Direction, Positive, Round a Cir-*

**ive Direction Through a Circuit.** — *Direction, Positive, Through a Cir-*

**ive Electricity.** — (See *Electricity,*

**ive Electrode.** — (See *Electrode,*

**ive Feeders.** — (See *Feeders, Posi-*

**ive-Omnibus Bars.** — (See *Bars, Posi-*

**ive Phase of Electrotonus.** — (See *tonus, Positive Phase of*.)

**ive Plate of Storage Battery.** — (See *Positive, of Storage Battery*.)

**ive Plate of Voltaic Cell.** — (See *Positive, of Voltaic Cell*.)

**ive Pole.** — (See *Pole, Positive*.)

**ive Potential.** — (See *Potential, Posi-*

**ive Side of Circuit.** — (See *Circuit, Side of*.)

**ively.** — In a positive manner.

**ively Excited.** — Excited or charged with positive electricity. (See *Electricity,*

**Binding** — — A device for connecting the terminal of an electric source with the terminal of an electro-receptive device for connecting different parts of an apparatus with one another.

ducting or circuit wire is either introduced by the opening a, or c', Fig. 448, and by the screw b, or b', or is placed in the opening d, d, and kept in place by means of a screw. Sometimes two openings are made at c, and c', for the purpose of connecting wires together.

A device for coupling or connecting the ends of two wires to each other. It is then called a coupler. (See *Couple, Voltaic*.)



Fig. 448. Binding Posts.

**Pot, Porous** — — The porous jar or cell of a voltaic cell. (See *Cell, Porous*.)

**Potential, Alternating** — — A potential, the sign or direction of which is alternately changing from positive to negative.

An alternating potential may be obtained either in the case of an electrostatic field, or in that of a magnetic field.

**Potential, Alternating Electrostatic** — — The potential of a charge that is undergoing rapid alternations.

**Potential, Alternating, Magnetic** — — The difference of magnetic potential produced by alternating electric currents.

**Potential, Constant** — — A potential which remains constant under all conditions.

A machine or other electric source is said to have a constant potential when it is capable, while in operation, of maintaining a constant difference of electric pressure between its two terminals on changes of load. (See *Circuit, Constant-Potential*.)

**Potential, Difference of** — — A term employed to denote that portion of the electromotive force which exists between any two points in a circuit.

The difference of potential at the poles of any electric source, such as a battery or dynamo, is that portion of the total electromotive force which is available, and is equal to the total electromotive force, less what is lost in the source.

Some difference of opinion exists as to the exact meaning that is attached to the phrase difference of potential.

A positively electrified body is said to have a higher electric potential than the earth, whose potential is taken as zero.



**Potential, Difference of, Methods of Measuring** — Methods employed for determining differences of potential.

These methods are as follows:

(1.) *By the Method of Weighing*, that is, by obtaining the weight required to overcome the attraction between two oppositely charged plates, or oppositely energized coils; or by measuring the repulsion between similarly charged surfaces, or similarly energized coils.

(2.) *By the Use of Electrometers*, or apparatus designed for measuring differences of potential. (See *Electrometers*.)

(3.) *By the Use of Galvanometers*.

Differences of potential, in the case of currents, may be determined from the quantity of electricity which flows per second through a given circuit, that is, by the number of amperes, just as the pressure of water at any point in the side of a containing vessel can be determined by the quantity of water that flows per second. Difference of potential in the case of currents, therefore, may be measured by any galvanometer which measures the current directly in amperes, provided the resistance of the circuit is known.

**Potential, Drop of** — A term sometimes used instead of fall of potential. (See *Potential, Fall of*.)

**Potential, Electric** — The power of doing electric work.

Electric level.

Electric potential can be best understood by comparison with the case of a liquid such as water.

The ability of a water supply or source to do work depends:

- (1.) On the quantity of water.
- (2.) On the level of the water, as compared with some other level; or, in other words, on the *difference between the two levels*.

In a like manner the ability of electricity to do work depends:

- (1.) On the quantity of electricity.
- (2.) On the electric potential at the place where the electricity is produced, as compared with that at some other place; or, in other words, on the *difference of potential*.

In the case of water flowing through a pipe, when its flow has been fully established, the quantity which passes in a given time is the same at any cross-section of the pipe.

In the case of electricity, the quantity of electricity flowing through any conductor, or part of a circuit, is the same at any cross-section. A galvanometer introduced into a break in any part of the conductor would show the same strength of current.

But, though the quantity of water which passes is the same at any cross-section of a pipe, the pressure per square inch is not the same, even in the case of a horizontal pipe of the same diameter throughout, but becomes less, or suffers a *loss of head*, or *difference of pressure*, at any two points along the pipe. This difference of pressure causes the flow of water between these two points against the resistance of the pipe.

So, too, in the case of a conductor carrying an electric current, when the full current strength has been established, the quantity of electricity that passes is the same at all cross-sections.

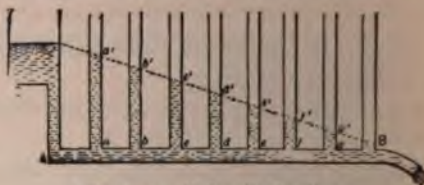


Fig. 449. Hydraulic Gradient.

The electric pressure or potential, however, is by no means the same at all points in the conductor, but suffers a loss of electric head or level, in the direction in which the electricity is flowing. It is this electric head or level, or difference of electric potential, that causes the electricity to flow against the resistance of the conductor.

These analogies can be best shown by the following illustration:

In Fig. 449, a reservoir, or source of water, at C, communicates with the horizontal pipe A-B, furnished with open vertical tubes at a, b, c, d, e, f, g, and B. If the outlet at B, is closed, the level of the water in the communicating vessels is the same as at the source; but if the liquid escape freely from B, the level of the water in the branch pipes will be found on the inclined dotted line, or at a', b', c', d', e', f', g', which may be called the *hydraulic gradient*.

The pressure per square inch, at any cross section of the horizontal pipe, which is measured by the height of the liquid in the vertical pipe at that point, decreases in the direction in which the liquid is flowing. The force that urges the liquid



through the pipe between any two points, may be called the *liquid-motive force* (*Fleming*) and is measured by the *difference of pressure* between these points.

In Fig. 450, the dynamo-electric machine at D, has its negative pole grounded, and its positive pole connected to a long lead, A B, the positive pole of which is also grounded. A *fall of potential*, represented by the inclined dotted line, occurs between A and B, in the direction in which the electricity is flowing.

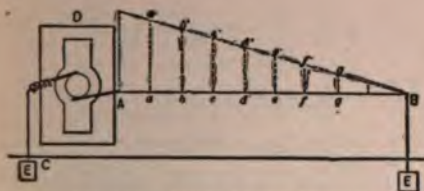


Fig. 450. Fall of Electric Potential.

The dynamo-electric machine may be regarded as a pump that is raising the electricity from a lower to a higher level, and passing it through the lead A B. The electric pressure or potential producing the flow is greatest near the dynamo and least at the further end, the differences at the points a, b, c, d, e, f, and g, being represented by the vertical lines a a', b b', c c', d d', e e', f f', and g g'.

The electricity flows between any two points as a and b, in the conductor A B, in virtue of the difference of electric pressure or potential between these two parts, or the difference between a a' and b b'.

Differences of potential must be distinguished from differences in electric charge, or *electrostatic density*. If two conductors at different potentials are connected by a conductor, a current will flow through this conductor. When their potential is the same, *no current flows*. The density of a charge is the quantity of electricity per unit of area.

The electric potential is the same at all points of an insulated charged conductor; the density is different at different points, except in the case of a sphere. The potential, however, is the same, since no current flows, or the charge does not redistribute itself. The density on an insulated, isolated sphere, is uniform over all parts of the surface, and its potential is the same at all points. If now the sphere be approached to another body, its density will vary at different parts of its sur-

face, and while the charge is redistributing itself so as to produce these differences in density the potential will vary. As soon, however, as this redistribution is effected and no further current exists, the potential is the same over all points, though the density differs at different points.

An electric source not only produces but also maintains a difference of potential. In the case of the flow of liquid in a pipe, if a continuous current of the liquid be maintained from the higher level in the reservoir to a lower level, as, for example, by means of a pump, it must flow through the pump to the reservoir, from the lower level towards the higher level. In case of an electric source, since the thing called electricity flows through a closed circuit, if its direction of flow in that part of the circuit external to the source—i. e., in the external or useful current—be from a higher to a lower level, then its flow through the remainder of the circuit—i. e., through the source—must be from the lower to the higher level. Since, however, the electrical potential of a body represents the work the electricity is capable of doing, the work done by the electricity may be regarded as being that done when it passes from the higher to the lower level.

**Potential, Electrostatic** — —The power of doing work possessed by a unit quantity of positive electricity charged or residing on an insulated body.

**Potential, Electrostatic, Difference of** — —Difference of potential of an electric charge. (See *Potential, Difference of, Electrostatics*.)

**Potential Energy**.—(See *Energy, Potential*.)

**Potential, Fall of** — —A decrease of potential in the direction in which an electric current is flowing, proportional to the resistance when the current is constant. (See *Potential, Electric*.)

**Potential Galvanometer**.—(See *Galvanometer, Potential*.)

**Potential Indicator**.—(See *Indicator, Potential*.)

**Potential, Magnetic** — —The amount of work required to bring up a unit north-seeking magnetic pole from an infinite distance to a given point in a magnetic field.



**Potential of Conductor, Methods of Varying** — (See *Conductor, Potential of, Methods of Varying.*)

**Potential of Conductors.**—(See *Conductor, Potential of.*)

**Potential, Negative** — That potential in the circuit external to the source towards which the electric current flows.

Generally the lower potential, or lower level.

**Potential, Positive** — That potential in the circuit external to the source, from which the electric current flows.

The higher potential or higher level.

**Potential, Uniform** — A potential that does not vary.

A constant potential. (See *Potential, Constant.*)

An electric source is said to generate a uniform potential when it maintains a constant difference of potential at its terminals.

**Potential, Unit Difference of** — Such a difference of potential between two points that requires the expenditure of one erg of work to bring a unit of positive electricity from one of these points to the other, against the electric force. (See *Erg.*)

The practical unit of difference of potential is the volt. (See *Volt.*)

**Potential, Zero** — An arbitrary level from which electric potentials are measured.

As we measure the heights of mountains from the arbitrary mean level of the sea, so we measure electric levels from the arbitrary level of the potential of the earth.

**Potentiometer.**—An apparatus for the galvanometric measurement of electromotive forces, or differences of potential, by a zero method. (See *Method, Null or Zero.*)

In the potentiometer the difference of potential to be measured is balanced or opposed by a known difference of potential, and the equality of the balance is determined by the failure of one or more galvanometers, placed in shunt circuits, to show any movement of their needles.

The principle of operation of the potentiometer will be understood from an inspection of Fig. 451. A secondary battery S, has its terminals con-

nected to the ends of a uniform wire A B, of high resistance called the *potentiometer wire*. There will, therefore, occur a regular drop or fall of potential along this wire, which, since the wire is uniform, will be equal per unit of length. This drop of potential can be shown by connecting the terminals of a delicate galvanometer, generally of high resistance, to different parts of the wire, when the deflection of the needle will be propor-




Fig. 451. Potentiometer.

tional to the drop of potential between the two points of the wire touched. If, now, the terminals of a *standard cell* be inserted in the circuit of the galvanometer, so as to oppose the current taken from the potentiometer wire, and the contacts of the potentiometer wire be slid along the wire until no deflection of the galvanometer needle is produced, the drop of potential between these two points on the wire will be equal to the difference of potential of the standard cell. (See *Cell, Voltaic, Standard.*)

Suppose, now, it be desired to measure the difference of potential between two points a and b, on the wire C, through which a current is flowing. Connect the points b and d, and a and c, as shown, with the delicate high resistance galvanometer G, in either of them. Now slide c, towards d, until the needle of G, shows no deflection. The potential between a and b, is then equal to that between c and d.

**Potentiometer Wire.**—(See *Wire, Potentiometer.*)

**Power.**—Rate of doing work.

Mechanical power is generally measured in horse power, which is equal to work done at the rate of 550 foot-pounds per second.

The C. G. S. unit of power is one erg per second.

The practical unit of power is the watt, or 10,000,000 ergs per second. The kilowatt is even more frequently used as the unit of power than the watt. (See *Power, Unit of.*)

**Power, Absorptive** — The property

possessed by many solid bodies of taking in and condensing gases within their pores.

Carbon possesses marked absorptive powers. The absorption of gases in this manner by solid bodies is known technically as the *occlusion of gases*. (See *Gas, Occlusion of*.)

One volume of charcoal, at ordinary temperatures and pressures, absorbs of

Ammonia.....	90	volumes
Hydrochloric acid.....	85	"
Sulphur dioxide.....	65	"
Hydrogen sulphide.....	55	"
Nitrogen monoxide.....	40	"
Carbonic acid gas.....	35	"
Ethylene.....	35	"
Carbon monoxide.....	9.42	"
Oxygen.....	9.25	"
Nitrogen.....	6.50	"
Hydrogen.....	1.25	"

—(*Saussure*.)

**Power, Candle** — —An intensity of light emitted from a luminous body equal to the light produced by a standard candle. (See *Candle, Standard*.)

The light-giving power of one standard candle.

**Power, Candle, Nominal** — —A term sometimes applied to the candle-power taken in a certain favorable direction.

This term is generally used in arc lighting. In the ordinary arc lamp the greatest amount of light is emitted at a particular point, viz., from the crater in the upper or positive carbon. (See *Arc, Voltaic*.)

**Power, Candle, Rated** — —A term sometimes used for nominal candle-power.

**Power, Candle, Spherical** — —The average or mean value of candle power taken at a number of points around the source of light.

**Power, Conducting** — —The ability of a given length and area of cross-section of a substance for conducting light, heat, electricity or magnetism, as compared with an equal length and area of cross-section of some other substance taken as a standard.

**Power, Conducting, for Electricity** — —The ability of a given length and area of

cross-section of a substance to conduct electricity, as compared with an equal length and area of cross-section of some other substance, such as pure silver or copper.

No substance is known that does not offer some resistance to the passage of an electric current.

The following table is taken from Sylvanus P. Thompson's "Elementary Lessons in Electricity and Magnetism":

#### GOOD CONDUCTORS.

Silver,	Other metals,
Copper,	Charcoal.

#### PARTIAL CONDUCTORS.

Water,	Wood,
The human body,	Marble,
Cotton,	Paper.

#### NON-CONDUCTORS.

Oils,	Gutta-percha,
Porcelain,	Shellac,
Dry wood,	Ebonite,
Silk,	Paraffine,
Resins,	Glass,

Dry air.

Heat decreases the conducting power of elementary substances. This decrease in the conducting power is approximately proportional to the increase of temperature. Carbon is an exception to the law, being a better conductor at a red or white heat than when cold.

The resistance of some alloys, such as German silver and platinoid, is but little affected by moderate changes of temperature. These alloys are, therefore, employed in the construction of resistance coils.

At a red heat insulators become fairly good conductors of electricity.

At very low temperatures the conducting powers of the metals increase.

Wroblewski has shown that at extremely low temperatures copper increases in its conducting power for electricity. He cooled copper to  $-200$  degrees C., the temperature of the solidification of nitrogen, and found that at this temperature its conducting power increased to about nine times its conducting power at  $0$  degrees C.

It may be remarked here that at exceedingly low temperatures a metal would take in or absorb heat from the surrounding medium with very great rapidity. In this sense it might be said that



its conducting power for heat was greatly increased.

Kohlrausch estimates the conducting power of distilled water at .00000000025, that of mercury being taken as unity.

The best conductors of electricity are the best conductors of heat.

This fact is well illustrated by the following table from Ayrton:

RELATIVE CONDUCTIVITIES PER CUBIC UNIT.

Name of Metal.	Electricity.	Heat.
Silver, annealed.....	100	100
Copper, ".....	94.1	74.8
Gold, ".....	73	54.8
Platinum.....	16.6	9.4
Iron.....	15.5	10.1
Tin.....	11.4	15.4
Lead.....	7.6	7.9
Bismuth.....	1.1	1.8

The electric conductivity of porous conductors decreases much more rapidly than the heat conductivity.

Practically perfect insulators for electricity can be obtained, but are unknown for heat.

Edlund believes the universal ether to be almost a perfect conductor. He bases this belief on the phenomena of sun spots, the occurrence of which is almost immediately followed by the occurrence of magnetic disturbances on the earth.

Lodge regards the luminiferous ether as being almost a perfect non-conductor, because he thinks that conductors must be opaque. It may be suggested in this connection that Edlund's hypothesis as to the conductivity of magnetic effects through the ether is also capable of an explanation by the effects of magnetic induction.

The conducting power for alternating currents is not the same as for steady currents. When the alternations become very high, the difference between these conducting powers of the metals becomes almost inappreciable.

Iron is an enormously worse conductor of electricity than copper for rapidly alternating currents, at least when the alternations are not too great. When, however, the alternations are extremely high, such as those which are produced by the discharge of a Leyden jar or lightning flash, the iron is as good a conductor as the copper. The reason for this is evident. The discharge in such cases keeps to the extreme outer

layer of the conductor, so that the composition of the substance is practically of no effect.

Hughes has shown that the resistance of an iron telephone line of the usual diameter, to periodic currents of about 100 per second, is somewhat more than three times its resistance for steady currents.

There is no such thing as conduction of electricity in gases. Electricity makes its way through a gas by a sudden piercing of the dielectric, or, in other words, by a disruptive discharge. (See *Discharge, Disruptive*.) In such a disruptive discharge it may be assumed that the gas becomes a conductor of electricity while the discharge is passing. It would then partake of the nature of an electrolytic conductor, since the discharge takes place by means of a true locomotion of atoms. (See *Conduction, Electrolytic*.)

**Power, Conducting, for Heat** — —The ability of a substance to transmit heat through its mass.

The metals are good conductors of heat. They are also good conductors of electricity. The conducting powers for heat and electricity are nearly identical. As the temperature of a body increases, its conducting power for heat is decreased. Carbon forms an exception to this statement.

*The flow of heat across a wall formed of a homogeneous material, the exposed faces of which are of equal extent and are maintained at a constant difference of temperature, takes place in accordance with the following laws:*

- (1.) The rate of flow across all perpendicular sections is the same.
- (2.) A uniform drop of temperature occurs from one side of the wall to the other in the direction in which the flow is taking place.
- (3.) The rate of flow is proportional to the difference in temperature.

The similarity between the laws of the flow of heat under the circumstances just named and the flow of electricity through a conductor is evident; the electrical current being the same in all parts of the circuit, a drop of potential occurring in the direction in which the current is moving, and the flow being proportional to the difference of potential.

**Power, Conducting, Tables of** — —Tables in which the relative conducting



powers of different substances are given. (See *Resistance, Tables of*.)

**Power, Electric** — —Power developed by means of electricity.

**Power, Electric, Distribution of** — —  
The distribution of electric power by means of any suitable system of generators, connecting circuits and electric motors.

**Power, Electric Transmission of** — —  
The transmission of mechanical energy by converting it into electric energy at one point or end of a line, and reconverting it into mechanical energy at some other point on the line. (See *Energy, Electric, Transmission of*.)

**Power, Horse** — —A rate of doing work equal to 550 foot-pounds per second, or 33,000 foot-pounds per minute.

1 horse-power =  $745.94 \times 10^7$  ergs per second.  
(See *Erg.*)

" = 745.941 watts. (See *Watt.*)

" = 42.746 lb. Fahr. heat units per min. (See *Units, Heat.*)

" = 23.748 lb. Cent. heat units per min. (See *Units, Heat.*)

**Power, Horse, Electric** — —Such a rate of doing electric work as is equal to 746 watts or 746 volt-coulombs per second.

This rate is equivalent to 33,000 foot-pounds per minute, or 550 foot-pounds per second.

Just as 1 pound of water raised through the vertical distance of 1 foot requires the expenditure of a foot-pound of energy, so 1 coulomb of electricity acting through the difference of potential of 1 volt requires a certain amount of work to be done on it. (See *Coulomb, Volt, Potential, Electric.*)

This amount is called a volt-coulomb or joule, and measured in foot-pounds is equal to .737324 foot-pounds. The volt-coulomb, or joule, is therefore the unit of electric work, just as the foot-pound is the unit of mechanical work.

The electric work of any circuit in joules is equal to the product of the volts by the coulombs.

If we determine the rate per second at which the coulombs pass, and multiply this product by the volts, we have a quantity which represents the electrical power, or rate of doing electrical work.

But 1 ampère is equal to 1 coulomb per second; therefore, if we multiply the current in amperes by the difference of potential in volts, the product is equal to the electrical power or rate of doing electrical work.

The product of an ampère by a volt is called a volt-ampère, or a watt.

One watt = .0013406 horse-power, or

One horse-power = 745.941 watts.

Therefore the electrical horse-power =  $\frac{CE}{746}$ ,  
where C = the current in amperes and E = the difference of potential in volts.

**Power, Multiplying, of Shunt** — —  
(See *Shunt, Multiplying Power of*.)

**Power of Periodic Current.** — (See *Current, Periodic, Power of*.)

**Power, Portative** — —The carrying power of a magnet. (See *Magnet, Portative Power of*.)

**Power, Projecting, of Magnet** — —The power a magnet possesses of throwing or projecting its lines of magnetic force across an intervening air space or gap.

The greater the air space the greater the magnetic reluctance, and consequently the greater the magnetizing force required to overcome it. Magnets of great projecting power are generally of great length, to accommodate the long coils of wire required.

**Power, Resuscitating, of Secondary Battery Cell** — —The power possessed by an apparently completely discharged secondary or storage cell of furnishing additional current after a protracted rest.

This resuscitating power is probably due to depolarization. It is therefore present in primary as well as in secondary batteries.

**Power, Stray** — —That part of the power employed in driving a dynamo, which is lost through friction, air churning or air currents, eddy currents, hysteresis, etc.

**Power, Thermo-Electric** — —A number which, when multiplied by the difference of temperature of a thermo-electric couple, will give the difference of potential thereby generated in micro-volts. (See *Diagram, Thermo-Electric.*)



**Power, Units of** — Various units employed in the measurement of power.

The following table of units of power is taken from Hering's work on dynamo-electric machines.

*Unit of Power.*

1 erg per second..	= .0000001 watt.
1 watt, or 1 volt-ampère, or 1 joule per second, or 1 volt-coulomb per second.....	= 1000000 ergs per second.
"	= 44.2394 foot-pounds per min.
"	= 6.11622 kilogram-metres per min.
"	= .0573048 lb.-Fah., heat unit per min.
"	= .318360 lb.-Cent., heat unit per min.
"	= .0144402 klgr.-Cent. heat unit per min.
"	= .0013592 metric horse-power.
"	= .0013406 horse-power.
1 foot-pound per min.....	= 226043 ergs per second.
"	= .0226043 watt.
"	= .13825 kilogram-metre per min.
"	= .00003072 metric horse-power.
"	= .000030303 horse-power.
1 kilogram-metre per min.....	= 1635000 ergs per second.
"	= .163500 watt.
"	= 7.23314 foot-pounds per min.
"	= .0002222 metric horse-power.
"	= .0002192 horse-power.
1 metric horse-power, or 1 French horse-power, or 1 cheval-vapeur, or 1 force de cheval, or 1 Pferdekraft.	= $735.75 \times 10^7$ ergs per second.
"	= 735.750 watts.
"	= 32549.0 foot-pounds per min.
"	= 4500 kilogram-metres per min.

1 metric h.-p., etc.	= 42.162 lb.-Fah., heat unit per min.
"	= 23.423 lb.-Cent., heat unit per min.
"	= 10.625 klgr.-Cent., heat unit per min.
"	= .98634 horse-power heat unit per min.
1 horse-power....	= $745.94 \times 10^7$ ergs per second.
"	..... = 745.941 watts.
"	..... = 33000 foot-pounds per min.
"	..... = 4562.33 kilogram-metres per min.
"	..... = 42.746 lb.-Fah., heat unit per min.
"	..... = 23.748 lb.-Cent., heat unit per min.
"	..... = 10.772 klgr.-Cent., heat unit per min.
"	..... = 1.01385 metric horse-power.
1 lb.-Fah., heat unit per min....	= $17.45 \times 10^7$ ergs per sec.
"	= 17.4505 watts.
"	= .23718 metric horse-power.
"	= .023394 horse-power.
1 lb. Cent., heat unit per min....	= $31.41 \times 10^7$ ergs per sec.
"	= 31.4109 watts.
"	= .04269 metric horse-power.
"	= .042109 horse-power.
1 klgr.-Cent., heat unit per min....	= $69.25 \times 10^7$ ergs per sec.
"	= 69.249 watts.
"	= .09412 metric horse-power.
"	= .092835 horse-power.

**Poynting's Law.**—(See *Law, Poynting's*.)

**Practical Unit of Inductance, or Self-Induction.**—(See *Inductance, or Self-Induction, Practical Unit of*.)

**Practical Unit of Magneto-Motive Force.**—(See *Force, Magneto-Motive, Practical Unit of*.)

**Practical Units.**—(See *Units, Practical*.)

**Pressel.**—A press switch or push connected to the end of a flexible, pendant conductor.

**Pressure Wires.**—(See *Wires, Pressure*.)

**Primary Battery.**—(See *Battery, Primary*.)

**Primary, Breaking the** — — Breaking or opening the circuit of the primary of an induction coil. (See *Primary, The*.)

**Primary Coil.**—(See *Coil, Primary*.)

**Primary, Making the** — — Closing or completing the circuit of the primary of an induction coil. (See *Primary, The*.)

**Primary Plate Condenser.**—(See *Plate, Primary, of Condenser*.)

**Primary Spiral.**—(See *Spiral, Primary*.)

**Primary, The** — — That conductor in an induction coil, or transformer, which receives the impressed electromotive force, or which carries the inducing current.

On changes in the current intensity in the primary, currents are induced in the secondary. (See *Induction, Electro-Dynamic. Coil, Induction. Transformer*.)

**Prime Conductor.**—(See *Conductor, Prime*.)

**Prime Motor.**—(See *Mover, Prime*.)

**Prime Mover.**—(See *Mover, Prime*.)

**Printer, Stock, Callahan's** — — A form of printing telegraph used in sending stock quotations telegraphically. (See *Telegraphy, Printing, Stock, Ticker, Stock*.)

**Printer, Stock, Phelps'** — — A form of printing telegraph used in sending stock quotations telegraphically. (See *Ticker, Stock, Telegraphy, Printing*.)

**Probe, Electric** — — A metallic conductor inserted in the body of a patient in order to ascertain the exact position of a bullet, or other foreign metallic substance.

Two conductors are placed parallel to each other, and are separated at the extremity of the probe by any suitable insulating material. On contact with the metallic substance, an electric bell is rung by the closing of the circuit, or the same thing is more readily detected by the deflection of the needle of a galvanometer, or by a telephone placed in the circuit.

**Process, Electrotyping** — — (See *Electrotyping, or the Electrotype Process*.)

**Processes of Carbonization.**—(See *Carbonization, Processes of*.)

**Production of Electricity by Light.**—(See *Electricity, Production of, by Light*.)

**Prognosis, Electric** — — In electrotherapeutics, a prognosis, or prediction of the fatal or non-fatal termination of a disease, from an electro-diagnosis based on the exaggerated or diminished reactions of the excitable tissues of the body when subjected to the varying influences of electric currents. (See *Diagnosis, Electro*.)

**Projections, Pacinotti** — — Radial projections or teeth in an armature core extending from the central shaft, so as to form slots, pockets, or armature chambers, for the reception of the armature coils.

The term Pacinotti projections was given to these teeth because they were first introduced by Pacinotti in his dynamo-electric machine.

**Projector, Mangin** — — A special form of search light.

The Mangin reflector consists of a concavo-convex mirror, the convex surface of which is silvered and acts as a reflector. The radii of curvature of the two surfaces are such that the light undergoes the two refractions, *i. e.*, on entering and on passing out of the mirror, in such a manner as to pass out of the mirror in absolute parallelism, and thus destroy all aberration.

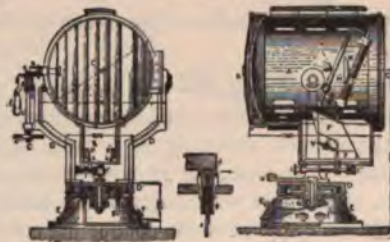


Fig. 452. Mangin Projector.

The Mangin projector is shown in longitudinal and in cross-section in Fig. 452, and the projector B, is placed in one end of the cylinder A, furnished with the openings for the ventilation of the chamber.

The cylinder is supported on trunnions, and by means of screws can be given any desired inclination, in a manner which will be readily understood from an inspection of the drawing.

The source of light is an arc lamp of the focusing type. A small disc is placed in front of the



arc in order to stop the direct light from the arc which would have divergent rays. The door C, is formed of a number of cylindrical lenses, placed parallel to one another, which cause the rays to diverge horizontally, when so desired.

**Prony Brake.**—(See *Brake, Prony*.)

**Proportional Coils.**—(See *Coils, Proportional*.)

**Proportionate Arms.**—(See *Arms, Proportionate*.)

**Proportionate Arms of Electric Bridge.**—(See *Arms, Proportionate*.)

**Prostration, Electric** — — Physiological exhaustion or prostration, resembling that produced by sunstroke, resulting from prolonged exposure to the radiation of an unusually large voltaic arc. (See *Sunstroke, Electric*.)

**Protection, Electric, of Houses, Ships and Buildings Generally** — — Means for protection against the destructive effects of a lightning discharge, consisting essentially in the use of lightning rods. (See *Rod, Lightning*.)

**Protection, Electric, of Metals** — — (See *Metals, Electrical Protection of*.)

**Protective Sheath.**—(See *Sheath, Protective*.)

**Protector, Cable** — — A device for the safe discharge of the static charge produced on the metallic sheathing of a cable, or on conductors surrounding or adjacent to the cable, consequent on changes in the electromotive force applied to the conducting core of such cable.

The cable protector is provided for the purpose of preventing the discharge of the charge from piercing and thus injuring the insulation of the cable itself.

**Protector, Comb** — — A term sometimes applied to a lightning protector or arrester, in which both the line and ground plates are furnished with a series of teeth, like those on a comb. (See *Arrester, Lightning*.)

**Protector, Voltaic Battery** — — A device for automatically disconnecting a voltaic battery, whenever the circuit in which it is placed becomes grounded.

The battery protector is used in systems of electric gaslighting, where, unless great care is exercised in insulating the circuits, considerable annoyance is often experienced from the readiness with which grounds are established. This arises from the high electromotive force of the spark obtained from the spark coil, piercing the insulation and establishing a ground through the gas pipes.

**Protoplasm, Effects of Electric Currents on** — — Contractions observed in all protoplasm on the passage of an electric current through it.

Protoplasm, the basis of plant and animal life, or the jelly-like matter that fills all organic cells, whatever may be the origin of such cells, suffers contraction when traversed by an electric current.

An increased activity in the movements of a form of microscopic life called the *amoeba* is occasioned by slight shocks from an induction coil; stronger discharges produce tetanic contractions, with, in some cases, expulsion of food or even of the nucleus. A uniform strength of current produces contraction and imperfect tetanus.

**Pull.**—A contact maker, similar in general construction to a push button, but operated by means of a pulling rather than a pushing force.

The pull is preferable to the push in exposed positions, such as outer doors, where moisture is apt to injure pushes.

**Pull, Chain** — — A chain pendant attached to a pendant burner for the movement of the wipe-spark spring and the ratchet in an electrically lighted gas burner.

**Pull, Door Bell, Electric** — — A circuit-closing device attached to a bell pull and operated by the ordinary motion of the pull.

**Pull, Electric Bell** — — A circuit-closing device operated by a pull.

Fig. 453 shows a form of electric bell pull. On pulling the bell handle, contact springs, that rest on a ring of insulating material when the

pull is in its normal position, are brought into contact with a metal ring, thus completing the circuit.



Fig. 453. Electric Bell Pull.

cuit. The bell pull is often used to replace the ordinary push button.

**Pulley, Driven** — — A pulley attached to the driven shaft. (See *Mover, Prime*.)

**Pulley, Driving** — — A pulley attached to the driving shaft. (See *Mover, Prime*.)

**Pulsating Current.**—(See *Current, Pulsating*.)

**Pulsation.**—A quantity of the nature of an angular velocity, equal to  $2\pi$  multiplied by the frequency of the oscillation, or, equal to  $2\pi$  divided by the duration of a single period.

**Pulsatory Current.**—(See *Current, Pulsatory*.)

**Pulsatory Magnetic Field.**—(See *Field, Magnetic, Pulsatory*.)

**Pulse, Electrical** — — An electric oscillation.

A momentary flow of electricity from a conductor, which gradually varies from the zero value to the maximum, and then to the zero value again, like a pulse or vibration in an elastic medium.

Electric pulses are set up in conductors connected with the coatings of a Leyden jar, on the discharge of the same. Such pulses produce a series of electrical oscillations, which move alternately backwards and forwards, until the discharge is gradually dissipated. (See *Oscillations, Electric*.)

The circumstances influencing the rate of propagation of an electric pulse through different parts of a closed circuit, according to Lodge, are—

(1.) The extra inertia, or the so-called magnetic susceptibility in the conducting substance, especially at its outer parts.

(2.) An undue constriction or throttling of the medium through which the disturbance is passing.

(3.) The nature of the insulating medium.

#### **Pump, Air, Geissler Mercurial** — —

A mercurial air pump, in which the vacuum is attained by the aid of a Torricellian vacuum.

In the *Geissler Mercury Pump*, Fig. 454, a vacuum is obtained by means of the Torricellian vacuum produced in a large glass bulb that forms the upper extremity of a *barometric column*. The lower end of this tube or column is connected with a reservoir of mercury by means of a flexible rubber tube. To fill the bulb with mercury the reservoir is raised above its level, *i. e.*, above thirty inches, the air it contains being allowed to escape through an opening governed by a stopcock. The vessel to be exhausted is connected with the bulb, and by means of a two-way exhaustion cock, communication can be made with the bulb, when it contains a Torricellian vacuum, and shut off from it while its air is being expelled.



Fig. 454. Geissler's Mercurial Air Pump.

In actual practice the mercury is mechanically pumped into the barometric column, and the valves are opened either by hand, or automatically by electrical means.

**Pump, Air, Mechanical** — — A mechanical device for exhausting or removing the air from any vessel.

An excellent form of air pump is shown in Fig. 455, which is a drawing of Bianchi's pump.

Three valves, all opening upwards, are placed



at the top and bottom of the cylinder, and in the piston, respectively. These valves are mechanically opened and closed at the proper moment by the movements of the piston, *i. e.*, their action is *automatic*. This enables a much higher vacuum to be obtained than when the valves open and close by the tension of the air.

Mechanical pumps are unable to readily produce the high vacua employed in most electric lamps. Mercury pumps are employed for this purpose. (See *Pump, Air, Mercurial*.)

**Pump, Air, Mercurial** — — A device for obtaining a high vacuum by the use of mercury.

Mercury pumps are in general of two types of construction, viz.:

- (1.) The Geissler pump.
- (2.) The Sprengel pump. (See *Pump, Air, Geissler Mercurial*. *Pump, Air, Sprengel's Mercurial*.)

**Pump, Air, Sprengel's Mercurial** — — A mercurial air pump in which the vacuum is obtained by means of the fall of a stream of mercury.

In the Sprengel mercury pump, Fig. 456, the fall of a mercury stream causes the exhaustion of a reservoir connected with the vertical tube, by the mechanical action of the mercury in entangling bubbles of air. These bubbles are largest at the beginning of the exhaustion, but become smaller and smaller near the end, until, at last, the characteristic metallic click of mercury or other liquid falling in a good vacuum




Fig. 455. Barrel of Bianchi's Air Pump.



Fig. 456. Sprengel's Mercurial Air Pump.

is heard. The exhaustion may be considered as completed when the bubbles entirely disappear from the column.

The Sprengel pump produces a better vacuum than the Geissler pump, but is slower in its action.

In actual practice, the mercury that has fallen through the tube is again raised to the reservoir connected to the drop tube by the action of a mechanical pump.

**Pumping of Electric Lights.**—A term sometimes applied to a pulsating or periodical increase and decrease in the brilliancy of the light.

This action is generally due to the periodic slipping of the belt or other driving mechanism. In the case of arc lamps it may also be caused by the improper action of the feeding device of the lamp.

**Puncture, Electro** — — The application of electrolysis to the treatment of aneurisms or diseased growths.

The blood is decomposed by the introduction of a fine platinum needle connected with the anode of a battery, and insulated, except near its point, by a covering of vulcanite.

The kathode is a sponge-covered metallic plate.

**Puncture, Galvano** — — A term sometimes applied to electro-puncture. (See *Puncture, Electro*.)

**Punning of Telegraph Pole.**—(See *Pole, Telegraphic, Punning of*.)

**Push.**—A name sometimes applied to a push button, or to a floor push. (See *Push, Floor, Button, Push*.)

**Push Button.**—(See *Button, Push*.)

**Push-Button Rattler.**—(See *Rattler, Push-Button*.)

**Push, Floor** — — A push button placed on the floor of a room so as to be readily operated by means of the foot. (See *Button, Push*.)

**Pyknometer.**—A term sometimes used for the specific gravity bottle employed in determining the specific gravity of a liquid.

**Pyrheliometer.**—An apparatus for measuring the energy of the solar radiation.

The pyrheliometer consists essentially of a short cylinder, the area of whose base is accurately determined. The cylinder being filled with a known weight of water, the water surface is exposed for a definite time to the sun's radiation, and the increase in temperature carefully determined. The product of the weight of the water thus heated by the increase in degrees, gives the number of heat units, from which the total energy absorbed is readily calculable. In order to avoid loss by reflection or diffusion from the water surface, it is covered by a layer of lamp-black. (See *Units, Heat, Calorimeter.*)

**Pyro - Electricity.** — (See *Electricity, Pyro.*)

**Pyro-Magnetic Generator or Dynamo.** — (See *Generator, Pyro-Magnetic.*)

**Pyro-Magnetic Motor.** — (See *Motor, Pyro-Magnetic.*)

**Pyrometer.** — An instrument for determining temperatures higher than those that can be readily measured by thermometers.

Pyrometers are operated in a variety of ways. A common method is by the expansion of a metal rod.

**Pyrometer, Siemens' Electric** — — An apparatus for the determination of tempera-

ture by the measurement of the electric resistance of a platinum wire exposed to the heat whose temperature is to be measured.

The platinum wire is coiled on a cylinder of fire-clay, so that its separate convolutions do not touch one another. It is protected by a platinum shield, and is exposed to the temperature to be measured while inside a platinum tube.

The resistance of the platinum coil at 0 degree C. having been accurately ascertained, the temperature to which it has been exposed can be calculated from the change in its resistance when exposed to the unknown temperature.

**Pyrometer, Siemens' Water** — — A pyrometer employed for determining the temperature of a furnace, or other intense source of heat, by calorimetric methods, *i. e.*, by the increase in the temperature of a known weight of water, into which a metal cylinder of a given weight has been put, after being exposed for a given time to the source of heat to be measured.

When copper cylinders are employed, the instrument possesses a range of temperature of 1,800 degrees F.; when a platinum cylinder is used, it has a range of 2,700 degrees F.

## Q

**Q.** — A contraction for electric quantity.

**Quad.** — A contraction sometimes employed in place of quadruplex telegraphy. (See *Telegraphy, Quadruplex.*)

**Quadrant.** — A term proposed for the unit of self-induction.

An earth quadrant is equal to  $10^9$  centimetres.

In the United States the word henry is used for the unit of self-induction. (See *Henry, A.*)

**Quadrant Electrometer.** — (See *Electrometer, Quadrant.*)

**Quadrant Electroscope, Henley's.** — (See *Electroscope, Quadrant, Henley's.*)

**Quadrant, Legal** — — A length equal to 9,978 kilometres, instead of the assumed 10,000 kilometres.

**Quadrant, Standard** — — A length equal to 10,000 kilometres.

**Quadrature, In** — — A term employed to express the fact that one simple periodic quantity lags 90 degrees behind another.

The electromotive force of self-induction is said to be in quadrature with the effective electromotive force or current.

**Quadruplex Telegraphy, Bridge Method of** — — (See *Telegraphy, Quadruplex, Bridge Method of.*)

**Qualitative Analysis.** — (See *Analysis, Qualitative.*)

**Quality or Timbre of Sound.** — (See *Sound, Quality or Timbre of.*)

**Quantitative Analysis.** — (See *Analysis, Quantitative.*)



**Quantity Armature.**—(See *Armature, Quantity*.)

**Quantity, Connection of Battery for** —(See *Battery, Connection of, for Quantity*.)

**Quantity Efficiency of Storage Battery.**—(See *Efficiency, Quantity, of Storage Battery*.)

**Quantity, Unit of Electric** — — A definite amount or quantity of electricity called the coulomb. (See *Coulomb*.)

Although the exact nature of electricity is unknown, yet, like a fluid (a liquid or gas), electricity can be accurately measured as to quantity.

A current of 1 ampère, for example, is a current in which one coulomb of electricity passes in every second.

A condenser of the capacity of 1 farad, is large enough to hold 1 coulomb of electricity if forced into the condenser under an electromotive force of 1 volt. (See *Capacity, Electrostatic. Farad. Volt. Ampère*.)

**Quiet Arc.**—(See *Arc, Quiet*.)

**Quiet Discharge.**—(See *Discharge, Silent*.)

**Quickening Solution.**—(See *Solution, Quickening*.)

## R

**R.**—A contraction used for ohmic resistance.

$\rho$ .—A contraction used for specific resistance.

**Radial Armature.**—(See *Armature, Radial*.)

**Radially Laminated Armature Core.**—(See *Core, Armature, Radially-Laminated*.)

**Radiant Energy.**—(See *Energy, Radiant*.)

**Radiant Matter.**—(See *Matter, Radiant, or Ultra-Gaseous*.)

**Radiate.**—To transfer energy by means of waves.

**Radiating.**—Transferring energy by means of waves.

**Radiation.**—Transference of energy by means of waves.

When an elastic body is set into vibration, whether it be the vibrations that produce light, heat or electricity, energy is charged on the body, and the body will then continue to vibrate until it imparts to some medium surrounding it an amount of energy exactly equal to that originally imparted to itself.

In the case of a sonorous body the energy is transferred from the vibrating body to the air around it. For example, in the case of an elastic metallic wire set into vibration, the wire will continue to vibrate until it does as much work on the surrounding air as was originally done on it, in order to set it into vibration.

In the case of a heated body the energy is transferred from the body to the luminiferous ether around it. For example, in the case of the same wire heated above the temperature of the air, the energy imparted to the molecules of the metal by the source of heat causes them to move towards and from one another. These to-and-fro motions of the molecules cause the surrounding ether to be set into waves, and as much energy is imparted to the ether, as was originally imparted to the wire in order to heat it.

In the case of a luminous body the energy is transferred from the body to the luminiferous ether. For example, if the wire is heated to luminosity by a certain amount of energy imparted to it, the surrounding ether is now set into waves of both light and heat, which differ from one another only in their wave length, and the luminous body will continue to radiate light and heat until it imparts to the surrounding ether an amount of energy exactly equal to that originally imparted to it.

So, too, in the case of a body charged with electricity. If disruptively discharged, the impulsive rush of electricity, so produced, causes the energy charged on it to be radiated as electromagnetic waves into the surrounding ether. The discharging body is, to all intents and purposes, in the same condition as the vibrating elastic wire, and dissipates or radiates its energy in much the same manner.

**Radiation, Electro-Magnetic** — — The sending out in all directions from a con-

ductor, through which an oscillating discharge is passing, of electro-magnetic waves in all respects similar to those of light except that they are of much greater length. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves.*)

**Radiation of Electricity.**—(See *Electricity, Radiation of.*)

**Radiation of Lines of Force.**—(See *Force, Lines of, Radiation of.*)

**Radical, Compound** — — A group of unsaturated atoms.

A group of elementary atoms, some of the bonds of which are open, or not connected or joined with the bonds of other atoms. (See *Atomicity.*)

For example, hydroxyl, HO, is a compound radical, with one of the two bonds of the diad oxygen atom, open or unsaturated.

**Radical, Simple** — — An unsaturated atom with its bond or bonds free.

A single unsaturated atom as distinguished from an unsaturated group of atoms.

**Radicals.**—Unsaturated atoms or groups of atoms, in which one or more of the bonds are left open or free.

Radicals are either *Simple* or *Compound*.

The radical may be regarded as the basis to which other elements may be added, or as the nucleus around which they may be grouped.

Thus  $H_2O$ , forms a complete chemical molecule, because the bonds of all its constituent atoms are saturated, thus  $H-O-H$ . But  $H-O-$ , or *hydroxyl*, is a radical, because its oxygen atom possesses one unsaturated or free bond. By combining with the radical ( $NO_2$ ), it forms nitric acid, thus  $H-O-(NO_2)$  or  $HNO_3$ .

During electrolysis, the molecules of the electrolyte are decomposed into two groups of simple or compound radicals, called *ions*. These *ions* are respectively electro-positive and electro-negative, and are called *kathions* and *anions*. (See *Ions, Electrolysis.*)

**Radiometer, Crookes'** — — An apparatus for showing the action of radiant matter in producing motion from the effects of the reaction of a stream of molecules escaping from a number of easily moved heated surfaces. (See *Matter, Radiant, or Ultra-Gaseous.*)

**Radiometer, Electric, Crookes** — —

A radiometer in which the repulsion of the molecules of the residual atmosphere takes place from electrified instead of from heated surfaces. (See *Radiometer, Crookes'.*)

**Radio-Micrometer, Boys'** — — An electrical apparatus for measuring the intensity of radiant heat.

The action of the radio-micrometer depends on the deflection, by a magnetic field, of a suspended thermo-electric circuit composed of three metals, viz.: two bars of antimony and bismuth, or of their alloys, which are soldered side by side to the end of a minute disc or strip of copper foil, as shown in Fig. 457. This disc or foil of copper is

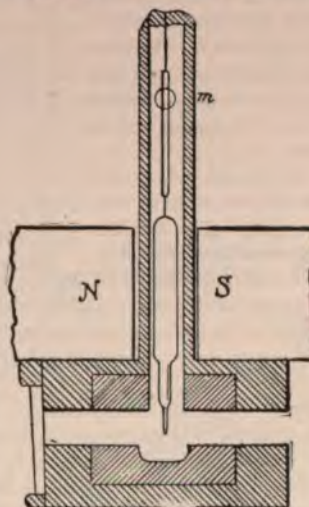


Fig. 457. Boys' Radio-Micrometer.

provided for the purpose of receiving the radiation that is to be measured. The upper ends of the thermo-couple are soldered to the ends of a long, narrow, inverted U-shaped piece of copper wire, which completes the thermo-electric circuit.

The absorption of radiant energy by the copper disc connected to the thermo-electric couple produces an electric current, and the circuit, being suspended in a magnetic field, is at once deflected to a degree dependent on the intensity of the radiation, or of the current generated at the thermo-electric junction.

The means adopted for the suspension of the system are shown in Figs. 457 and 458. A small piece of straight wire is soldered to the up-



per end of the copper stirrup, which completes the thermo-electric circuit. This wire is cemented to the lower end of a glass tube, the upper end of which is provided with a mirror, and the whole suspended, as shown, by a quartz fibre in the field of a powerful magnet.

In a radio-micrometer made by Prof. Boys, the minuteness of the suspended circuit may be judged from the following actual dimensions, viz.: Thermo-electric bars,  $\frac{1}{2} \times \frac{1}{8} \times \frac{1}{16}$  inch; copper circuit of number 36 copper wire, 1 inch long and about  $\frac{1}{16}$  inch wide; copper heat-receiving surface, blackened on the face exposed to the radiation,  $\frac{1}{16}$  inch in diameter, or  $\frac{1}{2} \times \frac{1}{8}$  inch; receiver,  $\frac{1}{16}$  inch square,  $\frac{1}{16}$  inch thick; quartz fibre 4 inches long,  $\frac{1}{1000}$  inch in diameter.

This instrument, when properly adjusted for extreme sensitiveness, should give clear indications when the blackened surface is warmed but the  $\frac{1}{100000}$  degree Centigrade. It will respond to the heat radiated on the surface of a half penny from a candle flame at a distance of 1,530 feet.

In order to avoid the disturbance due to the magnetic qualities of the antimony and bismuth bars, the central portions of the metallic block, inside which the system is suspended, is made of iron, as shown by the heavier shading in Fig. 457.

This mass of iron serves as a magnetic screen to the thermo-electric bars, but permits the action of the field on the circuit.

**Radiophone.**—A name sometimes given to the photophone. (See *Photophone*.)

**Radiophony.**—The production of sound by a body capable of absorbing radiant energy when an intermittent beam of light or heat falls on it.

The action of radiant energy, when absorbed by matter, is to cause its expansion by the consequent increase of temperature. This occurs even when the body is but momentarily exposed to a

flash of light, but the instantaneous expansion thus produced immediately dies away, and by itself is indistinguishable. If, however, a sufficiently rapid succession of such flashes fall on the body, the instantaneous expansions and contractions produce an appreciable musical note.

The sounds so produced have been utilized by Bell and Tainter in the construction of the *Photophone*. (See *Photophone*.)

**Railroad, Electric.**—A railroad, or railway, the cars on which are driven or propelled by means of electric motors connected with the cars.

The electric current that drives the motor is derived either from storage batteries placed on the cars, or from a dynamo-electric machine, or battery of dynamo-electric machines, conveniently situated at some point on the road. The current from the dynamo is led along the line by suitable electric conductors and is passed into the electric motor as the car runs along the tracks in various ways, viz.:

Systems for the electric propulsion of cars may, therefore, be divided into the dependent system, in which the driving current is obtained from conductors placed somewhere outside the cars, and the independent system, where the current is derived from primary or secondary batteries placed on the cars. (See *Railroads, Electric, Dependent System of Motive Power for. Railroads, Electric, Independent System of Motive Power for.*)

In the dependent system, the conductors which supply the car with current are placed either overhead, on the surface of the road-bed or underground. Thus arise three divisions of the dependent system:

- (1.) The Surface System.
- (2.) The Underground System.
- (3.) The Overhead System.

(1.) *The Surface System.*—By placing one or both rails in the circuit of the dynamo and taking the current from the tracks by means of sliding or rolling contacts connected with the motor.

(2.) *The Underground System.*—By placing the conducting wires parallel to each other in a longitudinally slotted underground conduit in the road-bed, and provided with two central plates, insulated from one another and connected respectively to the motor terminals, and taking the current by means of a traveling brush or roller, called a plow, sled or shoe. On the movement of the car over the track, these traveling contacts touch the




Fig. 458. Boys' Radio-Micrometer.



two parallel line conductors in the conduit and take the electric current therefrom. (See *Plow Sled*.)

(3.) *The Overhead System*.—By placing the line conductors on poles along the road, and taking the current therefrom by means of suitable traveling contacts called trolleys, or by sliders.

Where a single conductor is employed, the return conductor generally consists of the track itself, or of the track and ground. (See *Trolley*.)

The first method, viz., that of using the tracks alone as conductors, is not much employed.

The use of the track and ground as a return for the current is now very generally employed.

In some systems the track is divided into sections which are successively brought into connection with the main conductors by contacts effected by the attraction between magnets carried on the car and contact pieces of magnetic material placed below the surface. The rail section thus temporarily energized is placed in connection with the motor.

In order to regulate the speed, various devices are employed to vary the current strength in the motor circuit. These devices consist essentially of rheostats or resistances introduced into, or removed from, the motor circuit on the movement by hand of a lever that forms part of the circuit, over contact plates connected to the resistance coils.

In order to change the direction of the car, the direction of rotation of the electric motor is changed. This is effected by some form of reversing gear or mechanism that changes the direction of rotation of the motor, either by shifting the brushes, by changing the field, or by any other means. (See *Telferage. Motor, Electric. Rheostat*.)

**Railroads, Absolute Block System for** —A block system in which one train only is permitted to occupy a given block at any time. (See *Railroads, Block System for*.)

**Railroads, Automatic Electric Safety System for** —A system for automatically preventing the approach of two trains at any speed beyond a predetermined distance of each other.

The system consists essentially in the automatic closing of the circuit of an electric motor placed on the locomotive between the steam dome and the sand box. This motor is in circuit with a local battery placed on the cow-catcher, and in-

troduced in the circuit of the motor by a magnet placed on the cow-catcher, as shown in Fig. 459,



Fig. 459. Locomotive with Safety System.

which represents a locomotive provided with this system.

The magnet is on open circuit with generators placed on the rear car of a second train, or with generators at a bridge or crossing.

By means of double sectional-conductors placed along the track, the generators are automatically closed through the magnet, one conductor being in permanent connection with the magnet, while the other is connected to the generator in the rear car of a second train, at a switch or crossing. The other terminals of the magnet and generators are in permanent electrical connection with the rails, which are employed as return ground conductors.

Fig. 460 shows the application of the safety electric system to a bridge.



Fig. 460. Safety System for Bridge.

Fig. 461 shows the application of the safety system at grade crossing.




Fig. 461. Safety System for Grade Crossing.

The author is indebted to Mr. E. P. Thompson for cuts and general description.

**Railroads, Block System for** —A system for securing safety from collisions of moving railroad trains by dividing the road into a number of blocks or sections of a given length, and so maintaining telegraphic communication between towers located at the ends of each of such blocks as to prevent,



by the display of suitable signals, more than one train or engine from being on the same block at the same time.

There are two kinds of railway block systems in common use, viz.:

- (1.) The *Absolute Block System*.
- (2.) The *Permissive Block System*.

In the absolute system, which is the safer, one train only is permitted on any particular block at a given time.

In the permissive block system more than one train is permitted, under certain circumstances and conditions, to occupy the same block simultaneously, each train then being notified of the fact that it is not alone on the block.

The absolute block system, though expensive to construct and maintain, is the only one that should be permitted by law to exist on roads whose traffic exceeds a certain amount.

An absolute block system is employed on the London Underground Railroad, and on the Pennsylvania Railroad Systems.

The system in use on the New York Division of the Pennsylvania Railroad is as follows:

The road between Philadelphia and Jersey City is divided into some seventy sections, the length of each section being dependent on the amount of

necting each block-tower with the next tower on each side of it.

(3.) A line or wire called the *message wire*, and used for local traffic or business.

The general arrangement of the block-tower is shown in Fig. 462.

Each of the block-towers is sufficiently elevated above the road-bed to afford the operator an unobstructed view of the tracks.

The operator, having ascertained the actual condition of the track, either by observation or by telegraphic communication with the stations on either side of him, gives notice of this condition to all trains passing his station by the display of certain semaphore signals.

The semaphore signals as used on the Pennsylvania Railroad are shown in Figs. 463 and 464.

The form shown in Fig. 463 is used in the abso-



Fig. 462. Block Tower.

daily traffic, thus, between Jersey City and Newark, where the traffic is great, there are some fifteen sections, although the distance is only 7.9 miles.

In each block-tower there are connections with three separate and distinct telegraph lines or circuits, viz.:

(1.) A line or wire called the *train wire*, connecting the block-tower with the General Dispatcher's office at Jersey City. This line is used for sending train orders only.

(2.) A line or wire called the *block wire*, con-

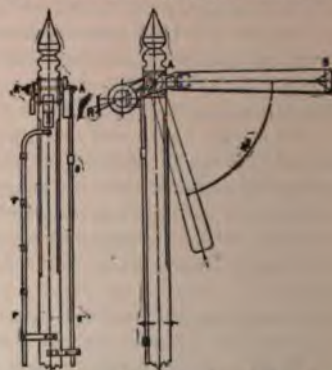


Fig. 463. Semaphore Signal—Absolute System.

lute system, and that shown in Fig. 464 in the permissive system. These signals consist essentially of an upright support provided with a movable arm A B, called the *semaphore arm*, capable of being set in any of two or three positions. The semaphore signal is placed outside the signal tower, often several hundred feet away, but is readily set from the tower in any of the desired positions by the operator, by the movement of rods connected with levers.

In the permissive system, the semaphore arm can be set in three positions, viz.:

(1.) In a horizontal position, or where the semaphore arm makes an angle of 90 degrees with the upright.

(2.) Or it may be dropped down from the horizontal position through an angle of 75 degrees, as shown in Fig. 463.

(3.) Or it may occupy a position exactly inter-



mediate between the first and second, or  $37^{\circ} 30'$  below the horizontal, as shown in Fig. 464.

Position No. 1 is the danger signal, and when it is displayed the train may not enter the block it governs.

Position No. 2 shows that the track is clear, and that the train may safely enter the block it governs.

Position No. 3, which is used in the permissive block system, only signifies caution, and permits the train to cautiously enter the block and look out for further signals.

The semaphore arm consists of a light wooden arm, 11 inches wide by  $5\frac{1}{2}$  feet in length, painted red or other suitable color that can be easily distinguished by daylight.

By night the positions of the semaphore arm are indicated by colored lights. These lights are

arm is shown at night by means of light reflected from a parabolic mirror, at the focus of which the signal lantern is placed. This method possesses the advantage over other systems of rendering it very improbable that the engineer would mistake an ordinary light for a signal light.

The green light is only used in the permissive block system. In the absolute block system, the semaphore arm has two positions only; viz., danger, or horizontal, and safety, or  $75^{\circ}$  degrees below the horizontal.

A single arm is used when it is intended to govern a single track only. Where the condition of a number of tracks is to be indicated, several arms are employed, one above the other.

When semaphore signals are placed on each side of a double-track road, the semaphore arm pointing to the right of the vertical support governs the line running to the right.

When the semaphore signals are placed at junctions or switch-crossings, the operator in the signal-tower opens or closes the switches from the tower by the movements of levers that set the switches, and then displays the proper semaphore signal for that crossing or route; red, or danger, if the route is blocked, and white, or safety, if it is clear. Here the interlocking apparatus is employed, which consists in devices by means of which, when a route has once been set up and a signal given for that route, the switches and signals are so interlocked that no signal can possibly be given for a conflicting route.

The signals or switches are operated by means of iron rods passing over rollers or pulleys. These rods are attached by suitable connections to the switch or semaphore signals, and are operated by means of levers from the signal-tower. Switches can be operated as far as 1,000 feet from the tower; signals as far as 2,500 feet.

Colored switch-signals are placed opposite the end of the switches to indicate the positions of the switch. These signals consist of red and white discs for day, and a lantern provided with red and white glasses for night. When the switch on any line is open, the switch-signal shows red; when shut, it shows white. These switch-signals are only used in the yards.

No passenger train is permitted on a block, after another train has passed the signal station, until a dispatch has been received from the station ahead that the train has passed and the block is thus cleared.

As an additional precaution against rear col-

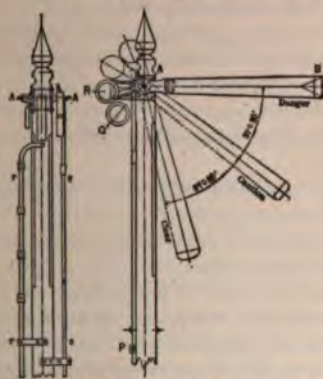


Fig. 464. Semaphore Signal—Permissive System.

operated as follows, viz.: in the absolute system, the semaphore arm A B, pivoted at A, bears at its shorter end a disc or lens of red glass R, and, in the permissive system, below this another disc or lens of green glass G. An oil lantern, provided with an uncolored glass lens, is so supported on a bracket fastened to the upright that when the semaphore arm points to danger the red glass is immediately in front of the lantern; when it points to caution, the green glass is in front of the lantern; but when it points to safety, the lantern is left uncovered save by its uncolored glass.

At night, therefore, when the semaphore arm is set to danger, a red light is displayed; when it points to caution, a green light is displayed; and when it points to safety, a white light is displayed.

In some systems the position of the semaphore



lisions, *tail-lights* are displayed at the ends of the trains. These consist of lanterns placed on each side of the rear end of the last car. These lanterns are furnished with three glass slides. The side of the lantern towards the rear of the car shows a *red* light; that to the front and side of the car shows a green light. The engineer, looking out of the cab, can thus see a green light, which serves as a "*marker*" and indicates to him that his train is intact. By day a green flag, placed in the same position as the lantern, serves the same purpose as a *marker*. An observer on the track, or in the tower, sees the red lights on the rear of the train when it has passed.

Freight trains are now run on separate tracks, except in places where the extra tracks are not yet completed. Here they do not run on schedule time, but are permitted to follow one another at intervals that depend on the condition of the tracks as shown by the signals displayed.

#### **Railroads, Electric, Continuous Overhead System of Motive Power for —**

A variety of the dependent system of motive power for electric railroads in which a continuous bare conductor is connected with the terminals of a generating dynamo, and supported overhead by suitable means, and a traveling wheel or trolley is moved over the same by the motion of the car, in order to carry off the current from the line to the car motor. (See *Railroads, Electric, Dependent System of Motive Power for.*)

#### **Railroads, Electric, Continuous Surface System of Motive Power for —**

A variety of the dependent system of motive power for electric railroads, in which the terminals of the generating dynamo are connected to the continuous bare metallic conductor that extends along the entire track on the surface of the roadway or street, and from which the current is taken off by means of a traveling conductor connected with the moving car. (See *Railroads, Electric, Continuous Underground System of Motive Power for.*)

#### **Railroads, Electric, Continuous Underground System of Motive Power for —**

A variety of the dependent system of motive power for electric railways, in which a continuous bare conductor is placed under-

ground in an open slotted conduit, and the current taken off from the same by means of sliding or rolling contacts carried on the moving car. (See *Railroads, Electric, Dependent System of Motive Power for.*)

#### **Railroads, Electric, Dependent System of Motive Power for —**

A term now generally used for a system of motive power for the propulsion of electric railway cars, in which the electric current is taken from wires or conductors connected with electric sources external to the cars.

A dependent system of motive power for electric railways includes three distinct varieties, namely :

- (1.) The Underground System.
- (2.) The Surface System.
- (3.) The Overhead System.

In all of these systems the bare conductor connected with the terminals of a generating dynamo may form either one continuous wire or it can be divided into separate portions or sections.

The underground system embraces two distinct varieties :

- 1st. A continuous bare conductor placed in an open slotted conduit.
- 2d. A sectional bare conductor placed in an open slotted conduit.

In the first variety of the underground system, bare conductors are placed in an open slotted conduit, and connected with the terminals of a dynamo-electric machine which generates the current that is to be employed for the propulsion of the cars. Traveling contacts placed on the car and connected with an electric motor, carry off the current from the bare conductor by rolling or sliding over it.

In the second variety of the underground system, a section of a bare conductor, or bare metallic points that, on the passage of the car over them are automatically connected with the generating dynamo, replace the continuous metallic conductors of the first system.

In the surface system, the wires or conductors that are connected with the generating dynamo, instead of being placed in the underground open slotted conduit, are placed directly on the surface of the street or roadbed and the current carried off from the same by suitable contacts placed on the car.

In most cases, however, in which the surface system is adopted, the conductors that are con-



with the generating dynamo do not extend throughout the entire length of the track, are limited to sections of the track that are only connected with the generating dynamo. Some of these systems arrangements are made, by which the car, as it passes over the track, automatically connects these sections with the generating dynamo while passing over the track and disconnects them after such sections have been passed.

The overhead system embraces two varieties:

A continuous trolley wire.

A divided or sectional trolley wire.

In the continuous trolley wire system, the current is taken off from the continuous wire by means of a trolley wheel that moves over the trolley wire.

In a system is especially suitable for suburban districts or small towns. In such a system the trolley wire is connected with a number of feeder wires that either extend from the generating station the entire length of the line, and are connected with such line at suitable points; or, separate feeders extend from the station to points on the line where they are tapped into the trolley wire.

In the divided or sectional trolley wire system the trolley wire is divided into suitable sections, and the sections extend the entire length of the line and are connected to the central points of each section; the feeders extend the entire length of the line and tap into both ends of the section.

The author is indebted to G. W. Mansfield for the principal facts contained in the above description.

**Railroads, Electric, Divided Overhead System of Motive Power for** — A sectional overhead system of motive power for electric railroads. (See *Railroads, Electric, Sectional Overhead System of Motive Power* for.)

**Railroads, Electric, Divided Surface System of Motive Power for** — A sectional system of motive power for electric railroads. (See *Railroads, Electric, Sectional Surface System of Motive Power* for.)

**Railroads, Electric, Divided Underground System of Motive Power for** — A sectional system of motive power for electric railroads. (See *Railroads, Electric,*

*Sectional Underground System of Motive Power for.*)

**Railroads, Electric, Double-Trolley System for** — A system of electric railroad propulsion, in which a double trolley is employed to take the driving current from two overhead trolley wires.

The double-trolley system differs from the single-trolley system in that it employs no earth return. The parallel wires also avoid the effects of injurious induction in neighboring telegraph or telephone wires. (See *Railroads, Electric, Dependent System of Motive Power for.*)

**Railroads, Electric, Independent System of Motive Power for** — A term for the electric propulsion of railway cars by means of primary or storage batteries placed on the car and directly connected with the motor.

This is called the independent system, because, unlike the dependent system, the energy required for the propulsion of the car is obtained directly from the energy of the electric source placed on the car, instead of, as in the dependent system, outside of the car.

**Railroads, Electric, Sectional Overhead System of Motive Power for** — A variety of the dependent system of motive power for electric railroads, in which sections of bare conductors are supported overhead on poles placed along the railroad track, and the current taken off from the same by means of traveling conductors such as the trolley wheel, which is moved over the trolley wire by the motion of the car.

Various systems are employed for connecting the different sections of the trolley wire by means of feeder wires with the generating dynamo. (See *Railroads, Electric, Dependent System of Motive Power for.*)

**Railroads, Electric, Sectional Surface System of Motive Power for** — A variety of the dependent system of motive power for electric railroads in which conductors are placed on the roadbed or along the track, and the current taken off from the same by means of contacts connected with the moving car, and so arranged as to automatically switch in such bare sections on the passage



of the car over them, and to switch them out as the car leaves them. (See *Railroads, Electric, Dependent System of Motive Power for.*)

**Railroads, Electric, Sectional Underground System of Motive Power for** — —A variety of the dependent system of motive power for electric railroads in which a sectional conductor is placed underground in a slotted conduit, and the current taken from the same by means of sliding or rolling contacts connected with the moving car. (See *Railroads, Electric, Dependent System of Motive Power for.*)

**Railroads, Electric, Section Line of** — —Any part of the overhead electric conductors insulated from other parts so as to permit its supply of electric power to be separately controlled.

**Railroads, Electric, Signal Service System for** — —The system of electric signals used on railways for ascertaining the condition of the roads, sending instructions to engineers, and conveying intelligence generally from stations along the road to the running trains.

**Railroads, Electric, Single-Trolley System** — —A system of electric railroad propulsion in which a single trolley is employed to take the driving current from a single overhead trolley wire.

The earth, or a conductor placed along the track on the roadbed, acts as the return. (See *Railroads, Electric, Dependent System of Motive Power for.*)

**Railroads, Permissive Block System for** — —A block system in which more than one train is permitted under given conditions to occupy the same block simultaneously. (See *Railroads, Block System for.*)

**Railway, Electric** — —An electric railroad. (See *Railroad, Electric.*)

**Range, Molecular** — —The distance at which the molecules of matter exert a sensible attraction for one another.

This distance has been estimated in the case of zinc and oxygen as equal to about the ten-millionth of a millimetre.

**Ratchet-Pendant Argand-Electric Burner.** —(See *Burner, Argand-Electric, Ratchet-Pendant.*)

**Ratchet-Pendant Electric Burner.** —(See *Burner, Ratchet-Pendant, Electric.*)

**Ratchet-Pendant Electric Candle Burner.** —(See *Burner, Ratchet-Pendant Candle Electric.*)

**Ratio, Velocity** — —A ratio, in the nature of a velocity, that exists between the dimensions of the electrostatic and the electro-magnetic units.

This ratio will be understood from the comparison of the following units. In each case the numerator gives the dimensions in the electrostatic and the denominator the dimensions in the electro-magnetic system :

$$\text{Quantity, } \frac{M^{\frac{1}{2}} L^{\frac{3}{2}} T^{-1}}{M^{\frac{1}{2}} L^{\frac{1}{2}}} = \frac{L}{T} = V$$

Here the value of the ratio, viz., the *length* divided by the *time*, is clearly in the nature of a velocity, for  $V = \frac{L}{T}$ .

$$\text{Potential, } \frac{M^{\frac{1}{2}} L^{\frac{1}{2}} T^{-1}}{M^{\frac{1}{2}} L^{\frac{3}{2}} T^{-2}} = \frac{T}{L} = \frac{1}{V}$$

$$\text{Capacity, } \frac{L}{L^{-1} T^2} = \frac{L^2}{T^2} = V^2$$

$$\text{Resistance, } \frac{L^{-1} T}{L^{-1} T^{-1}} = \frac{T^2}{L^2} = \frac{1}{V^2}$$

A remarkable similarity exists between the value of the *velocity* expressed in C. G. S. units, and the velocity of light, which is of great significance in the *electro-magnetic theory of light*. (See *Light, Maxwell's Electro-Magnetic Theory of.*)

The velocity of light is  $2.9992 \times 10^{10}$  centimetres per second.

The velocity ratio,  $v$ , is  $2.9800 \times 10^{10}$  centimetres per second.

**Rattler, Push-Button** — —A device connected with a push button to show that the bell connected at a distant point, in the circuit of a push button, rings when the button is pressed.

**Ray, Actinic** — —A ray of light or other form of radiant energy that possesses the

of effecting chemical action. (See *Composition*.)

ays of light, and even some of those into the human eye, are *actinic* to some lar chemical substance or another. er the ether waves produce the effects of light or of chemical decomposition de on the nature of the material on which it, as well as on the character of the waves ves.

**Electric (Raia torpedo)** — — A of fish named the ray, which, like the eel, pos- the power ducing elec-

electric or- situated at ack of the and consists reds of poly- cellular , supplied numerous fibres, as in Fig. 465. Fishes. Elec-



yleigh's of Clark's ard Voltaic (See *Cell*, ic, Stand- Rayleigh's of Clark's.) Fig. 465. The Raia Torpedo.

ction.—In electro-therapeutics mus- contractions following the closing or g of an electric circuit.

ction Coil.—(See *Coil, Reaction*.)

ction of Degeneration.—(See *Degen- t, Reaction of*.)

ction of Exhaustion.—(See *Exhaus- reaction of*.)

ction Principle of Dynamo-Electric nes.—(See *Machine, Dynamo-Elec- reaction Principle of*.)

ction Telephone.—(See *Telephone, m*.)

**Reaction Time.**—(See *Time, Reaction*.)

**Reaction Wheel, Electric** — — (See *Wheel, Reaction, Electric*.)

**Reactions, Kathodic and Anodic Electro-Diagnostic** — — The reactions which occur at the kathode or anode of an electric source placed on or over any part of a living body.



Fig. 466. Kathodic and Anodic Reactions.

Fig. 466, from De Watteville's "Medical Electricity" represents what he assumes takes place at the points of entrance and exit of the current in a nerve submitted to the action of the anode of an electric source. Two zones are formed, an anodic and a kathodic zone; the virtual anode is formed by the portion of the skin nearer the nerve, and the virtual kathode by the adjoining muscles. There are thus formed two zones of influence—one immediately around the anode, called the polar or anodic electrotonic zone, and one surrounding this and including the virtual kathode, and called the peripolar, or kathelectrotonic zone.

**Reading Telescope.**—(See *Telescope, Reading*.)

**Real Efficiency of Storage Battery.**— (See *Efficiency, Real, of Storage Battery*.)

**Real Hall Effect.**—(See *Effect, Hall, Real*.)

**Recalcence.**—The property, possessed by incandescent steel when cooling, of again becoming incandescent after a certain degree of cooling has been reached.

The property of recalcence was first pointed out by Barrett.

A steel wire heated at the middle or near one end to a bright red, and allowed to cool in a dim light, will cool until a low red heat is reached, when it will be observed to reheat at some point in the originally heated portion. This reheating is manifested by a brighter red spot



which moves along the portion originally heated. This reheating is called *recalcence*, and is due to latent heat (potential energy), which, disappearing when the bar was heated, again becomes sensible (kinetic energy) on cooling.

The temperature at which recalcence takes place is sensibly the temperature at which heated steel regains its magnetizability.

**Received Current.**—(See *Current, Received*.)

**Receiver, Gramophone** — —The receiver employed in the gramophone. (See *Gramophone*.)

**Receiver, Graphophone** — —The receiver employed in the graphophone. (See *Phonograph*.)

**Receiver, Harmonic** — —A receiver, employed in systems of harmonic telegraphy, consisting of an electro-magnetic reed, tuned to vibrate to one note or rate only. (See *Telegraphy, Gray's Harmonic Multiple*.)

**Receiver Magnet.**—(See *Magnet, Receiving*.)

**Receiver, Phonographic** — —The apparatus employed in a telephone, phonograph, graphophone or gramophone for the reproduction of articulate speech. (See *Phonograph*.)

**Receiver, Telephonic** — —The receiver employed in the telephone. (See *Telephone*.)

**Receptive Device, Electro** — —(See *Device, Electro-Receptive*.)

**Receptive Device, Magneto** — —(See *Device, Magneto-Receptive*.)

**Reciprocal** — —The reciprocal of any number is the quotient arising from dividing unity by that number.

Thus, for example, the reciprocal of 4, is  $\frac{1}{4}$  or .250.

The conducting power of any circuit is equal to the reciprocal of its resistance; or, in other words, the conducting power is inversely proportional to the resistance.

The following table contains the reciprocals of the numerals up to 100:

TABLE OF RECIPROCAL.

No.	Re-cipro-cal.	No.	Re-cipro-cal.	No.	Re-cipro-cal.	No.	Re-cipro-cal.	No.	Re-cipro-cal.
2	0.5000	22	0.0455	42	0.0238	62	0.0161	82	0.0122
3	0.3333	23	0.0435	43	0.0233	63	0.0159	83	0.0120
4	0.2500	24	0.0417	44	0.0227	64	0.0156	84	0.0119
5	0.2000	25	0.0400	45	0.0222	65	0.0154	85	0.0118
6	0.1667	26	0.0385	46	0.0217	66	0.0152	86	0.0116
7	0.1429	27	0.0370	47	0.0213	67	0.0149	87	0.0115
8	0.1250	28	0.0357	48	0.0208	68	0.0147	88	0.0114
9	0.1111	29	0.0345	49	0.0204	69	0.0145	89	0.0112
10	0.1000	30	0.0333	50	0.0200	70	0.0143	90	0.0111
11	0.0909	31	0.0323	51	0.0196	71	0.0141	91	0.0110
12	0.0833	32	0.0313	52	0.0192	72	0.0139	92	0.0109
13	0.0769	33	0.0303	53	0.0189	73	0.0137	93	0.0108
14	0.0714	34	0.0294	54	0.0185	74	0.0135	94	0.0106
15	0.0667	35	0.0286	55	0.0182	75	0.0133	95	0.0105
16	0.0625	36	0.0278	56	0.0179	76	0.0132	96	0.0104
17	0.0588	37	0.0270	57	0.0175	77	0.0130	97	0.0103
18	0.0556	38	0.0263	58	0.0173	78	0.0128	98	0.0102
19	0.0526	39	0.0256	59	0.0169	79	0.0127	99	0.0101
20	0.0500	40	0.0250	60	0.0167	80	0.0125	100	0.0100
21	0.0476	41	0.0244	61	0.0164	81	0.0123		

—(Clark & Sabine.)

**Recoil Circuit.**—(See *Circuit, Recoil*.)

**Record, Chronograph** — —A record made by means of a chronograph for the purpose of measuring and recording small intervals of time. (See *Chronograph, Electric*.)

**Record, Gramophone** — —The irregular indentations, cuttings or tracings made by a point attached to the diaphragm spoken against, and employed in connection with the receiving diaphragm for the reproduction of articulate speech.

**Record, Graphophone** — —The record made by the movement of the diaphragm of the graphophone. (See *Phonograph*.)

**Record, Phonographic** — —The record produced in a phonograph, for the subsequent reproduction of audible articulate speech.

**Record, Telephonic** — —The record produced by the diaphragm of a receiving telephone.

Various methods have been proposed for obtaining telephonic records, but none of them have yet been introduced into actual commercial use.

**Recorder, Chemical, Bain's** — —An apparatus for recording the dots and dashes of

a Morse telegraphic dispatch, on a sheet of chemically prepared paper.

A fillet of paper soaked in some chemical substance, such as ferro-cyanide of potassium, is moved at a uniform rate between the two terminals of the line, one of which is iron tipped, so that on the passage of the current, a blue dot, or a dash, will be made on the paper according to the length of time the current is passing.

In order to insure a moist condition of the paper fillet, some deliquescent salt, like ammonium nitrate, is generally mixed with the ferro-cyanide of potassium.

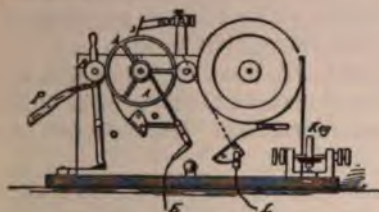


Fig. 467. Bain Recorder.

A Bain recorder is shown in Fig. 467. A, is a drum of brass, tinned on the outside. The paper fillet is drawn from the roll and kept pressed against the cylinder A, by a small wooden roller B. The needle, which is a metallic point, is placed in connection with one end of the line wire, and the brass drum is connected with the other end through the earth. Care must be observed to connect the needle point with the positive electrode, as otherwise the paper will not be marked. (See *Electrolysis*.)

The Bain recorder is now almost entirely replaced by the Morse sounder. (See *Sounder, Morse Telegraphic*.)

**Recorder, Morse** — An apparatus for automatically recording the dots and dashes of a Morse telegraphic dispatch, on a fillet of paper drawn under an indenting or marking point on a striking lever, connected with the armature of an electro-magnet.

This apparatus is sometimes called a Morse register.

The Morse recording or registering apparatus is shown in Fig. 468.

The paper fillet passes between a pair of rollers *r*, driven by the clockwork *W*. The upper roller is provided with a groove, so that the movement of the stylus at the bent end of the lever *L*, by the

electro-magnet *M*, moving its armature attached to the lever *L*, may indent or emboss the paper fillet. When no current is passing, the armature of the magnet and the lever *L*, are drawn back by the action of an adjustable spring at *n*.



Fig. 468. Morse Recorder.

In the drawing, the ordinary Morse sounder is shown on the right. The sounder has almost entirely replaced the recording apparatus.

**Recorder, Siphon** — An apparatus for recording in ink on a sheet of paper, by means of a fine glass siphon supported on a fine wire, the message received over a cable.

One end of the siphon dips in a vessel of ink. The record is received on a fillet of paper moved mechanically under the siphon. The ink is discharged from the siphon by electric charges imparted to the ink by a static electric machine.




Fig. 469. The Siphon Recorder.

In the annexed sketch of the siphon recorder, Fig. 469, a light rectangular coil *b b*, of very fine wire, is suspended by a thin wire *f f*, between the poles *N, S*, of a powerful compound permanent magnet, and moving on the vertical axis of the supporting wire *f f*, and adjustable as to tension, at *h*. A stationary soft iron core *a*, is magnetized




Fig. 470. Record of Siphon Recorder.

by induction and strengthens the magnetic field of *N, S*. The cable current is received by the



coil *b b*, through the suspending wire *f f*, and is moved by it to the right or the left, according to its direction, to an extent that depends on the current strength.

The fine glass siphon *n*, which dips into a reservoir of ink at *m*, is capable of movement on a vertical axis *l*, and is moved backwards or forwards, in one direction by a thread *k*, attached




Fig. 471. Record of Siphon Recorder.

to *b*, and in the opposite direction by a retractile spring attached to an arm of the axis *l*.

As the paper is moved under the point of the siphon, an irregular curved line is marked thereon.

Two records as actually received by a siphon recorder are shown in the Figs. 470 and 471. Movements upwards correspond to the dots, and downwards to dashes.

**Rectification of Alcohol, Electric** —  
—(See *Alcohol, Electric Rectification of*.)

**Rectified.**—Turned in one and the same direction.

The alternate currents in a dynamo-electric machine are rectified or caused to flow in one and the same direction by means of a commutator.

The word commuted, generally used in this connection, would appear to be preferable to the word rectified. (See *Commutator*.)

**Rectilinear Co-ordinates, Abscissa of** —  
—(See *Abscissa of Rectilinear Co-ordinates*.)

**Rectilinear Current.**—(See *Current, Rectilinear*.)

**Red Heat.**—(See *Heat, Red*.)

**Red Hot.**—(See *Hot, Red*.)

**Reducteur or Resistance for Voltmeter.**  
—A coil of known resistance as compared with the resistance of the coils of a voltmeter, and connected with them in series for the purpose of increasing the range of the instrument. (See *Voltmeter*.)

**Reducteur or Shunt for Ammeter.**—A shunt coil connected in multiple with the coils of an ammeter for the purpose of changing the value of the readings.

The ratio of the resistance of the reducteur and the ammeter coils is known. A reducteur increases the range of current measured by the ammeter.

**Refining of Metals, Electric** — —The refining of metals by the application of electrolysis.

When certain precautions are taken, metals thrown down from their solutions, are obtained in a chemically pure condition. This fact is utilized in the electrical refining of metals. If, for example, a plate of impure copper is to be refined electrolytically, it is used as the anode of a copper bath, and placed opposite a thin plate of pure copper forming the cathode. The passage of the current gradually dissolves the copper from the plate at the anode, and deposits it in a chemically pure condition on the plate at the cathode.

Somewhat similar principles are employed for electrically refining other metals.

**Reflect.**—To throw off from a surface, according to the laws of reflection, as of waves in an elastic medium. (See *Reflection, Laws of*.)

**Reflecting.**—Throwing off from a surface, according to the laws of reflection. (See *Reflection, Laws of*.)

**Reflecting Galvanometer.**—(See *Galvanometer, Reflecting*.)

**Reflection.**—The throwing back of a body or wave from a surface at an angle equal to that at which it strikes such surface. (See *Reflection, Laws of*.)

**Reflection, Laws of** — —The laws governing the reflection of light

(1.) The angle of reflection, or the angle included between the reflected ray and the perpendicular to the reflecting surface at the point of incidence, is equal to the angle of incidence, or the angle included between the striking ray and the perpendicular to the reflecting surface at the point of incidence.

(2.) The plane of the angle of incidence coincides with the plane of the angle of reflection.

**Reflection of Electro-Magnetic Waves.**  
—(See *Waves, Electro-Magnetic, Reflection of*.)

**Reflection of Induction.**—(See *Induction, Reflection of*.)

**Reflector.**—A plane or curved surface, capable of regularly reflecting light.

**Reflector, Parabolic** — —A reflector,



or mirror, the reflecting surface of which is a paraboloid, or such a surface as would be obtained by the revolution of a parabola about its axis.

A parabolic curve, which may be regarded as a section of a parabola, is shown in Fig. 472. A parabola has the following properties: If lines  $FP$ ,  $Fp$ , etc., be drawn from the point  $F$ , called the focus, to any point,  $P$ ,  $p$ , etc., in the curve, and the lines  $Pp$ ,  $Pp$ ,  $Pp$ , etc., be then drawn severally parallel to the axis,  $VM$ , then all such angles,  $FPp$ ,  $FpP$ , will be bisected by verticals to tangents at the point  $P$ ,  $p$ , and  $P$ .

Therefore, if a light be placed at the focus of a parabolic reflector, all the light reflected from the surface of the parabola will pass off sensibly parallel to the axis  $VM$ .

In *Locomotive Head lights*, a lamp is placed at the focus of a parabolic reflector, and the parallel beam so obtained is utilized for the illumination of the track. In a *search light* an electric arc lamp is placed at the focus of a parabolic reflector, or at the focus of a lens.

A parabolic reflector is used for search lights, sometimes in connection with an arc lamp. A focusing arc lamp must be used for this purpose, so as to maintain the voltaic arc at the focus of the parabolic reflector, notwithstanding the unequal consumption of the positive and negative carbons. (See *Arc, Voltaic*.)

**Refract.**—To change the direction of waves in any elastic medium in accordance with the laws of refraction. (See *Refraction*.)

**Refracting.**—Changing the direction of waves in an elastic medium in accordance with the laws of refraction.

**Refraction.**—The bending of a ray of sound, light, heat, or electro-magnetism at the surface of any medium whose density differs from that through which such ray was previously passing.

Rays of sound, light, heat or electro-magnetism are transmitted or propagated in straight lines as long as the density of the homogeneous medium through which they are passing undergoes no change. That is, as long as the medium

is homogeneous or isotropic. (See *Medium, Isotropic*.) As the rays enter the surface of a medium which differs in density from that through which they have been passing, they are bent or refracted at the surface of such a medium.

This bending takes place towards a perpendicular to the refracting surface at the point of incidence, when the medium into which the rays are entering is of greater density than that they are leaving, and from the perpendicular when the medium they are entering is of less density than that they are leaving.

The refraction or bending of the ray is caused by the difference in the velocity with which the waves are propagated through the two media.

There is no refraction or deviation when the two rays enter the new medium at right angles to its surface, or when there is no angle of incidence.

**Refraction, Double** — —The property possessed by certain substances of splitting up a ray of light passed through them into two separate rays, and thus doubly refracting the ray.

Certain specimens of calc spar possess the property of double refraction. Each of the two rays into which the original ray is separated is polarized. Such calc spar is called doubly refracting calc spar.

**Refraction, Double, Electric** — —The property of doubly refracting light acquired by some transparent substances while in an electrostatic or electro-magnetic field.

Transient or momentary powers of double refraction, acquired by a transparent substance while placed in an electric field.

The intensity of double refraction is proportional to the square of the electric force.

The action of an electric field in endowing a substance with the power of double refraction while kept in such field, is due to the strain produced by the electrostatic stress of the field.

A similar transient power of double refraction is acquired by many bodies when subjected to the strain produced by a simple mechanical stress.

**Refreshing Action of Current.**—(See *Action, Refreshing, of Current*.)

**Region, Extra-Polar** — —A term applied in electro-therapeutics to the region



Fig. 472. Parabolic Reflector.



which lies outside or beyond the therapeutic electrode.

The term extra-polar region is used in contradistinction to polar region. (See *Region, Polar*.)

**Region, Polar** — — A term applied in electro-therapeutics to that region or part of the body which lies directly below the therapeutic electrode.

**Register, Double-Pen Telegraphic** — — A telegraphic register provided with two separate styluses or pens for recording the telegraphic message on a fillet of paper. (See *Register, Telegraphic*.)

**Register, Morse** — — A name sometimes given to a Morse recorder. (See *Recorder, Morse*.)

**Register, Telegraphic** — — An apparatus employed at the receiving end of a telegraphic line for the purpose of obtaining a permanent record of the telegraphic dispatch.

The telegraphic register consists essentially of means whereby a fillet or tape of paper is drawn mechanically under a pen or stylus attached to the armature of an electro-magnet and moving therewith.

The pen or stylus presses against the paper whenever the armature is attracted to the electro-magnet, and is held there while the cur-



Fig. 473. Ink-Writing Register.

rent is passing through the coils of the electro-magnet. By these means the dots and dashes of the telegraphic alphabet are recorded on the paper fillet as embossed or printed dots and dashes. The Morse register is an apparatus of this description. (See *Recorder, Morse*.)

A form of ink-writing telegraphic register is shown in Fig. 473. It is self-starting.

**Register, Time, for Railroads** — — A telegraphic recording apparatus or register designed to record all telegraphic messages transmitted over a line.

The record is received on an endless band or fillet of paper. It is useful in case of disputes as to the time certain messages were sent over the line.

**Register, Watchman's Electric** — — A device for permanently recording the time of a watchman's visit to each of the different localities he is required to visit at stated intervals.

These registers are of a variety of forms. They consist, however, in general, of a drum or disc of paper driven by clockwork, on which a mark is made by a stylus or pencil, operated on the closing of a circuit by the pressing of a push button or the pressing of a key by the watchman at each station.

**Registering Apparatus, Electric** — — (See *Apparatus, Registering, Electric*.)

**Registering Electrometer** — (See *Electrometer, Registering*.)

**Regulable, Automatically** — — Capable of being automatically regulated. (See *Regulation, Automatic*.)

**Regulate, Automatically** — — To regulate in an automatic manner. (See *Regulation, Automatic*.)

**Regulation, Automatic** — — Regulation automatically effected.

**Regulation, Automatic, of Dynamo-Electric Machine** — — Such a regulation of a dynamo-electric machine as will automatically preserve constant either the current or the potential difference.

The automatic regulation of dynamo-electric machines may be accomplished in the following ways, viz.:

(1.) *By a Compound Winding of the Machine.*

This method is particularly applicable to constant-potential machines. By this winding, the magnetizing effect of the shunt coils is maintained approximately constant, while that of the series coils varies proportionally to the load on the machine.

The series coils are sometimes wound close to

the poles of the machine, and the shunt coils nearer the yoke of the magnets. Custom, however, varies in this respect, and very generally the shunt coils are placed nearer the poles than the series coils. (See *Machine, Dynamo-Electric, Compound-Wound.*)

(2.) *By Shifting the Position of the Collecting Brushes.*

In the Thomson-Houston system of current regulation, the current is kept practically constant by the following devices: The collecting brushes are fixed to levers moved by the regulator magnet R, as shown in Fig. 474, the armature of which is provided with an opening for the entrance of the paraboloidal pole piece A. A dash-pot is provided to prevent too sudden movement.

When the current is normal, the coil of the regulator magnet is short-circuited by contact points at S T, which act as a shunt of very low resistance. These contact points are operated by the solenoid coils of the controller, traversed by the main current. The cores of this solenoid are suspended by a spring. When the current becomes too strong, the contact point is opened, and the current, traversing the coil of the regular magnet A, attracts its armature, which shifts the collecting brushes into a position in which a smaller current is taken off.

A carbon shunt,  $r$ , of high resistance, is provided to lessen the spark at the contact points S T, which occurs on opening the circuit.




Fig. 474. Thomson-Houston Regulator.

In operation the contact points are continually opening and closing, thus maintaining a practically constant current in the external circuit.

(3.) *By the Automatic Variation of a Resistance shunting the field magnets of the machine, as in the Brush system.*

In Fig. 475 the variable resistance C, forms a part of the shunt circuit around the field magnets F M. This resistance is formed of a pile of carbon plates. On an increase of the current, such, for example, as would result from turning out some of the lamps, the electro-magnet B,

placed in the main circuit, attracts its armature A, and, compressing the pile of carbon plates C, lowers their resistance, thus diverting a proportionally larger portion of the current from the field magnet coils F M, and maintaining the current practically constant.

In some machines the same thing is done by hand, but this is objectionable, since it requires the presence of an attendant.

(4.) *By the Introduction of a Variable Resistance into the shunt circuit of the machine, as in the Edison and other systems.*

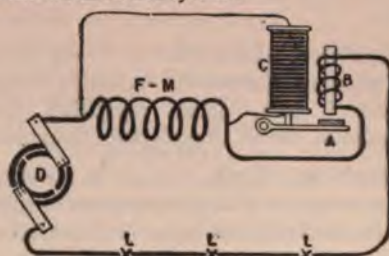


Fig. 475. The Brush Regulator.

This resistance may be adjusted either automatically by an electro-magnet whose coils are in an independent shunt across the mains, or may be operated by hand.

In Fig. 476, the variable resistance is shown at R, the lever switch being in this case operated by hand whenever the potential rises or falls below the proper value.

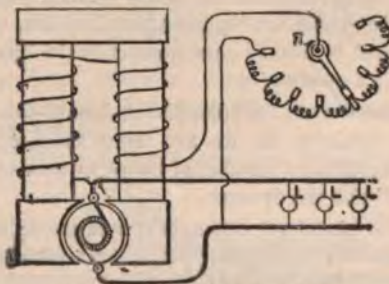


Fig. 476. The Edison Regulator.

The machine shown is thus enabled to maintain a constant potential on the leads to which the lamps L, L, L, etc., are connected in multiple arc.

(5.) *Dynamometric Governing*, in which a series dynamo is made to yield a constant current by governing the steam engine that drives it, by means of a dynamometric governor. This governor operates by maintaining a constant torque or turning moment, instead of by means of



the usual centrifugal governor which maintains a constant speed.

(6.) *Electric Governing of the Driving Engine*, in which the governor is regulated by the current itself instead of by the speed of rotation, as usual.

**Regulation, Hand** — — Such a regulation of a dynamo-electric machine as will preserve constant, either the current or the potential, said regulation being effected by hand as distinguished from automatic regulation.

**Regulator, Automatic** — — A device for securing automatic regulation as distinguished from hand regulation. (See *Regulation, Hand. Regulation, Automatic.*)

**Regulator, Hand** — — A resistance box, the separate coils or resistances of which can be readily placed in or removed from a circuit by means of a hand-moved switch.

The term hand regulator is used as distinguished from automatic regulator. (See *Regulator, Automatic. Regulation, Automatic.*)

**Regulator Magnet.**—(See *Magnet, Regulator.*)

**Regulator, Monophotal Arc-Light** — — A term sometimes employed for an electric arc lamp in which the whole current passes through the arc-regulating mechanism, and which is usually operated singly in circuit with a dynamo.

**Regulator, Polyphotal Arc-Lamp** — — A regulator for an arc lamp suitable for maintaining a number of lamps in series circuit with the dynamo.

Polyphotal regulators differ from monophotal regulators in that their regulating electro-magnets are energized by a shunt circuit around the electrodes of the lamp, while in monophotal regulators such electro-magnets are placed in the direct circuit. The terms monophotal and polyphotal are not generally used in America.

**Reguline Electro-Metallurgical Deposit.**—(See *Deposit, Electro-Metallurgical, Reguline.*)

**Rejuvenation of Luminescence.**—(See *Luminescence, Rejuvenation of.*)

**Relative Calibration.**—(See *Calibration, Relative.*)

**Relay.**—An electro-magnet, employed in systems of telegraphy, provided with contact points placed on a delicately supported armature, the movements of which throw a battery, called the local battery, into or out of the circuit of the receiving apparatus.

A relay is sometimes called a receiving magnet.



Fig. 477. Telegraphic Relay.

The use of a relay permits much smaller currents to be used than could otherwise be done, since the electric impulses, on reaching a distant station, are required to do no other work than attracting a delicately poised movable contact, and thus, by throwing a local battery into the circuit of the receiving apparatus, to cause such local battery to perform the work of registering. Its use is especially required in the Morse system of telegraphy in order to cause the sounder to be distinctly heard.

A form of relay that is much used is shown in Fig. 477.

The electro-magnet M, is wound with many turns of very fine wire. In the form used by the Western Union Telegraph Company, there are about 8,500 turns, having resistance of 150 ohms. A screw m, is provided for moving the electro-magnet M, a slight distance in or out, for the purposes of adjustment. A semi-cylindrical armature A, of soft iron, is attached to the insulated armature lever a, the lower end of which is supported by a steel arbor, which is pivoted between two set screws.

A retractile spring S', regulable at S, is provided for moving the armature away from the electro-magnet. There are four binding posts, two of which are placed in the circuit of the electro-magnet, and two in that of the local battery. The ends of the line wire are connected with the former, and the receiving instrument placed in the circuit of the latter. A platinum

contact is placed on the end of a screw supported at F, opposite a similar contact, near the end a, of the armature lever. The contact is regulable by means of a screw c.

On the energizing of the electro-magnet, the attraction of its armature closes the platinum contact, and, by thus completing the circuit of the local battery, causes an attraction of the armature of the receiving apparatus. On the cessation of the current in the main line, the spring S', pulls the armature away from the magnet, breaks the circuit of the local battery, and thus permits a similar spring on the receiving instrument to pull its armature away. Thus all the movements of the armature of the relay are reproduced with increased intensity by the armature of the receiving instrument.

The connections of the relay to the local battery and the registering apparatus, will be better understood from an inspection of Fig. 478, which represents a form of relay much used in Germany.




Fig. 478. Telegraphic Relay, German Pattern.

The retractile spring f, is regulated by the up-and-down movements of its lower support, which slides in the vertical pillar S. The line wire is shown at m m, connected at one end to earth by a ground wire.

The registering apparatus R, is connected in the circuit of the local battery L, as shown. The contacts are made by the end B, of the lever B B', attached to the armature A, of the electro-magnet M M.

**Relay Bell.**—(See *Bell, Relay, Electric*.)

**Relay, Box-Sounding Telegraphic** —  
—A relay the magnet of which is surrounded by a resonant case of wood for the purpose of increasing the intensity of the sound made by the armature of the magnet.

A form of box-sounding relay is shown in Fig. 479.

**Relay, Differential** — —A telegraphic



Fig. 479. Box-Sounding Relay

relay containing two differentially wound coils of wire on its magnet cores.

When the currents which pass through these two coils are of the same strength, there is no movement of the armature, since the fields of the two coils neutralize each other.

The differential relay is used in the differential method of duplex and quadruplex telegraphy. (See *Telegraphy, Duplex Differential Method of*. *Telegraphy, Quadruplex Differential Method of*.)

**Relay Magnet.**—A name sometimes given to a relay. (See *Relay*.)

**Relay, Microphone** — —A device for automatically repeating a telephonic message over another wire.




Fig. 480. Microphone Relay.

A form of microphone relay is shown in Figs. 480 and 481.

Several minute microphones mounted on the




Fig. 481. Microphone Relay.

diaphragm of the telephone whose message is to be repeated, so vary the resistance of a local battery included in their circuit as to automatically repeat the articulate speech received.

The microphones may be connected either in



multiple arc or in series, as shown respectively to the left and right in Fig. 480.

**Relay, Pocket Telegraphic** — — A form of telegraphic relay of such small dimensions as to permit it to be readily carried in the pocket.

**Relay, Polarized** — — A telegraphic relay provided with a permanently magnetized armature in place of the soft iron armature of the ordinary instrument.

In the form of polarized relay shown in Fig. 482, N S, is a steel magnet, whose magnetism is consequently permanent, with its north and south poles at N, and S, respectively. The cores of the electro-magnet  $m, m'$ , are of soft iron, and, since they rest on the north pole of the permanent steel magnet, the poles, brought very near together by the armatures at  $n, n'$ , will be of the same polarity as N, when no current is passing through the coils  $m, m'$ ; but when such current does pass, one of these poles becomes of stronger north polarity, while the other changes its polarity to south.

By these means to-and fro movements of the armature lever, with its contact point, are effected without the use of a retractile spring; movement in one direction occurring on the closing of the circuit due to the electro-magnetism developed



Fig. 482. Polarized Relay.

by the coils  $m, m'$ , and movement in the opposite direction, on the losing of this magnetism on breaking the circuit, by the permanent magnetism of the steel magnet N S.

These movements are imparted to the soft iron lever  $c, c'$ , pivoted at B, and passing between the closely approached soft iron poles at  $n, n'$ . This lever rests at the end  $c'$ , against a contact point

when moved in one direction, and against an insulated point when moved in the opposite direction. It rests against the insulated point when no current is passing through the coils  $m, m'$ .

If the armature lever were placed in a position exactly midway between the poles  $n, n'$ , it would not move at all, being equally attracted by each; but if moved a little nearer one pole than the other, it would be attracted to, and rest against, the nearer pole.

When alternating currents are employed on the line, the lever  $c, c'$ , must be adjusted as nearly as possible in the middle of the space between  $n$  and  $n'$ , in which case it will remain on the side to which it was last attracted, until a current in the opposite direction moves it to the other side.

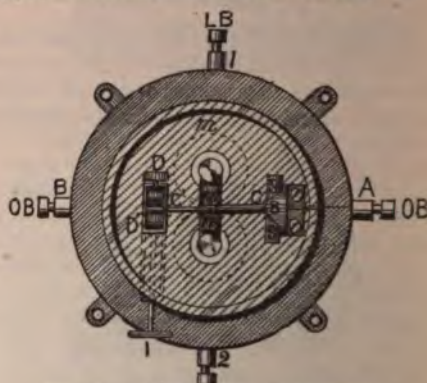


Fig. 483. A Detail of the Polarized Relay.

The space between the magnet poles  $n, n'$ , and the contacts of the armature lever at D, and D', are shown in detail in Fig. 483, which is a plan of Fig. 482. The binding posts for the line battery are shown at L B, 1, and 2, and those for the local battery at A and B. The dotted lines show the connections.

Since the polarized relay dispenses with the retractile spring, it is far more sensitive than the ordinary instrument. Once adjusted, no further regulation is required, in which respect it differs very decidedly from non-polarized relays.

There are other forms of polarized relays, but the above will suffice to illustrate the general principle of their operation.

**Relay Shunt, Stearn's** — — (See *Shunt, Relay, Stearn's*.)

**Reluctance, Magnetic** — — A term recently proposed in place of magnetic resistance to express the resistance offered by a

medium to the passage through its mass of lines of magnetic force.

The term reluctance, in the sense of resistance to passage of lines of magnetic force, has been proposed in place of resistance, for the purpose of carrying out the conception of regarding the flow of lines of force in a magnetic circuit as being due to a magneto-motive force, and being opposed by a reluctance of the substances forming such circuit to the passage of such lines.

According to this conception,

The magnetic flux =

$$\frac{\text{The magneto-motive force}}{\text{The reluctance.}}$$

#### Reluctance, Magnetic, Unit of —

Such a magnetic reluctance in a closed circuit that permits unit magnetic flux to traverse it under the action of unit magneto-motive force.

In present practical work reluctances vary from 100,000 to 100,000,000 of the practical units.

**Reluctivity.**—A term proposed for magnetic reluctance. (See *Reluctance, Magnetic*.)

This term is not generally adopted.

**Removable Key Switch.**—(See *Switch, Removable Key*.)

**Renovation of Secondary Cell.**—(See *Cell, Secondary or Storage, Renovation of*.)

**Renovation of Secondary or Storage Cell.**—(See *Cell, Secondary or Storage, Renovation of*.)

**Reofore.**—A rheophore. (See *Rheophore*.)

**Repeaters, Telegraphic** — Telegraphic devices, whereby the relay, sounder or registering apparatus, on the opening and closing of another circuit, with which it is suitably connected, is caused to repeat the signals received.

Repeaters are employed to establish direct communication between very distant stations, or to connect branch lines to the main line.

Fig. 484, shows Wood's Button Repeater. This repeater consists simply of a three-point switch  $L$ , capable of being placed on the points 1, 2 and 3; and a ground switch at 4. The circuits are arranged between the sounders  $S, S'$ , relays

$M, M'$ , main batteries  $B, B'$ , and the two main lines  $E$ , and  $W$ , in the manner shown.

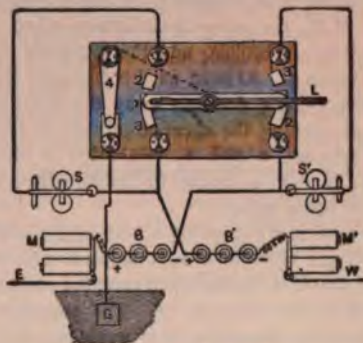


Fig. 484. Wood's Button Repeater.

If the lever  $L$ , is in the position shown in the drawing, the lines  $E$  and  $W$ , form independent circuits.

If the ground switch 4 is closed, and the lever  $L$ , is placed on 2, the eastern line repeats into the western. If the lever  $L$ , is placed on the plates 3, 3, the western line repeats into the eastern.

This repeater is non-automatic and can be worked in but one direction at a time; moreover, it requires the services of an attendant.

The automatic repeater can be operated in both directions, and dispenses with the constant services of an attendant at the repeating station.

In sending a dispatch through a repeater, the dots and dashes are prolonged so as to give the lever of the repeating instrument time in which to move backwards and forwards.

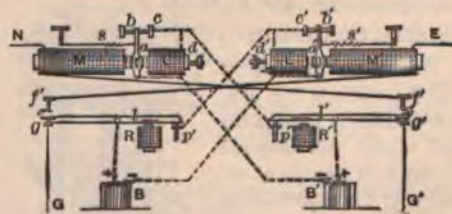


Fig. 485. Hick's Automatic Button Repeater.

In Hick's Automatic Repeater, shown in Fig. 485, the switch or circuit-changer is automatic in its action.

The relay magnets are shown at  $M, M'$ , the sounders at  $R$  and  $R'$ ;  $f, f'$ , are platinum contacts operated by levers  $l$  and  $l'$ , and  $L$  and  $L'$ , are extra local magnets, that act on armatures



placed directly opposite the armatures of the relay magnets.

The extra local magnet *L*, is cut out of the circuit of *B'*, the *extra local battery*, when the main circuit is broken, and the armature is in contact with *c*. As soon as this happens, however, the spring *s*, drawing away the armature, and thus opening the short-circuit of no resistance between *c* and *a*, establishes a circuit through *L*. On *a*, coming in contact with *c*, the circuit is again broken.

The tension of the spring *s*, is so regulated that a very rapid vibration of *a*, is maintained so constantly, that it is impossible to close the main circuit when *L*, is not cut out. The armature *a*, will therefore respond to very weak impulses of the relay magnet.

On breaking the *western main circuit N*, the lever *a*, vibrates very rapidly. The lever *l*, of the sounder *R*, first breaks the circuit of *L*, and afterwards that of the *eastern main circuit E*, which passes through *M*. Both *L'* and *M'*, being broken, a slight tension of *s'*, will hold *a*, in place, thus avoiding the breaking of the western main circuit through the closing of the local circuit through *R*. On the closing of the western circuit, the reverse of these operations occurs.

The author has taken the above explanation mainly from Pope's work on "Modern Practice of the Electric Telegraph."

**Repeating Sounder.**—(See *Sounder, Repeating*.)

**Replenisher.**—A static influence machine devised by Sir William Thomson for charging the quadrants of his quadrant electrometer.

Two brass carriers *C* and *D*, shown in Fig. 486, are electrically fixed to the end of the vulcanite rod *E*, which is capable of rotation by the thumb screw at *M*, in the direction shown by the arrow. Hollow metal half-cylinders, *A* and *B*, act as inductors, a strip of brass fixed around the edges of a piece of vulcanite *P*, connecting the metallic springs *S*, and *S'*, as shown.

The action of the replenisher is readily under-

stood from the following considerations, as suggested by Ayrton in his "Practical Electricity":

*A* and *B*, Fig. 487, are two insulated hollow metallic vessels having a small difference of potential between them, *A*, being the higher. *C*, and *D*, are two small uncharged conductors held by insulating strings. If *C* and *D*, be held near *A* and *B*, as shown, the potential of *C*, will, by induction, be raised somewhat above that of *D*, so that when connected by a conductor, such as the metallic wire *W*, a small quantity of positive electricity will flow from *C*, to *D*, thus leaving *D*, positively, and *C*, negatively charged.

If, now, *C* and *D*, are removed from *W*, and placed in the bottom of *B* and *A*, as shown in Fig. 488, the difference of potential between *A*, and *B*, will be thereby increased, and if they are then withdrawn, and totally discharged, and



Fig. 487. Action of Replenisher.

again placed in the first position shown, an additional charge can be given to *A* and *B*, and this can be repeated as often as desired.

In the replenisher, *A* and *B*, correspond to the vessels *A* and *B*; the brass carriers *C* and *D*, to the balls *C* and *D*, and the spring *S S*, and *M*,



Fig. 488. Action of Replenisher.

to the wire *W*. No initial charge need be given to *A* and *B*, since they are invariably found to



be at a sufficient difference of potential to build up the charge.

**Replenisher, Carriers of** — —The moving conductors of a replenisher which carry the charges and thus permit of an accumulation of such charges. (See *Replenisher*.)

**Repulsion, Electric** — —The mutual driving apart or tendency to mutually drive apart existing between two similarly charged bodies, or the mutual driving apart of similar electric charges.

**Repulsion, Electro-Dynamic** — —The mutual repulsion between two electric circuits whose currents are flowing in opposite directions.

Parallel currents flowing in opposite directions repel one another, because their lines of magnetic force have the same direction in adjoining parts of the circuit. (See *Dynamics, Electro*.)

**Repulsion, Electro-Magnetic** — —The mutual repulsion produced by two similar electro-magnetic poles.

**Repulsion, Electrostatic** — —The mutual repulsion produced by two similar electric charges.

**Repulsion, Magnetic** — —The mutual repulsion exerted between two similar magnetic poles.

**Repulsion, Molecular** — —The mutual repulsion existing between molecules arising from their kinetic energy. (See *Matter, Kinetic Theory of*.)

**Residual Atmosphere**—(See *Atmosphere, Residual*.)

**Residual Charge**—(See *Charge, Residual*.)

**Residual Magnetism**—(See *Magnetism, Residual*.)

**Resin**—A general term applied to a variety of dried juices of vegetable origin.

Resins are, in general, transparent, inflammable solids, soluble in alcohol, and, in general, excellent non-conductors of electricity. Rosin is one of the varieties of resin.

**Resinous Electricity**—(See *Electricity, Resinous*.)

**Resistance**—Something placed in a circuit for the purpose of opposing the passage or

flow of the current in the circuit or branches of the circuit in which it is placed.

The electrical resistance of a conductor is that quality of the conductor in virtue of which there is a fixed numerical ratio between the potential difference of the two opposing faces of a cubic unit of such conductor, and the quantity of electricity which traverses either face per second, assuming a steady flow to take place normal to these faces, and to be uniformly distributed over them, such flow taking place solely by an electromotive force outside the volume considered.

The term is used in the first definition in the concrete sense of something intended for or used as a resistance. For the physical definitions and facts see *Resistance, Electric*.

Gases offer very high resistance to the flow of an electric current. Their non-conducting power causes the increase of resistance which attends the polarization of a voltaic cell. (See *Cell, Voltaic, Polarization of*.)

Resistances consist of coils, strips, bars or spirals of metal, or plates of carbon, or metallic powders, powdered or granulated carbon, or liquids.

**Resistance, Absolute Unit of** — —The one thousand millionth of an ohm. (See *Ohm, Units, Practical*.)

**Resistance, Asymmetrical** — —Conductors or parts of conductors, which offer a greater resistance to the flow of an electric current in one direction than in another.

Asymmetrical conductors are unknown, so far as structural peculiarities are concerned, but can be obtained by the use of counter electromotive forces, acting as resistance. This term was proposed by Wilke in discussing the obtaining of continuous currents by commutatorless dynamo-electric machines.

The resistance of the human body is possibly an asymmetrical resistance.

An evident application of an asymmetrical resistance is to direct alternating currents so as to cause the current that passes to flow in and to the same direction.

**Resistance, Balanced** — —A resistance so placed in a circuit as to be balanced or made equal to another resistance connected therewith.



**Resistance, Balanced, for Dynamos —**

—A resistance that possesses a range sufficient to balance one dynamo against another with which it is desired to run in parallel. —(*Urquhart.*)

**Resistance Box.—(See Box, Resistance.)**

**Resistance Bridge.—(See Bridge, Resistance.)**

**Resistance Coil.—(See Coil, Resistance.)**

**Resistance Coil, Standard — (See Coil, Resistance, Standard.)**

**Resistance, Conductivity —**—The resistance offered by a substance to electric conduction, or to the passage of electricity through its mass.

**Resistance, Dielectric —**—A term sometimes employed for the resistance of a dielectric to mechanical strains produced by electrification.

The dielectric resistance of the glass, or other dielectric of a Leyden jar or condenser, is frequently overcome by the passage of the charges on the conducting surfaces, and the glass is thus pierced.

The term dielectric resistance would appear to be badly chosen; for, like all substances, dielectrics possess a true ohmic resistance, which increases with the increase of length, and decreases with the increase of area of cross-section.

The resistance of the dielectric, however, differs from the ordinary ohmic resistance of conductors, in that the resistance of the dielectric is suddenly overcome, and the discharge passes disruptively as a spark.

**Resistance, Effect of Heat on Electric**

—Nearly all metallic conductors have their electric resistance increased by an increase of temperature.

The carbon conductor of an incandescent electric lamp, on the contrary, has its resistance decreased when raised to electric incandescence. The decrease amounts to about three-eighths of its resistance when cold.

The effects of heat on electric resistance may be summarized as follows:

(1.) The electric resistance of metallic conductors increases as the temperature rises. In some alloys this increase is small.

(2.) The electric resistance of electrolytes decreases as the temperature rises.

(3.) The electric resistance of dielectrics and non-conductors decreases as the temperature rises.

**RESISTANCE AND CONDUCTIVITY OF PURE COPPER AT DIFFERENT TEMPERATURES.**

Centigrade Temperature	Resistance.	Conductivity.	Centigrade Temperature	Resistance.	Conductivity.
0°	1.00000	1.00000	16°	1.06168	.94190
1	1.00381	.99624	17	1.06563	.93841
2	1.00756	.99250	18	1.06959	.93494
3	1.01135	.98878	19	1.07356	.93148
4	1.01515	.98508	20	1.07742	.92804
5	1.01896	.98139	21	1.08164	.92452
6	1.02280	.97771	22	1.08533	.92121
7	1.02663	.97406	23	1.08954	.91782
8	1.03048	.97042	24	1.09365	.91445
9	1.03435	.96679	25	1.09763	.91110
10	1.03822	.96319	26	1.10161	.90776
11	1.04209	.95970	27	1.10567	.90443
12	1.04599	.95603	28	1.10972	.90113
13	1.04990	.95247	29	1.11382	.89784
14	1.05406	.94893	30	1.11782	.89457
15	1.05774	.94541			

—(*Latimer Clark.*)

**Resistance, Electric —**—The ratio between the electromotive force of a circuit and the current that passes therein.

The reciprocal of electrical conductivity.

Resistance can be defined as the reciprocal of electrical conductivity, because even the best electrical conductors possess appreciable resistance.

Ordinarily the resistance of a circuit may be conveniently regarded as that which *opposes* or *resists* the passage of the current. Strictly speaking, however, this is not true, since from *Ohm's law* (See *Law of Ohm, or Law of Current Strength*)

$$C = \frac{E}{R}, \text{ from which we obtain}$$

$$R = \frac{E}{C}, \text{ which shows that resistance is a}$$

ratio between the electromotive force that causes the current and the current so produced.

Resistance may be expressed as a velocity. The dimensions of resistance in terms of the electro-magnetic units are

$$\frac{L}{T}$$

(See *Units, Electro-Magnetic.*) But these are the dimensions of a velocity, which is the ratio of the distance passed over in unit time. Resistance may therefore be expressed as a velocity.

"The resistance known as 'one ohm' is intended to be  $10^9$  absolute electro-magnetic units, and, therefore, is represented by a velocity of  $10^9$  centimetres or 10,000,000 metres (one earth quadrant) per second."—(Sylvanus Thompson.)

Resistance may be represented by a velocity, one ohm being the resistance of a wire, which, if moved through a unit field of force at the rate of 1,000,000,000 ( $10^9$ ) centimetres per second will have a current of one ampère generated in it. (See Resistance, Ohmic. Resistance, Spurious.)

The true value of the ohm is exactly  $10^9$  centimetres. The material standards employed, i. e., the B. A. and "legal" ohms, are not absolutely of this value.

One mil-foot of soft copper at 10.22 degrees C. or 50.4 degrees F. has the standard resistance of exactly 10 legal ohms; at 15.56 or 59.9 degrees F., it has a resistance of 10.20 legal ohms, and at 23.9 degrees C. or 75 degrees F., 10.53 legal ohms.

#### RESISTANCE.

Resistance of Wires of Pure Annealed Copper at 0° C.  
(Density = 8.9.)

Diameters in Millimetres.	Weight per Metre in Grammes.	Length in Metres per Kilogramme. (Bare Wire.)	Resistance of Wire of Pure Annealed Copper at 0° C.		
			Ohms per Kilometre.	Metres per Ohm.	Ohms per Kilogramme.
5	175	5.7	.8	1230.5	.00456
4.4	135.28	7.4	1.06	944.38	.00784
3.9	106.35	9.5	1.35	722	.0128
3.4	80.8	12.5	1.80	553.92	.0222
3	62.93	16	2.3	439.07	.0365
2.7	51	19.8	2.8	355.65	.0557
2.4	40.23	25	3.6	281	.088
2.2	33.82	30	4.2	236.08	.123
2	27.95	36	5.1	195.15	.185
1.8	22.7	44	6.3	158.08	.278
1.6	17.89	56	8	124.9	.448
1.5	15.75	63	9.1	109.75	.574
1.4	13.7	73	10.5	95.651	.763
1.3	11.84	85	12	82.47	1.03
1.2	10.06	100	14	70.247	1.42
1.1	8.47	119	17	59.024	2.02
1	6.99	144	20	48.782	2.95
.9	5.66	178	25	39.515	4.19
.8	4.47	225	32	31.225	7.21
.7	3.83	294	42	23.9	12.3
.6	2.52	400	57	17.56	22.78
.5	1.74	576	81	12.305	46.81
.4	1.175	900	123.4	8.173	110.41
.34	.808	1251	177.0	5.622	222.55
.3	.7181	1607	228.5	4.377	367.2
.24	.4026	2508	357	2.801	895.36
.2	.2797	3614	514	1.945	1,857.6
.16	.179	5590	803.1	1.245	4,489
.13	.1007	9929	1426	.7	14,179
.1	.0699	14369	2056	.486	29,549
.08	.0447	24570	3213	.311	78,943
.06	.0322	39824	5713	.173	227,515
.04	.0112	88878	12848	.078	1142,405

—(Hospitalier.)

The following table, based on Matthiessen's measurements, gives the relative resistances of equal lengths and cross-sections of a number of different substances used in electricity as compared with silver.

#### LEGAL MICROHMS.

NAMES OF METAL.	Resistance in Microhms at 0 degree C.		Relative Resistance.
	Cubic Centimetre.	Cubic Inch.	
Silver, annealed...	1.504	0.5921	1.
Copper, annealed.	1.598	0.6292	1.063
Silver, hard drawn	1.634	0.6433	1.086
Copper, h'rd dr'wn	1.634	0.6433	1.086
Gold, annealed....	2.058	0.8102	1.369
Gold, hard drawn.	2.094	0.8247	1.393
Aluminium, ann'd	2.912	1.147	1.935
Zinc, pressed.....	5.626	2.215	3.741
Platinum, annealed	9.057	3.565	6.022
Iron, annealed....	9.716	3.825	6.460
Nickel, annealed..	12.47	4.907	8.285
Tin, pressed.....	13.21	5.202	8.784
Lead, pressed.....	19.63	7.728	13.05
German silver.....	20.93	8.240	13.92
Antimony, pressed	35.50	13.98	23.60
Mercury.....	94.32	37.15	62.73
Bismuth, pressed..	131.2	51.65	87.23

—(Ayrton.)

The above resistances are for chemically pure substances only. Slight impurities produce a very considerable increase in the resistance.

#### Resistance, Electric, of Liquids —

The resistance offered by a liquid mass to the passage of an electric current.

As a rule the electric resistances of liquids, with the single exception of mercury, are enormously higher than those of metallic bodies.

To roughly determine the resistance of a liquid, a section is taken between two parallel metallic plates A and B, Fig. 489, placed as shown in the figure, and an electric current is passed between them.

In order to accurately vary the size of the plates immersed in the liquid, and hence the area of cross-section of the liquid conductor, as well as the distance between the plates, the apparatus shown in Fig. 490 may be used, in



Fig. 489. Resistance of Liquid.



TABLE OF CONDUCTING POWERS AND RESISTANCES IN OHMS—B. A. UNITS.

NAMES OF METALS.	Conducting power at 0 degree C.	Resistance of a wire one foot long weighing one grain.	Resistance of a wire one metre long weighing one gramme.	Resistance of a wire one foot long $\frac{1}{1000}$ inch in diameter.	Resistance of a wire one metre long, one millimetre in diameter.	Approximate percentage of variation in resistance for 1 degree of temperature at 20 deg.
Silver, annealed.....	.....	0.2214	0.1544	9.936	0.01937	0.377
Silver, hard drawn.....	100.00	0.2481	0.1689	9.151	0.02103	.....
Copper, annealed.....	.....	0.2064	0.1440	9.718	0.02057	0.388
Copper, hard drawn.....	99.55	0.2106	0.1469	9.940	0.02104	.....
Gold, annealed.....	.....	0.5849	0.4080	12.52	0.02650	0.355
Gold, hard drawn.....	77.96	0.5950	0.4150	12.74	0.02697	.....
Aluminium, annealed.....	.....	0.06822	0.05759	17.72	0.03751	.....
Zinc, pressed.....	29.02	0.5710	0.3983	32.22	0.07244	0.365
Platinum, annealed.....	.....	3.536	2.464	55.09	0.1166	.....
Iron, annealed.....	16.81	1.2425	0.7522	59.40	0.1251	.....
Nickel, annealed.....	13.11	1.0785	0.8666	75.78	0.1604	.....
Tin, pressed.....	12.36	1.317	0.9184	80.36	0.1701	0.365
Lead, pressed.....	8.32	3.236	2.257	119.39	0.2527	0.387
Antimony, pressed.....	4.62	3.324	2.3295	216.0	0.4571	0.389
Bismuth, pressed.....	1.24	5.054	3.525	798.0	1.689	0.354
Mercury, liquid.....	.....	18.740	13.071	600.0	1.270	0.072
Platinum-silver, alloy, hard or annealed.....	.....	4.243	2.959	143.35	0.3140	0.031
German silver, hard or annealed.....	.....	2.652	1.850	127.32	0.2695	0.044
Gold, silver, alloy, hard or annealed.....	.....	2.391	1.668	66.10	0.1399	0.065

—(Jenkin.)

which these distances are readily adjustable, as shown.

**Resistance, Equivalent** — — A single resistance which may replace a number of separate resistances in a circuit without altering the value of the current traversing it.

**Resistance, Essential** — — A term sometimes used instead of internal resistance.

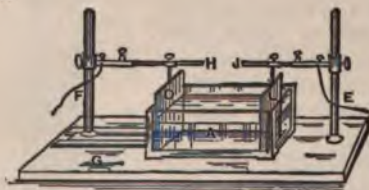


Fig. 490. Apparatus for Measuring Resistance of Liquid.

**Resistance, External Secondary** — — A term proposed by Du Bois Reymond for the change in the resistance of a circuit external to the electric source when cataphoric action takes place. (See *Action, Cataphoric*.)

"If the copper electrodes of a constant battery be placed in a vessel filled with a solution of cupric sulphate and from each electrode there projects a cushion saturated with this fluid, then,

on placing a piece of muscle, cartilage, vegetable tissue, or even a prismatic strip of coagulated albumen across these cushions, we observe, that very soon after the circuit is closed, there is a considerable variation of the current. \* \* \* This phenomenon is called 'external secondary resistance.' "—(Landois and Sterling.)

**Resistance, Extraordinary** — — A term sometimes employed instead of external resistance. (See *Resistance, External Secondary*.)

**Resistance, False** — — A resistance arising from a counter electromotive force and not directly from the dimensions of the circuit, or from its specific resistance.

The false resistance of any circuit is sometimes called its spurious resistance. (See *Force, Electromotive, Counter. Resistance, Spurious*.)

**Resistance, Inductionless** — — A term sometimes used instead of non-inductive resistance. (See *Resistance, Non-Inductive*.)

**Resistance, Inductive** — — A resistance which possesses self-induction.

**Resistance, Insulation** — — The resistance of a line or conductor existing between the line or conductor and the earth through the insulators, or between the two

wires of a cable through the insulating material separating them.

The insulation resistance of a telegraph line is the resistance that exists between the line and the earth, through its insulators. The insulation resistance will decrease as the length of line increases, since for any increase in the number of poles and insulators there is a proportional increase in the area of cross-section of the insulating supports.

If the insulation resistance is 1,000,000 ohms per mile, in a line 200 miles in length, the insulation resistance is only 5,000 ohms, that is,  $\frac{1,000,000}{200} = 5,000$  ohms.

### Resistance, Joint, of Parallel Circuits

—The joint resistance of two parallel circuits is determined by means of the following formula:

$$R = \frac{r r'}{r + r'}$$

Where  $R$  = the joint resistance of any two circuits whose separate resistances are respectively  $r$  and  $r'$ .

When there are three resistances  $r$ ,  $r'$  and  $r''$ , in parallel, the joint resistance,

$$R = \frac{r r' r''}{r r' + r r'' + r' r''}$$

(See *Circuits, Varieties of*.)

**Resistance, Magnetic** —The reciprocal of magnetic permeability or conductivity for lines of magnetic force.

Resistance offered by a medium to the passage of the lines of magnetic force through it.

The magnetic resistance of the circuit of the lines of force is reduced by forming the circuit of a medium having a high magnetic permeability, such as soft iron. This is accomplished by the armature or keeper of a magnet, or by the iron in an iron-clad magnet. (See *Magnet, Iron-Clad*.)

### Resistance, Measurement of

—Methods employed for determining the resistance of any circuit or part of a circuit.

Numerous methods are employed for this purpose. Among these are:

(1.) *The use of a resistance box with a Wheatstone bridge*, by opposing or balancing the unknown resistance against a known resistance. (See *Balance, Wheatstone's Electric*.)

(2.) *The differential galvanometer*. (See *Galvanometer, Differential*.)

(3.) *The method of substitution*.

(4.) *Comparison of the deflections of a galvanometer*.

**Method of Substitution.**—A resistance-box  $R$ , Fig. 491, galvanometer  $G$ , and the resistance  $x$ , that is to be measured, are placed in the direct circuit of the battery  $B$ , by means of conductors of such thick wire that their resistance can be neglected.

The deflection of the galvanometer is first measured with  $x$ , in circuit, and no resistance in the box  $R$ . The resistance  $x$ , is then cut out of the circuit by placing a thick copper wire across the terminals of the mercury cups at  $m m'$ , and resistances unplugged in  $R$ , until the same deflection is obtained. Then, if the electromotive force of the battery has remained constant, the resistances unplugged equal the unknown resistance.

For full description of the various methods of determining resistance the reader is referred to "Ayrton's Practical Electricity," "Kemp's Handbook of Testing," or other standard books on electrical measurements.

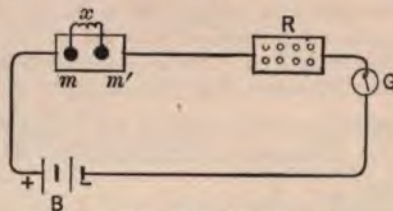


Fig. 491. Substitution Method.

When several resistances are placed in series in any circuit, by measuring the difference of potential at their terminals, their values can be determined by simple calculation, being directly proportional to these differences of potential.

This method is especially applicable to the measurement of such low resistances as the armatures of dynamo-electric machines.

**Resistance, Non-Inductive** —A resistance in which self-induction is practically absent.

An incandescent lamp filament is practically a non-inductive resistance when compared with a coil on the helix of an electro-magnet.

**Resistance of Human Body.**—(See *Body, Human, Resistance of*.)



**Resistance of Voltaic Arc.**—(See *Arc, Voltaic, Resistance of*.)

**Resistance, Ohmic** — —The true resistance of a conductor due to its dimensions and specific conducting power, as distinguished from the spurious resistance produced by a counter electromotive force. (See *Force, Electromotive, Counter. Resistance, Spurious*.)

The term ohmic resistance must be regarded as a pleonasm. Its use can only be permitted in contradistinction to counter electromotive force resistance. True and spurious resistance would seem preferable.

**Resistance or Cell, Selenium** — —A mass of crystalline selenium, the resistance of which is reduced by placing it in the form of narrow strips between the edges of broad conducting plates of brass.

The selenium employed for this purpose is the vitreous variety which has been fused and maintained for several hours at about 220 degrees C., by means of which its resistance is reduced.

By exposure to sunlight, the resistance of a selenium cell is decreased fully one-half its resistance in the dark. The selenium cell is used in the photophone. (See *Photophone*.)

**Resistance or Reducteur for Voltmeter.** —(See *Reducteur or Resistance for Voltmeter*.)

**Resistance, Secondary** — —A term sometimes used in place of external secondary resistance. (See *Resistance, External Secondary*.)

**Resistance Slide.**—(See *Slide, Resistance*.)

**Resistance, Specific** — —The particular resistance which a substance offers to the passage of electricity through it.

In absolute measure, the resistance in absolute units between the opposite faces of a centimetre cube of the given substance.

In the practical system the resistance given in ohms.

**Resistance, Specific Conduction** — —A term sometimes used instead of specific resistance. (See *Resistance, Specific*.)

**Resistance, Specific, of Liquids** — —

The resistance of a given length (one centimetre) and area of cross-section (one square centimetre) of any liquid as compared with the resistance of an equal length and cross-section of pure silver.

The resistance of a few common liquids and solutions is here given from Lupton:

Water, pure, at 75 degrees C.	1.188 $\times 10^8$ ohms, i. e., 118,800,000.
Water at 4 degrees C.	9.100 $\times 10^8$ "
Water at 11 degrees C.	3.400 $\times 10^8$ "
Dilute hydrogen sulphate (sulphuric acid) at 18 degrees C., 5 per cent. acid.	4.88
Dilute hydrogen sulphate at 18 degrees C., 3 per cent. acid	1.38 ohms.
Nitric acid at 18 degrees C., density 1.32	1.61 "
Saturated solution of copper sulphate (blue vitriol) at 10 degrees C.	29.30 "
Saturated solution of zinc sulphate at 14 degrees C.	21.50 "
Hydrochloric acid, 20 per cent. acid, at 18 degrees C.	1.34 "
Sal ammoniac, 25 per cent. salt	2.53 "
Common salt, saturated, at 13 degrees C.	5.30 "

It will be observed that the resistance varies considerably with differences of temperature.

**Resistance, Spurious** — —A false resistance arising from the development of a counter electromotive force. (See *Resistance, False. Force, Electromotive, Counter*.)

The spurious resistance is also called the false resistance, in order to distinguish it from the true or ohmic resistance. (See *Resistance, Electric*.)

**Resistance, Standard** — —A resistance used for comparison with or the determination of unknown resistances.

A committee appointed by the American Institute of Electrical Engineers in 1890 reported the following values for the standard resistance of copper wire; at 0 degree C. in B. A. U. and legal ohms, viz.:



## STANDARD RESISTANCE AT 0° C.

	B. A. U. Legal Ohms.	
Meter-millimetre,"		
"soft copper"...	.02057	.02034
Cubic centimetre...	.000001616	.000001598
"Mil-foot" .....	9.720	9.612

**Resistance, Tables of** — Tables in which the resistance of equal lengths and cross-sections of different substances is given in ohms, or other units of resistance.

**Resistance Thermometer.**—(See *Thermometer, Electric Resistance*.)

**Resistance, Transition** — A term sometimes used in electro-therapeutics for a change in the value of the resistance caused by polarization.

Whenever an electric current passes through a fluid substance and decomposes the fluid, the decomposition products collect on the electrodes and produce an increase in the resistance of the circuit.

**Resistance, True** — The resistance which a conductor offers to the passage of a current by reason of its dimensions and specific conducting power, as distinguished from a spurious resistance produced by a counter electromotive force.

The true resistance is sometimes called the ohmic resistance.—(See *Resistance, Spurious Resistance, Ohmic*.)

**Resistance, Unit of** — Such a resistance that unit difference of potential is required to cause a current of unit strength to pass. (See *Ohm, Potential, Electric Potential, Difference of*.)

**Resistance, Unit of, Absolute** — The one thousand millionth of an ohm. (See *Ohm, Units, Practical*.)

**Resistance, Unit of, Jacobi's** — The electric resistance of 25 feet of a certain copper wire weighing 345 grains.

Another unit of electric resistance proposed by Jacobi was the resistance of a copper wire one metre in length and one millimetre in diameter.

**Resistance, Unit of, Matthiessen's** — The resistance of one statute mile of pure annealed copper wire  $\frac{1}{8}$  inch in diameter at

15.5 degrees C, and determined by him to be 13.59 B. A. ohms.

**Resistance, Unit of, Varley's** — The resistance of one statute mile of a special copper wire  $\frac{1}{8}$  inch in diameter.

Varley's unit was afterwards adjusted by him to equal 25 Siemens Mercury Units.

**Resistance, Variable** — A resistance the value of which can be readily varied.

Variable resistances are either :

- (1.) Automatically variable resistances; or
- (2.) Non-automatically variable resistances.

**Resistance, Variable, Automatic** — A resistance the value of which can be automatically varied.

A pile of carbon plates resting on one another, in loose contact, offers a high resistance, but when compressed as by an electro-magnet their resistance is lowered. Brush employs such an automatic resistance in the regulation of his dynamo-electric machine. (See *Regulation, Automatic*.)

**Resistance, Variable Non-Automatic** — A resistance the value of which is regulated by hand. (See *Rheostat*.)

**Resistance, Virtual** — A term sometimes employed instead of impedance. (See *Impedance*.)

**Resonance, Electric** — The setting up of electric pulses in open-circuited conductors, by the action of pulses in neighboring conductors.

Electric resonance, like acoustic resonance, takes place when a correspondence exists between the time-rate of vibration of the body producing the resonance, and the body in which the resonance is produced. In other words, when the wave lengths are the same in the two bodies, or when the wave length in one is equal to a half wave length, or some definite multiple of a half wave length of the other.

Partial resonance may occur, when there is a small difference between the wave lengths of the two bodies. Beyond certain limits, however, this is so small as to be practically absent.

When an electrical pulse is started in a conductor by the discharge of a Leyden jar, a side flash spark is obtained in the alternative path, between the discharge points. The length of this spark has its greatest value, when the time required for the



pulse to travel backwards and forwards along the conducting wires, is exactly equal to the time of a complete oscillation in the circuit, or when the length of the open-circuit wires is equal to half a wave length, or some multiple of half a wave length.

The fact that the length of the spark is greatest when certain relations exist between the dimensions of the two circuits, shows that the time-rate of an electrical pulse in any circuit depends on the dimensions of that circuit.

In the case of acoustic resonance, in order that one tuning fork may be able to excite vibrations in another, the fork producing or exciting the vibration must be strictly in unison with the fork in which the vibrations are excited, and any variations produced in the rate of vibration of the sounding fork, by overloading it, or, in other words, by altering its dimensions, checks the effects of its resonance.

In a similar manner, any alterations in the dimensions of the circuit, checks or diminishes the effects of electric resonance in a neighboring circuit, which was previously in unison with it. This has been experimentally shown by Hertz as follows:

An induction coil A, Fig. 492, has the terminals of its secondary connected to an open rectangular circuit provided with sparking terminals, 1, and 2, called a spark micrometer. Under certain conditions, when the discharge occurs at the terminals B, of the ordinary discharger, sparks are produced by electric resonance in the electric resonator formed by the spark micrometer at M.

Supposing, now, that a certain character of spark is obtained at the terminals B, that is, a certain velocity of electrical pulsations is obtained which depends on the nature of the spark; suppose, moreover, that the dimensions of the spark micrometer or electric resonator are such that the greatest length of spark is obtained. Then, any alteration in the character of these sparks, between the terminals at B, varies the intensity of the sparks in the spark micrometer.

If, for example, the apparatus be arranged

as shown in Fig. 493, in which one of the secondary terminals of the induction coil has connected with it a copper wire i g h. The sparks at M, decrease considerably. When, however, the conductor C, is connected with the free end H, of this additional conductor, then this effect is not observed, as is shown by the fact that when the conductor C, is attached at the point G, it produces no effect on it.

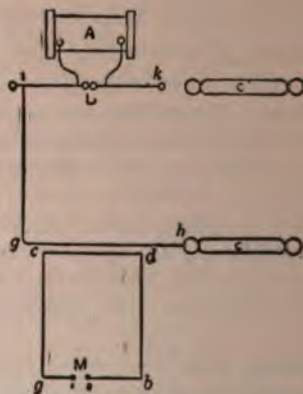


Fig. 493. Electric Resonance.

In another experiment with the same apparatus, matters may be arranged that the sparks in the micrometer circuit pass singly. When, now, another conductor C', is attached to K, a stream of sparks immediately passes.

It would appear, therefore, from the above experiments, that when two circuits are taken, having as nearly as possible the same vibration periods, any alteration in the dimensions of either will prevent one from producing electrical resonance in the other.

In the above experiments Hertz demonstrated the following facts, viz.,

- (1.) The sparks in the micrometer circuit are smaller when the discharges take place between points, or a point and a plate, instead of between knobs.
- (2.) The micrometer sparks are feebler in rarefied gas than in air at ordinary pressures.
- (3.) Extremely slight differences in the nature of secondary sparks produce considerable difference in the length of the micrometer sparks.

Hertz found the above results were obtained when the secondary sparks were of a brilliant color, and were attended by a sharp crack.

- (4.) The length of the spark in the micrometer



circuit varies with the length of the micrometer circuit.

This, of course, follows from the fact that any alteration of the length in the micrometer circuit, produces, by electrical retardation, a corresponding alteration in the time of the electrical pulses.

(5.) No effect is produced in the length of the micrometer spark by variations in the material, the resistance, or the diameter of the wire forming the micrometer circuit.

This is probably because the rate of propagation of electrical pulses along a conductor, depends mainly on the capacity of the conductor, and on its co-efficient of self-induction, and only to a slight extent on its resistance.

(6.) The length of wire connecting the micrometer circuit with the secondary circuit has but little effect, provided such length does not exceed a few metres.

Local disturbances, therefore, must traverse conductors without undergoing any appreciable change.

(7.) The position of the point on the micrometer circuit connected with the secondary circuit, is of the greatest importance.

When the point on the micrometer circuit is situated symmetrically with respect to the two micrometer knobs, variations of potential will reach the terminals in the same phase, and there will be but little effect, as seen by the sparks between the micrometer knobs. Such a point on the micrometer knobs is called the null point, or it is called as in a corresponding case in acoustics, a nodal point. (See *Point, Null. Point, Nodal.*)

(8.) When the conductors are of sufficient length, their approach produces disturbances in a previously adjusted and quiet spark micrometer, just as the approach of a conductor would.

Probably one of the most curious effects connected with the phenomena of electrical resonance is that pointed out by Lodge, viz.: that when the spark from a secondary circuit is so placed that the light is visible from a micrometer circuit, the effects of the discharge are greatly increased. Lodge also found that the light from burning magnesium wire, or, in general, light rich in the ultra-violet rays, produces the same effect.

**Resonator, Electric** — — An apparatus employed by Hertz in his investigations on electric resonance. (See *Resonance, Electric.*)

An electric resonator consists essentially of an

open-circuited conductor, or circuit of such dimensions that electro-magnetic waves or pulses are propagated through it at the same rate as those which are occurring in a neighboring circuit from which electro-magnetic radiation is taking place. Under these circumstances electro-magnetic pulses are set up sympathetically by resonance in the open circuit of the resonator, like the sympathetic vibrations in a tuning fork, when placed near another vibrating tuning fork, which is giving off sound waves of exactly the same period of vibration as its own.

**Resonator, Electro-Magnetic** — — A term applied to the Hertz spark micrometer, in which electro-magnetic waves are produced by electric resonance. (See *Resonance, Electric.*)

**Resultant.**—In mechanics, a single force that represents in direction and intensity the effects of two or more separate forces.

The separate forces are called the components. (See *Components.*)

**Retardation.**—A decrease in the speed of telegraphic signaling caused either by the induction of the line conductor on itself, or by mutual induction between it and neighboring conductors, or by condenser action, or by all.

The line must receive a certain charge before a current sent into it at one end can produce a signal at the other end. This charge will depend on the length and surface of the wire, on the neighborhood of the wire to the earth or other wires, and on the nature of the insulating material between the wire and neighboring conductors. This results in a charge given to the wire which is lost as a current for signaling. The greater the *electrostatic capacity* of the line wire, the greater will be the retardation in signaling. (See *Capacity, Specific Inductive. Dielectric. Capacity, Electrostatic. Induction, Electro-Dynamic.*)

Retardation in signaling is produced by the following causes:

(1.) *Self-Induction* which produces extra currents. (See *Induction, Self. Currents, Extra.*)

The extra current on making, retards the beginning of the signal; the extra current on breaking, retards its stopping.

(2.) *Mutual Induction* between the line conductor and neighboring conductors.



(3.) The *Magnetic Inertia* or *Lag*, or the time required to magnetize or demagnetize the core of the electro-magnetic receptive devices used on the line.

(4.) By *Condenser Action*, the cable acting as a condenser.

**Retardation, Electric** — —A retardation in the starting or stopping of an electric current, arising from self-induction. (See *Induction, Self. Retardation*.)

**Retardation, Inductive** — —A retardation in the appearance of a signal at the distant end of a cable, produced by the action of induction. (See *Retardation*.)

**Retardation, Magnetic** — —A retardation in the magnetization or demagnetization of a substance due to magnetic lag. (See *Retardation. Lag, Magnetic*.)

**Retarding, Electrically** — —Decreasing the speed of telegraphic signaling, by means of induction. (See *Retardation*.)

**Retentivity, Magnetic** — —A term proposed by Lamont in place of coercive force, or the power possessed by a magnetizable substance of resisting magnetization or demagnetization. (See *Force, Coercive*.)

**Return Circuit**.—(See *Circuit, Return*.)

**Return, Earth** — —(See *Earth Return*.)

**Return Ground**.—(See *Ground-Return*.)

**Return Wire or Conductor**.—(See *Wire, Return*.)

**Returns**.—In a system of distribution, those conductors through which the current flows back from the electro-receptive devices to the source. (See *Leads*.)

The word *returns* is sometimes used in a system of distribution by parallel circuits, to distinguish between the conductor by which the current goes back or returns from the receptive devices to the dynamo, and the conductor that leads it to the receptive devices. The term *leads* is, however, often applied to both conductors.

**Reverse-Induced Current**.—(See *Current, Reverse-Induced*.)

**Reversed Currents**.—(See *Currents, Reversed*.)

**Reverser, Current** — —A switch, or other apparatus, designed to reverse the direction of a current.

**Reversible Bridge**.—(See *Bridge, Reversible*.)

**Reversible Heat**.—(See *Heat, Reversible*.)

**Reversibility of Dynamo**.—The ability of a dynamo to operate as a motor when traversed by an electric current. (See *Motor, Electric*.)

**Reversing Gear of Electric Motor**.—(See *Motor, Electric, Reversing Gear of*.)

**Reversing Key**.—(See *Key, Reversing*.)

**Reversing Key of Quadruplex Telegraphic System**.—(See *Key, Reversing, of Quadruplex Telegraphic System*.)

**Reversing Magnetic Field**.—(See *Field, Magnetic, Reversing*.)

**Rheochord**.—A word formerly employed instead of rheostat. (See *Rheostat*.)

**Rheometer**.—A word formerly employed for any device for measuring the strength of a current.

This word is now obsolete and is replaced by the word *galvanometer*. (See *Galvanometer*.)

**Rheomotor**.—A word formerly employed to designate any electric source.

This word is now obsolete, and replaced by the various names of the different electric sources. (See *Source, Electric*.)

**Rheophore**.—A word formerly employed to indicate a portion of a circuit conveying a current and capable of deflecting a magnetic needle placed near it. (Obsolete.)

**Rheoscope**.—A word formerly employed in place of the present word *galvanoscope*, for an instrument intended to show the presence of a current, or its direction, but not to measure its strength. (Obsolete.)

**Rheoscope, Physiological** — —A sensitive nerve-muscle preparation employed to determine the presence of an electric current. (See *Frog, Galvanoscope*.)

A term sometimes applied in electro-therapeutics to the frog's legs preparation adapted to show the presence of any electric current.

The physiological rheoscope is adapted to show the presence of an electric current without the use of a galvanometer. On the passage of the electric current the frog's legs twitch convulsively.

**Rheostat.**—An adjustable resistance.

A rheostat enables the current to be brought to a standard, *i. e.*, to a fixed value, by adjusting the resistance; hence the name.

The term rheostat is applied generally to a readily variable resistance, the varying values of which are known.

**Rheostat, Dynamo-Balancing** — —An adjustable resistance whose range is sufficient to balance the current of one dynamo against another with which it is required to run in parallel.

**Rheostat, Water** — —A rheostat the resistance of which is obtained by means of a mass of water of fixed dimensions. (See *Rheostat*.)

**Rheostat, Wheatstone's** — —A form of apparatus sometimes employed for an adjustable resistance.

This apparatus is very seldom employed in accurate work.

The parallel cylinders A and B, Fig. 494, are formed respectively of conducting and non-conducting materials, the bare wire on which can be wound from either cylinder to the other. When introduced into a circuit, only the resistance of that part of the wire that is on B, is introduced into the circuit, since the bare wire on A, is short-circuited by the metallic cylinder. This rheostat is not very suitable for accurate measurements, owing to the difficulty of invariably obtaining reliable contacts.

**Rheostatic Machine.**—(See *Machine, Rheostatic*.)



Fig. 494. Wheatstone's Rheostat.

**Rheotome.**—A word formerly employed for any device by means of which a circuit could be periodically interrupted.

This word is now obsolete, and is replaced by interrupter. (See *Interrupter*.)

**Rheotrope.**—A word formerly employed for any device by which the current could be reversed.

This word is now obsolete and replaced by commutator or current reverser. (See *Reverser, Current*.)

**Rhigolene.**—A highly volatile hydro-carbon obtained during the distillation of coal oil, and employed in the flashing treatment of carbons for incandescent lamps. (See *Carbons, Flashing Process for*.)

**Rhumbs of Compass.**—(See *Compass, Rhumbs of*.)

**Ribbed Armature Core.**—(See *Core, Armature, Ribbed*.)

**Ribbon Copper.**—(See *Copper, Ribbon*.)

**Right-Handed Solenoid.**—(See *Solenoid, Right-Handed*.)

**Right-Hand Trolley Frog.**—(See *Frog, Trolley, Right-Hand*.)

**Rigidity, Molecular** — —Resistance offered by the molecules of a substance to rotation or displacement.

The molecular rigidity of a magnetizable substance was until recently considered to be the cause of the differences of coercive force or magnetic retentivity possessed by different substances. The general acceptance of Ewing's theory of magnetism has, of course, caused the above view to be considerably modified. (See *Magnetism, Ewing's Theory of. Force, Coercive. Retentivity, Magnetic*.)

**Ring, Ampère** — —The turn or turns of wire used in electric balances for the measurement of electric current.

**Ring Armature.**—(See *Armature, Ring*.)

**Ring Armature Core.**—(See *Core, Armature, of Dynamo-Electric Machine*.)

**Rings, Electric** — —A term sometimes used instead of Nobili's rings. (See *Metallochromes*.)



**Rings, Electro-Chromic** — —A term sometimes applied to metallochromes. (See *Metallochromes*.)

**Rings, Nobili's** — —A term sometimes used for metallochromes. (See *Metallochromes*.)

**Roaring of Arc.**—(See *Arc, Roaring of*.)

**Rocker Arm.**—(See *Arm, Rocker*.)

**Rocker, Brush** — —In a dynamo-electric machine or electric motor, any device for shifting the position of the brushes on the commutator cylinder.

**Rocker, Multiple-Pair Brush** — —A term sometimes used for multiple-pair brush yoke. (See *Yoke, Multiple-Pair Brush*.)

**Rocker, Single-Brush** — —A device by means of which a single pair of brushes are so supported on a dynamo-electric machine or electric motor, as to be capable of being readily shifted into the desired position on the commutator cylinder.

**Rocker, Single-Pair Brush** — —A term sometimes used for single-pair brush yoke. (See *Yoke, Single-Pair Brush*.)

**Rod Clamp.**—(See *Clamp, Rod*.)

**Rod, Clutch** — —A clutch or clamp provided in an arc lamp to seize the lamp rod and thus arrest its fall, during feeding, beyond a certain predetermined point.

The clutch or clamp is caused to release or hold the lamp rod by the action of an electro-magnet placed in a shunt circuit around the electrodes. (See *Lamp, Arc, Electric*.)

**Rod, Discharging** — —A jointed rod provided at both ends with balls and connected at the middle by a swinging joint which permits the balls to move towards or from one another, employed for the disruptive discharge of Leyden batteries or condensers. (See *Discharge, Disruptive. Jar, Leyden*.)



Fig. 495. Discharging Rod.

The insulated handles H, H, Fig. 495, permit

the balls at M, M, to be readily applied to the opposite coatings of the jar or condenser.

The name discharging tongs is sometimes applied to this apparatus.

**Rod, Lamp** — —A metallic rod provided in electric arc lamps for holding the carbon electrodes.

When the upper carbon only is fed, as is the case in most arc lamps, there is usually but one lamp rod provided. The clutch or clamp of the feeding device acts against this rod, which must of necessity be at least as long as the upper carbon. (See *Lamp, Arc, Electric*.)

**Rod, Lightning** — —A rod, or wire cable of good conducting material, placed on the outside of a house or other structure, in order to protect it from the effects of a lightning discharge.

Lightning rods were invented by Franklin. The results of a very extended inquiry on the subject, leave no room for doubt that a lightning rod, properly placed and constructed, affords an efficient protection to the buildings on which it is placed.

To insure this protection, however, the following conditions were, until very recently, generally insisted on in order to permit the rod to properly act, viz.:

(1.) The rod, generally of iron or copper, should have such an area of cross-section as to enable it to carry without fusion the heaviest bolt it is liable to receive in the latitude in which it is located.

When of iron, the area of cross-section should be about seven times greater than when of copper.

(2.) The rod should be continuous throughout, all joints being carefully avoided.

When joints are used, they should be made of as low resistance as possible, and should be protected against corrosion.

(3.) The upper extremity of the rod should terminate in one or more points formed of some metal that is not readily corroded, such as platinum or nickel.

(4.) The lower end of the rod should be carried down into the earth until it meets permanently damp or moist ground, where it should be attached to a fairly extended metallic surface buried in the ground.

Metallic plates will answer for grounding the



it, if gas or water pipes are available, the rod should be placed in good electrical connection with, by wrapping it around and securing it to such pipes.

The fourth requirement is of great importance for the proper action of a lightning rod, and is not thoroughly fulfilled, may render the rod useless, no matter how carefully the other requirements are attended to. When a bolt strikes a lightning rod which is not properly grounded, the charge is almost certain to destroy the object to which the rod is connected.

The rod should not be insulated from the ground, unless to prevent stains from the oxidation of the metal. On the contrary, the rod should be directly connected with all masses of metal in its path, such as tin roofs, gutter spouts, cornices, etc. In this way only can dangerous disruptive lateral discharges from the rod and masses of metal be avoided.

The rod should project above the roof or some part of the building, or, in other words, the height of the rod should bear a certain proportion to the size of the building to be protected.

A rod will protect a conical space around it, the radius of whose base is equal to the vertical height of the rod above the ground, but whose surface is curved inwards instead of being straight.

If the building is very high, a number of rods, all connected to one another should be employed.

A lightning rod sometimes fails to protect a barn, from the fact that a heated, ascending current of air from a fire in the house, or the gradual heating of green hay or grain in the barn, acting as a conductor, increases the virulence of the lightning beyond the ability of its point to protect it.

A stranded conductor is much better than a solid cross-section of a solid rod of the same size.

Copper tape is better than a copper rod for lightning rods, because a rapidly periodic current, whose periodicity is sufficiently great, passes mainly over the surface of the conductor only. Carrying an electric current as taking its path from the surrounding dielectric, a tape is better because the surface which absorbs the heat is greater in the case of a tape than of a rod. (See *Law, Poynting's*.)

A lightning rod more frequently acts to quietly dissipate an impending cloud by *convective discharge*

than by an actual *disruptive discharge* of the same. (See *Discharge, Convective. Discharge, Disruptive*.)

Lightning rods should be frequently tested to see that no breaks or oxidation of their joints have occurred.

Professor Lodge takes exception to some of the heretofore generally received notions concerning the action of lightning rods. He distinguishes between two distinct kinds of discharge that may occur between a charged cloud and the earth, viz.:

- (1.) A steady strain or current.
- (2.) An impulsive rush or oscillatory discharge.

A discharge by a steady strain or current occurs when the cloud gradually approaches a point on the earth; or, in the case of the cloud being stationary, when it receives its charge gradually by the approach of another cloud.

In steady discharge, the lightning rod, with its pointed end, either quietly discharges the cloud by a convective discharge, or by a harmless conductive discharge through the rod, after a spark has passed disruptively between the cloud and the rod. (See *Discharge, Convective. Discharge, Conductive. Discharge, Disruptive*.)

The impulsive discharge or rush occurs whenever the cloud that discharges to the earth receives its charge suddenly, as by the discharge into it of a neighboring cloud, or when a bound charge, produced by the presence of a neighboring charged cloud, is suddenly liberated by discharge, and, thus becoming free, impulsively discharges to the earth.

In all cases of an impulsive discharge or rush, a counter electromotive force is set up in the rod, which resists the discharge through the rod and causes the electricity to rush back and spit off in lateral discharges. In this case the conducting power of the rod has no effect in facilitating the discharge. Indeed, the smaller its resistance, and the longer the oscillations last, the greater the danger from lateral discharges. (See *Discharge, Lateral. Path, Alternative*.)

The following principles advanced by Lodge differ from the views heretofore generally received, viz.:

(1.) Iron is a better substance for a lightning rod than copper, because it is equally as good a conductor as copper for very rapidly alternating currents, and is more difficult to fuse.

(2.) All neighboring metallic conductors should be connected to earth. These connections should



preferably be by separate conductors rather than by the rod itself.

(3.) The lightning conductors should have a good separate earth, but should be connected to water pipes, gas pipes, etc., if near them, by an underground connection.

(4.) The lightning conductor should be detached from the building and not close against it.

(5.) The rod should be of flat section, or a stranded conductor.

**Rod, Lightning, for Ships** — —A system of rods designed to afford electric protection for vessels at sea.

Since the lightning discharge takes place between the points of greatest difference of potential, and these points are generally the cloud and the nearest point of the earth, tall objects are especially liable to be struck.

Ships at sea should, therefore, be thoroughly protected from lightning.

In Harris' system of lightning protection for ships, the rods are connected with a series of copper plates and rods so placed on the masts as to readily yield to strains. These plates or rods are electrically connected with the copper sheathing of the vessel and *with all large masses of metal* in the vessel. This latter precaution is especially necessary in the case of men-of-war, in order to protect the powder magazine.

Harris' method for the lightning protection of ships was adopted only after very considerable opposition. It proved, however, so efficacious in practice that serious effects of lightning on vessels so protected are now almost unknown. In 1845, Harris received the honor of knighthood from the English Government for his services in this respect.

**Rod, Lightning, Points on** — —Points of inoxidizable material, placed on lightning rods, to effect the quiet discharge of a cloud by convection streams. (See *Rod, Lightning, Convection, Electric*.)

**Rod, Thunder** — —A term formerly used for lightning rod. (See *Rod, Lightning*.)

**Rods, Bus** — —Heavy copper rods employed in a central or distributing station, to which all the terminals of the generating dynamos are connected, and from which the current passes to the different points of the distribution system over the feeders.

Bus rods are often called bus bars or bus wires. (See *Wires, Bus*.)

**Rodding a Conduit** — (See *Conduit, Rodding a*.)

**Rolling Contact** — (See *Contact, Rolling*.)

**Rose, Ceiling** — —An ornamental ceiling plate through which an electric conductor passes.

**Rosette** — —An ornamental plate provided with contacts connected to the terminals of the service wires, and placed in a wall for the ready attachment of the incandescent lamp.

A word sometimes used in place of rose.

**Rosette Cut-Out** — (See *Cut-Out, Rosette*.)

**Rotary Magnetic Polarization** — (See *Polarization, Magnetic Rotary*.)

**Rotary-Phase Current** — (See *Current, Rotating*.)

**Rotary-Phase Dynamo** — (See *Dynamo, Rotary-Phase*.)

**Rotary-Phase Motor** — (See *Motor, Rotating Current*.)

**Rotary-Phase Transformer** — (See *Transformer, Rotary-Phase*.)

**Rotating Brushes of Dynamo-Electric Machine** — (See *Brushes, Rotating, of Dynamo-Electric Machines*.)

**Rotating Current** — (See *Current, Rotating*.)

**Rotating Current Field** — (See *Field, Rotating Current*.)

**Rotating Current Motor** — (See *Motor, Rotating Current*.)

**Rotating Current Transformer** — (See *Transformer, Rotatory Current*.)

**Rotation, Electro-Magnetic** — —A rotation obtained by electro-magnetic attractions and repulsions. (See *Disc, Arago's, Disc, Faraday's, Motor, Electric*.)

**Rotation, Magneto-Optic** — —A rotation of the plane of polarization of a beam of polarized light on its passage through a transparent medium when placed in a strong magnetic field.

The medium only possesses such properties while in the field.

In a ray of ordinary light the vibrations of the ether particles are at right angles to the direction of the ray, or to the direction in which the light is moving. But the vibrations occur indiscriminately in all planes passing through the line of direction. Under certain circumstances, all the ether particles may be caused to move in planes that are parallel to one another. Such a beam of light is called a *plane polarized beam*.

A plane polarized beam of light, when passed through many transparent substances, will have its ether particles vibrating in the same plane when it emerges from the medium, as it had before it entered. Some transparent substances, however, possess the property of *rotating* or *turning* the *plane of polarization of the light* to the right




Fig. 496. Magneto-Optic Rotation.

or to the left. This property is called respectively *right-handed rotary polarization*, and *left-handed rotary polarization*.

Many substances that ordinarily possess no power of rotary polarization acquire this power when placed in a magnetic field. This property of a magnetic field was discovered by Faraday.

The effect is to be ascribed to the strain produced in the transparent medium by the stress of the magnetic field. It may be caused in solid bodies by mechanical force.

The apparatus for demonstrating the rotation of the plane of polarization by a magnetic field is shown in Fig. 496.

A powerful electro-magnet, M, M, is provided with a hollow core. The substance c, is placed in the field produced by the approached poles, and its action on the light of a lamp, placed at the end l, is observed by suitable apparatus at a.

**Rubber of Electrical Machine.**—A cushion of leather, covered with an electric amalgam, and employed to produce electricity by its friction against the plate or cylinder of a frictional electric machine. (See *Machine, Frictional Electric*.)

**Rubbing Contact.**—(See *Contact, Rubbing*.)

**Ruhmkorff Coil.**—(See *Coil, Ruhmkorff*.)

**Ruhmkorff's Commutator.**—(See *Commutator, Ruhmkorff's*.)

**Rule, Ampère's, for Effect of Current on Needle** — —A magnetic needle, when placed near a conductor through which a current is flowing, has its north pole deflected to the left of the observer, who is supposed to be swimming with the current and facing the needle.

## S

**S.**—A contraction employed for second.

**S. H. M.**—A contraction employed for simple harmonic motion.

**S. N. Code.**—A contraction for single needle code.

**S. W. G.**—A contraction for Standard Wire Gauge.

**Saddles, Telegraphic** — —Brackets placed on the top of telegraphic poles for the support of the insulators.

Saddle brackets are usually employed for the wire attached to the top of a telegraph pole. (See *Pole, Telegraphic*.)

**Safe Carrying Capacity of a Conductor.**

— (See *Capacity, Safe Carrying, of a Conductor*.)

**Safety Catch.**—(See *Catch, Safety*.)

**Safety Device for Multiple Circuits.**—(See *Device, Safety, for Multiple Circuits*.)

**Safety Fuse.**—(See *Fuse, Safety*.)

**Safety Lamp, Electric** — —(See *Lamp, Electric Safety*.)

**Safety Plug.**—(See *Plug, Safety*.)

**Safety Strip.**—(See *Strip, Safety*.)

**Saint Elmo's Fire.**—(See *Fire, St. Elmo's*.)



**Salient Magnetic Pole.**—(See *Pole, Magnetic, Salient*.)

**Saline Creeping.**—(See *Creeping, Saline*.)

**Salts, Electrolysis of** — —The decomposition of a salt into its electro-positive and negative radicals or ions. (See *Electrolysis*.)

**Sandy Deposit, Electro-Metallurgical** — —(See *Deposit, Electro-Metallurgical, Sandy*.)

**Saturated Solution.**—(See *Solution, Saturated*.)

**Saturation, Magnetic** — —The maximum magnetization which can be imparted to a magnetic substance.

The condition of iron, or other paramagnetic substance, when its intensity of magnetization is so great that it fails to be further sensibly magnetized by any magnetic force, however great.

When the core of an electro-magnet is saturated by the passage of an electric current, the only further increase of its magnetization that is possible, is that due to the magnetic field of the increased current which may be sent through its coils. This is comparatively insignificant.

A permanent magnet is sometimes said to be super-saturated, that is, to have received more magnetism than it can retain for any considerable time after its magnetization.

In the saturated field magnets of a dynamo-electric machine the magnetic density is seldom taken at a larger value than 16,000 lines per square centimetre of area of cross-section. But this is only *practical* saturation, since Ewing has forced 45,300 lines per square centimetre by using an enormously high magnetizing force ( $H = 24,500$ ).

**Saturation, Magnetic, Diaeritical Point of** — —A term proposed by S. P. Thompson for such a value of the co-efficient of magnetic saturation, that the core is magnetized to exactly one-half its possible maximum of magnetization.

**Saw, Electric** — —A platinized steel wire, employed while incandescent for cutting hard substance.

**Scale, Tangent** — —A scale designed for use with a galvanometer, on which the values of the tangents are marked, instead of

equal degrees as ordinarily, thus avoiding the necessity of finding from tables the tangents corresponding to the degrees.

Such a scale may be constructed as follows: Draw the *tangent* B T, to the circle, Fig. 497, and lay off on it any number of equal divisions or parts, as, for example, the thirty shown in the annexed figure. Connect these parts with the centre C, of the circle. The arc of the circle will




Fig. 497. Tangent Scale.

thus be divided into parts proportional to the value of the tangents of the angles.

These parts are more nearly equal the nearer they are to B, and grow smaller and smaller the further they are from B. In tangent galvanometers it is therefore very difficult to accurately determine the current strength when the deflections of the needle are very large.

**Scale, Thermometer, Centigrade** — —A thermometer scale, in which the length of the thermometric tube between the melting point of ice and the boiling point of water is divided into one hundred equal parts or degrees.

Centigrade degrees are indicated by a C., thus 0 degree C. or 100 degrees C., to distinguish them from Fahrenheit degrees that are marked F. In the Fahrenheit scale the freezing point of water is taken at 32 degrees, and the boiling point at 212 degrees.

**Scale, Thermometer, Fahrenheit's** — —A thermometer scale in which the length of the thermometer tube between the melting point of ice and the boiling point of water is divided into 180 equal parts called degrees.

Fahrenheit degrees are indicated by an F., thus, 32 degrees F.

The freezing point of water in Fahrenheit's scale is marked 32 degrees F., and the boiling point of water is marked 212 degrees F.

**Schiseophone.**—An electro-mechanical appliance for detecting flaws and internal defects in rails or other metallic masses.

The schiseophone consists essentially in the combination of a microphone and telephone with a mechanical hammer and induction balance.



**Schweigger's Multiplier.**—(See *Multiplier*, *Schweigger's*.)

**Scintillating Jar.**—(See *Jar*, *Scintillating*.)

**Scratch Brush.**—(See *Brush*, *Scratch*.)

**Scratch Brush, Circular** — — (See *Brush*, *Scratch*, *Circular*.)

**Scratch Brush, Hand** — — (See *Brush*, *Scratch*, *Hand*.)

**Scratch Brushing.**—(See *Brushing*, *Scratch*.)

**Screen, Electric** — — A closed conductor placed over a body to screen or protect it from the effects of external electrostatic fields.

An electric screen is sometimes called an electric shield.

The ability of a closed, hollow conductor to act as a screen, arises from the fact that all points on its inner surface are at the same potential, and therefore are not affected by an increase or decrease in the potential of the outside of the conductor as compared with that of the earth. (See *Net*, *Faraday's*.)

No considerable thickness is required for the efficient operation of an electric screen.

**Screen, Magnetic** — — A hollow box whose sides are made of thick iron, placed around a magnet or other body so as to cut it off or screen it from any magnetic field external to the box.

Magnetic screens are placed around delicate galvanometers to avoid any variations in their field due to extraneous masses of iron or neighboring magnets. They are also sometimes placed around watches to shield or screen the works from the effects of magnetism.

To act effectively, when the external fields are at all powerful, magnetic screens must be made of thick iron. They differ in this respect from electrostatic shields, which will afford protection against electrostatic charges although they may be but mere films.

**Screen, Methven's** — — A vertical rectangular metallic screen used in connection with a standard argand burner, for furnishing a standard amount of light for photometric purposes.

In a rectangular screen a small vertical slot is made of such dimensions as to permit an amount

of light to pass just equal to two standard candles. The proper burning of the argand lamp is determined by supplying sufficient gas to produce a flame exactly 3 inches high. The glass chimney used in the burner is 6 inches high, and is provided with two horizontal wires placed on each side of the burner at the required height.

Methven's screen possesses the advantage of being easily used and of furnishing a reliable standard of light. Extended experiments made with it appear to show that the amount of light produced depends rather on the height of the gas flame than on the quality of the gas itself. In using Methven's screen care should be taken

(1.) To see that the gas flame is of exactly the required height.

(2.) That the chimney on the lamp is quite clean.

(3.) That the top of the flame is as regular as possible.

As this last point is almost impossible to obtain in actual practice, the flame is adjusted so that the highest point extends about one-eighth of an inch above the height of the horizontal wires.

(4.) That the lamp and apparatus be permitted to acquire its normal temperature before the readings are taken.

Fig. 498 shows the construction of the ordinary Methven standard screen. The vertical slot in the screen is placed as shown before the standard argand burner. Horizontal wires for the adjustment of the height of the flame are placed one on each side of the gas chimney.



Fig. 498. Methven's Standard Screen.

**Screening, Electrostatic** — — Screening or shielding from the inductive effects of a charge.

A continuous metallic surface surrounding an air space to be shielded, completely protects any body placed within such air space from electrostatic influence. (See *Cube*, *Faraday's*.)

**Screening, Magnetic** — — Preventing magnetic induction from taking place by interposing a metallic plate, or a closed circuit of insulated wire, between the body producing



the magnetic field and the body to be magnetically screened.

A magnetic needle is screened from the action of the earth's field by placing it inside a hollow iron box, which prevents the lines of force of the earth's field from passing through it by concentrating them on itself. This action is dependent on the fact that iron is paramagnetic and therefore offers the lines of force less resistance through its mass than elsewhere. A plate of copper would not effect any such magnetic shielding or screening.

In any magnetic field, however, in which the strength of the field is undergoing rapid, periodic variations, a plate of copper or other electric conductor may act as a screen to protect neighboring conductors from the effects of magnetic induction, and its ability to thoroughly effect such a screening will depend directly on its conducting power.

If, for example, the copper plate *c* (Fig. 499), be interposed between a coil of copper ribbon *a*, and the fine wire coil *b*, it will greatly reduce the intensity of the induced currents, produced when rapidly alternating currents are sent through *a*. If, however, the copper plate be slit, as shown to the right at *a*, the screening effect is lost, but is regained if the slit be connected by a conductor. Similarly a flat coil of insulated wire effects no screening action when open, but when closed acts as the uncut copper plate.

Here the screening action is due to the fact that the energy of the field is spent in producing eddy currents in the interposed metal screen or coils. If the metal screen is discontinuous in the direction in which the eddy currents tend to flow, the inability of the screen to absorb the energy as eddy currents prevents its action as a screen.

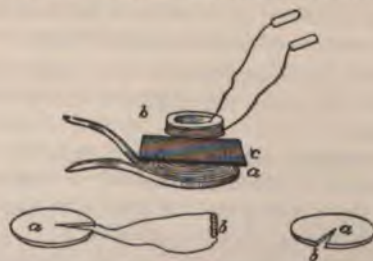


Fig. 499.

The word magnetic screening is generally employed in the latter sense of preventing magnetic

induction from occurring in a neighboring conductor, by interposing some conducting substance in which eddy currents can be freely established.

As to the efficiency of the screening action, if the makes-and-breaks do not follow one another very rapidly, the following principles can be proved:

(1.) If the screening material have absolutely no electrical resistance it will effect a perfect magnetic screening when placed between the primary and secondary, no matter what its thickness may be.

(2.) If the screen have a finite conductivity, the screening will be imperfect, unless the thickness of the material employed is considerable.

If, however, the makes-and-breaks follow one another very rapidly, then

The screening effect of even imperfect conductors will become manifest with comparatively thin screens of metal.

As to magnetic screening, therefore, it follows that the less the conductivity, the greater must be the speed of reversal, in order that the screening action may be effective.

Where a screen of iron is employed, an additional effect is produced by the fact that the small magnetic resistance of the metal, or its conductivity for lines of magnetic force, causes the lines of induction to pass through its mass, and thus effect a screening action for the space on the other side. This action is, by some, called magnetic screening.

In the case of iron screens, considerable thickness is required in the metal plate, in order to obtain efficient screening action of this latter character. On account of this action of iron, in conducting away lines of force, a much smaller speed of reversal is required, in order to obtain effective screening action, where plates of iron are used, than in the case of plates of other metal.

The apparatus shown in Fig. 500 was employed



Fig. 500. Willoughby Smith's Apparatus.

by Mr. Willoughby Smith, in studying the effects of magnetic screening.

The flat coils *A*, and *B*, were employed for the primary and secondary coils respectively, and were connected to the battery *C*, and the galva-



nometer F, as shown. Current reversers, D and E, were so arranged as to reverse galvanometer and battery alternately, and so cause the opposite induced currents to affect the galvanometer in the same direction. If the commutators were caused to reverse the current slowly, a plate of copper interposed between A and B, produced but little effect on the galvanometer, but if the reversers were driven at a very rapid rate, a marked decrease of deflection occurred.

The screening action of the metals, or their ability to diminish the galvanometer deflection, is in the order of their electrical conductivity, except in the case of iron, which, as we have seen already, has an additional screening power, due to its conducting away the lines of magnetic force.

It follows from the preceding principles that the use of lead covered cables, for the conveyance of periodic currents, of the frequency of, say, sixty to one hundred alternations per second, is of but little or no advantage for protecting neighboring telephones from inductive action, because

- (1.) Lead is a poor conductor.
- (2.) The rapidity of alternation is too slow.

J. J. Thomson made some experiments with electrical oscillations produced by resonance, of about  $10^8$  in frequency. He obtained this frequency of oscillation from oscillations set up in the primary of an induction coil, in a secondary circuit of suitable dimensions. The presence of these secondary vibrations or waves was shown by means of the sparks seen at the terminals of a spark-micrometer circuit. Under these circumstances he found that the interposition of a thin sheet of tin foil or gold leaf at once completely stopped the secondary sparks by the shielding action it exerted.

**Screening, Magnetostatic** — —Screening from the inductive effect of a stationary magnetic field.

Magnetostatic screening differs from electrostatic screening in that the plate of iron or other paramagnetic material surrounding the space to be screened must have a fairly considerable thickness. This arises from the fact that the magnetic susceptibility of the substance is not infinitely great.

**Screw, Binding** — —A name sometimes applied to a binding post. (See *Post, Binding*.)

**Seal, Hermetical** — —Such a sealing of

a vessel, designed to hold a vacuum, or gaseous atmosphere under pressures greater or less than that of the atmosphere, as will prevent either the entrance of the external atmosphere into the vessel, or the escape of the contained gas into the atmosphere.

Hermetical sealing may be accomplished either by the use of suitable cements, or by the direct fusion of the walls of the containing vessel. The latter method is generally employed.

**Search Light, Automatic** — —(See *Light, Search, Automatic*.)

**Search Light, Electric** — —(See *Light, Search, Electric*.)

**Secohm**.—The practical unit of self-induction, or the practical unit of inductance.

The secohm is equivalent to a length equal to that of an earth quadrant, or  $10^9$  centimetres.

The word secohm is a contraction for second, ohm, and implies the fact that the product of the ohm and the second are taken.

The word henry is now generally used in the United States for secohm. (See *Henry*.)

**Secohmmeter**.—An apparatus for measuring the co-efficient of self-induction, mutual induction and capacity of conductors. (See *Secohm. Induction, Mutual. Induction, Self*.)

The principle of the secohmmeter depends upon successively performing the cycle of magnetic operations, by making and breaking the circuit of a galvanometer by means of a commutator capable of working at a definite speed.

**Second, Ampère** — —One ampère flowing for one second. (See *Hour, Ampère*.)

**Second, Watt** — —A unit of electrical work.

A watt-second equals the work due to the expenditure of an electrical power of one watt for one second. It is the same as a volt-coulomb.

The *watt-second* and the *H. P. hour*, etc., are units of *work*, since  $\text{Power} = \frac{\text{Work}}{\text{Time}}$ , therefore,  $\text{power} \times \text{time} = \text{work}$ .

**Secondary Battery**.—(See *Battery, Secondary*.)

**Secondary Battery, Cell of** — —(See *Cell, Secondary*.)



**Secondary Cell.**—(See *Cell, Secondary*.)

**Secondary Cell, Jar of** — — (See *Jar of Secondary Cell*.)

**Secondary Clock.**—(See *Clock, Secondary*.)

**Secondary Coil.**—(See *Coil, Secondary*.)

**Secondary Currents.**—(See *Currents, Secondary*.)

**Secondary, Fixed** — — The secondary of an induction coil, that, as is common in such coils, is fixed, as contradistinguished from a movable secondary. (See *Secondary, Movable*.)

**Secondary Generator.**—(See *Generator, Secondary*.)

**Secondary Impressed Electromotive Force.**—(See *Force, Electromotive, Secondary Impressed*.)

**Secondary, Movable** — — The secondary conductor of an induction coil, which, instead of being fixed as in most coils, is movable.

The peculiar movements observed in the secondary of an induction coil when the secondary is free to move, have been carefully studied by Prof. Elihu Thomson. The secondaries employed for this purpose are in the shape of rings, discs, spheres, wedges, bars, wheels, etc., etc.

The primary is in the form of a straight cylindrical coil surrounding a straight core. The coils are traversed by rapidly alternating currents and possess considerable impedance.

Among the many phenomena concerning the behavior of movable secondaries in such a rapidly alternating field are the following, viz.:

(1.) A metallic ring, resting on lugs attached to the coils of the primary, is thrown violently off the magnet on the passage of alternating currents through the primary.

(2.) Two metallic rings of the same diameter brought into the field are mutually attracted to each other, with sufficient force to sustain the weight of one of the rings when the other ring is held in the field.

(3.) Metallic spheres are set into rotation when so held near the primary pole as to be shielded

from the action of part of the rapidly alternating field. When held on one side of the pole, this rotation occurs in the opposite direction to that when held on the opposite side.

(4.) Metallic discs similarly placed are similarly set into rotation.

(5.) The speed of rotation of spheres or discs varies in different positions.

(6.) Spheres or discs of diamagnetic substances attain their maximum rotation when held in position at right angles to those of paramagnetic substances.

(7.) Bars of steel or substances possessing high coercive power, placed dissymmetrically on the primary as regards their centres of gravity, exhibit the phenomena of a shifting magnetic field. (See *Field, Magnetic, Shifting*.)

(8.) A wedge-shaped piece of steel placed with a flat face on the primary, exhibits a shifting magnetic field, and acts on movable metallic masses near it, just as though a fluid substance was escaping with great velocity from its edges.

**Secondary Movers.**—(See *Movers, Secondary*.)

**Secondary Plate of Condenser.**—(See *Plate, Secondary, of Condenser*.)

**Secondary Spiral.**—(See *Spiral, Secondary*.)

**Secretion Current.**—(See *Current, Secretion*.)

**Section Line of Electric Railway.**—(See *Railroads, Electric, Section Line of*.)

**Section, Neutral, of Magnet** — — A section passing through the neutral line or equator of a magnet. (See *Line, Neutral, of a Magnet. Magnet, Equator of*.)

**Section, Trolley** — — A single continuous length of trolley wire, with or without its branches.

**Sectional or Divided Overhead System of Motive Power for Electric Railroads.**—(See *Railroads, Electric, Sectional Overhead System of Motive Power for*.)

**Sectional or Divided Surface System of Motive Power for Electric Railroads.**—(See *Railroads, Electric, Sectional Surface System of Motive Power for*.)



**Sectional or Divided Underground System of Motive Power for Electric Railroads.**—(See *Railroads, Electric, Sectional Underground System of Motive Power for*.)

**Sectional Plating.**—(See *Plating, Sectional*.)

**Sectional Plating Frame.**—(See *Frames, Sectional Plating*.)

**Seebeck Effect.**—(See *Effect, Seebeck*.)

**Seismograph, Electric** — —An apparatus for electrically recording the direction and intensity of earthquake shocks.

**Seismograph, Micro** — —An electric apparatus for photographically registering the vibrations of the earth produced by earthquakes or other causes.

The micro-seismograph consists essentially of a microphone placed on the ground and connected with a telephone. A small concave mirror movable about a horizontal axis is supported on a plate of aluminium supported on a platinum wire connected with the diaphragm of the telephone. The movements of the diaphragm of the telephone are permanently recorded on a strip of sensitized paper that is moved before the mirror.

**Selective Absorption.**—(See *Absorption, Selective*.)

**Selenium.**—A comparatively rare element generally found associated with sulphur.

**Selenium Battery.**—(See *Battery, Selenium*.)

**Selenium Cell.**—(See *Cell, Selenium*.)

**Selenium Eye.**—(See *Eye, Selenium*.)

**Selenium Photometer.**—(See *Photometer, Selenium*.)

**Self-Induced Current.**—(See *Currents, Self-Induced*.)

**Self-Induction.**—(See *Induction, Self*.)

**Self-Induction, Co-efficient of** — —(See *Induction, Self Co-efficient of*.)

**Self-Recording Magnetometer.**—(See *Magnetometer, Self-Recording*.)

**Self-Registering Wire Gauge.** — (See *Gauge, Wire, Self-Registering*.)

**Self-Winding Clock.**—(See *Clock, Self-Winding*.)

**Semaphore.**—A variety of signal apparatus employed in railroad block systems.

The semaphore used on the Pennsylvania Railroad consists of a wooden post, in the neighborhood of twenty feet in height, on which a wooden arm or blade, six feet in length and a foot in width, is displayed.

When the block is clear, during the day the arm is placed pointing downwards at an angle of 75 degrees with the horizontal; during night semaphore displays a white light. When the block is not clear, the arm or blade is placed in a horizontal position by day, or displays a red light at night. (See *Railroads, Block System for*.)

**Semaphore Arm.**—(See *Arm, Semaphore*.)

**Semaphore Indicator.**—(See *Indicator, Semaphore*.)

**Sender, Zinc** — —A device employed in telegraphic circuits, by means of which, in order to counteract the retardation produced by the charge given to the line, a momentary reverse current is sent into the line after each signal.

A zinc sender generally consists of a low resistance Siemens relay introduced between the line and the front contact of the signaling key.

**Sensibility, Electro** — —An effect produced on a sensory nerve by its electrization.

**Sensibility of Galvanometer.**—(See *Galvanometer, Sensibility of*.)

**Sensitive Thread Discharge.**—(See *Discharge, Sensitive Thread*.)

**Separate Coil Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Separate Coil*.)

**Separate Touch, Magnetization by** — —(See *Touch, Separate*.)

**Separately Excited Dynamo.**—(See *Dynamo, Separately Excited*.)

**Separately Excited Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Separately Excited*.)

**Separator.**—An insulating sheet of ebonite, or other similar substance, corrugated and perforated so as to conform to the outline of the plates of a storage battery, and placed between them at suitable intervals, in such a



manner as to avoid short-circuiting, without impeding the free circulation of the liquid.

**Series and Magneto Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Series and Magneto.*)

**Series and Separately Excited Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Series and Separately Excited.*)

**Series and Shunt-Wound Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Series and Shunt-Wound.*)

**Series Circuit.**—(See *Circuit, Series.*)

**Series-Connected Battery.**—(See *Battery, Series-Connected.*)

**Series-Connected Electro-Receptive Devices.**—(See *Devices, Electro-Receptive, Series-Connected.*)

**Series-Connected Electro-Receptive Devices, Automatic Cut-out for —**—(See *Cut-out, Automatic, for Series-Connected Electro-Receptive Devices.*)

**Series-Connected Sources.**—(See *Sources, Series-Connected.*)

**Series-Connected Translating Devices.**—(See *Devices, Translating, Series-Connected.*)

**Series-Connected Voltaic Cells.**—(See *Cells, Voltaic, Series-Connected.*)

**Series Connection.**—(See *Connection, Series.*)

**Series, Contact —**—A series of metals arranged in such an order that each becomes positively electrified by contact with the one that follows it.

The contact values of some metals, according to Ayrton and Perry, are as follows:

#### CONTACT SERIES.

*Difference of Potential in Volts.*

Zinc.....	}	.....	.210
Lead.....	}	.....	
Lead.....	}	.....	.069
Tin.....	}	.....	
Tin.....	}	.....	.313
Iron.....	}	.....	
Iron.....	}	.....	.146
Copper.....	}	.....	
Copper.....	}	.....	.238
Platinum.....	}	.....	
Platinum.....	}	.....	.113
Carbon.....	}	.....	

The difference in potential between zinc and carbon is equal to 1.089, and is obtained by adding the successive differences of potential between the intermediate couples, thus:

$$.210 + .069 + .313 + .146 + .238 + .113 = 1.089.$$

This fact is known technically as *Volta's Law*, which may be formulated as follows:

*The difference of potential, produced by the contact of any two metals, is equal to the sum of the differences of potentials between the intervening metals in the contact series.*

**Series Distribution of Electricity by Constant Currents.**—(See *Electricity, Series Distribution of, by Constant Current Circuit.*)

**Series-Multiple.**—A series of multiple connections. (See *Circuit, Series-Multiple.*)

**Series-Multiple Circuit.**—(See *Circuit, Series-Multiple.*)

**Series - Multiple-Connected Electro-Receptive Devices.**—(See *Devices, Electro-Receptive, Series-Multiple-Connected.*)

**Series-Multiple-Connected Sources.**—(See *Sources, Series-Multiple-Connected.*)

**Series-Multiple-Connected Translating Devices.**—(See *Devices, Translating, Series-Multiple-Connected.*)

**Series-Multiple Connection.**—(See *Connection, Series-Multiple.*)

**Series, Parallel —**—A term sometimes applied to a multiple-series connection. (See *Connection, Multiple-Series.*)

**Series, Thermo-Electric —**—A list of metals so arranged according to their thermo-electric powers, that each metal in the series is electro-positive to any metal lower in the list.

**Series-Transformer.**—(See *Transformer, Series.*)

**Series Turns of Dynamo-Electric Machine.**—(See *Turns, Series, of Dynamo-Electric Machine.*)

**Series Winding.**—(See *Winding, Series.*)

**Series-Wound Dynamo.**—(See *Dynamo, Series.*)

**Series-Wound Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Series-Wound.*)

**Series-Wound Motor.**—(See *Motor, Series-Wound*.)

**Service Conductors.**—(See *Conductors, Service*.)

**Service, Street** — — In a system of incandescent lamp distribution that portion of the circuit which is included between the main and the service cut-out.

**Serving, Cable** — — The covering of hemp or jute spun around the insulated core of a cable to act as a protection against the pressure of the iron wire which forms the armor of the cable.

**Shackling a Wire.**—Inserting an insulation between the two ends of a cut wire.

**Shaded or Screened.**—Cut off or screened from the effects of an electrostatic or magnetic field. (See *Screening, Magnetic. Screen, Magnetic. Screen, Electric*.)

**Shadow, Electric** — — A term sometimes used for molecular shadow. (See *Shadow, Molecular*.)

**Shadow, Molecular** — — The comparatively dark space on those parts of the walls of Crookes' tubes, which have been protected from molecular bombardment by suitably placed screens.

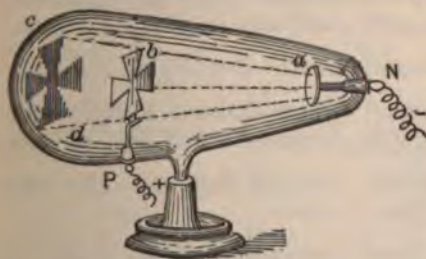


Fig. 501. Molecular Shadow.

If *a*, in the Crookes tube, shown in Fig. 501, be connected with the negative pole of an electric source, and the cross-shaped mass of aluminium at *b*, be connected with the positive electrode, on the passage of a series of rapid discharges, *phosphorescence* is produced by the molecular bombardment from *a*, in all parts of the vessel opposite *a*, except those lying in the

projection of its geometrical shadow. (See *Phosphorescence, Electric*.)

**Shadow Photometer.**—(See *Photometer, Shadow*.)

**Shaft, Driven** — — A shaft which receives its power from the driving shaft. (See *Mover, Prime*.)

**Shaft, Driving** — — The main line of shafting which takes its power directly from the prime mover.

**Shallow-Water Submarine Cable.**—(See *Cable, Submarine, Shallow-Water*.)

**Sheath, Protective** — — A device attached to a transformer or converter, to prevent any connection from taking place between the high-potential primary circuit and the low-potential secondary circuit.

The protective sheath devised by Prof. Elihu Thomson consists essentially in an earth-connected copper strip or divided plate interposed between the windings for the secondary and primary circuit. Should the primary circuit lose its high insulation it becomes grounded.

**Sheet, Current** — — The sheet into which a current spreads when the wires of any source are connected at any two points near the middle of a very large and thin conductor.

A continuous electric current does not flow through the entire mass of a conductor in any single line of direction. If the terminals of any source are connected to neighboring parts of a greatly extended thin conductor, the current spreads out in a thin sheet known as a *current sheet*, and instead of flowing in a straight line between the points, spreads over the plate in *curved lines of flow*, which, so far as shape is concerned, are not unlike the *lines of magnetic force*.

**Sheet Lightning.** — (See *Lightning, Sheet*.)

**Shellac.**—A resinous substance possessing valuable insulating properties, which is exuded from the roots and branches of certain tropical plants.

The specific inductive capacity of shellac as compared with air is 2.74.



**Shell, Magnetic** — —A sheet or layer consisting of magnetic particles, all of whose north poles are situated in one of the flat surfaces of the layer, and the south poles in the opposite surface. (See *Magnetism, Lamellar Distribution of*.)

**Shell Transformer.**—(See *Transformer, Shell*.)

**Shield, Magnetic, for Watches** — —A hollow case of iron, in which a watch is permanently kept, in order to shield it from the influence of external magnetic fields. (See *Screen, Magnetic*.)

**Shifting Magnetic Field.**—(See *Field, Magnetic, Shifting*.)

**Shifting Zero.**—(See *Zero, Shifting*.)

**Ships, Lightning Rods for** — —(See *Rod, Lightning, for Ships*.)

**Ship's Sheathing, Electric Protection of** — —Attaching pieces of zinc to the copper sheathing of a ship for the purpose of preventing the corrosion of the copper by the water. (See *Metals, Electrical Protection of*.)

**Shock, Break** — —A term sometimes employed in electro-therapeutics for the physiological shock produced on the opening or breaking of an electric circuit.

**Shock, Electric** — —The physiological shock produced in an animal by an electric discharge.

**Shock, Opening** — —The physiological shock produced on the opening or breaking of an electric circuit.

**Shock, Static** — —A term employed in electro-therapeutics for a mode of applying Franklinic currents or discharges, by placing the patient on an insulating stool and applying one pole of a static machine provided with small condensers or Leyden jars, to an insulated platform on which the patient is placed, while the other pole is applied to the body of the patient by the operator.

The electrode applied to the body of the patient is provided with a ball electrode. Shocks are given to the patient on the approach of this electrode by the discharge of the Leyden jars.

**Short-Arc System of Electric Lighting.**—(See *Lighting, Electric, Short-Arc System*.)

**Short-Circuit.**—To establish a short circuit. (See *Circuit, Short*.)

**Short-Circuit Key.**—(See *Key, Short-Circuit*.)

**Short-Circuiting.**—Establishing a short circuit. (See *Circuit, Short*.)

**Short-Circuiting Plug.**—(See *Plug, Short-Circuiting*.)

**Short-Coil Magnet.**—(See *Magnet, Short-Coil*.)

**Short-Core Electro-Magnet.**—(See *Magnet, Electro, Short-Core*.)

**Short-Shunt Compound-Wound Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Compound-Wound, Short-Shunt*.)

**Shunt.**—An additional path established for the passage of an electric current or discharge.

**Shunt.**—To establish an additional path for the passage of an electric current or discharge.

**Shunt and Separately Excited Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Shunt and Separately Excited*.)

**Shunt Circuit.**—(See *Circuit, Shunt*.)

**Shunt Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Shunt-Wound*.)

**Shunt, Electric Bell** — —(See *Bell, Shunt, Electric*.)

**Shunt, Electro-Magnetic** — —In a system of telegraphic communication an electro-magnet whose coils are placed in a shunt circuit around the terminals of the receiving relay.

The electro-magnetic shunt operates by its self-induction. Its poles are permanently closed by a soft iron armature so as to reduce the resistance of the magnetic circuit. (See *Induction, Self*.)

On making the circuit in the coils of a receiving relay, a current is produced in the coils of the electro-magnetic shunt in the *opposite direction* to the relay current; and, on breaking the circuit in the relay, a current is produced in the coils of the electro-magnetic shunt in the *same direction* as the current in the relay.

The connection of the coils of the electro-magnetic shunt with those of the receiving relay, however, is such that on making the circuit in the relay the current in the shunt coils flows through the relay in the same direction, and on breaking the circuit it flows in the opposite direction. Therefore this shunt produces the following effects:

(1.) At the commencement of each signal in the receiving relay, it produces an induced current in the same direction which strengthens the current in the relay.

(2.) At the ending of each signal in the receiving relay, it produces a current in the opposite direction, which hastens the motion of the tongue of the polarized relay. (See *Relay, Polarized.*)

**Shunt, Galvanometer** — —A shunt placed around a sensitive galvanometer for the purpose of protecting it from the effects of a strong current, or for altering its sensibility. (See *Shunt.*)

The current which will flow through the shunt wire depends on the relative resistance of the galvanometer and of the shunt. In order that only

$\frac{1}{10}$ ,  $\frac{1}{100}$ , or  $\frac{1}{1000}$  of the total current shall pass through the galvanometer, it is necessary that the resistances of the shunt shall be the  $\frac{1}{9}$ ,  $\frac{1}{99}$ , or  $\frac{1}{999}$  of the galvanometer resistance.

Fig. 502 shows a shunt, in which the resistances, as compared with that of the galvanometer, are those above referred to. The galvanometer terminals are connected at N, N. Plug keys are used to connect one or another of the shunts with the circuit. (See *Shunt, Multiplying Power of.*)

**Shunt, Magnetic** — —An additional path of magnetic material provided in a mag-

netic circuit for the passage of the lines of force.

**Shunt, Multiplying Power of** — —A quantity, by which the current flowing through a galvanometer provided with a shunt, must be multiplied, in order to give the total current.

The multiplying power of a shunt may be determined from the following formula, viz.:

$A = \left( \frac{s+g}{s} \right) \times C$ , in which  $\frac{s+g}{s}$  = the multiplying power of a shunt whose resistance is  $s$ ;  $g$ , is the galvanometer resistance;  $C$ , the current through the galvanometer, and  $A$ , the total current passing;  $s$  and  $g$ , are taken in *ohms*, and  $C$  and  $A$ , in *ampères*.

Suppose, for example, that but  $\frac{1}{10}$  the entire current is to flow through the galvanometer; then the resistance of the shunt must evidently be  $\frac{1}{9}g$ , for,

$$\frac{s}{s+g} = \frac{1}{1+9} = \frac{1}{10};$$

or,  $10s = s+g$ .  $10s - s = g$ .  $\therefore 9s = g$ ; or,  $s = \left( \frac{1}{9} \right) g$ .

**Shunt or Reducteur for Ammeter.** — (See *Reducteur or Shunt for Ammeter.*)

**Shunt Ratio.** — The ratio existing between the shunt and the circuit which it shunts (See *Shunt, Multiplying Power of.*)

**Shunt, Relay, Stearns'** — —A shunt employed in the differential method of duplex telegraphy to short-circuit the relay and then permit the line current to be cut off directly after it has completed its work in closing the local circuit.

The use of the relay shunt permits the slackening of the armature spring of the relay, because the decreased duration of the line current does not produce so strong a magnetization of the iron.

**Shunt-Turns of Dynamo-Electric Machine.** — (See *Turns, Shunt, of Dynamo-Electric Machine.*)

**Shunt-Wound Dynamo-Electric Machine.** — (See *Machine, Dynamo-Electric, Shunt-Wound.*)

**Shunt-Wound Motor.** — (See *Motor, Shunt-Wound.*)

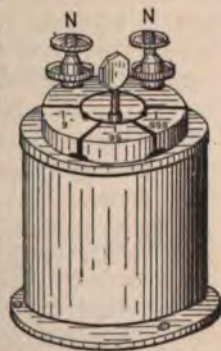


Fig. 502. Galvanometer Shunt.



**Shunting.**—Establishing a shunt circuit.

**Shuttle Armature.**—(See *Armature, Shuttle.*)

**Side A, of Quadruplex Table.**—(See *Table, Quadruplex, A, Side of.*)

**Side B, of Quadruplex Table.**—(See *Table, Quadruplex, B, Side of.*)

**Side Flash.**—(See *Flash, Side.*)

**Sidero-Magnetic.**—(See *Magnetic, Sidero.*)

**Siemens' - Armature Electro-Magnetic Bell.**—(See *Bell, Electro-Magnetic, Siemens' Armature Form.*)

**Siemens' Differential Voltmeter.**—(See *Voltmeter Siemens' Differential.*)

**Siemens' Electric Pyrometer.**—(See *Pyrometer, Siemens' Electric.*)

**Siemens-Halske Voltaic Cell.**—(See *Cell, Voltaic, Siemens-Halske.*)

**Siemens' Water Pyrometer.**—(See *Pyrometer, Siemens' Water.*)

**Signal Arm.**—(See *Arm, Signal.*)

**Signal, Electric Tell-Tale** — — An electrically operated signal, generally silent, whereby the appearance of a white or colored disc, on a black or otherwise uniformly colored surface, indicates the occurrence of a certain predetermined event.

**Signal Service for Electric Railways.**—(See *Railroads, Electric, Signal Service System for.*)

**Signals, Electro-Pneumatic** — — Signals operated by the movements of diaphragms or pistons moved by compressed air, the escape of which is controlled electrically.

**Signaling, Balloon, for Military Purposes** — — Transmitting intelligence of the movements of an enemy's army obtained from observations made in balloons by means of telephone circuits connected with the balloon.

**Signaling, Curb** — — In cable telegraphy a system for avoiding the effects of retardation by rapidly discharging the cable before another electric impulse is sent into

it, by reversing the battery, before connecting it to earth, and then connecting to earth before beginning the next signal.

**Signaling, Double-Curb** — — In curb signaling, a method by which the cable, after being connected with the battery for sending a signal, is subjected to a reverse battery, but instead of being put to earth after this connection, as in single-curb signaling, the battery is again reversed and connected to earth.

The time during which the cable is connected to the reversed battery before being put to earth, that is, the time during which it receives the positive and negative currents, may be made of any suitable duration.

**Signaling, Double-Current** — — Signaling by means of currents that alternately change their direction.

Double-current signaling was devised by Varley in order to avoid the effects of the induction of underground conductors on Morse telegraphic apparatus. The idea of reversing the direction of the current was to hasten the discharge of the wire, which was prolonged by induction. Double-current working, however, possesses other advantages, and is used in duplex and quadruplex transmission.

**Signaling, Single-Curb** — — In curb signaling, a method by which the cable, after connection with the battery for sending a signal, is subjected to a reverse battery current, and then put to earth before again being connected to the battery for sending the next signal.

**Signaling, Single-Current** — — Signaling by making or breaking the circuit of a single current.

Single-current signaling is of two kinds, viz.:

(1.) *Open-Circuit Signaling*, in which the batteries are fixed at each station, and are in circuit only when signaling.

(2.) *Closed-Circuit Signaling*, where the batteries are divided, one half generally being at each end of the line, and so connected that both sets flow in the same direction.

**Signaling, Single-Current, Closed-Circuit** — — A system of single-circuit signaling in which the sending batteries are placed at each end of the line and are so connected as

to remain always in circuit. (See *Signaling, Single-Current.*)

**Signaling, Single-Current, Open-Circuit** — — A system of single-current signaling in which the sending batteries, fixed at each station, are in circuit during signaling only. (See *Signaling, Single-Current.*)

**Signaling, Velocity of Transmission of** — — The speed or rate at which successive signals can be sent on any line without the retardation producing serious interference. (See *Retardation.*)

**Silent Discharge.**—(See *Discharge, Silent.*)

**Silver Bath.**—(See *Bath, Silver.*)

**Silver Chloride Voltaic Cell.**—(See *Cell, Voltaic, Silver Chloride.*)

**Silver Plating.**—(See *Plating, Silver.*)

**Silver Voltameter.**—(See *Voltameter, Silver.*)

**Silvered Plumbago.**—(See *Plumbago, Silvered.*)

**Silvering, Electro** — — Covering a surface with a coating of silver by electro-plating. (See *Plating, Electro.*)

Electro-plating with silver.

**Silurus Electricus.**—The electric eel. (See *Eel, Electric.*)

**Simple Arc.**—(See *Arc, Simple.*)

**Simple Circuit.**—(See *Circuit, Simple.*)

**Simple Electric Candle-Burner.**—(See *Burner, Simple Candle Electric.*)

**Simple-Harmonic Current.**—(See *Current, Simple-Harmonic.*)

**Simple-Harmonic Curve.**—(See *Curve, Simple-Harmonic.*)

**Simple-Harmonic Motion.**—(See *Motion, Simple-Harmonic.*)

**Simple Magnet.**—(See *Magnet, Simple.*)

**Simple-Periodic Current.**—(See *Currents, Simple-Periodic.*)

**Simple-Periodic Electromotive Force.**—(See *Force, Electromotive, Simple-Periodic.*)

**Simple-Periodic Motion.**—(See *Motion, Simple-Periodic.*)

**Simple Radical.**—(See *Radical, Simple.*)

**Simple-Sine Motion.**—(See *Motion, Simple-Sine.*)

**Simple Voltaic Cell.**—(See *Cell, Voltaic, Simple.*)

**Simplex Telegraphy.**—(See *Telegraphy, Simplex.*)

**Sims-Edison Torpedo.**—(See *Torpedo, Sims-Edison.*)

**Sine Galvanometer.**—(See *Galvanometer, Sine.*)

**Single-Brush Rocker.**—(See *Rocker, Single-Brush.*)

**Single-Cup Insulator.**—(See *Insulator, Single-Shed.*)

**Single Curb.**—(See *Curb, Single.*)

**Single-Current Signaling.**—(See *Signaling, Single-Current.*)

**Single-Curve Trolley Hanger.**—(See *Hanger, Single-Curve Trolley.*)

**Single-Fluid Hypothesis of Electricity.**—(See *Electricity, Single-Fluid Hypothesis of.*)

**Single-Fluid Voltaic Cell.**—(See *Cell, Voltaic, Single-Fluid.*)

**Single-Loop Armature.**—(See *Armature, Single-Loop.*)

**Single-Magnet Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Single-Magnet.*)

**Single-Pair Yoke.**—(See *Yoke, Single-Pair.*)

**Single-Shackle Insulator.**—(See *Insulator, Single-Shackle.*)

**Single-Shed Insulator.**—(See *Insulator, Single-Shed.*)

**Single-Stroke Electric Bell.**—(See *Bell, Single-Stroke Electric.*)

**Single Touch.**—(See *Touch, Single.*)

**Single-Wire Cable.**—(See *Cable, Single-Wire.*)



**Single-Wire Circuit.**—(See *Circuit, Single-Wire*.)

**Sinistrorsal Solenoid or Helix.**—(See *Solenoid, Sinistrorsal*.)

**Sinuuous Currents.**—(See *Current, Sinuous*.)

**Siphon, Electric** — —A siphon in which the stoppage of flow, due to the gradual accumulation of air, is prevented by electrical means.

In the electric siphon, an opening is provided at the highest part of the bend of the siphon tube, and a chamber is attached thereto, provided with a float. Contact points are so connected with the float that when it falls, contact is made, and when it rises, contact is broken.

The closing of the circuit, on the fall of the float, operates an electric motor which drives an air pump which exhausts the air from the siphon. Or the float being raised in the siphon, the contact is broken and the operation of the pump is stopped.

**Siphon Recorder.**—(See *Recorder, Siphon*.)

**Sir William Thomson's Standard Cell.**—(See *Cell, Voltaic, Standard, Sir William Thomson's*.)

**Skin Effect.**—(See *Effect, Skin*.)

**Skin, Faradization of** — —The therapeutic treatment of the skin by a faradic current.

For efficient faradization the skin should be thoroughly dried and a metallic brush or electrode employed. For very sensitive parts, as, for example, the face, the hand of the operator, first thoroughly dried, is to be preferred as an electrode.

**Skin, Human, Electric Resistance of** — —The electric resistance offered by the skin of the human body.

The electric resistance of the skin is subject to marked differences in different parts of the body, where its thickness or continuity varies. It varies still more with variations in its condition of moisture. Even in the same individual the resistance varies materially under apparently similar conditions.

**Sleeve, Insulating** — —A tube of treated paper or other insulating material, provided

for covering a splice in an insulated conductor.

**Sleeve Joint.**—(See *Joint, Sleeve*.)

**Sleeve, Lead** — —A lead tube provided for making a joint in a lead-covered cable.

**Sled.**—The sliding contacts drawn after a moving electric railway car through the slotted underground conduit containing the wires or conductors from which the driving current is taken.

**Slide Bridge.**—(See *Bridge, Electric, Slide Form of*.)

**Slide, Resistance** — —A rheostat, in which the separate resistances or coils are placed in or removed from a circuit by means of a sliding contact or key.

Apparatus employed in telegraphy for charging a conductor to a given fraction of the maximum potential of the battery so as to adjust its charge in order to balance the varying charge of a cable.

The resistance slide consists essentially of a set of resistance coils of high insulation and of equal resistance. Suppose, for example, ten such equal coils to be connected in series, then if connected to the charging battery the potential will vary by one-tenth at the junction between each pair. A condenser, therefore, will be charged to any number of tenths of the potential of the charging battery by connecting it at suitable points.

A second set of coils of equal resistance is arranged so as to subdivide any of the lower coils, thus permitting an adjustment to within a hundredth of the potential of the battery.

**Slide Wire.**—(See *Wire, Slide*.)

**Sliding Contact.**—(See *Contact, Sliding*.)

**Slow-Speed Electric Motor.**—(See *Motor, Electric, Slow-Speed*.)

**Sluggish Magnet.**—(See *Magnet, Sluggish*.)

**Small Calorie.**—(See *Calorie, Small*.)

**Smee Voltaic Cell.**—(See *Cell, Voltaic, Smee*.)

**Smelting, Electro** — —The separation or reduction of metallic substances from their ores by means of electric currents.

**Snap Switch.**—(See *Switch, Snap*.)

**Soaking-In.**—A term sometimes employed by telegraphers to represent the gradual penetration of an electric charge by a neighboring dielectric.

An electric displacement occurs in the neighboring dielectric, and produces thereby what is generally called the residual charge.

**Soaking-Out.**—A term sometimes employed by telegraphers to represent a gradual discharge which occurs in the case of a charged conductor in a neighboring dielectric.

When a condenser, or other similar conductor, is discharged, the discharge is not instantaneous. The charge which soaked in, gradually recovers, or soaks-out.

**Socket, Electric Lamp** — —A support



Fig. 503. Lamp Socket.

for the reception of an incandescent electric lamp.

Incandescent lamp sockets are generally made so that the mere insertion of the base of the lamp



Fig. 504. Lamp Socket.

in the socket completes the connection of the lamp terminals with the terminals of the socket. The

socket terminals are connected with the leads that supply current to the lamp; the removal of the lamp from the socket automatically breaks its circuit. The socket is generally provided with a key for turning the lamp on or off without removing it from the socket.

Figs. 503 and 504 show forms of lamp sockets for incandescent lamps and the details of the key for connecting or disconnecting the lamp with the leads.

**Socket, Wall** — —A socket placed in a wall and provided with openings for the insertion of a wall plug with which the ends of a flexible twin-lead are connected.

A wall-socket permits the temporary connection of a portable electric lamp, a push button or other device with the conductor or lead.

**Soft-Drawn Copper Wire.**—(See *Wire, Copper, Soft-Drawn*.)

**Soldering, Electric** — —A process for obtaining metallic joints, in which heat generated by the electric current is used to melt the solder in the place of ordinary heat.

**Solenoid.**—A cylindrical coil of wire the convolutions of which are circular.

An electro-magnetic helix. (See *Solenoid, Electro-Magnetic, or Electro-Magnetic Helix*.)

A solenoid is termed dextrorsal or sinistrorsal according to the direction in which its wire is wound. (See *Solenoid, Dextrorsal. Solenoid, Sinistrorsal*.)

**Solenoid Core.**—The core, usually of soft iron, placed within a solenoid and magnetized by the magnetic field of the current passing through the solenoid.

The soft iron core of a solenoid differs from that of an electro-magnet in the fact that the core of the solenoid is *movable*, while that of the electro-magnet is fixed. (See *Magnet, Electro*.)

In order to obtain a nearly uniform pull in its various positions in the solenoid, the soft iron cores are made of a shape which insures a greater mass of metal towards the middle of the core. (See *Bars, Krizik's*.)

**Solenoid, Dextrorsal** — —A solenoid in which the winding is right-handed. (See *Solenoid, Practical*.)

**Solenoid, Electro-Magnetic, or Electro-Magnetic Helix** — —The name given to



a cylindrical coil of wire, each of the convolutions of which is circular.

A circuit bent in the form of a helix, supported at its two extremities, as shown in Fig. 505, and traversed by an electric current, will move into the magnetic meridian of the place, and, if free to move in a vertical plane, will come to rest in the line of the magnetic inclination or dip of the place.

A solenoid traversed by an electric current acquires thereby all the properties of a magnet, and is attracted and repelled by other magnets. Its poles are situated at the ends of the cylinder on which the solenoid may be supposed to be wound.

**Solenoid, Ideal** — — A solenoid consisting of a cylinder built up of a number of true circular currents, with all faces of like polarity turned in the same direction and entirely independent of one another.

The practical solenoid differs from the ideal solenoid in that the successive circular circuits or currents are all connected with one another in series.

The polarity of a solenoid depends on the direction of the current as regards the direction in which the solenoid is wound.

This solenoid is sometimes called an electro-magnetic solenoid or helix, in order to distinguish

move, will come to rest in the plane of the magnetic meridian when traversed by an electric current.

It will also be attracted or repelled by the approach of a dissimilar or similar magnet pole respectively, as shown in Fig. 505.

**Solenoid, Left-Handed** — — A sinistrorsal solenoid or one in which the winding is left-handed. (See *Solenoid, Practical*.)

**Solenoid, Magnetic** — — A spiral coil of wire which acts like a magnet when an electric current passes through it.

The magnetic solenoid must be distinguished from a solenoidal magnet. (See *Magnet, Solenoidal*. *Solenoid, Electro-Magnetic, or Electro-Magnetic Helix*.)

**Solenoid, Practical** — — The name applied to the ordinary solenoid in order to distinguish it from the ideal solenoid. (See *Solenoid, Ideal*.)

A *Practical Solenoid* consists, as shown in Figs.




Fig. 506. *Practical Solenoid*.

505 and 506, of a spiral coil of wire in which the successive circular circuits are connected to one another in series.



Fig. 507. *Right-Handed Helix*. Fig. 508. *Left-Handed Helix*. Fig. 509. *Helix, with Consequent Poles*.

The polarity of the solenoid depends on the direction of the current, and therefore on the direction of winding. In any solenoid, however, the polarity may be reversed by reversing the direction of the current. (See *Magnet, Electro*.)

A *Right-Handed, or Dextrorsal Solenoid*, is one wound in the direction shown in Fig. 507 at 1.

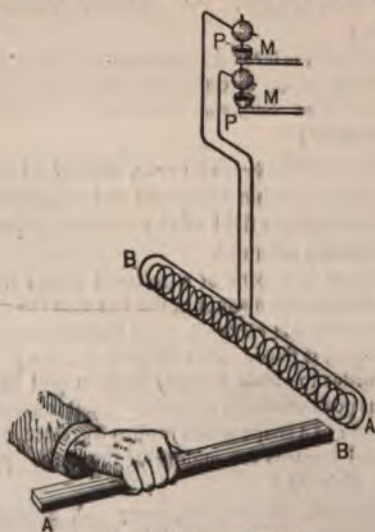


Fig. 505. *Practical Solenoid*.

it from a solenoidal magnet. (See *Magnet, Solenoidal*.)

A solenoid, if suspended so as to be free to

*A Left-Handed, or Sinistrorsal Solenoid*, is one wound in the direction shown in Fig. 508 at 2.

The solenoid shown in Fig. 509 at 3, is wound so as to produce *consequent poles*. (See *Poles, Consequent*.)

**Solenoid, Right-handed** — — A dextrorsal solenoid, the winding in which is right-handed. (See *Solenoid, Practical*.)

**Solenoid, Sinistrorsal** — — A solenoid in which the winding is left-handed. (See *Solenoid, Practical*.)

**Solenoidal**.—Pertaining to a solenoid.

**Solid Angle**.—(See *Angle, Solid*.)

**Solid Line**.—(See *Line, Solid*.)

**Solution**.—A liquid in which another substance, generally a solid, is dissolved.

The liquid may contain either a solid, another liquid, or a gas.

**Solution, Bain's Printing** — — The solution used in Bain's chemical telegraph.

Bain's solution is made by mixing together one part of a saturated solution of potassium ferrocyanide, with two parts of water.

**Solution, Battery** — — The exciting liquid for voltaic cells. (See *Cell, Voltaic*.)

**Solution, Chemical, Bain's** — — A solution employed in connection with Bain's recording telegraph. (See *Recorder, Chemical, Bain's*.)

**Solution, Quicking** — — A solution of a salt of mercury, in which objects to be electro-plated are dipped after cleansing, just before being placed in the plating bath.

If the articles have been properly cleansed, immersion in the quicking solution will cover them with a uniform, silver-like coating, which will insure an adherent, uniform coating in the plating bath.

**Solution, Saturated** — — A solution in which as much of the solid or other substance has been dissolved in the liquid as it will take at a given temperature.

**Solution, Super-Saturation of** — — The condition assumed by a warmed saturated solution of a salt, when placed in a closed vessel out of contact with the air, and allowed to cool without being shaken.

Under the above circumstances the solution may be cooled without depositing any crystals.

Such a solution is said to be super-saturated. It will immediately deposit crystals if a crystal of the salt dissolved or a crystal of an isomorphous salt be dropped in the solution, or often if merely shaken.

It is important in standard voltaic cells in which zinc sulphate is used, that the solution be saturated but not super-saturated.

**Sonometer, Hughes'** — — An apparatus for determining the amount of inductive disturbance in an induction balance, by comparing the sounds heard in a telephone, as a result of such induction, with the sounds heard in the same telephone under circumstances in which the amount of disturbance is directly measurable.

An apparatus devised by Professor Hughes to be used in connection with the induction balance, in order to measure the amount of disturbance of balance produced therein in any particular case.

**Sonorescence**.—A term proposed for the sounds produced when a piece of vulcanite or any other solid substance is exposed to a rapid succession of flashes of light. (See *Photophone*.)

**Sound**.—The sensation produced on the brain, through the ear, by the vibrations of a sonorous body.

The sound waves that are capable of producing the sensation of sound on the brain through the ear.

The word sound is therefore used in science in two distinct senses, viz.:

(1.) *Subjectively*, as the sensation produced by the vibrations of a sonorous body.

(2.) *Objectively*, as the waves or vibrations that are capable of producing the sensation of sound.

Sound is transmitted from the vibrating body to the ear of the hearer by means of alternate to-and-fro motions in the air, occurring in every direction around the vibrating body and forming spherical waves called *waves of condensation and rarefaction*. Unlike light and heat, these waves require a tangible medium such as air to transmit them.

Sound, therefore, is not propagated in a vacuum. The vibrations of sound are *longitudinal*, that is, the to-and-fro motions occur in the same direction as that in which the sound is traveling. The vibrations of light are *transverse*,



that is, the to-and-fro motions are at right angles to the direction in which the light is traveling.

**Sound.**—(Objectively.) The waves in the air or other medium which produce the sensation of sound.

**Sound.**—(Subjectively.) The effect produced on the ear by a vibrating body.

**Sound, Absorption of** — —Acoustic absorption. (See *Absorption, Acoustic*.)

**Sound, Characteristics of** — —The peculiarities that enable different musical sounds to be distinguished from one another.

The characteristics of musical sounds are:

(1.) The *Tone or Pitch*, according to which a sound is either grave or shrill.

(2.) The *Intensity or Loudness*, according to which a sound is either loud or feeble.

(3.) The *Quality or Timbre*, the peculiarity which enables us to distinguish between two sounds of the same pitch and intensity, but sounded on different instruments, as for example, on a flute and on a piano.

**Sound, Quality or Timbre of** — —That peculiarity of a musical note which enables us to distinguish it from another musical note of the same tone or pitch, and of the same intensity or loudness, but sounded on another instrument.

The middle C, for example, of a pianoforte, is readily distinguishable from the same note on a flute, or on a violin; that is to say, its quality is different. The differences in the quality of musical sounds are caused by the admixture of additional sounds called *overtones* which are always associated with any musical sound.

Briefly, nearly all so-called simple musical sounds are in reality chords or assemblages of a number of different musical sounds.

In the case of the many different notes that are present in an apparently simple note or tone, one of the notes is far louder than all the others and is called the *fundamental tone* or note, and is what is recognized by the ear as the note proper. The others are called the *overtones*. The overtones are too feeble to be heard very distinctly, but their presence gives to the fundamental note its own peculiar quality. In the case of a note sounded on the flute, these overtones are different either in number or in their relative intensities from the same note sounded on another instru-

ment. Their fundamental tones, however, are the same.

The peculiarities which enable us to distinguish the voice of one speaker or singer from another are due to the presence of these overtones. The overtones must be correctly reproduced by the diaphragm of the telephone, or phonograph, graphophone, or gramophone, if the articulate speech is to be correctly reproduced with all its characteristic peculiarities.

**Sounder, Morse Telegraphic** — —An electro-magnet which produces audible sounds by the movements of a lever attached to the armature of the magnet.

The Morse sounder has now almost entirely supplanted the paper recorder or register. On short lines it is placed directly in the telegraphic circuit. On long lines it is operated by a *local battery*, thrown into or out of the action by the *relay*. (See *Relay*.)



Fig. 510. Morse Sounder.

The Morse sounder, shown in Fig. 510, consists of an upright electro-magnet M, whose soft iron armature A, is rigidly attached to the striking lever B, working in adjustable screw pivots as shown. The free end of the lever is limited in its strokes by two set screws N, N. The lower of these screws is set so as to limit the approach of the armature A, to the poles of the electro-magnet; the upper screw is set so as to give the end B, sufficient play to produce a loud sound. A retractile spring, attached to the striking lever near its pivoted end, and provided with regulating screw S S, pulls the lever back when the current ceases to flow through M.

The dots and dashes of the Morse alphabet are reproduced by the sounder, as audible signals, that are distinguished by the operator by means of the different sounds produced by the up and down stroke of the lever as well as by the differ-



ence in the intervals of time between the successive signals.

Another form of telegraphic sounder, similar in its general construction to that already described, is shown in Fig. 511.



Fig. 511. Telegraphic Sounder.

**Sounder, Repeating** — —A telegraphic sounder which repeats the telegraphic dispatch into another circuit.

**Sounds, Magnetic** — —Faint clicks heard on the magnetization of a readily magnetizable substance.

One of the earlier forms of Reis' telephone, operated by means of a rapid succession of these faint magnetic sounds.

**Source, Electric** — —Any arrangement capable of maintaining a difference of potential or an electromotive force.

The following are the more important electric sources, arranged according to the character of the energy which is converted into electric energy.

#### ELECTRIC SOURCES.

- |   |                               |
|---|-------------------------------|
| 1. Voltaic Cell or Primary Battery.           | } Chemical Potential Energy.  |
| 2. Charged Storage Cell or Secondary Battery. |                               |
| 3. Thermo Cell or Thermo Battery.             | } Radiant Energy.             |
| 4. Selenium Cell or Selenium Battery.         |                               |
| 5. Magneto-Electric Machine.                  | } Mechanical Energy.          |
| 6. Dynamo-Electric Machine.                   |                               |
| 7. Frictional Electric Machine.               |                               |
| 8. Electrostatic Induction Machine.           |                               |
| 9. Magneto-Electric Telephone Transmitter.    | } Heat and Mechanical Energy. |
| 10. Pyromagnetic Generator.                   |                               |
| 11. Animal or Plant.....                      | Vital Energy.                 |

#### Sources, Multiple-Arc-Connected — —

A term sometimes applied to sources connected in multiple. (See *Sources, Multiple-Connected*.)

#### Sources, Multiple-Connected — —

The connection of a number of separate sources so as to form a single source by joining the positive poles of all the separate sources to a single positive lead or conductor, and all the negative poles to a single negative lead or conductor.

The multiple connection of sources results in each of the sources discharging its current into the main conductor in a direction parallel to that of the other sources.

The electromotive force in the same is that of any single source, but the resistance of the combined source decreases with each source added. Supposing the resistance of each source be the same, then if ten such sources are connected in multiple-arc, the resistance of the combined source is but one-tenth the resistance of a single source. (See *Circuit, Multiple*.)

Sources are combined in multiple-arc whenever the current furnished by the separate sources is insufficient to properly operate the electro-receptive or translating device with which it is connected.

#### Sources, Multiple-Series-Connected — —

—The connection of a number of separate sources so as to form a single source by connecting a number of the sources in groups in series, and joining these groups together in multiple-arc.

The battery of sources obtained by connecting a number of separate sources in multiple-series will have an electromotive force equal to the sum of the separate electromotive forces of the sources connected in any of the separate series-connected groups.

The current produced will be greater in proportion to the number of separate groups in parallel. The internal resistance will be increased in proportion to the number of coils in series, and decreased in proportion to the number of groups in multiple-arc or parallel.

Sources are connected in *multiple-series* when both the electromotive force and the current of any single source are insufficient to operate the electro-receptive or translating device. (See *Circuit, Multiple-Series*.)



**Sources, Parallel-Connected** — — A term sometimes applied to multiple-connected sources. (See *Sources, Multiple-Connected*.)

**Sources, Series-Connected** — — The connection of a number of separate electric sources so as to form a single source, in which the separate sources are placed in a single line or circuit by so connecting their opposite poles that the current produced in each passes successively through each of the sources.

The series-connection of sources results in an electromotive force equal to the sum of the separate electromotive forces produced by each source—that is, a rise of potential occurs with each source added. This connection increases the resistance of the circuit by the amount of the resistance of each source introduced into the circuit. The value of the resulting current depends on the total electromotive force and resistance of the series-connected sources.

Sources are connected in series when the electromotive force furnished by a single source is insufficient for the character of work required to be done. (See *Circuit, Series*.)

**Sources, Series-Multiple-Connected** — — The connection of a number of separate electric sources, so as to form a single source, in which the separate sources are connected in a number of separate multiple groups or circuits, and these groups or circuits separately connected together in series. (See *Circuit, Series-Multiple*.)

**Southern Light**.—A name sometimes given to the Aurora Australis. (See *Aurora Australis*.)

**Space, Clearance** — — The space between the revolving armature of a dynamo-electric machine, or electric motor, and the polar faces of the pole pieces.

**Space, Dark, Crookes'** — — A dark space surrounding the negative electrode in a rarefied space through which electric discharges are passing.

Crookes' dark space lies immediately between the negative electrode and its glow or luminous discharge. It differs, therefore, from Faraday's dark space, which lies between the luminous discharges of the negative and positive electrodes.

The radius of Crookes' dark space increases with the degree of exhaustion. It varies also with the character of the residual gas, with the temperature of the negative electrode, and somewhat with the intensity of the spark. When the vacuum becomes sufficiently high, the dark space fills the entire tube through which the discharges are passing.

Crookes has found that in the case of substances that become phosphorescent under the electric discharge, phosphorescence best takes place when the body is placed on the boundary of the dark space.

**Space, Dark, Faraday's** — — The gap in the continuity of the luminous discharges that occurs between the glow of the positive and negative electrodes.

Faraday's dark space is seen in a partially exhausted tube through which the discharges of an induction coil are passing. It occurs in as low a vacuum as 6 millimetres of mercury. As the vacuum becomes higher, the length of the dark space increases.

**Space, Inter-Air** — — A term sometimes employed for the air space between the outer surface of the revolving armature of a dynamo-electric machine and the adjacent faces of the pole pieces. (See *Space, Clearance*.)

**Space, Interferrie** — — A term sometimes used for air gap. (See *Gap, Air*.)

**Span Wire**.—(See *Wire, Span*.)

**Spark Coil**.—(See *Coil, Spark*.)

**Spark Gap**.—(See *Gap, Spark*.)

**Spark, Length of** — — The length of spark that passes between two charged conductors depends:

(1.) On the difference of potential between them.

(2.) On the character of the gaseous medium that separates the two conductors.

(3.) On the density or pressure of the gaseous medium between the conductors.

Up to a certain pressure, a decrease in the density causes an increase in the length of the distance the spark will pass. When this limit is reached, a further decrease of density decreases the length of spark. A high vacuum prevents the passage of a spark even under great differences of potential.

(4.) On the kind of material that forms the electrodes between which the charges pass.

(5.) On the shape of the charged conductor.

(6.) On the direction of the current.

Sparks from the prime conductor are denser and more powerful than those from the negative conductor.

It will be observed that the length of the spark practically depends mainly on two circumstances, viz., on the differences of potential of the opposite charges, and the conducting power of the medium that separates the two bodies.

**Spark, T-Shaped** — —A variety of three-branched spark obtained by the discharge of a Leyden jar through a peculiar form of induction coil. (See *Spark, Three-Branched*.)

**Spark, Three-Branched** — —A peculiar form of branched spark obtained by the discharge of a Leyden jar through a peculiar form of induction coil.

The three-branched spark was obtained by Elihu Thomson by the use of the following apparatus: The discharges of a Leyden jar, charged by a Töpler-Holtz machine, were sent through an induction coil, the primary and secondary of which

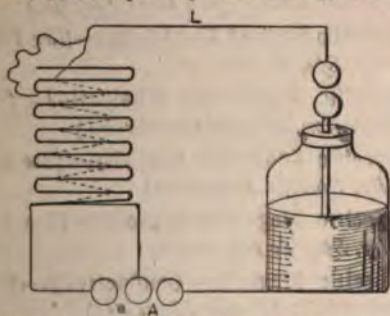


Fig. 512. Apparatus for Three-Branched Sparks.

were of few turns. The circuit connections were as shown in Figs. 512 and 513, and the apparatus is described by Thomson as follows:

"A double coil was made, Fig. 512, in which the inner turns were about twelve and the outer turns twenty. These were kept separate from each other and a branch wire taken from the line and slid from point to point on the outer wire enabled the effective length of the same to be adjusted. The inner coil was connected through a small spark gap, as at A, to the outer coating of a Leyden jar, while the wire L, was brought near the pole of the jar, which was continually being

charged from a Töpler-Holtz machine. The discharge, in passing from the knob of the jar to the wire L, representing the line, passed by the

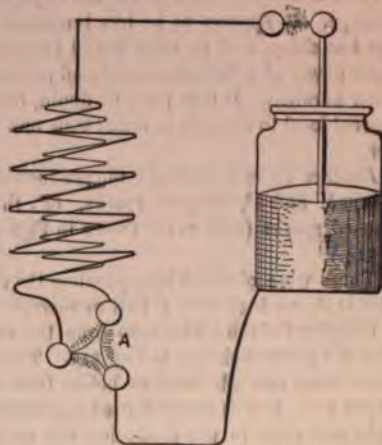


Fig. 513. Apparatus for T and Y Shaped Sparks.

inner coil. When a certain length of the outer coil was employed, only a very short, almost imperceptible spark was obtainable at a. If the balance of the turns were disturbed by including more or less than the proper number of the outer turns, not only did a vigorous spark occur, but the gap at a, could be quite considerably extended, in accordance with the amount of departure taken from the proper number of turns required to produce the balance. This experiment indicates that it is possible to make a selective path for the Leyden jar discharge, and to have a structure so proportioned that the discharges reaching line will pass to earth without



tending to go through the circuit of the dynamo. The action is apparently due to a balance of electromotive forces such that the discharge which tends to pass from the line in going to earth induces in the coil connected to the dynamo a counter electromotive force which nearly wipes out the potential of the discharge before it reaches the dynamo. This balance of inductive effects is certainly very striking, and once obtained, it is disturbed, as, in the experiments, by changing the relative lengths of the coils in inductive relation through so small an amount as an inch or two.

"It may be mentioned here that some curious



effects of spark were obtained in these experiments. When a disturbance of the balance exists and a spark is obtained at a, the character of the spark is different from that of the Leyden jar discharge. It appears to be less luminous, the noise less sharp, and its color would indicate a greater power of volatilizing metal and perhaps a greater duration. It is in part, no doubt, due to a current local to the coils in series with one another.

"Another curious effect was the production of T-shaped and Y-shaped sparks, or three-branched sparks (such as are shown in Figs. 513 and 514.)"

"These were obtained by separating the electrodes at A, an inch and a half or thereabouts, and bringing the third electrode from the outer coil to the position shown in Fig. 513. The discharges were now obtained as before from the charged jar. In this case the discharge appears to split and unite in air, producing the curious shaped sparks shown. It would seem that to obtain these effects—particularly the sparks which were three-branched from a common point in the centre between the discharge electrodes—the dielectric air must break down simultaneously between the three electrodes. It would easily explain the T-shapes to assume the straight part above to form first, and the cross or transverse spark to strike from the side of this spark to the third electrode."

**Spark Tube.**—(See *Tube, Spark*.)

**Spark, Wipe** — In an electric gas-lighting pendant burner, a spark obtained from a spark coil by the wiping contact of a spring, moved by the pulling of the pendant. (See *Burner, Ratchet-Pendant, Electric*.)

**Spark, Y-Shaped** — A variety of three-branched spark obtained by the discharge of a Leyden jar through a peculiar form of induction coil. (See *Spark, Three-Branched*.)

**Sparking Discharge.**—(See *Discharge, Disruptive*.)

**Sparking Distance.**—(See *Distance, Sparking*.)

**Sparking, Line of Least** — The line on a commutator cylinder of a dynamo connecting the points of contact of the collecting brushes where the sparking is a minimum.

In some forms of dynamos the line of least

sparkling lies parallel to the lines of magnetic force of the field.

In most forms, however, it is at right angles to such lines. The exact position of all these lines is changed by the angular lead of the brushes. (See *Lead, Angle of*.)

**Sparkling of Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Sparking of*.)

**Spar Torpedo.**—(See *Torpedo, Spar*.)

**Spasmodic Governor.**—(See *Governor, Spasmodic*.)

**Speaking-Tube Annunciator.**—(See *Annunciator, Oral or Speaking-Tube*.)

**Speaking-Tube Mouth Piece, Electric Alarm** — A mouth piece for a speaking tube, so arranged, that the movement of a pivoted plate covering the mouth piece automatically rings a bell at the other end of the tube.

**Specific Conduction Resistance.**—(See *Resistance, Specific Conduction*.)

**Specific Conductivity.**—(See *Conductivity, Specific*.)

**Specific Heat.**—(See *Heat, Specific*.)

**Specific Heat of Electricity.**—(See *Electricity, Specific Heat of*.)

**Specific Hysteresial Dissipation.**—(See *Dissipation, Specific Hysteresial*.)

**Specific Inductive Capacity.**—(See *Capacity, Specific Inductive*.)

**Specific Magnetic Capacity.**—(See *Capacity, Specific Magnetic*.)

**Specific Magnetic Conductivity.**—(See *Conductivity, Specific Magnetic*.)

**Specific Magnetic Inductivity.**—(See *Inductivity, Specific Magnetic*.)

**Specific Resistance.**—(See *Resistance, Specific*.)

**Specific Resistance of Liquids.**—(See *Resistance, Specific, of Liquids*.)

**Speech, Articulate** — The successive tones of the human voice that are necessary to produce intelligible words.

The phrase articulate speech refers to the joining or articulation of the successive sounds involved in speech. The receiving diaphragm of a



telephone is caused to reproduce the articulate speech uttered near the transmitting diaphragm.

**Speed, Critical, of Compound-Wound Dynamo** — —The speed at which both the series and shunt coils of the machine give the same difference of potential when the full load is on the machine, as the shunt coil would if used alone on open-circuit.

**Speed Indicator.**—(See *Indicator, Speed.*)

**Speeding.**—Varying the number of revolutions per minute.

The speeding of a dynamo is for the purpose of obtaining the current requisite to properly operate the electro-receptive device placed in its circuit.

**Spent Acid.**—(See *Acid, Spent.*)

**Spent Liquor.**—(See *Liquor, Spent.*)

**Spherical Armature.**—(See *Armature, Spherical.*)

**Sphygmogram.**—A record made by a sphygmograph. (See *Sphygmograph.*)

**Sphygmograph.**—An instrument for recording the peculiarities of the normal or abnormal pulse.

**Sphygmograph, Electrical** — —An instrument for electrically recording the peculiarities of the pulse.

**Sphygmophone.**—An apparatus in which a microphone is employed for the medical examination of the pulse. (See *Microphone.*)

**Spider, Armature** — —A light framework or skeleton consisting of a central sleeve or hub keyed to the armature shaft, and provided with a number of radial spokes or arms for fixing or holding the armature core to the dynamo-electric machine.

**Spider, Driving** — —Radial arms or spokes connected to the armature of a dynamo-electric machine and keyed to the shaft so as to act as a driving wheel for the armature.

**Spin, Magnetic** — —A term sometimes employed instead of magnetic field.

The term magnetic spin is sometimes used instead of magnetic field because the magnetism is now generally believed to be due to the effects of a rotary motion or spin in the surrounding universal ether.

**Spiral, Primary** — —The primary of an induction coil or transformer. (See *Transformer, Coil, Induction.*)

**Spiral, Roget's** — —A suspended wire spiral conveying a strong electric current and devised to show the attractions produced by parallel currents flowing in the same direction.

The lower end of the wire spiral dips into a mercury cup. On the passage of the current, the attraction of the neighboring turns of the spiral for each other shortens the length of the spiral sufficiently to draw it out of the mercury and thus break the circuit. When this occurs the weight of the spiral causes it to fall and again re-establish the circuit. A rapid automatic-make-and-break is thus established, accompanied by a brilliant spark at the mercury surface due to the extra spark on breaking.

**Spiral, Secondary** — —The secondary coil of an induction coil or transformer. (See *Transformer, Coil, Induction.*)

**Splice Box.**—(See *Box, Splice.*)

**Split Battery.**—(See *Battery, Split.*)

**Split Lead Tee.**—(See *Tee, Split Lead.*)

**Sputtering of Arc.**—(See *Arc, Sputtering of.*)

**Spots, Sun** — —Dark spots, varying in number and position, which appear on the face of the sun and are believed by some to be caused by huge vortex motions in the masses of glowing gas that surround the sun's body.

Sun spots occur in greater number at intervals of about every eleven years.

Their occurrence is generally attended with unusual terrestrial magnetic variations. (See *Storm, Magnetic.*)

In the opinion of most astronomers the sun spots mark depressions in the atmosphere of the sun. Their exact causes are unknown, though they appear to be dependent on a local cooling or condensation of the sun's atmosphere.

When observed through a telescope the sun spot appears as a dark region surrounded by a less dark region. Though darker by contrast with the rest of the sun's face, yet such spots are in reality much brighter than the most brilliant arc light. The outline of the sun spot is quite irregular.



**Spreading-Out Magnetic Field.**—(See *Field, Magnetic, Spreading-Out.*)

**Sprengel Mercury Pump.**—(See *Pump, Air, Sprengel's Mercurial.*)

**Spring Ammeter.**—(See *Ammeter, Spring.*)

**Spring Contact.**—(See *Contact, Spring.*)

**Spring, Hold-Off** — —A spring which acts to keep one thing away from another in opposition to some force tending to keep it in contact with such a thing.

**Spring, Hold-On** — —A spring which acts to keep one thing against another in opposition to some force tending to pull it away.

A hold-on spring is sometimes employed in a dynamo-electric machine for the purpose of keeping the collecting brushes in proper pressure against the segments of the commutator.

**Spring-Jack.**—A device for readily inserting a loop in a main electric circuit. The spring-jack is generally used in connection with a multiple switch board. (See *Board, Multiple Switch.*)

**Spring-Jack Cut-Out.**—(See *Cut-Out, Spring-Jack.*)

**Spurious Hall Effect.**—(See *Effect, Hall, Spurious.*)

**Spurious Resistance.**—(See *Resistance, Spurious.*)

**Stabile Galvanization.**—(See *Galvanization, Stabile.*)

**Staggering.**—A term sometimes applied to the position of the brushes on a commutator cylinder, in which one brush is placed slightly in advance of the other brush so as to bridge over a break.

When a break occurs in the circuit of the armature wires, the device of staggering the brushes is adopted for temporarily bridging over the break. When a break occurs, the rewinding of the armature is the only radical cure.

**Standard Candle.**—(See *Candle, Standard.*)

**Standard Carcel Gas Jet.**—(See *Jet, Gas, Carcel Standard.*)

**Standard, Dynamo** — —The supports for the bearings of a dynamo-electric machine.

**Standard Earth Quadrant.**—(See *Quadrant, Standard.*)

**Standard of Self-Induction, Ayrton & Perry's** — —(See *Induction, Self, Ayrton & Perry's Standard of.*)

**Standard Ohm.**—(See *Ohm, Standard.*)

**Standard, Pentane** — —A standard source of light used in photometric measurements, in place of a Methven screen.

The pentane standard is constructed in general in the same manner as the Methven standard. In place, however, of ordinary coal gas, a mixture of pentane and air is used. Pentane is a variety of coal oil left after several distillations of ordinary crude oil. It distills at a temperature not greater than 50 degrees centigrade.

The mixture for burning consists of about twenty volumes of air to seven volumes of pentane. A burner of the pentane standard is somewhat similar to the Methven standard, but differs in a number of minor details.

**Standard Resistance Coil.**—(See *Coil, Resistance, Standard.*)

**Standard Size of Electrodes, Erb's** — —(See *Electrodes, Erb's Standard Size of.*)

**Standard Voltaic Cell.**—(See *Cell, Voltaic, Standard.*)

**Standard Voltaic Cell, Clark's** — —(See *Cell, Voltaic, Standard, Clark's.*)

**Standard Voltaic Cell, Clark's, Rayleigh's Form of** — —(See *Cell, Voltaic, Standard, Rayleigh's Form of Clark's.*)

**Standard Voltaic Cell, Fleming's** — —(See *Cell, Voltaic, Standard, Fleming's.*)

**Standard Voltaic Cell, Lodge's** — —(See *Cell, Voltaic, Standard, Lodge's.*)

**Standard Voltaic Cell, Sir William Thomson's** — —(See *Cell, Voltaic, Standard, Sir William Thomson's.*)

**Standard Wire Gauge.**—(See *Gauge, Wire, Standard.*)



**Standardizing a Voltaic Cell.**—(See *Cell, Voltaic, Standardizing a.*)

**Standards, Motor** — —A name applied to the supports for the bearings of an electric motor.

**State, Allotropic** — —A modification of a substance, in which, without changing its chemical composition, it assumes a condition in which many of its physical and chemical properties are different from those it ordinarily possesses.

Thus the element carbon occurs in three widely different allotropic states, viz.:

- (1.) As charcoal, or ordinary carbon;
- (2.) As graphite, or plumbago; and
- (3.) As the diamond.

**State, Anelectrotonic** — —The condition of decreased functional activity which occurs in a nerve in the neighborhood of the anode or positive terminal of a source to whose influence it is subjected. (See *Anelectrotonus.*)

**State, Electrotonic** — —A peculiar state supposed by Faraday to exist in a wire or other conductor, whereby differences of potential are produced by means of its movement through a magnetic field.

In his early researches Faraday regarded this state as a necessary condition in which a wire or conductor must exist, prior to its movement through a magnetic field, in order to have a difference of potential produced; but at a later day he abandoned this idea, and explained the true causes of electrodynamic induction. (See *Induction, Electro-Dynamic.*)

The term electrotonic state is to be carefully distinguished from electrotonus, or the change produced in the functional activity of a nerve by an electric current. (See *Electrotonus.*)

**State, Kathelectrotonic** — —The condition of increased functional activity of a nerve in the neighborhood of the kathode or negative terminal of a source to whose influence it is subjected. (See *Kathelectrotonus.*)

The kathelectrotonic state is one of the states or conditions of electrotonus or altered functional activity produced in a nerve by an electric current. (See *Electrotonus.*)

**State, Nascent** — —A term used in chemistry to express the state or condition of an elementary atom or radical just liberated from chemical combination, when it possesses chemical affinities or attractions more energetic than afterwards.

According to Grothüss' hypothesis, during the decomposition of a chain of polarized molecules, such for example as in the case of hydrogen sulphate,  $H_2SO_4$ , in a zinc-copper voltaic cell, the two atoms of hydrogen  $H_2$ , liberated by the combination of the  $SO_4$ , with an atom of zinc, Zn, possess a stronger affinity for the  $SO_4$  of the molecule next to it, than does its own  $H_2$ , and thus liberates its two atoms of hydrogen, which in turn unite with the  $SO_4$  of the next molecule in the polarized chain, and this continues until the two atoms of hydrogen liberated from the last molecule in the chain are given off at the copper plate. (See *Hypothesis, Grothüss'*.)

The peculiar properties characteristic of the nascent state of elements is doubtless due to the fact that the elements are then in a *free state*, with their *bonds open or unsatisfied*, and therefore possess greater affinities than when they are united in molecules. Thus  $H-$ ,  $H-$ , or *atomic hydrogen*, should possess different affinities than  $H-H$ , or *molecular hydrogen*.

**State, Passive** — —The condition of a metallic substance in which it may be placed in liquids that would ordinarily chemically combine with it, without being attacked or corroded.

It is very doubtful whether metallic bodies can be properly regarded as possessing an actual passive state. Iron, for example, which is one of the metals that is said to be capable of assuming this so-called *passive state*, can be placed in this condition by immersing it for a few moments in concentrated nitric acid, and subsequently washing it. It will then, unlike ordinary iron, neither be attacked by concentrated nitric acid, nor will it precipitate copper from its solutions. This condition is now generally believed to be due to the formation of a thin coating of magnetic oxide on its surface.

Many of the instances of the so-called passive state are simply cases of the well known electrical preservation of metals that form the negative element of a voltaic combination, under which circumstances the positive element only of the



voltaic couple is chemically attacked by the electrolyte. (See *Cell, Voltaic. Metals, Electrical Protection of.*)

**State, Permanent, of Charge on Telegraph Line** — —The condition of the charge on a telegraph wire when the current reaching the distant end has the same strength as at the sending end.

**State, Variable, of Charge of Telegraph Line** — —The condition of the charge on a telegraph wire while the strength of the current is increasing up to the full strength in all parts.

The duration of the variable state is directly as the length of the line, the electrostatic capacity and the total resistance. It is increased by leakage, by static capacity and by the effects of the extra current. (See *Currents, Extra.*)

**Static Breeze.**—(See *Breeze, Static.*)

**Static Electricity.** — (See *Electricity, Static.*)

**Static Energy.**—(See *Energy, Static.*)

**Static Hysteresis.** — (See *Hysteresis, Static.*)

**Static Insulation.** — (See *Insulation, Static.*)

**Static Magnetic Induction.**—(See *Induction, Magnetic, Static.*)

**Static Shock.**—(See *Shock, Static.*)

**Statics.**—The science which treats of the relations that must exist between the points of application of forces and their direction and intensity, in order that equilibrium may result.

**Statics, Electro** — —That branch of electric science which treats of the phenomena and measurement of electric charges.

Some of the more important principles of electrostatics are embraced in the following laws:

(1.) Charges of like name, *i. e.*, either positive or negative, repel each other. Charges of unlike name attract each other.

(2.) The forces of attraction or repulsion between two charged bodies are directly proportional to the product of the quantities of electricity possessed by the bodies and inversely proportional to the square of the distance between them.

These laws can be demonstrated by the use of Coulomb's torsion balance. (See *Balance, Coulomb's Torsion.*)

**Statics, Magneto** — —That branch of magnetism which treats of magnetic attractions and repulsions, the distribution of lines of magnetic force and other facts regarding fixed magnets.

**Station, Central** — —A station, centrally located, from which electricity for light or power is distributed by a series of conductors radiating therefrom.

**Station, Distant** — —A term applied by an operator to the distant end of the line in order to distinguish it from his own end.

**Station, Distributing** — —A station from which electricity is distributed.

A central station.

**Station, Home** — —A term applied by an operator to his end of the line, in order to distinguish it from the other or distant station.

**Station, Transforming** — —In a system of distribution by transformers or converters a station where a number of transformers are placed, in order to supply a group of houses in the neighborhood. (See *Transformer, Electricity, Distribution of, by Alternating Currents.*)

**Stationary Floor Key.**—(See *Key, Stationary Floor.*)

**Stationary Torpedo.**—(See *Torpedo, Stationary.*)

**Stay Rods, Telegraphic** — —Metal rods attached to a telegraph pole, and securely fastened in the ground in order to counteract the effects of a pull or tension on the poles. (See *Pole, Telegraphic.*)

Stay rods should be used in all exposed situations, or where the poles are exposed to severe strains.

**Steady Current.**—(See *Current, Steady.*)

**Stearns' Relay Shunt.**—(See *Shunt, Relay, Stearns.*)

**Steel, Qualities of, Requisite for Magnetization** — —Qualities which must be

possessed by steel in order to permit it to permanently retain a considerable magnetization.

For the purposes of permanent magnetization steel should possess the following qualities:

It should be hard and fine grained. Hard cast steel answers the purpose very well. Scoresby showed that an intimate relation exists between the quality of the iron from which the steel is made, and the ability of the steel to take and retain considerable magnetism.

The steel should be hardened as high as possible and the temper afterwards drawn by heat to a violet-straw color. Practice is not uniform in this respect, the exact color varying with the quality of the steel.

An admixture with the steel of about  $\frac{1}{100}$  of one per cent. of tungsten is said to increase its magnetic powers.

Cast steel is not generally employed for magnets, wrought steel being generally preferred.

**Step-by-Step, or Dial Telegraphy.**—(See *Telegraphy, Step-by-Step.*)

**Step-Down Transformer.**—(See *Transformer, Step-Down.*)

**Step-Up Transformer.**—(See *Transformer, Step-Up.*)

**Sterilization, Electric** — —Sterilizing a solution by depriving it of whatever germs it may contain by means of electrical currents.

The following experiments were recently made on sterilization by means of electric currents: The fluid, with the culture, was placed in a glass test tube, wound about with a wire coil connected either with a dynamo or accumulator or other electric source. Some increase in temperature was made, but never over 98° Fahr. When a current 1.25 volts, 2.5 amperes passed, a complete sterilization of *Micrococcus Prodigiosus* occurred at the end of twenty-four hours.

Blood and water containing pathogenic germs was sterilized in five to thirty minutes. The above described effects would appear to be magnetic rather than electric.

**Sticking.**—A word applied by telegraphers to the failure of the positive pole relay armature to leave the magnet pole on the cessation of the current.

In telegraphy, when from any cause a circuit is imperfectly broken by an operator's key, or at

the points of contact of a relay or other instrument, such failure is called sticking. When an arc is formed at the points of a relay where the local circuit is made and broken, the relay "sticks." The arc is caused by burning of the platinum points. *Sticking* may be a result of a too weak retractile spring.

**Stone, Hercules** — —A name given by the ancients to the lodestone. (See *Lodestone.*)

**Stool, Insulating** — —A stool provided with insulating supports of vulcanite or other insulator, employed to afford a ready insulating stand or support.

**Stop, Limiting** — —A stop set so as to limit the motion of an electrically vibrating or oscillating bar to any predetermined extent.

Such limiting stops are common on telegraphic and various other electrical apparatus.

**Stopping-Off.**—A process employed in electro-plating, in which a metallic article, already electro-plated over its entire surface, is electro-plated with another metal over certain parts only.

The process of stopping-off consists of covering the parts which are to receive the metallic coating, with various stopping-off varnishes. By this means articles can be electro-plated on parts of their surfaces with gold and on the remainder with silver. The whole surface is first silvered and the portions intended to be afterwards gilded are then stopped-off and the object placed in the gilding bath.

**Stopping-Off Varnish.**—(See *Varnish, Stopping-Off.*)

**Storage Battery.**—(See *Battery, Storage.*)

**Storage Capacity of Secondary Cell.**—(See *Cell, Secondary or Storage, Capacity of.*)

**Storage Cell.**—(See *Cell, Storage.*)

**Storage of Electricity.**—(See *Electricity, Storage of.*)

**Storm, Auroral** — —A term sometimes employed to express an unusual prevalence of auroras.

**Storm, Electric** — —An unusual condition of the atmosphere as regards the quantity of its free electricity.



A thunder storm is a variety of electric storm. (See *Storm, Thunder*.)

**Storm, Magnetic** — Irregularities occurring in the distribution of the earth's magnetism, affecting the magnetic declination, dip, and intensity.

Magnetic storms have been observed to accompany auroral displays, and to be coincident with the occurrence of *sun spots*, or unusual outbursts of solar activity.

The coincidence of magnetic storms and outbursts of solar activity is unquestioned. Wolf, of Zurich, has shown by a comparison of numerous observations of sun spots, the unquestioned correspondence, in the times of their greatest activity, which occur every 11.1 years, with the time of occurrence of an unusual number of sun spots. He has placed these results in the form of curves. Those shown in Fig. 515 are taken from observations at Paris and Prague. The full lines represent the periods of sun spots. The dotted lines the periods of magnetic storms.

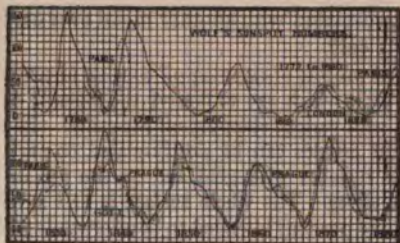


Fig. 515. Wolf's Sun Spot Numbers.

**Storm, Thunder** — A storm during which electrical discharges accompanied by thunder take place between two clouds or between a cloud and the earth. (See *Electricity, Atmospheric. Storms, Thunder, Geographical Distribution of*.)

**Storms, Thunder, Geographical Distribution of** — The following general facts as to the geographical distribution of thunder storms, show the intimate relation between the frequency of thunder storms and the time and place of the condensation of vapor.

(1.) Thunder storms seldom, if ever, occur in the polar regions.

This is probably because the rainfall in the

polar regions results from the condensation of the vapor that was formed in the equatorial or temperate regions, so that a considerable time elapses between the evaporation and condensation.

(2.) Thunder storms seldom, if ever, occur in rainless districts, owing probably to the absence of the condensation of vapor.

(3.) Thunder storms are most frequent and violent in the equatorial regions, where the rainfall results from the condensation of the vapor by the action of ascending currents, conveying the vapor almost immediately after its formation into the upper and colder regions of the atmosphere.

(4.) Thunder storms occur in regions beyond the tropics, at those seasons of the year when the rainfall results from the condensation of the vapor shortly after the time of its formation, viz., in the temperate zones in the hotter parts of the year.

**Straight-Line Trolley Hanger.**—(See *Hanger, Straight-Line Trolley*.)

**Straightaway Bunched Cable.**—(See *Cable, Bunched, Straightaway*.)

**Strain, Dielectric** — The strained condition in which the glass, or other dielectric of a condenser, is placed by the charging of the condenser.

The deformation of a body under the influence of a stress. (See *Stress*.)

The *stress* in this case, i. e., the force producing the deformation or *strain*, is the attraction of the opposite charges. This stress, in the case of a Leyden jar, is often sufficiently great to cause a rupture of the glass.

**Strain, Electro-Magnetic** — The deformation produced by an electro-magnetic stress. (See *Stress, Electro-Magnetic*.)

**Strain, Electrostatic, Optical** — A strain or deformation produced in a plate of glass, or other transparent solid, by subjecting it to the stress of an electrostatic field. (See *Stress, Electrostatic*.)

To obtain the electrostatic stress, holes are drilled in the plate of glass, and wires from a *Holtz machine* or *induction coil* placed therein, the wires being separated by a thin layer of glass.

The glass, on being traversed by a beam of plane polarized light, rotates the plane of polarization of the light in the same direction as the glass would if subjected to a strain in the direction of the beam.



*tion of the lines of electric force.* (See *Rotation, Magneto-Optic.*)

**Strain, Magnetic** — —The deformation produced in the air-gap between two dissimilar magnetic poles, or in any substance placed therein, by the stress of the lines of magnetic force bridging such gap.

**Strain, Optical** — —A deformation or alteration of volume produced in a plate of glass, or other transparent medium, by the action of any stress. (See *Strain, Electro-Magnetic, Strain, Electrostatic, Optical.*)

**Strain, Optical Electro-Magnetic** — —A strain produced in a plate of glass or other transparent medium by placing it in a magnetic field. (See *Stress, Electro-Magnetic, Rotation, Magneto-Optic.*)

Optical strain, whether electrostatic or magnetic, or even mechanical, often causes a medium to acquire the power of double refraction or rotary polarization. (See *Refraction, Double, Electric, Rotation, Magneto-Optic.*)

**Stranded Core of Cable.**—(See *Core, Stranded, of Cable.*)

**Stranded Line.**—(See *Line, Stranded.*)

**Strap Copper.**—(See *Copper, Strap.*)

**Straps and Climbers.**—Devices employed by linemen for climbing wooden telegraph poles.

**Stratham's Electric Fuse.**—(See *Fuse, Electric, Stratham's.*)

**Stratification Tube.**—(See *Tube, Stratification.*)

**Stratified Discharge.**—(See *Discharge, Stratified.*)

**Stray Field.**—(See *Field, Magnetic, Stray.*)

**Stray Power.**—(See *Power, Stray.*)

**Stream-Lines of an Escaping Fluid.**—Lines which show the actual path of the particles of an escaping fluid.

When the escape has reached a steady condition, the stream-lines correspond to the flow lines.

**Streamers.**—Pillars or parallel flashing columns of light frequently seen during the prevalence of an aurora. (See *Aurora Borealis.*)

**Streamers, Auroral** — —A term sometimes applied to the flashing columns or pillars of light that are thrown out in the shape of streams, from portions of the sky during the prevalence of an aurora. (See *Aurora Borealis.*)

**Streaming Discharge.**—(See *Discharge, Streaming.*)

**Streamlets, Current** — —A theoretical conception of a series of parallel current streams or current filaments, flowing through a solid conductor.

In the case of uniform distribution of an electric current where the current density is the same for all areas of cross-section, these current streamlets are all of the same strength.

In the case of rapidly alternating currents, however, the current streamlets are of greater strength near the surface. When the rate of alternation is sufficiently great, they are almost entirely absent at the central parts.

The conception of current streamlets is made in order to account for the increase in the resistance of a solid conductor through which rapidly alternating currents of electricity are passing. (See *Currents, Simple-Periodic.*)

**Streams, Convection** — —Streams of electrified air or other gaseous or vaporous particles given off from the pointed ends of charged, insulated conductors. (See *Convection, Electric.*)

**Street Mains.**—(See *Main, Street.*)

**Street Service.**—(See *Service, Street.*)

**Strength, Field** — —The intensity or total flux of magnetism of a dynamo.

This term is also sometimes roughly used for the current strength in the field magnet circuit of a dynamo-electric machine.

**Strength of Current.**—(See *Current Strength.*)

**Strength of Magnetic Field.**—(See *Field, Magnetic, Strength of.*)

**Strength of Magnetism.**—(See *Magnetism, Strength of.*)

**Stress.**—The pressure, pull, or other force producing a deformation or strain.



**Stress, Dielectric** — —The force producing the deformation or strain in a dielectric.

A dielectric strain, in the case of a Leyden jar or condenser, is sometimes sufficiently great to pierce the dielectric.

**Stress, Electro-Magnetic** — —The force or pressure in a magnetic field, which produces a strain or deformation in a piece of glass or other similar substance placed therein. (See *Strain, Optical Electro-Magnetic*.)

**Stress, Electrostatic** — —The force or pressure in an electrostatic field, which produces strain or deformation in a piece of glass or other substance placed therein. (See *Strain, Electrostatic, Optical*.)

**Stress, Energy of** — —A term sometimes used in place of potential energy. (See *Energy, Potential*.)

**Stress, Magnetic** — —The force acting to produce a strain in the air-gap between two dissimilar magnet poles by the action of the lines of magnetic force, bridging such air gap.

**Striæ, Electric** — —Parallel streaked bands, consisting of alternate light and dark spaces, produced in tubes containing low vacua, by the passage of rapidly alternating currents through them. (See *Tube, Stratification*.)

**Strip, Safety** — —A strip or bar used as a safety fuse. (See *Fuse, Safety*.)

**Stripping.**—Dissolving the metal coating from a silver-plated or other metal-plated article.

The object of the "stripping" process is to recover silver from imperfectly plated ware, or from old ware which is to be replated.

Stripping of silver is accomplished either in the cold or by aid of heat, by the use of the following solutions, viz.:

Concentrated sulphuric acid,  
(Baumé, 66 degrees).....100 parts.  
Concentrated nitric acid,  
(Baumé, 40 degrees)..... 10 "

The objects are suspended in this liquid, which, provided it be not diluted with water, possesses the property of dissolving the silver without touching the metal underneath.

**Stripping Baths.**—(See *Bath, Stripping*.)

**Stripping Liquid.**—(See *Liquid, Stripping*.)

**Stroke, Lightning** — —A disruptive discharge between two oppositely charged clouds, or between a cloud and the earth. (See *Discharge, Disruptive*.)

**Stroke, Lightning, Back or Return** — —An electric shock, caused by an induced charge, produced by the discharge of a lightning flash.

The shock is not caused by the lightning flash itself, but by a charge which is induced in neighboring conductors by the discharge. These induced effects are, in fact, effects of electro-dynamic induction. (See *Induction, Electro-Dynamic*.) A similar effect may be noticed by standing near the conductor of a powerful electric machine, when shocks are felt at every discharge.

The effects of the return shock are sometimes quite severe. These effects are often experienced by sensitive people on the occurrence of a lightning discharge at a considerable distance.

In some instances the return stroke has been sufficiently intense to cause death. In general, however, the effects are much less severe than those of the direct lightning discharge.

**Struts for Telegraphic Poles.**—Inclined wooden or iron poles, applied to telegraph poles in order to support the thrust or pressure acting on them. (See *Pole, Telegraphic*.)

**Sturgeon's or Barlow's Wheel.**—A wheel capable of rotation on a horizontal axis, which, when placed between the poles of a magnet, rotates when a current is passed through it between the axis and the circumference.

**Sub-Aqueous Cable.**—(See *Cable, Sub-Aqueous*.)

**Sub-Branch.**—(See *Branch, Sub*.)

**Sub-Main.**—(See *Main, Sub*.)

**Submarine Boat.**—(See *Boat, Submarine, Electric*.)

**Submarine Cable.**—(See *Cable, Submarine*.)

**Submarine Mine.**—(See *Mine, Submarine*.)



**Submarine Telegraphy.**—(See *Telegraphy, Submarine.*)

**Substance, Ferro-Magnetic** — —A term proposed in place of paramagnetic, for substances that are magnetic after the manner of iron. (See *Paramagnetic.*)

**Subterranean Mine.** (See *Mine, Subterranean.*)

**Subway, Electric** — —An accessible underground way or passage provided for the reception of electric wires or cables.

Underground electric conductors, like all electric conductors, are liable to faults, crosses, etc. Unless they are readily accessible, very serious loss and damage may occur before the fault is located and corrected.

**Sulphating.**—A name applied to one of the sources of loss in the operation of a storage battery, by means of the formation of a coating of inert sulphate of lead on the battery plates.

The addition of a solution of sulphate of soda to the sulphuric acid liquid is claimed to have the effect of decreasing the extent of the sulphating.

**Summer Lightning.**—(See *Lightning, Summer.*)

**Sun Spots.**—(See *Spots, Sun.*)

**Sunstroke, Electric, or Electric Prostration or Insolation** — —Physiological effects, similar to those produced by exposure to the sun, experienced by those exposed for a long while to the intense light and heat of the voltaic arc.

Electric sunstroke is sometimes called electric insolation, or electric prostration.

The effects of electric sunstroke were first noticed by Desprez in his classic experiments on the fusion or volatilization of carbon.

On undue exposure to an intense electric light the eyes are irritated and the skin burned as by the sun. In some cases it is claimed that the effects of sunstroke, or excessive production of heat, as in true *insolation*, are produced. In the applications of electricity to electric furnaces, these same effects have been noticed in an intensified degree.

From some recent investigations it would appear that these effects are to be ascribed to the light rather than to the heat.

The symptoms are as follows: Pain in the throat, face and temples, followed by a coppery red color of the skin, irritation and watering of the eyes, when the symptoms disappear. The skin peels off in about five days.

**Superficial Eddy Currents.**—(See *Currents, Eddy, Superficial.*)

**Super-Saturation of Solution.**—(See *Solution, Super-Saturation of.*)

**Supplement of Angle.**—(See *Angle, Supplement of.*)

**Supply, Unit of, Electrical** — —A unit, provisionally adopted in England by the Board of Trade, equal to 1,000 ampères flowing for one hour under an electromotive force of one volt.

This would, of course, equal 1,000 watt-hours, and would be the same as 100 ampères flowing for ten hours under one volt.

One unit of electrical supply is equal to 1.34 actual horse-power expended for one hour, and will feed 13.4 Swan lamps of 21 candle-power for one hour. It is equal in illuminating power in Swan lamps to the light produced by 100 cubic feet of gas consumed in twenty 14-candle burners in one hour.

The unit of electrical supply is called a "Board of Trade unit," a B. O. T. unit, or simply a bot. It is equal to one kilo-watt hour.

**Support, Tripod Roof** — —A support for a housetop telegraphic line.

The tripod roof support, as its name indicates, consists of a three-legged support for any suitable insulator.

A common form is shown in Fig. 516.

**Support, Underground Cable** — —A support provided for holding a cable where it passes around the side of a man-hole, underground conduit, or other similar location.

**Surface, Demarcation** — —The surface at which a demarcation current is generated.

The surface which marks the point of injury in a muscle or nerve.

Demarcation currents in electro-therapeutics, are currents produced in injured nerves or muscles. They are probably due to the chemical changes that take place between the injured and the uninjured tissues. The demarcation surface is



the surface separating parts in a normal condition from those in an abnormal condition.

An injury to a muscle or nerve causes or produces at such surface a dying substance which is



Fig. 516. Tripod Roof Support.

negative to the uninjured, normal or positive substance. Such a surface results in a demarcation current.

**Surface Density.**—(See *Density, Surface*.)

**Surface, Equipotential, of a Conductor Through Which a Current is Flowing** —

—A surface described within the mass of a conductor, conveying an electric current, at points perpendicular to the direction of the flow, all possessing the same potential.

**Surface, Equipotential, or Level Surface of Escaping Fluid** —A surface described within the mass of a fluid in motion at all places perpendicular to the stream lines passing such surface.

**Surface Integral of Magnetic Induction.**—(See *Induction, Magnetic, Surface-Integral of*.)

**Surfaces, Equipotential, Electrostatic** —Surfaces, all the points of which are at the same electric potential. (See *Potential, Electric*.)

Electric surfaces perpendicular to the lines of electric force over which a quantity of electricity, considered as being concentrated at a point, may be moved without doing work. (See *Field, Electrostatic*.)

Equipotential surfaces correspond with a water level, over which a body may be moved horizontally without doing any work against the force of gravity.

In the case of the charged insulated sphere, shown in Fig. 517, the equipotential surfaces, represented by the circles, are concentric.




Fig. 517. Equipotential Surfaces.

**Surfaces, Equipotential, Magnetic** —

—Surfaces surrounding the poles of a magnet, or system of magnets, where the magnetic potential is the same. (See *Potential, Magnetic*.)

Magnetic equipotential surfaces extend in a direction perpendicular to the lines of magnetic force. (See *Field, Magnetic*.)

No work is required in order to move a unit pole over equipotential magnetic surfaces, because in so doing it cuts no lines of magnetic force. Work, however, is done when the motion is from one equipotential surface to another.

Equipotential surfaces, whether electric or magnetic, cannot intersect one another, since their potential is the same at all points.

**Surfaces, Isothermal** —Surfaces connecting points in a body which have the same temperature.

**Surging Discharge.**—(See *Discharge, Surging*.)

**Surgings, Electric** —Electric oscillations set up in a charged conductor that is undergoing rapid discharge.

These surgings produce waves in the surrounding ether that travel outwards with the velocity of

light. (See *Electricity, Hertz's Theory of Electro-Magnetic Radiations or Waves.*)

**Susceptibility, Magnetic** — The ratio existing between the induced magnetization and the magnetic force producing such magnetism, or the intensity of magnetism divided by the magnetic force.

Susceptibility relates to the *poles* produced in a body by a magnetizing force, whereas permeability refers its power to *conduct* lines of force. When the inducing field has unit strength of magnetization, the magnetic susceptibility will measure directly the strength of the magnetization.

When a bar of iron is placed in a magnetic field, it is threaded by the lines of magnetic force, and thus becomes magnetized by *induction*. This induction will necessarily depend both on the number of lines of force in the magnetizing field and on the *magnetic permeability* of the magnetized body; or, in other words, the *induction* is equal to the product of the intensity of the magnetizing field and the magnetic permeability of the body in which the induction occurs.

The magnetic susceptibility is sometimes called the Co-efficient of Magnetization; calling  $K$ , the susceptibility,  $H$ , the magnetizing force, and  $I$ , the intensity of the resulting magnetization; then

$$K = \frac{I}{H}.$$

The magnetic permeability is sometimes called the Co-efficient of Magnetic Induction, calling  $\mu$ , the permeability,  $B$ , the magnetic induction and  $H$ , the magnetic force producing the induction; then

$$\mu = \frac{B}{H}.$$

**Suspending Wire of Aërial Cable.**—(See *Wire, Suspending, of Aërial Cable.*)

**Suspension, Bifilar** — The suspension of a needle by two parallel wires or fibres, as distinguished from a suspension by a single wire or fibre.

A bifilar suspension is shown in Fig. 518. The two threads,  $a, b$  and  $a', b'$ , are connected to the needle  $M N$ , so as to permit it to hang in a true horizontal position. Any




Fig. 518. Bifilar Suspension.

twisting, around the imaginary axis  $c, c'$ , causes the lines of suspension,  $a, b$  and  $a', b'$ , to tend to cross one another and so shorten the axis  $c, c'$ .

Harris, who was the first to employ the bifilar suspension, showed that the reactive force imparted to the suspension threads by turning the needle, was:

- (1.) Directly proportional to the distance between the threads.
- (2.) Inversely as their lengths.
- (3.) Directly proportional to the weight of the suspended body.
- (4.) Proportional to the angle of twist or torsion of the threads on each other.

Any deflection of the needle shortens the vertical distance between the points of support and the needle, and so tends to lift the needle. The motions are therefore balanced against the force of gravity instead of against the torsion of the fibre.

**Suspension, Combined Fibre and Spring** — The suspension of a needle by the combined use of a spiral spring and a single fibre.

In this form of suspension the spring is introduced between the fibre and the needle. It is valuable for marine galvanometers and other apparatus exposed to tilting or rolling motions, because it permits the instrument to be tilted through several degrees without causing any considerable variation in the deflections produced by the current or the charge.

**Suspension, Fibre** — Suspension of a needle by means of a fibre of unspun silk or other material.

A fibre suspension generally means a single fibre or thread. It may, however, be applied to a bifilar suspension. (See *Suspension, Bifilar.*)

A fibre suspension is to be preferred to a *pivot* suspension, since it eliminates all friction. It has, however, the disadvantage of necessitating leveling screws.

**Suspension, Knife-Edge** — The suspension of a needle on knife edges that are supported on steel or agate planes.

A suspension of this kind is used in the dipping needle, since it permits of freedom of motion in a single vertical plane only.

**Suspension, Pivot** — Suspension of a needle by means of a jeweled cup and a metallic pivot.



the jeweled cup is placed above the centre of the eye of the needle, and is supported on a steel point. As a rule, compass needles have this variety of support.

**Swage.**—A particular form of anvil on which highly heated metallic plates are shaped by hammering them into forms the same as that of the anvil on which they are placed.

**Swage.**—To fashion heated metallic plates by hammering them into the form of an anvil on which they are supported.

**Swaging.**—Fashioning highly heated metallic plates into any desired form by hammering while on suitable dies.

**Swaging, Electric** — — The forming or shaping of metallic plates by hammering them against suitable anvils or dies while softened by electrical heating.

The electro-swaging apparatus consists of a welding transformer provided with a movable clamp. The pressure required for the swaging is attained by the use of steam admitted into a cylinder by a lever which operates a four-way valve:

The rod, bar, or plate of metal to be shaped or swaged, is first heated by the passage of a powerful heating current, obtained preferably from a welding transformer, one of the clamps of which is movable. When the metal is suitably softened by the passage of the current, it is then subjected to swaging.

**Swelling Current.**—(See *Currents, Swelling*.)

**Swelling Faradic Current.**—(See *Currents, Swelling Faradic*.)

**Swinging Annunciator.**—(See *Annunciator, Pendulum or Swinging*.)

**Swinging Cross.**—(See *Cross, Swinging or Intermittent*.)

**Switch, Automatic, for Incandescent Electric Lamps** — — A device by which incandescent electric lamps can be lighted or extinguished at a distance by means of push buttons.

The automatic switch for incandescent lamps corresponds in electric lighting to the automatic gaslighting device in systems of electric gaslighting. It consists essentially of two electro-magnets, one for turning the switch which lights

the lamp by cutting them into the circuit of the lighting mains or conductors, and the other for extinguishing them, by cutting them out. These electro-magnets are operated by two push buttons, a black one to extinguish the lamp and a white button to light it.

The details of the automatic switch are shown in Fig. 520. The mains  $M^1$  and  $M^2$ , are connected to one set of contacts, and the branches containing



Fig. 519. Automatic Switch.

the lamps to be lighted, to the contacts between them. The push buttons,  $P^1$  and  $P^2$ , are connected by their wires to the main  $M^1$  and the branch  $B^1$ .

These buttons are made respectively positive and negative, and are marked  $+$  and  $-$ . The third wire of the push button is connected as shown to the lamp  $L$ , and the switch magnet,  $S M$ .

When the contact is closed at  $P^1$ , the armature of  $S M$ , closes the contact through  $C$ . When the button is released, connection is estab-




Fig. 520. Automatic Switch.

lished between the magnet and the lamp  $L$  in series. This is for the purpose of cutting down the circuit to the  $\frac{1}{10}$  of an ampère, and thus admitting a thin wire to serve between the button and the switch magnet.

When the button,  $P^2$ , is closed the lamp is turned out.

**Switch Board.**—(See *Board, Switch*.)

**Switch Board, Multiple** — — (See *Board, Multiple Switch*.)

**Switch Board, Telegraphic** — — (See *Board, Switch, Telegraphic*.)

**Switch Board, Trunking** — — (See *Board, Switch, Trunking*.)

**Switch, Break-Down** — — A special switch, employed in small three-wire systems, for connecting the positive and negative bus-wires in such a manner as to practically convert it into a two-wire system and permit the system to be supplied with current from a single dynamo. (See *Wires, Bus*.)

**Switch, Changing** — — A switch designed to throw a circuit from one electric source to another.

A changing switch, for example, is of use in disconnecting a circuit from one dynamo and connecting it to another; or, in other words, to suddenly transfer the load from one dynamo to another.

**Switch, Changing-Over** — — A term sometimes applied to a changing switch. (See *Switch, Changing*.)

**Switch, Distributing** — — A multiple switch board. (See *Board, Multiple Switch*.)

**Switch, Distributing, for Electric Lights** — — A switch employed in a system of arc lighting by series-distribution, by means of which any particular dynamo-electric machine or a number of



Fig. 521. Double-Break Knife Switch.

separate dynamo-electric machines can be connected with the same circuit without interfering with the lights. (See *Board, Multiple Switch*.)

**Switch, Double-Break** — — A term sometimes used for double-pole switch. (See *Switch, Double-Pole*.)

**Switch, Double-Break Knife** — — A knife switch provided with double-break contacts.

A double-break knife switch is shown in Fig. 521.

**Switch, Double-Pole** — — A switch that makes or breaks contact with both poles of the circuit in which it is placed.

A switch consisting of a combination of two separate switches, one connected to the positive lead and the other to the negative lead.

Double-pole switches are used in most systems of incandescent lighting in order to insure the thorough separation of the circuit from the main conductor or leads when cut out and to diminish the spark.

**Switch, Feeder** — — The switch employed for connecting or disconnecting each conductor of a feeder from the bus-bars in a central station.

**Switch, Four-Point** — — A switch by which a circuit can be completed through four central points.

**Switch, Knife** — — A switch which is opened or closed by the motion of a knife

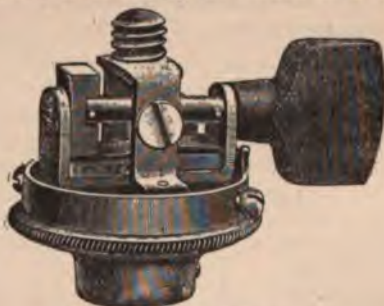


Fig. 522. Lamp-Socket Switch.

contact which moves between parallel contact plates.

A knife-edge switch. (See *Switch, Knife-Edge*.)

**Switch, Knife-Break** — — A knife switch. (See *Switch, Knife*.)

**Switch, Knife-Edge** — — A term sometimes used in place of knife switch. (See *Switch, Knife*.)



**Switch, Lamp-Socket** — —A switch placed in the socket of an incandescent lamp and provided for throwing the lamp in and out of the circuit.

A form of lamp socket switch is shown in Fig. 522. Its operation will be understood from an inspection of the drawing.

**Switch Pin.**—(See *Pin, Switch*.)

**Switch, Plug** — —A switch in which a metal plug is withdrawn to throw into a circuit a coil or other device, the ends of which are connected to metallic blocks that are sufficiently near together to be joined and short-circuited by the insertion of the plug.

**Switch, Pole-Changing** — —A switch employed for changing the direction of the current in any circuit.

A form of pole-changing switch is shown in Fig. 523.



Fig. 523. Pole-Changing Switch.

If the two outer contacts are connected to the same pole as the source, as, for example, the positive, and the two intermediate contacts are connected to the other pole, or to the negative, then in the position shown in the cut, the current will flow through any receptive device connected with the switch, in one direction, but if the switch is moved to the left, it will flow in the opposite direction.

**Switch, Removable Key** — —A plug switch. (See *Switch, Plug*.)

**Switch, Reversing** — —A switch for reversing the direction of the battery current through a galvanometer.

A simple reversing switch consists of four insulated brass segments mounted on a plate of ebonite and furnished with openings between them for plug connections.

The battery terminals are connected to two diagonally opposite segments, as B, and D, Fig. 524, and the leading wires of the galvanometer,

or other instrument, to the other segments, as C and A. If, now, the plugs are placed between B and C, and A and D, the battery current flows in one direction. If, however, the plugs are



Fig. 524. Reversing Switch.

placed between A and B, and C and D, the battery current will flow in the opposite direction.

The battery current is cut off if one plug is removed. In practice, however, it is preferable to remove both plugs, so as to avoid any current from want of sufficient insulation.

**Switch, Snap** — —A switch in which the transfer of the contact points from one position to another is accomplished by means of a quick motion obtained by the operation of a spring.

The object of the snap switch is to prevent the switch resting in any half way position, and thus preventing the establishing of an arc.

**Switch, Telephone, Automatic** — —A device for automatically transferring the connection of the main line from the call bell to the telephone circuit.

In most telephone circuits, as now arranged, the automatic switch, besides transferring the main line from the call bell to the telephone circuit

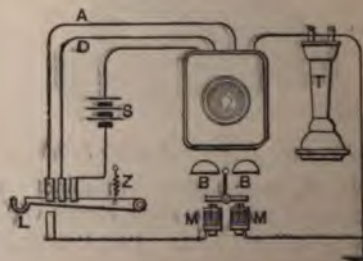


Fig. 525. Automatic Telephone Switch.

closes the local battery circuit of the telephone on the removal of the telephone from its signaling hook.

The means whereby this is accomplished are shown in Fig. 525. On the removal of the telephone from the hook L, the lever is pulled upwards by the spring Z, thus closing the contacts 1, 2 and 3, by which the local battery S<sub>1</sub> is closed through the circuit of the transmitter, the telephone disconnected from the circuit of the call bell M, B, and connected with the circuit of the transmitter. On replacing the telephone on the hook L, its weight depresses the lever, breaking connection with 1, 2 and 3, and establishing connection with the call circuit.

**Switch, Three-Point** — —A switch by means of which a circuit can be completed through three different contact points.

**Switch, Time** — —An automatic switch in which a predetermined time is required either to insert a resistance in or remove it from a circuit.

**Switch, Two-Point** — —A switch by

means of which a circuit can be completed through two different contact points.

**Switch, Two-Way** — —A switch provided with two contacts connected with two separate and distinct circuits.

**Switch, Yale-Lock, for Burglar Alarm** — —(See *Alarm, Yale-Lock Switch Burglar.*)

**Switched-In.** —Placed in a circuit by means of a switch. (See *Closed-Circuited.*)


**Switched-Out.** —Cut out of a circuit by means of a switch. (See *Open-Circuited.*)

**Symbols and Diagrams, Standard Electric** — —Standard symbols and diagrams used in electro-technics.

The standard electric diagrams and symbols shown on pages 501, and 502, were arranged by Prof. F. B. Crocker, and are reproduced from the *Electrical Engineer*.

# SYMBOLS COMMONLY USED IN ELECTRICAL WORK.

MECHANICAL.			ELECTRICAL.		MAGNETIC.
L or l. Length	D. Diameter	E. or E.M.F. Electromotive force	v. Volt	N. North pole	
M or m. Mass	r. Radius	P.D. Potential difference	amp. Ampere	S. South pole	
T or t. Time	H.P. Horse power	C. Current	Ω. Ohm	m. Strength of pole	
v. Velocity	I.H.P. Indicated "	R. Resistance	M. Megohm.	H. Magnetizing force	
F or f. Force	B.H.P. Brake "	p. Specific resistance	B.A.U. Brit. Ass'n Unit	(C.G.S.)	
g. Acceleration due to gravity.	r.p.m. Revolutions per min.	Q. Quantity	mfd. Microfarad	B. Magnetic induction	
W or w. Work.	C.G.S. Centimetre gramme second (System)	K. Electrostatic capacity.	h. or hy. Henry	(C.G.S. lines)	
P. Power.	A.W.G. American Wire Gauge	L. Inductance (Coeff. of)	z. Electrochemical equivalent	I. Intensity of magnetization	
ft. lb. Foot pound.	B.W.G. Birmingham Wire Gauge	A.M. Amperemeter.	J. Joule	μ. Magnetic permeability	
		V.M. Voltmeter	K.W. Kilowatt	κ. Magnetic susceptibility	
		F.M. Field Magnet	Complete period (Alt. cur.)	H. Horizontal intensity of Earth's magnetism	
		+ Positive pole or terminal	⎓ Dynamo		
		- Negative " " "	⎓ Battery		

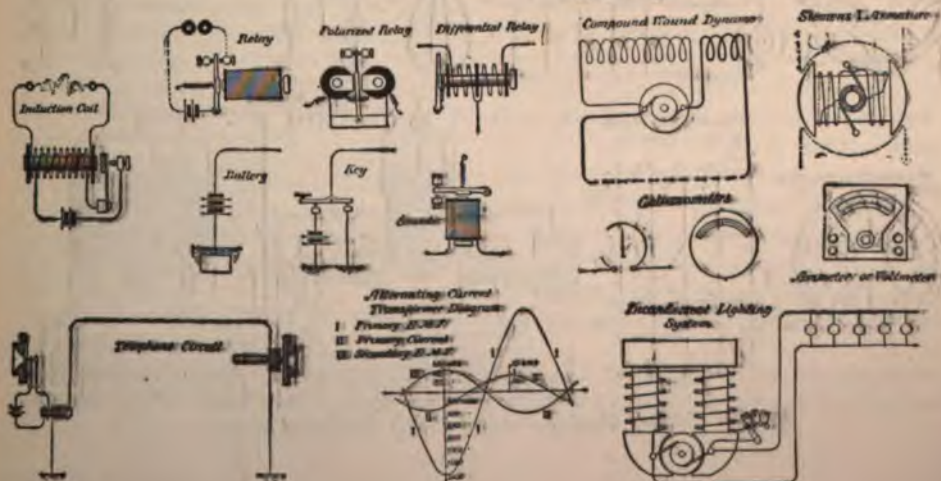



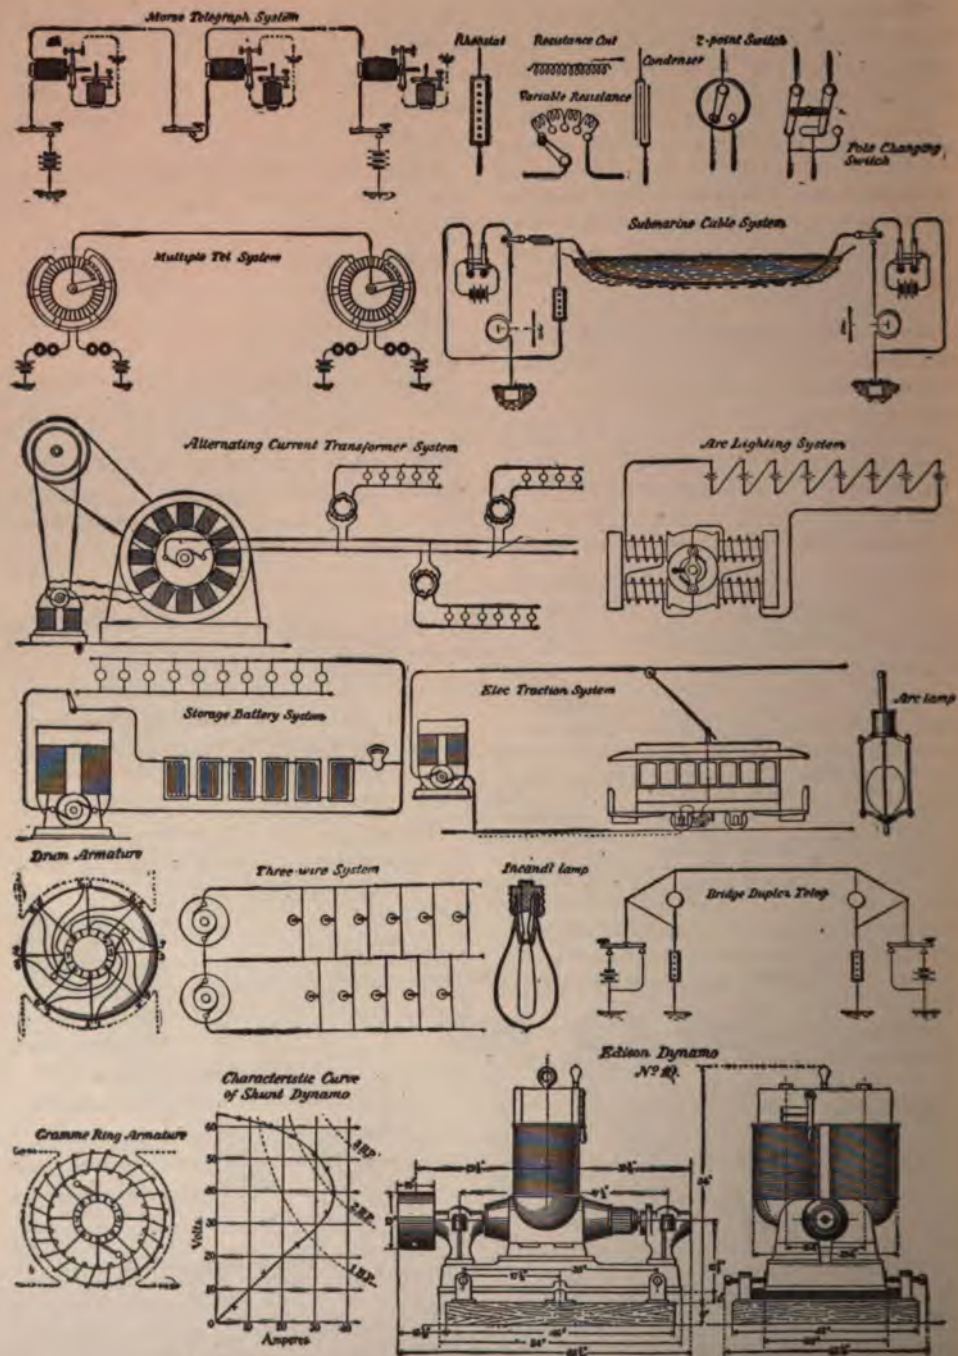


Fig. 526. Crocker's Chart of Standard Electric Symbols and Diagrams.

**Symmetrical Induction of Armature.**—(See *Induction, Symmetrical, of Armature.*)

**Symmetrical Magnetic Field.**—(See *Field, Magnetic, Symmetrical.*)

**Sympathetic Electrical Vibrations.**—(See *Vibrations, Sympathetic Electrical.*)

**Sympathetic Vibrations.**—(See *Vibrations, Sympathetic.*)

**Synchronism.**—The simultaneous occurrence of any two events.

A rotating cylinder, or the movement of an index or trailing arm, is brought into synchronism with another rotating cylinder or another index or trailing arm, not only when the two are moving with exactly the same speed, but when in addition they are *simultaneously moving over similar portions of their respective paths.*

In the Breguet *Step-by-Step* or *Dial Telegraph* (See *Telegraphy, Step-by-Step*), the movements of the needle on the indicator are synchronized with the movements of the needle on the *manipulator.*

In systems of *Fac-Simile Telegraphy* the movements of the transmitting apparatus are synchronized with those of the receiving apparatus.

In Delany's *Synchronous Multiplex Telegraph System*, the trailing arm that moves over a circular table of contacts at the transmitting end, is accurately synchronized with a similar trailing arm moving over a similar table at the receiving end.

Delany, who was the first to obtain rigorous synchronism at the two ends of a telegraphic line hundreds of miles in length, accomplishes this by the use of La Cour's phonic wheel, through the agency of correcting electric impulses, automatically sent in either direction over the main line, when one trailing arm gets a short distance in advance or back of the other.

With alternating current dynamos, where one dynamo is feeding incandescent lamps connected to the leads in multiple, and it is desired to couple another alternating current dynamo in parallel with the first, it is necessary to obtain a complete synchronism of the two dynamos before coupling them, since otherwise the lamps will show variations in their light, and the machine may suffer.

**Synchronizable.**—Capable of being synchronized. (See *Synchronism.*)

**Synchronize.**—To cause to occur or act simultaneously. (See *Synchronism.*)

**Synchronized.**—Caused to occur or act simultaneously. (See *Synchronism.*)

**Synchronizing Dynamo-Electric Machine.**—(See *Machine, Dynamo-Electric, Synchronizing.*)

**Synchronous Multiplex Telegraphy.**—(See *Telegraphy, Synchronous Multiplex, Delany's System.*)

**System, Astatic** — —An astatic combination of magnets.

An astatic needle consists of an astatic system of two magnetic needles. The needles are rigidly fixed together with their opposite poles facing each other. The two needles form an astatic pair or couple. (See *Needle, Astatic.*)

**System, Block, for Railways** — —(See *Railroads, Block System for.*)

**System, Centimetre - Gramme - Second** — —(See *Units, Centimetre - Gramme - Second.*)

**System, Continuous Underground, of Motive Power for Electric Railroads** — —(See *Railroads, Electric, Continuous Underground System of Motive Power for.*)

**System, Dependent, of Motive Power for Electric Railroads** — —(See *Railroads, Electric, Dependent System of Motive Power for.*)

**System, Independent, of Motive Power for Railroads** — —(See *Railroads, Electric, Independent System of Motive Power for.*)

**System, Multiphase** — —A term frequently applied to a system of rotating electric currents. (See *Current, Rotating.*)

**System of Distribution of Electricity by Commutating Transformers.**—(See *Electricity, Distribution of, by Commutating Transformers.*)

**System of Distribution of Electricity by Condensers.**—(See *Electricity, Distribution of, by Alternating Currents by Means of Condensers, Electricity, Distribution of, by Continuous Current by Means of Condensers.*)

**System of Distribution of Electricity by Means of Alternating Currents.**—(See *Elec-*



*tricity, Distribution of, by Alternating Currents.*)

**System of Distribution of Electricity by Motor Generators.**—(See *Electricity, Distribution of, by Motor Generators.*)

**System, Three-Wire** — — A system of electric distribution for lamps or other translating devices connected in multiple, in which three wires are used instead of the two usually employed.

In the three-wire system two dynamos are generally employed, which are connected with one another in series.

The three conductors are connected as shown in Fig. 527, the central conductor to the junction of the two dynamos and the two others to their free terminals, and the difference of potential between the central and the two outer conductors is maintained the same. The lamps, or other electro-receptive devices, are placed in multiple-arc between either branch, and so distributed that the current in each branch is the same. When such balance is established no current flows through the central or *neutral* conductor. But when that balance is disturbed, the surplus current in one branch is taken up by the central conductor.

The three-wire system effects considerable

economy in the weight of wire required. Since in the multiple-series-connection of electro-receptive devices whatever difference of potential is impressed on the mains is fed to each device, no higher difference of potential can be employed on the mains than that which the devices are capable of taking. In the case of an incandescent lamp, if such difference be exceeded, too strong a current is passed through the lamps with a consequent decrease in their life.

In the three-wire system of distribution a higher difference of potential can be maintained on the mains than is required for any lamp placed in

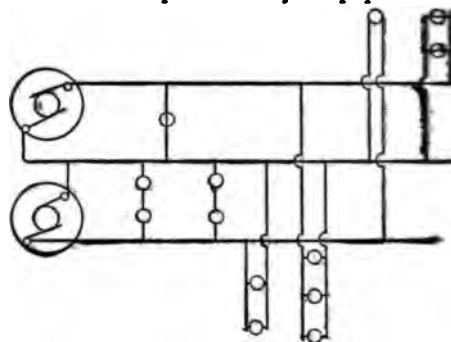


Fig. 527. Three-Wire System.

connection therewith, and in this manner a considerable saving is effected in the cost of the leads.





1





**This book is under no circumstances to be  
taken from the Building**

[illegible]





